

SEMICONDUCTORS

AMS-501

#### INTEGRATED AND DISCRETE

# **SEMICONDUCTORS**

#### Applications for

- **■** EDP Peripherals
- Industrial Control
- **■** Motor & Power Drive
- Office Automation
- Mass Storage

- Automotive
- Consumer
- Displays
- Power Management



### Allegro MicroSystems, Inc.

Formerly Sprague Semiconductor Group

115 Northeast Cutoff, Box 15036 Worcester, MA 01615 (508) 853-5000

# TABLE OF CONTENTS

1.	GENERAL INFORMATION & PRODUCT INDEX
	Allegro MicroSystems, Inc 1-1
	Definition of Terms 1-3
	Allegro Package Designators1-5
	Allegro Part Numbering Systems1-6
	Ordering Information 1-8
	Technical Assistance
	Product Index (ICs and Transistor Arrays) 1-9
	See Also:
	Discrete Semiconductors Index and Cross Reference 7-2
	Sales Offices and RepresentativesBack of Book
2.	PRODUCT SELECTION GUIDES
	Peripheral Power and Display Drivers 2-1
	High-Voltage (≥80 V) Peripheral Power and Display Drivers 2-3
	BiMOS Intelligent Power Interface Drivers 2-4
	Motor Drivers 2-5
	Hall-Effect Sensors
	Devices for Mass Storage Applications 2-7
	Devices for Printer Applications2-7
	Automotive, Signal Processing, and Consumer ICs 2-8
	Integrated Circuits Cross-Reference 2-10
	Competitive Integrated Circuits Part-Numbering Systems 2-16
	See Also:
	Quick Guide to Allegro Discrete Devices
	Discrete Semiconductors Index and Cross Reference 7-2
	Discrete and Integrated Circuit
	Semiconductor Chips Brochure CN-193
3.	TECHNICAL DATA & APPLICATION NOTES
	for Peripheral Power and Display Driver ICs
	in Numerical Order Beginning at 3-1
	Applications Information:
	Power ICs for Motor-Drive Applications
	Integrated Circuits for Current-Sourcing Applications 3-229
	Expanding the Frontiers of IC Interface
	for Electronic Displays 3-239
	Trends in IC Interface for Electronic Displays 3-245
	2936 3-Phase Brushless DC Motor Controller/Driver 3-251
	Series 5800 BiMOS II Power Drivers 3-255
	See Also:
	Reliability ReportsSection 8

### TABLE OF CONTENTS

4.	TECHNICAL DATA & APPLICATION NOTES for Hall-Effect Sensor ICs
	in Numerical Order Beginning at 4-
	Applications Information:
	Hall Effect Applications Guide 4-74
	The Hall Effect Sensor 4-10
5.	TECHNICAL DATA & APPLICATION NOTES for Mass Storage Application ICs
	in Numerical OrderBeginning at 5-
6.	TECHNICAL DATA & APPLICATION NOTES
	for Automotive, Signal-Processing, and Consumer ICs
	in Numerical OrderBeginning at 6-
7.	TECHNICAL DATA
	for Discrete Transistors, Diodes, and Arrays
	Quick Guide to Discrete Devices
	Discrete Semiconductors Index and Cross Reference 7-2
	Discrete Devices Ratings:
	NPN Bipolar Transistors 7-14
	PNP Bipolar Transistors 7-10
	N-Channel Junction Field-Effect Transistors
	P-Channel Junction Field-Effect Transistors
	General-Purpose and Schottky Diodes
	Zener Diodes
	Transistor and Diode Arrays
	See Also:
	High-Current Darlington Transistor Arrays Section
	Discrete and Integrated Circuit
	Semiconductor Chips Brochure CN-19
8.	QUALITY & RELIABILITY INFORMATION
	Reliability
	PACE Primer
	Reliability Reports:
	Series 2000 and 2800 Darlington Drivers
- /	Series 5800 BiMOS Drivers
	Series 6100 High-Voltage Display Drivers
	SOT-23 Transistors

### TABLE OF CONTENTS

υ.	PACKAGE INFORMATION	
	Package Thermal Characteristics	9-1
	Thermal Design for Plastic Integrated Circuits	9-3
	High-Performance Power Package for Power-Integrated Circuit Devices	9-7
	Applications Information:	
	Electrostatic Protection for Semiconductor Products	9-19
	Operating and Handling Practices for MOS Integrated Circuits	9-21
	Mounting Power Tab Devices	<b>9-2</b> 1
	Surface-Mount Integrated Circuits	9-22
	Computing IC Temperature Rise	9-25
	Thermal Resistance — A Reliability Consideration	9-30
	Package Outline Drawings	9-39
	A, B, & M Plastic DIPs	9-39
	EA, EB, & EP Square Plastic Leaded Chip Carriers	9-45
	EQ Rectangular Plastic Leaded Chip Carrier	9-47
	JT Thin Quad Flatpack	9-49
	K Plastic SIP	9-51
	KA Plastic SIP	9-52
	L Plastic SOICs	9-53
	LB & LW Wide-Body Plastic SOICs	9-55
	LL Long-Leaded Plastic SOT	9-57
	LR Plastic Small-Outline Transistor	9-68
	LT Plastic SOT	9-58
	U Plastic SIP	9-59
	UA Plastic SIP	9-60
	W Plastic Power-Tab SIP	9-61
	WH Plastic Power-Tab SIP for Horizontal Mounting	9-62
	WV Plastic Power-Tab SIP for Vertical Mounting	9-62
	Z Plastic Power-Tab SIP	9-66
	Plastic Transistor	9-67
	Plastic Small-Outline Transistor	9-68
	Tape and Reel Information for Discrete Devices	9-69
SA	LES OFFICES & REPRESENTATIVES	
	World-Wide Back of	f Book

### **GENERAL INFORMATION & PRODUCT INDEX**

AND THE PROPERTY OF THE PROPER

PAPERPETE PER PANEO E AS DECUMENTARIO

HAMILION OF STREET

MASS STORAGE APPEARATION IC

AUTOMOTIVE, SIGNAL-PROCESSING. & CONSUMERIES

DISCRETE TRANSISTORS, DIODES, & ARRAYS

QUALITY & RELIABILITY INFORMATION

PACKAGE INFORMATION

#### SECTION 1. GENERAL INFORMATION & PRODUCT INDEX

Allegro MicroSystems, Inc.	1-1
Definition of Terms	1-3
Allegro Package Designators	1-5
Allegro Part Numbering Systems	1-6
Ordering Information	1-8
Technical Assistance	1-8
Product Index (ICs and Transistor Arrays)	1-9
See Also:	
Discrete Semiconductors Index and Cross Reference	7-2
Sales Offices and Representatives	Back of Book

## GENERAL INFORMATION


### ALLEGRO MICROSYSTEMS, INC.

Allegro MicroSystems, Inc. specializes in the design, manufacture, and marketing of advanced mixed-signal (analog + digital) integrated circuits as well as a line of discrete transistors and diodes. Allegro, formerly the Sprague Semiconductor Group, combines over 25 years of semiconductor experience, over a decade of extensive merged-technologies experience, and worldwide resources in design and applications engineering, process technology, packaging, quality control, manufacturing, and testing.

Allegro is a leading supplier of mixed-signal solutions and emphasizes system-level ICs for original equipment manufacturers that primarily serve the computer peripherals, automotive, consumer, and industrial markets. Allegro's strengths center on an excellent track record in product quality and innovation, and a diversified base of major OEM customers. The company's reputation for quality spans both product design and manufacturing. This reputation is evident in preferred vendor/ship-to-stock programs. Allegro has received quality awards from leading manufacturers worldwide, and is the only US IC manufacturer to have received IECQ manufacturer's approval.

Headquartered in Worcester, Massachusetts, Allegro currently operates two wafer-fabrication plants in Worcester and Willow Grove, Pennsylvania, as well as assembly/test operations in the Philippines.

Allegro's product expertise in power ICs, signal processing ICs, and sensor ICs—believed to be unique in the industry—is supported by strong capabilities in bipolar, CMOS, and DMOS process technologies. Allegro can and does combine any two or all three of its product disciplines (and/or process technologies) in a single monolithic chip to deliver powerful system-level solutions.

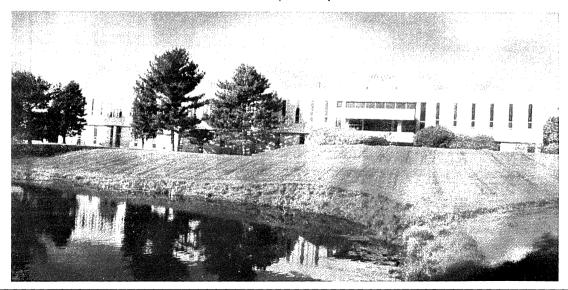

### GENERAL INFORMATION ALLEGRO MICROSYSTEMS, INC.



Within the worldwide semiconductor market, Allegro has strategically positioned itself in the analog segment. Allegro primarily serves the analog IC industry through the development, manufacture, and marketing of a wide variety of complex products. The company emphasizes application-specific, market-driven products with high technology content. These include bipolar, CMOS, and DMOS technologies, as well as merged technologies such as BiCMOS (bipolar + CMOS), BCD (bipolar + CMOS + DMOS), and DABIC (digital + analog + BiCMOS).

Analog ICs can generally be separated into three classifications: sensor, signal processing, and power ICs. Sensors are analog ICs which respond to physical phenomena and provide inputs to an electronic system. Signal processing ICs represent a broad category of analog ICs which accept, generate, or process an analog signal. Power ICs are those products which act as the interface from an electronic system back to the physical world. These products typically operate at voltages and currents well in excess of those applied to other parts of the electronic system due to their requirement to drive motors, displays, solenoids, relays, lamps, and other devices.

At Allegro, original designs are emphasized, rather than second source products, in order to command a higher value in the market-place. Many of these original designs have ultimately become industry standard products, such as the company's popular Hall-effect switches and power drivers.

Customers expect suppliers to add tangible value at a system level because they need to maximize performance and speed time to market. Applications, design, and technology consultation provided by IC suppliers, therefore, become crucial, as does the working synergy between the two design partners. Customers also need to feel confident in their IC supplier's ability to control the manufacturing and testing processes, thereby ensuring quality, reliability, and consistent delivery.

Allegro is exceptionally positioned to serve each customer's system requirements with either application-specific custom products or a broad spectrum of standard products. The measure of our success is your total satisfaction.

### GENERAL INFORMATION

#### **DEFINITION OF TERMS**

ABSOLUTE MAXIMUM RATINGS are limiting values of operation and should not be exceeded under the worst conditions. These values are chosen to provide acceptable serviceability of the device. The equipment manufacturer should design so that initially, and throughout life, no absolute maximum value is exceeded. If exceeded, even if the device continues to operate, its life may be considerably shortened.

The absolute maximum output current ratings are the maximum allowable under any condition. In application, output current will be limited by number of outputs conducting, duty cycle and timing, ambient temperature, heat sinking and/or forced cooling, and other heat sources.

Under any set of conditions, the specified maximum junction temperature (usually +150°C) should not be exceeded. In those devices which include an internal thermal shutdown, fault conditions which produce excessive junction temperature will activate device thermal shutdown circuitry. These conditions can be tolerated, but should be avoided.

**TYPICAL CHARACTERISTICS** are given for circuit design information only and, unless otherwise stated, are usually given at the nominal operating voltage and an ambient temperature of +25°C. Although these values are indicative of the peak distribution for a large number of production lots, these values should not be construed as guaranteed for any particular device or production lot.

**CHARACTERISTICS LIMITS** are those values that are guaranteed under the test conditions shown.

The absolute magnitude convention is used for **Electrical Characteristics Limits** where the limits are defined as:

maximum [minimum] limit: the greater [smaller] magnitude limit of a range of like-signed values; if the range includes both positive and negative values, both limiting values are maximums [the minimum is implicitly zero].

The algebraic convention is used for **Magnetic Characteristics Limits** where negative flux densities are defined as less than zero.

The minimum value is therefore the most negative value, the maximum value is the most positive value, and zero has no special significance.

**RECOMMENDED OPERATING CONDITIONS** are given for optimum device performance. Operation outside these conditions is permitted (within the Absolute Maximum Ratings) without any implied guarantee of level of performance.

It is recommended that equipment manufacturers consult their local sales office whenever device applications involve unusual electrical, mechanical, or environmental operating conditions.

#### **DEFINITION OF TERMS**

SPECIAL SYMBOLS are sometimes used to simplify circuit drawings.











Transistor
Dwg. No. OA-001

**ADVANCE INFORMATION** is used to advise customers of proposed additions to the product line. The specifications given are target or goal specifications and may, therefore, change without notice. Allegro MicroSystems, Inc. reserves the right to not manufacture these proposed devices which have been announced as "advance information". Contact your local sales office for details of current status and latest specifications.

**PRELIMINARY INFORMATION** is issued to advise customers of additions to the product line which, nevertheless, still have "pre-production" status. Details may, therefore, change without notice although it is expected that the performance data is representative of "full production" status. Contact your local sales office for details of current status and latest specifications.

#### IMPORTANT NOTICE

Allegro MicroSystems, Inc., reserves the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the performance, reliability, or manufacturability of its products. Changes and improvements made after the publication of this catalog will be reflected in updated data sheets or other literature as soon as possible. Components made under military approvals will be in accordance with the approval requirements.

The information included herein is believed to be accurate and reliable. However, Allegro MicroSystems, Inc. assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.


Allegro MicroSystems, Inc. reserves the right to discontinue any device without notice.

Before placing an order, Allegro advises its customers to obtain the latest version of the relevant information to verify that the information being relied upon is current.

Allegro products are not intended for use in life support appliances, devices, or systems. Use of an Allegro product in such applications without the written consent of Allegro MicroSystems, Inc. is prohibited.


## PACKAGE DESIGNATORS

**A** (DIP) 14 to 40 pins




Dwg. OA-004-18

**B** (Semi-Tab DIP) 8 to 24 pins



Dwg. OA-004-17

EA (One-Semi-Tab PLCC) 28 leads EB (Semi-Tab PLCC) 28 or 44 leads EP (Sq. PLCC) 20, 28, or 44 leads EQ (Rect. PLCC) 32 (7 x 9) leads



Dwg. OA-007-44

K (SIP) 4 pins KA (SIP) 5 pins



Dwg. OA-013-4

JT (Thin Quad Flatpack) 64 leads



Dwg. OA-014-64

LL, LR, or LT (SOT)



Dwg. OA-008-3

L (SOIC) 8, 14, or 16 leads



Dwg. OA-005-14

LB (Semi-Tab SOIC) 20 or 24 leads LW (Wide-Body SOIC) 16 to 28 leads



Dwg. OA-005-21

THE PROPERTY OF THE PARTY OF TH

Dwg. OA-005-17

M (DIP) 8 pins



Dwg. OA-004-8

U






Dwg. OA-015-3


Dwg. OA-015-4

W (Power-Tab SIP) 12 leads



Dwg. OA-006-12

Z (Power-Tab SIP) 5 leads



Dwg. OA-006-5

### DEVICE PART-NUMBERING

#### ALLEGRO MICROSYSTEMS NEW PART NUMBERS

8958 Instructions (optional; in the order listed). A = Revision, see detail specification F = Active pull-down device (BiMOS only) -1 = (Any number except 883) Selected version, see detail specification BU = Burned-In device\* BS = Compliant, with screening to BS9493\* TR = Tape and reel (surface-mount devices only) Package Designation. A = Plastic, dual in-line B = Plastic, dual in-line semi-tab C = Unpackaged chip † EA = Plastic, leaded chip carrier, one semi-tab EB = Plastic, leaded chip carrier, two semi-tabs EP = Plastic, leaded chip carrier, square EQ = Plastic, leaded chip carrier, rectangular JT = Plastic, thin quad flatpack, 64 leads K = Plastic, 4-lead mini-SIP KA = Plastic, 5-lead mini-SIP L = Plastic, SOIC LB = Plastic, wide-body SOIC power tab LL = Plastic, SOT-89, long-lead version LR = Plastic, SOT-23/TO-236AB LT = Plastic SOT-89/TO-243AA LW = Plastic, wide-body SOIC M = Plastic, 8-pin mini-DIP T = Plastic, 3-lead mini-SIP U = Plastic, 3-lead thin mini-SIP UA = Plastic, short 3-lead thin mini-SIP W = Plastic, 12-lead single in-line power tab WH = W Package with 18 formed leads, horizontal mount WV = W Package with 18 formed leads, vertical mount X = Special Z = Plastic, 5-lead single in-line power tab (TO-220) Operating Temperature Range. C = Commercial (0°C to +70°C) S = Standard (-20°C to +85°C) E = Extended automotive/industrial (-40°C to +85°C) K = Industrial/military (-40°C to +125°C)L = Automotive/military (-40°C to +150°C)  $M = Military (-55^{\circ}C to +125^{\circ}C)$ X =Special (i.e., wafer probe at +25°C only) Device Type (four digits).


#### Allegro MicroSystems Identifier.

- \* Instruction suffix 'BU' available only with temperature codes 'S', 'E', 'K, or 'L'; suffix 'BS' available only through European sales office.
- † Discrete and integrated circuit chips are described in Brochure CN-193.

All possible combinations of device type, operating temperature range, and package style are not necessarily available. Consult individual device specifications or sales office for complete information.


### **DEVICE PART-NUMBERING**

#### ORIGINAL SPRAGUE SEMICONDUCTOR GROUP PART NUMBERS

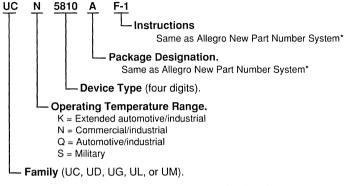

- Instruction suffix 'BU' available only with temperature codes 'N' or 'Q'; suffix 'BS' available only through European sales office.
- † Discrete and integrated circuit chips are described in Brochure CN-193.

#### ORIGINAL SPRAGUE SEMICONDUCTOR GROUP PART NUMBERS

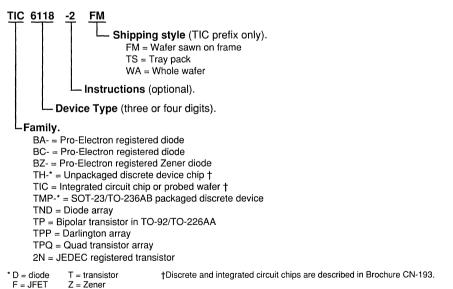

All possible combinations of device type, operating temperature range, and package style are not necessarily available. Consult individual device specifications or sales office for complete information.

### GENERAL INFORMATION

#### ORDERING INFORMATION

To place an order, obtain price and delivery information, or to request technical literature, contact your local Allegro sales office or sales representative. See back of book, or:

From United States

and Canada

Allegro MicroSystems, Inc.

115 Northeast Cutoff

Box 15036

Worcester, MA 01615 Tel: (508) 853-5000 Fax: (508) 853-5049

From Europe and Mideast

Allegro MicroSystems Europe Ltd. Balfour House, Churchfield Road

Walton-on-Thames, Surrey KT12 2TD

UNITED KINGDOM Tel: (44-932) 253-355 Fax: (44-932) 246-622

From Asia

Allegro MicroSystems, Inc.

115 Northeast Cutoff

Box 15036

Worcester, MA 01615 Tel: (508) 853-5000 Fax: (508) 853-5049

### TECHNICAL ASSISTANCE

Requests for additional technical information or applications assistance should be referred to your local Allegro sales office or sales representative. See back of book, or:

Allegro MicroSystems, Inc. 115 Northeast Cutoff

Box 15036

Worcester, MA 01615 Tel: (508) 853-5000 Fax: (508) 853-5049

# INTEGRATED CIRCUITS AND TRANSISTOR ARRAYS

### PRODUCT INDEX IN NUMERICAL ORDER\*

See Section 7 for Index to Discrete Devices

Part Number *	Description	Page
06 thru 56	Quad Transistor Arrays	7-35
903 thru 942	Multiple Diode Arrays	7-31
2001 thru 2024	7-Channel, High-Current Darlington Arrays	3-1
	Reliability Report	8-9
2061 thru 2069	1.5 A Darlington Switches	3-9
2222	Quad NPN Transistor Array	7-34
2429	Fluid Detector	6-1
2436	Dual-Mode (10 min/5 min) Countdown Timer	6-4
2454 and 2455	Automotive Lamp Monitors/Comparators	6-7
2460	Electronic Spark Timing	6-11
2540	Quad 1.8 A Darlington Power Driver	3-18
2543	Quad Protected Darlington Power Driver	3-21
2544	Quad 1.8 A Darlington Power Driver	3-25
2547	Quad Protected Darlington Power Driver	3-28
2549	Quad Protected Darlington Power Driver	3-32
2580	8-Channel, High-Current Source Driver	3-36
2585	8-Channel, Saturated Source Driver	3-36
2588	8-Channel, High-Current Source Driver	3-36
2595	8-Channel, Saturated Sink Driver	3-44
2596 and 2597	8-Channel, Saturated Sink Drivers	3-46
2801 thru 2823	8-Channel, High-Current Darlington Arrays	3-48
	Reliability Report	8-9
2878 and 2879	Quad 4 A Darlington Switches	3-56
2907	Quad PNP Transistor Array	7-34
2916	Dual Full-Bridge PWM Motor Driver	3-61
2917	Dual Full-Bridge PWM Motor Driver	3-66
2918	Dual Full-Bridge PWM Motor Driver	3-71
2936	3-Phase ±2 A Brushless DC Motor Drivers	3-76
	Description and Application	3-249
2943	High-Current Half-Bridge Motor Driver	3-84
2944	Quad 4 A High-Voltage Source Driver	3-88
2953 and 2954	2 A Full-Bridge PWM Motor Drivers	3-91
2961	3.4 A PWM Printhead/Motor Driver	3-96
2962	Dual 3 A PWM Solenoid/Motor Driver	3-101
2981 thru 2984	8-Channel, Source Drivers	3-106
2985	8-Channel, Saturated Source Driver	3-111

Complete part number includes additional characters to indicate operating temperature range and package style.
 See detailed specification.

### ICs AND TRANSISTOR ARRAYS PRODUCT INDEX IN NUMERICAL ORDER

Part Number *	Description	Page
2987	8-Channel, Short-Circuit Protected Source Driver	3-113
2993	Dual Full-Bridge Motor Driver	3-117
2998	Dual 2 A Full-Bridge Motor Driver	3-121
3046	Zero-Speed Hall-Effect Gear-Tooth Sensors	4-1
3055	Multiplexed Two-Wire Hall-Effect Sensor IC	4-8
3056 and 3058	Zero-Speed Hall-Effect Gear-Tooth Sensors	4-1
3059	AC Coupled Hall-Effect Gear-Tooth Sensor	4-16
3113	Hall-Effect Switch	4-20
3119	Hall-Effect Switch	See 3121
3120	Hall-Effect Switch	4-20
3121, 3122, & 3123	Hall-Effect Switches for High-Temperature Operation	4-24
3130	Hall-Effect Switch	4-20
3132 and 3133	Ultra-Sensitive Bipolar Hall-Effect Switches	4-29
3140	Hall-Effect Switch	4-20
3141, 3142, & 3143	Sensitive Hall-Effect Switches for High-Temperature Operation	4-34
3175 and 3177	Hall-Effect Digital Latches	4-35
3185 thru 3189	Hall-Effect Latches for High-Temperature Operation	4-38
3235	Dual Output Hall-Effect Digital Switch	4-42
3275	Complementary Output Hall-Effect Latch	4-46
3501	Linear Output Hall-Effect Sensor	4-48
3503	Ratiometric, Linear Hall-Effect Sensor	4-52
3506 and 3507	Ratiometric, Linear Hall-Effect Sensors for High-Temperature Operation	4-56
3625 and 3526	Power Hall Sensor/Drivers for Brushless DC Motors	4-57
3718	Low-Voltage Audio Power Amplifier	6-16
3751	Power Operational Amplifier	3-125
3827	FM Stereo Decoder with Noise-Actuated Blend	See 3828
3828	FM Stereo Decoder with Noise-Actuated Blend	6-20
3841	AM Signal Processor	6-25
3844	Dual-Conversion AM Receiver	6-32
3845 and 3846	AM Noise Blankers	6-34
3847	Dual-Conversion AM Receiver	See 3844
3848	Dual-Conversion AM Receiver	6-41
3859	FM Communications IF System	6-43
3883	FM Communications IF and Audio System	6-45
3904 and 3906	Quad Transistor Arrays	7-34
4000	Medium-Power Quad Darlington Array	7-32
5140	Protected PowerHall Sensor Lamp/Solenoid Driver	4-63
5275	Complementary Output Hall-Effect Latched Driver	4-70
5348	Smoke Detector with Interconnect and Timer	6-48
5401	Quad PNP Transistor Array	7-34
5616	Liquid Crystal Display Automotive Clock	6-55

<sup>\*</sup> Complete part number includes additional characters to indicate operating temperature range and package style. See detailed specification.

### ICs AND TRANSISTOR ARRAYS PRODUCT INDEX IN NUMERICAL ORDER

Part Number *	Description	Page
5703 and 5706	Quad Peripheral and Power Drivers	3-129
5713	Dual OR Peripheral and Power Driver	3-133
5800 and 5801	High-Speed BiMOS Latched Drivers	3-136
	Reliability Report	8-14
5804	1.25 A, Unipolar Stepper-Motor Translator/Driver	3-141
5810	10-Bit High-Speed Serial-In, Latched Source Driver	See 5810-F
5810-F	10-Bit Serial-In, Latched Source Drivers with Active Pulldowns	3-146
5811	12-Bit High-Speed Serial-In, Latched Driver	
5812-F	12-Bit Serial-In, Latched Source Drivers with Active Pulldowns	3-154
5815	8-Bit High-Speed Latched Source Driver	3-158
5816	Addressable, Latched 16-Channel Driver	3-161
5817	Addressable, 28-Line Decoder/Driver	3-165
5818-F	32-Bit Serial-In, Latched Source Drivers with Active Pulldowns	3-170
5821 thru 5823	8-Bit High-Speed Serial-In, Latched High-Voltage Drivers	3-174
5829	9-Bit Serial-In, Latched 1.6 A Driver	3-178
5832	32-Bit Serial-In, Latched Sink Driver	3-187
5833	32-Bit Serial-In, Latched Darlington Driver	3-191
5841 thru 5843	8-Bit Serial-In, Latched High-Voltage Drivers	3-195
5881	Dual 8-Bit Latched Driver with Read Back	3-200
5890 and 5891	8-Bit Serial-In, Latched Source Drivers	3-203
5895	8-Bit Serial-In, Latched Source Driver	3-208
6002	Dual Complementary-Pair Transistor Array	7-34
6116 and 6118	Vacuum Fluorescent Display Drivers	3-213
	Reliability Report	8-19
6427	Quad NPN Transistor Array	7-34
6502 and 6700	Dual Complementary-Pair Transistor Arrays	7-34
7003	7-Channel, 150 V Darlington Array	3-218
8131	Precision Supervisory Systems Monitor	6-61
8181	Low-Dropout, 5 V Regulator	6-66
8901	3-Phase Brushless DC Motor Back-EMF Controller/Driver	5-1
8902	3-Phase Brushless DC Motor Back-EMF Controller/Drivers	5-11
8920	Dual Schottky Diode	5-21
8925	3-Phase ±4 A Brushless DC Motor Controller/DMOS Driver	
8932	5 V MOS Voice Coil Motor Driver	See 8932-A
8932-A	5 V MOS Voice Coil Motor Driver	5-28
8936	5 V MOS Voice Coil Motor Driver	5-35
8951	Servo Controller System	5-42
8952	Servo Loop Compensator	
8958	12 V Voice-Coil Motor Driver	5-52
8980	SuperServo Spindle & Voice-Coil Actuation Manager/Driver	5-58

<sup>\*</sup> Complete part number includes additional characters to indicate operating temperature range and package style. See detailed specification.



### **PRODUCT SELECTION GUIDES**

Parties - Carrier (Carrier Constitution Constitution Constitution Constitution Constitution Constitution Const

MASS STORĀČIE APPĒĪG MIDNIG

AUTOMOTIVE, SIGNAL-PROCESSING, & CONSUMER D

633

DISCRETE TRANSISTURS, DIODES, & ARRAYS

QUALITY & RELLABILITY INFORVESTION

PACKAGE INFORMATION

#### **SECTION 2. PRODUCT SELECTION GUIDES**

Peripheral Power and Display Drivers	2-1
High-Voltage (≥80 V) Peripheral Power and Display Drivers	2-3
BiMOS Intelligent Power Interface Drivers	2-4
Motor Drivers	2-5
Hall-Effect Sensors	2-6
Devices for Mass Storage Applications	2-7
Devices for Printer Applications	2-7
Automotive, Signal Processing, and Consumer ICs	2-8
Integrated Circuits Cross-Reference	2-10
Competitive Integrated Circuits Part-Numbering Systems	2-16
See Also:	
Quick Guide to Allegro Discrete Devices	7-1
Discrete Semiconductors Index and Cross Reference	7-2
Discrete and Integrated Circuit Semiconductor Chips	Brochure CN-193

#### PERIPHERAL POWER AND DISPLAY DRIVERS

Section 3, unless otherwise indicated

#### IN ORDER OF 1) OUTPUT CURRENT, 2) OUTPUT VOLTAGE, 3) NUMBER OF DRIVERS

Output Ratings *		Features						
mA	٧	#	Serial Input	Latched Drivers	Diode Clamp	Saturated Outputs	Internal Protection	Part Number †
IK DRIVE	RS							
100	20	8	_	_		Х	_	2595
	30	32	X	X	_	_	-	5833
	40	32	X	×	-	Χ	-	5832
250	150	7	_	_	Х		-	7003
300	60	2	Hall S	ensor/Driver		X	_	5275 ‡
	45	1	Hall S	ensor/Driver	X	_	Х	5140 ‡
	50	8	_	_	X	Х	-	2596
	80	2	_	_	X	X	_ 1	5713
	80	4	_	-	X	X	-	5703 and 5706
350	50	4		X	X		-	5800
	50	7	_	_	Х	_	_ [	2001, 2003, and 2004
	50	8	_	_	X	_	_	2801, 2803, and 2804
	50	8	_	X	X	_	_	5801
	50	8	Х	x	_		_ 1	5821
	50	8	x	x	X	_	_	5841
	60	16		S-Line Latched		-	_	5816
		-			Decodel/Di	ivei –	_	
	80	8	X	X		_	-	5822
	80	8	X	X	X	_	-	5842
	95	7	_	-	X	_	-	2023 and 2024
	95	8	-	-	X	_	-	2823
	100	8	X	X	_	_	-	5823
	100	8	X	X	X	_		5843
450	30	28	Dual 4	to 14-Line De	coder/Drive	r –		5817
500	50	7			X	-		2013
600	60	4			_	X	Х	2547
	60	4	_	_	Х	X	X	2549
700	60	4			X	Х	Х	2543
750	50	8			X	Х	-	2597
900	14	2	Hall S	ensor/Driver	X	X	X	3625‡
000	26	2		ensor/Driver	X	X	x	3626‡
1250	50	4	Stepp	er Motor Trans	lator/Driver		X	5804
	50	2	-	_	X		_	2061
	50	4	_	_	X	_	_	2064 and 2068
1500	80	2			X			2062
. 500	80	4	_	_	X		_	2065 and 2069
1600	50	9	X	X			х	5829
1800	50	4			X			2544
. 300	50	4	-	-	X	_	-	2540
4000	50	4			X	_	-	2878
	80	4	_	_	X	_	_ 1	2879

Current is maximum specified test condition, voltage is maximum rating.
 See specification for sustaining voltage limits or over-current protection voltage limits.

Continued next page...

<sup>†</sup> Complete part number includes additional characters to indicate operating temperature range and package style.

<sup>‡</sup> Hall-Effect sensor. See Section 4.

### SELECTION GUIDE PERIPHERAL POWER AND DISPLAY DRIVERS

Output Ratings *			Features					
mA	v	#	Serial Input	Latched Drivers		Saturated Outputs	Internal Protection	Part Number †
URCE DF	RIVERS							
-25	60	8	_	Х	_	_	_	5815
	60	10	X	X	Active Pull-Dow	n –	_	5810-F
	60	12	X	X	-	_	- 1	5811
	60	20	X	×	Active Pull-Dow	n –	-	5812-F
	60	32	X	Х	Active Pull-Dow	n –	- 1	5818-F
	65	8	_	_	_	_	-	6118-2
	80	8	_	Х	_	_	_	5815-1
	80	10	X	Х	Active Pull-Dow	n –	_	5810-F-1
	80	20	X	Х	Active Pull-Dow	n –	- 1	5812-F-1
	80	32	X	Х	Active Pull-Dow	n –	_	5818-F-1
	85	6	_	_	_	_	- 1	6116
	85	8	_	_	_	-	- 1	6118
	115	8	_	_	_	_	-	6118-1
-120	-25	8	_	_	Х	Х	_	2585
	30	8	_	_	X	Χ	- 1	2985
	50	8	X	Χ	X	X	-	5895
-350	35	8	-	_	X	_	Х	2987
	50	8	_	_	X	_	-	2981 and 2982
	50	8	X	Х	X	_	_	5891
	-50	8	_	_	X	_	- 1	2580 and 2588
	-80	8	_	_	X	_	- }	2588-1
	80	8	_	-	X	_	-	2983 and 2984
	80	8	Х	Х	X	-	-	5890
-4000	60	4	_		Х	_	_	2944
URCE / S	INK DRIVER	RS						
+350	7.0	2	Voice	Coil Motor I	Drivor	NMOS	Y	3 0808

±350	7.0	2	Voice-Coil Motor Driver	NMOS	Х	8980 §
±500	6.0 6.0 40	2 2 4	Voice-Coil Motor Driver Voice-Coil Motor Driver Dual Full Bridge X	CMOS CMOS	X X -	8932-A § 8936 § 2993
±750	45	4	Dual PWM Bridge X	Х	Х	2916
±800	16	2	Voice-Coil Motor Driver	_	Х	8958 §
±900	7.0 14	3 3	3-Ø Back-EMF Controller/Driver 3-Ø Back-EMF Controller/Driver	DMOS DMOS	X X	8901 § 8902 §
±1000	7.0 28	3 1	3-Ø Back-EMF Controller/Driver Power Op Amp X	NMOS -	X -	8980 § 3751
±1500	45 45	4	Dual PWM Full Bridge X Dual PWM Full Bridge X	-	X X	2917 2918
±2000	45 50 50	3 2 4	3-Ø Brushless Controller/Driver PWM Full Bridge X Dual Full Bridge X	- - -	X X X	2936 and 2936-120 2953 and 2954 2998
±3000	45	2	PWM Control X	_	_	2962
±3400	45	1	PWM Control X	_	Х	2961
±4000	14	3	3-Ø Brushless Controller/Driver	DMOS	Х	8925 §

<sup>\*</sup> Current is maximum specified test condition, voltage is maximum rating.
See specification for sustaining voltage limits or over-current protection voltage limits.

<sup>†</sup> Complete part number includes additional characters to indicate operating temperature range and package style.

<sup>‡</sup> Hall-Effect sensor. See Section 4.

<sup>§</sup> Mass Storage device. See Section 5.

### HIGH-VOLTAGE PERIPHERAL POWER AND DISPLAY DRIVERS

Section 3

#### IN ORDER OF 1) OUTPUT VOLTAGE, 1) OUTPUT CURRENT, 3) NUMBER OF DRIVERS

Output Ratings*					Features			
v	mA	#	Serial Input	Latched Drivers	Diode Clamp	Saturated Outputs	Internal Protection	Part Number †
80	-25	8	_	×	_	_	_	5815-1
j	-25	10	X	X A	ctive Pull-Do	wn –	_	5810-F-1
l	-25	20	X	X A	ctive Pull-Do	wn –	_	5812-F-1
l	-25	32	X	X A	ctive Pull-Do	wn –	_	5818-F-1
	300	2		_	_	X	X	5713
1	300	4		_	_	X	X	5703 and 5706
}	-350	8	_	_	Х	_	-	2983 and 2984
1	350	8		Х	Х	_	_	5822
l	350	8		Х	Х	X	-	5842
l	-350	8	X	Х	Х	_	-	5890
l	1500	2		-	_	X	-	2062
}	1500	4		_	_	X	_	2065 and 2069
ł	4000	4.	-	-	Χ	_	_	2879
-80	-350	8			Х	-		2588-1
85	-25	6	_	_	_	_	_	6116
	-25	8	_	-	-	_	_	6118
95	350	7	_	_	Х	_	_	2023 and 2024
1	350	8	_	-	X		_	2823
100	350	8	×	X	_	_		5823
	350	8	X	X	Х	-	_	5843
115	-25	8				_	_	6118-1
150	250	7	_		Х	_	_	7003

Current is maximum test condition; voltage is absolute maximum allowable.
 Negative current is defined as coming out of (sourcing) the output.

<sup>†</sup> Complete part number includes additional characters to indicate operating temperature range and package style.

# **BIMOS SMART POWER INTERFACE DRIVERS**

Section 3

	Output I	Ratings *	Part Number †
SERIAL-INPUT LATCHED DRIVERS			
8-Bit (saturated drivers)	-120 mA	50 V‡	5895
8-Bit `	350 mA	50 V	5821
8-Bit	350 mA	50 V‡	5841
8-Bit	-350 mA	50 V‡	5891
8-Bit	350 mA	80 V	5822
8-Bit	350 mA	80 V‡	5842
8-Bit	-350 mA	80 V‡	5890
8-Bit	350 mA	100 V	5823
8-Bit	350 mA	100 V‡	5843
9-Bit	1.6 A	50 V	5829
10-Bit (active pull-downs)	-25 mA	60 V	5810-F
10-Bit (active pull-downs)	-25 mA	80 V	5810-F-1
12-Bit	-25 mA	60 V	5811
20-Bit (active pull-downs)	-25 mA	60 V	5812-F
20-Bit (active pull-downs)	-25 mA	80 V	5812-F-1
32-Bit (active pull-downs)	-25 mA	60 V	5818-F
32-Bit (active pull-downs)	-25 mA	80 V	5818-F-1
32-Bit	100 mA	30 V	5833
32-Bit	100 mA	40 V	5832
ARALLEL-INPUT LATCHED DRIVERS			
4-Bit	350 mA	50 V‡	5800
8-Bit	-25 mA	60 V	5815
8-Bit	-25 mA	80 V	5815-1
8-Bit	350 mA	50 V‡	5801
Dual 8-Bit With Read Back	25 mA	20 V‡	5881
PECIAL-PURPOSE FUNCTIONS			
Unipolar Stepper Motor Translator/Driver	1.25 A	50 V‡	5804
Addressable 16-Line Latched Decoder/Driver	350 mA	60 V‡	5816
Addressable 28-Line Decoder/Driver	450 mA	30 V	5817

Current is maximum specified test condition, voltage is maximum rating. See specification for sustaining voltage limits.
 Negative current is defined as coming out of (sourcing) the output.

<sup>†</sup> Complete part number includes additional characters to indicate operating temperature range and package style.

<sup>‡</sup> Internal transient-suppression diodes included for inductive-load protection.

### **MOTOR DRIVERS**

Sections 3, 4, and 5

Function	Output R	latings *	Part Number †	Detailed Info Section
NTEGRATED CIRCUITS FOR BRUSHLESS DC N	MOTORS			
3-Phase Controller/Drivers	±2.0 A	45 V	2936 and 2936-120	3
2-Phase Hall-Effect Sensor/Controller	20 mA	25 V	3235	4
Hall-Effect Latched Sensors	10 mA	24 V	3175 and 3177	4
Hall-Effect Complementary Output Sensor	20 mA	25 V	3275	4
2-Phase Hall-Effect Sensor/Driver	900 mA	14 V	3625	4
2-Phase Hall-Effect Sensor/Driver	900 mA	26 V	3626	4
Hall-Effect Comp. Output Sensor/Driver	300 mA	60 V	5275	4
3-Phase Back-EMF Controller/Driver	±900 mA	7 V	8901	5
3-Phase Back-EMF Controller/Driver	±900 mA	14 V	8902	5
3-Phase Controller/DMOS Driver	±4.0 A	14 V	8925	5
3-Phase Back-EMF Controller/Driver	±1.0 A	7 V	₹ 8980	5
ULL-BRIDGE DRIVERS FOR DC AND BIPOLAR	STEPPER MOTORS			
PWM Current Controlled Dual Full Bridge	±750 mA	45 V	2916	3
PWM Current Controlled Dual Full Bridge	±1.5 A	45 V	2917	3
PWM Current Controlled Dual Full Bridge	±1.5 A	45 V	2918	3
PWM Current Controlled Full Bridges	±2.0 A	50 V	2953 and 2954	3
Dual Full Bridge	±500 mA	40 V	2993	3
Dual Full Bridge	±2.0 A	50 V	2998	3
THER MOTOR DRIVERS				
Unipolar Stepper Motor Driver	1.8 A	50 V	2544	3
Linear Servo Motor Driver	±1.0 A	28 V	3751	3
Unipolar Stepper-Motor Translator/Driver	1.25 A	50 V	5804	3
Voice-Coil Motor Driver	±500 mA	6 V	8932-A	5
Voice-Coil Motor Driver	±500 mA	6 V	8936	5
Servo Controller System	_	_	8951	5
Servo Loop Compensator	-	-	8952	5
Voice-Coil Motor Driver	±800 mA	16 V	8958	5
Voice-Coil Motor Driver	±350 mA	7 V	8980	5

Current is maximum specified test condition, voltage is maximum rating.
 See specification for sustaining voltage limits or over-current protection voltage limits.
 Negative current is defined as coming out of (sourcing) the output.

<sup>†</sup> Complete part number includes additional characters to indicate operating temperature range and package style.

#### HALL-EFFECT SENSORS

Section 4

#### UNIPOLAR HALL-EFFECT SWITCHES

Switch Points (at Max. Operate	T <sub>A</sub> = +25°C) Min. Release	Max. Output Ratings	Part Number *	Ext. Temp. Available
175 G	25 G	2 x 25 mA†/25 V	3235	_
200 G	50 G	25 mA/25 V	3140	yes
200 G	50 G	900 mA/28 V	5140	
300 G	-25 G	24 V‡	3055	yes
350 G	50 G	25 mA/25 V	3120	yes
400 G	140 G	25 mA/30 V	3122	yes
440 G	180 G	25 mA/30 V	3123	yes
450 G	30 G	25 mA/25 V	3113	
450 G	125 G	25 mA/30 V	3121	yes
Gear-Tooth Senso	ors, Zero Speed	25 mA/28 V	3046/56/58	yes
Gear-Tooth Senso	or, AC Coupled	25 mA/24 V	3059	yes

<sup>\*</sup> Complete part number includes additional characters to indicate operating temperature range and package style.

#### **BIPOLAR HALL-EFFECT SWITCHES**

Switch Points (at Max. Operate	t T <sub>A</sub> = +25°C) Min. Release	Max. Output Ratings	Part Number *	Ext. Temp. Available
+75 G	-75 G	25 mA/25 V	3133	yes
+95 G	-95 G	25 mA/25 V	3132	yes
+150 G	-150 G	25 mA/25 V	3130	yes

#### **BIPOLAR HALL-EFFECT LATCHES**

Switch Points (at	t T <sub>A</sub> = +25°C)	Max. Output		Ext. Temp.
Min. Operate	Max. Operate	Ratings	Part Number *	Available
±50 G	±150 G	. 15 mA/18 V	3177	_
±50 G	±150 G	25 mA/30 V	3187	yes
±25 G	±170 G	15 mA/18 V	3175	_
±80 G	±180 G	25 mA/30 V	3188	yes
±50 G	±230 G	25 mA/30 V	3189	yes
±25 G	±250 G	2 x 50 mA/25 V†	3275	· -
±25 G	±250 G	2 x 500 mA/30 V†	5275	-
±170 G	±270 G	25 mA/30 V	3185	yes
±70 G	±330 G	25 mA/30 V	3186	yes

<sup>\*</sup> Complete part number includes additional characters to indicate operating temperature range and package style.

#### **LINEAR HALL-EFFECT SENSORS**

Description	Part Number *	Ext. Temp. Available
Typical output 0.7 mV/gauss	3501	-
Typical output 1.3 mV/gauss	3503	_
Typical output 2.5 mV/gauss	3506/07	yes

<sup>\*</sup> Complete part number includes additional characters to indicate operating temperature range and package style.

<sup>†</sup> Output 1 switches on south pole, output 2 switches on north pole.

<sup>‡</sup> Multiplexed two-wire sensor; after proper address, power/signal bus current indicates magnetic field condition.

<sup>†</sup> Complementary outputs for 2-phase unipolar brushless dc motor control.

See also, 2429 fluid detector and 5348 smoke detector, Section 6.

# DEVICES FOR MASS STORAGE APPLICATIONS

Section 5

Part Number*	Description
8901	5 V 3-Phase Brushless DC Motor Controller/Driver with Back-EMF Sensing
8902	5 V and 12 V 3-Phase Brushless DC Motor Controller/Driver with Back-EMF Sensing
8920	Dual Schottky Diode
8925	3-Phase Motor Controller/Driver with Linear Current Control and Power DMOS Outputs
8932-A	6 V, 600 mA Voice Coil Motor Driver
8936	6 V, 600 mA Voice Coil Motor Driver
8951	Servo Controller System
8952	Servo Loop Compensator
8958	16 V, 250 mA Voice Coil Motor Driver
8980	Spindle & Voice-Coil Actuation Manager/Driver

<sup>\*</sup> Complete part number includes additional characters to indicate operating temperature range and package style.

# **DEVICES FOR PRINTER APPLICATIONS**

Section 3

Part Number*	Description
2916	Dual 45 V, 750 mA Full-Bridge PWM Stepper Motor Driver
2917	Dual 45 V, 1.5 A Full-Bridge PWM Stepper Motor Driver
2918	Dual 45 V, 1.5 A Full-Bridge PWM Stepper Motor Driver
2961	45 V, 3.4 A Solenoid Printhead Driver
2962	Dual 45 V, 3 A Solenoid Printhead Driver
5817	Addressable 30 V, 450 mA 28-Line Ink-Jet Printer Decoder/Driver
5829	Serial-In 50 V, 1.6 A 9-Wire Solenoid Printhead Driver

<sup>\*</sup> Complete part number includes additional characters to indicate operating temperature range and package style.

### AUTOMOTIVE, SIGNAL-PROCESSING, AND CONSUMER ICS

#### **EXTENDED TEMPERATURE DEVICES SUITABLE FOR AUTOMOTIVE APPLICATIONS**

Part Number *	Function	Detailed Info Section
2001, 2003, 2004,		
2013, and 2023	High-Voltage, High-Current Darlington Arrays	3
2065 and 2068	1.5 A Darlington Switches	3
2429	Fluid (Low-Coolant) Detector	6
2436	Countdown Power Timer (Rear-Window Defogger)	6
2454 and 2455	Lamp Monitors	6
2460	Electronic Spark Timing	6
2543, 2547, & 2549	Protected Quad Power Drivers	3
2596	8-Channel Saturated Sink Driver	3
2801, 2803, 2804, & 2823	High-Voltage, High-Current Darlington Arrays	3
2916	Dual Full-Bridge PWM Motor Driver	3
2943	High-Current Half-Bridge Motor Driver	3
2981 thru 2984	8-Channel Source Drivers	3
3046, 3056, & 3058	Hall-Effect Gear-Tooth Sensors - Zero Speed	4
3059	Hall-Effect Gear-Tooth Sensor - AC Coupled	4
3120	Hall-Effect Switch	4
3121, 3122, & 3123	Hall-Effect Switches	1 4
3130	Hall-Effect Switch	4
3132 and 3133	Ultra-Sensitive Bipolar Hall-Effect Switches	4
3140	Hall-Effect Switch	4
3141, 3142, & 3143	Sensitive Hall-Effect Switches	4
3185 thru 3189	Hall-Effect Latches	4
3506 and 3507	Ratiometric, Linear Hall-Effect Sensors	4
3828	FM Stereo Decoder	6
3841	AM Signal Processor	6
3844	Dual-Conversion AM Receiver	6
3845 and 3846	AM Noise Blankers	6
3848	Dual-Conversion AM Receiver	6
4000	Medium-Power Darlington Array	7
5140	Protected PowerHall Sensor - Lamp/Solenoid Driver	4
5616	LCD Automotive Clock - Programmable	6
5703	Quad 2-Input Peripheral/Power Driver	3
5800 and 5801	BiMOS II Latched Drivers	3
5810-F	BiMOS II 10-Bit Serial-Input, Latched Source Driver	3
5812-F	BiMOS II 20-Bit Serial-Input, Latched Source Driver	3
5832	BiMOS II 32-Bit Serial-Input, Latched Driver	3
6118	Fluorescent Display Driver	3

<sup>\*</sup> Complete part number includes additional characters to indicate operating temperature range and package style.

### SELECTION GUIDE AUTOMOTIVE, SIGNAL-PROCESSING, AND CONSUMER ICS

#### LINEAR INTEGRATED CIRCUITS FOR RADIO APPLICATIONS (Detailed Information in Section 6)

Part Number *	Inputs	Function	Supply Voltage Range
3718	Audio	Low-Voltage Audio Power Amplifier	1.8-9 V
3828	Composite Audio	FM Stereo Decoder w/Noise-Actuated Blend	8.5-12 V
3841	to 30 MHz	AM Signal Processor	7-16 V
3844	to 30 MHz	Dual-Conversion AM Receiver	7.5-16 V
3845	to 30 MHz	AM Stereo Noise Blanker	7.5-12 V
3846	to 30 MHz	AM Noise Blanker	7.5-12 V
3848	to 30 MHz	Dual-Conversion AM Receiver	7.5-16 V
3859	to 30 MHz	FM Communications IF System	4-9 V

<sup>\*</sup> Complete part number includes additional characters to indicate operating temperature range and package style.

#### SPECIALIZED INTEGRATED CIRCUITS FOR CONSUMER APPLICATIONS

Part Number *	Function	Detailed Info Section
2429	Fluid Detector	6
2436	Countdown Power Timer	6
2455	Quad Comparator	6
3059	Hall-Effect Gear-Tooth Sensor	4
5348	lonization-Type Smoke Detector	6
8902	3-Phase Brushless DC Motor Controller/Driver w/Back-EMF Sensing	5

Complete part number includes additional characters to indicate operating temperature range and package style.

#### OTHER ANALOG INTEGRATED CIRCUITS

Part Number *	Function	Detailed Info Section
3501	Linear Output Hall-Effect Sensor	4
3503	Ratiometric Linear Output Hall-Effect Sensor	4
3506 and 3507	Ratiometric Linear Output Hall-Effect Sensors	4
3718	Low-Voltage Audio Power Amplifier	6
3751	Power Operational Amplifier	3
8131	Precision Supervisory Systems Monitor	6
8181	Low-Dropout, High-Efficiency, 5 V Regulator	6
8932-A	16 V, 250 mA Voice-Coil Motor Driver	5
8936	16 V, 250 mA Voice-Coil Motor Driver	5
8951	Servo Controller System	5
8952	Servo Loop Compensator	5
8958	16 V, 800 mA Voice-Coil Motor Driver	5

Complete part number includes additional characters to indicate operating temperature range and package style.

### CROSS REFERENCE

### IN ALPHA-NUMERICAL ORDER

The suggested Allegro replacement devices are based on similarity as shown in currently published data. Exact replacement in all applications is not guaranteed and the user should compare the specifications of the competitive device and recommended Allegro replacement.

#### **MFG ABBREVIATIONS:**

Α	Allegro MicroSystems	OKI	Oki Semiconductor
ASAHI	Asahi	PE	Pro-Electron #
CS	Cherry Semiconductor	RCA	RCA (Harris)
DI	Dionics, Inc.	RFA	Rifa
EXR	Exar Integrated Systems	SAM	Samsung Semiconductor
FSC	Fairchild Semiconductor	SANY	Sanyo
HIT	Hitachi Ltd.	SG	Silicon General Inc.
IP	Integrated Power	SIEM	Siemens Corp.
ITT	ITT Semiconductors	SIG	Signetics Corp.
MAT	Matsushita	SGS	SGS/ATES
MCRL	Micrel	SPR	Sprague Electric Co.
MICR	Microswitch	SYL	Sylvania
MIT	Mitsubishi Electric Corp.	THM	Thomson-CSF
MOT	Motorola Semiconductor	TI	Texas Instruments
MT	Mietec	TOS	Toshiba Corp.
NEC	Nippon Electric Co.	TRW	TRW
NS	National Semiconductor	UNI	Unitrode

<sup>#</sup> European registration; manufactured by various companies including ITT, Philips, SGS/ATES, Siemens, Thomson-CSF, AEG-Telefunken, Valvo, & others.

Functional equivalent only; usually improved performance but not necessarily pin compatible.

# CROSS REFERENCE CA-MIC

Competitive Part Number			Suggested		Competitive Part Number			nber	Suggested		
Prefix	Base Number	Suffix	Mfg. Code(s)	Allegro Replacement	Notes	Prefix	Base Number	Suffix	Mfg. Code(s)	Allegro Replacement	Notes
CA	3169		RCA	UDN2943Z	≈	L	298	DNE	TI	UDN2993B	<b>≈</b>
CA	3219	AE	RCA	UDN2543B		L	298		SGS/UNI	UDN2998W	≈
CA	3219	E	RCA	UDQ2543B		L	603	В	SGS	ULN2823A	
CA	3242	E	RCA	UDN2543B		L	6218		SGS	UDN2916B	≈
CA	3262	E	RCA	UDN2543B		L	6219		SGS	UDN2916B	
CS	166		CS	ULN2429A		L	6220		SGS	UDN2544B	
DI	508		DI	UDN6116A	≈	L	6221		SGS	UDN2540B	
DI	514		DI	UDN6118A-2	≈	LB	1231		SANY	ULN2001A	
DN	6835		NS/MAT	UGN3501U		LB	1233		SANY	ULN2003A	
DN	6836		NS/MAT	UGN3501U		LB	1234		SANY	ULN2004A	
DN	6837		NS/MAT	A3121EU		М	2001	Р	MIT	ULN2001A	
DN	6838		NS/MAT	UGN3130U		M	2003	Р	MIT	ULN2003A	
DN	6839		NS/MAT	A3121EU		М	2004	Р	MIT	ULN2004A	
ECG	2013		SYL	ULN2013A		М	2064	Р	MIT	ULN2064B	≈
ECG	2021		SYL	UDN6118A		М	2065	Р	MIT	ULN2065B	
EW	550		ASAHI	UGN3140U		М	2580	Р	MIT	UDN2580A	
FSA	2619	Р	FSC	TND908		М	2803	Р	MIT	ULN2803A	
FSA	2719	Р	FSC	TND903		М	2823	Р	MIT	ULN2823A	
HA	13007		HIT	UDN2540B		M	2981	Р	MIT	UDN2981A	
HA	13415		HIT	UDN2543B		M	2982	Р	MIT	UDN2982A	
HA	13421	Α	HIT	UDN2993B	≈	M	2983	Р	MIT	UDN2983A	
HA	16617	Р	HIT	UDN6118A-2		М	2984	Р	MIT	UDN2984A	
HA	16617	PJ	HIT	UDQ6118A-2		M	54523	Р	MIT	ULN2003A	
IΡ	293	D	IP	UDN2993B	≈	M	54524	Р	MIT	ULN2001A	
IΡ	2064	N	IP	ULN2064B		М	54526	Р	MIT	ULN2004A	
IΡ	2065	N	IP	ULN2065B		М	54532	Р	MIT	ULN2064B	≈
IP	2068	N	IP	ULN2068B		М	54562	Р	MIT	UDN2982A	
IP	2069	N	IP	ULN2069B		М	54563	Р	MIT	UDN2981A	
ITT	552		ITT	ULN2001A		MC	1411	Р	MOT	ULN2001A	
ITT	556		ITT	ULN2003A		MC	1411	TP	MOT	ULQ2001A	
ITT	652		ITT	ULN2001A		MC	1413	P	MOT	ULN2003A	
ITT	656		ITT	ULN2003A		MC	1413	TP	MOT	ULQ2003A	
KA	2580	Α	SAM	UDN2580A		MC	1416	Р	MOT	ULN2004A	
KA	2588	Α	SAM	UDN2588A		MC	1416	TP	MOT	ULQ2004A	
L	165		SGS	ULN3751Z		MC	1417	Р	MOT	UDN2580A	
L	201		SGS	ULN2001A		MC	1473	PI	MOT	UDN5713M	
L	203		SGS	ULN2003A		MC	3359	Р	MOT	ULN3859A	
L	204		SGS	ULN2004A		MC	3479	Р	MOT	UCN5804B	≈
L	293	D	SGS/UNI	UDN2993B	≈	MIC	5800	вм	MCRL	UCQ5800L	
L	293		SGS	UDN2993B	≈	MIC	5800	BN	MCRL	UCQ5800A	
L	295		SGS/UNI	UDN2962W	~	MIC	5801	BN	MCRL	UCQ5801A	
L	298	D	SGS	UDN2998W	≈	MIC	5801	BV	MCRL	UCQ5801EP	

<sup>#</sup> European registration; manufactured by various companies including ITT, Philips, SGS/ATES, Siemens, Thomson-CSF, AEG-Telefunken, Valvo, & others.

<sup>≈</sup> Functional equivalent only; usually improved performance but not necessarily pin compatible.

## CROSS REFERENCE MIC-TD

Competitive Part Number			Suggested	Competitive Part Number				Suggested			
Prefix	Base Number	Suffix	Mfg. Code(s)	Allegro Replacement	Notes	Prefix	Base Number	Suffix	Mfg. Code(s)	Allegro Replacement	Notes
МІС	5801	CN	MCRL	UCN5801A		SG	2001	N	SG	ULN2001A	
MIC	5821	CN	MCRL	UCN5821A		SG	2003	N	SG	ULN2003A	
MPQ	3904		MOT	TPQ3904		SG	2004	N	SG	ULN2004A	
MPQ	3906		MOT	TPQ3906		SG	2013	N	SG	ULN2013A	
MPQ	6002		MOT	TPQ6002		SG	2023	N	SG	ULN2023A	
MPQ	6502		MOT	TPQ6502		SG	2024	N	SG	ULN2024A	
MPQ	6700		MOT	TPQ6700		SG	2064	W	SG	ULN2064B	
MSL	912	R	OKI	UDN6118A-2		SG	2065	W	SG	ULN2065B	
MTC	6020		MT	UCN5801A		SG	2068	W	SG	ULN2068B	
MTC	6033	D	MT	UCN5832C	~	SG	2069	W	SG	ULN2069B	
MTC	6034	D	MT	UCN5832C	æ	SG	3173	Р	SG	ULN3751Z	
NE	594	N	SIG	UDN6118A-2		SG	3643	S	SG	UDN2962W	~
NE	5503	N	SIG	ULN2023A		SG	3853	N	SG	ULN2013A	
NE	5504	N	SIG	ULN2024A		SG	6118	N	SG	UDN6118A	
NE	5601	N	SIG	ULN2001A		SN	75064	NE	TI	ULN2064B	
NE	5603	N	SIG	ULN2003A		SN	75065	NE	TI	ULN2065B	
NE	5604	. N	SIG	ULN2004A		SN	75068	NE	ΤI	ULN2068B	
OH	360		TRW	A3121E-		SN	75069	NE	TI	ULN2069B	
OHN	3013	U	TRW	UGN3113U		SN	75437	ANE	TI	UDN2543B	
OHN	3019	Ü	TRW	A3121EU		SN	75468	D	TI	ULN2023L	
OHN	3020	Ü	TRW	A3121EU		SN	75468	N	TI	ULN2023A	
OHN	3030	U	TRW	UGN3130U		SN	75468	N	TI	ULN2023A	
OHN	3040	Ü	TRW	UGN3140U		SN	75469	N	TI	ULN2024A	
OHS	3019	U	TRW	A3121LU		SN	75469	N	TI	ULN2024A	
OHS	3020	U	TRW	A3121LU A3121LU		SN	75512	BN	TI	UCN5811A	
OHS	3030	U	TRW	UGS3130U		SN	75512 75518	FN	TI	UCN5818EPF	
OHS		U	TRW			SN	75518 75518	N	TI	UCN5818AF	
	3040	U		UGS3140U				IN	TI		
PBD PBD	3517	N	RFA	UCN5804B	*	SN SN	754410		TI	UDN2993B	≈
	3523-01	N	RFA	ULN2001A			754411	- A		UDN2993B	≈
PBD	3523-02	N	RFA	ULN2004A		SS	31	EA	MICR	UGS3132U	~
PBD	3523-03	N	RFA	ULN2003A		SS	41		MICR	UGS3132UA	≈
PBD	3523-12	N	RFA	ULN2024A		SS	44	Α	MICR	UGS3140UA	≈
PBD	3523-13	N	RFA	ULN2023A		SS	.44	В	MICR	UGS3120UA	~
PBL	3717		RFA	UDN2953B	~	SS	46		MICR	A3185LUA	*
PBL	3770	•	RFA	UDN2953B	≈	SS	81	EA	MICR	UGN3132U	≈
S	4534		AMI	UCN5810AF		SS	89	A1	MICR	UGN3501U	≈
SA	594	N	SIG	UDQ6118A-2		TCA	365		PE/SIEM	ULN3751Z	#≈
SAA	1027		SIG/PE	UCN5804B	≈ .	TD	62001	AP	TOS	ULN2001A	
SAA	1042		MOT/PE	UCN5804B	æ	TD	62001	Р	TOS	ULN2001A	
SAS	251	S4	SIEM	UGN3275-		TD	62003	AP	TOS	ULN2003A	
SAS	251	S5	SIEM	A3121E-		TD	62003	Р	TOS	ULN2003A	
SG	298	. D	SG	UDN2998W	*	TD	62004	AP	TOS	ULN2004A	

<sup>#</sup> European registration; manufactured by various companies including ITT, Philips, SGS/ATES, Siemens, Thomson-CSF, AEG-Telefunken, Valvo, & others.

<sup>≈</sup> Functional equivalent only; usually improved performance but not necessarily pin compatible.

# CROSS REFERENCE TD-UHP

Competitive Part Number			Suggested	Competitive Part Number				Suggested			
Prefix	Base Number	Suffix	Mfg. Code(s)	Allegro Replacement	Notes	Prefix	Base Number	Suffix	Mfg. Code(s)	Allegro Replacement	Notes
TD	62004	Р	TOS	ULN2004A		UCN	4401	Α	SPR	UCN5800A	
TD	62064	AP	TOS	ULN2064B		UCN	4801	Α	SPR	UCN5801A	
TD	62064	Р	TOS	ULN2064B		UCN	4801	ADP	THM	UCN5801A	
TD	62081	AP	TOS	ULN2801A		UCN	4810	Α	SPR	UCN5810AF	
TD	62083	AP	TOS	ULN2803A		UCN	4810	Ν	ΤI	UCN5810AF	
TD	62084	AP	TOS	ULN2804A		UCN	4815	Α	SPR	UCN5815A	
TD	62101	Р	TOS	ULN2001A		UCN	4821	Α	SPR	UCN5821A	
TD	62103	Р	TOS	ULN2003A		UCN	4822	Α	SPR	UCN5822A	
TD	62104	Р	TOS	ULN2004A		UCN	4823	Α	SPR	UCN5823A	
TD	62478	•	TOS	UDN5713M		UCN	5812	Α	SPR	UCN5812AF	
TD	62781	AP	TOS	UDN6118A-2		UCN	5812	A-1	SPR	UCN5812AF-1	
TDA	3717		PE	UDN2953B	#≈	UCN	5812	EP	SPR	UCN5812EPF	
TEA	3717		PE	UDN2953B	 #≈	UCN	5812	EP-1	SPR	UCN5812EPF-1	
TID	121		TI	TND933		UD	4181		SPR	UDN5706A	≈
TID	122		TI	TND940		UDN	2541	В	SPR	UDN2543B	≈
TID	123		TI	TND938		UDN	2542	В	SPR	UDN2543B	≈
TID	124		Τİ	TND939		UDN	2952	В	SPR	UDN2953B	~
TL	170		TI	UGN3130U	≈	UDN	2952	w	SPR	UDN2954W	≈
TL	172	С	TI	A3121EU	~	UDN	2975	w	SPR	UDN2962W	≈
TL	173	Č	TI	UGN3503U	*	UDN	5713	N	TI	UDN5713M	
TL	173	i	TI	UGN3503U	≈	UDN	6126	A	SPR	UDN6116A	
TL	3019	•	TI	A3121EUA	~	UDN	6184	A	SPR	UDN6118A-I	
TL	3020		TI	UGN3120UA		UGN	3013	-	SPR	UGN3113-	
TL	4810	BDW	TI	UCN5810LWF		UGN	3019	-	SPR	A3121E-	
TL	4810	BIDW	TI	UCQ5810LWF		UGN	3020	-	SPR	A3121E-	
TL	4810	BIN	Ti	UCQ5810AF		UGN	3030	-	SPR	UGN3130-	
TL	4810	BN	TI	UCN5810AF		UGN	3040	-	SPR	UGN3140-	
TL	5812	FN	Ti	UCN5812EPF		UGN	3075	-	SPR	UGN3175-	
TL	5812	FN	TI	UCN5812EPF		UGN	3077	-	SPR	UGN3177-	
TL	5812	IFN	TI	UCQ5812EPF		UGN	3119	-	A/SPR	A3121E-	
TL	5812	IN	TI	UCQ5812EFF		UGN	3131	-	A/SPR	UGN3132-	
TL	5812	N	Ti	UCN5812AF		UGN	3501	M	SPR	UGN3501LI	-
TYA	298	IN	MOT/PE	ULQ2436M	#	UGS	3019	-	SPR	A3121L-	~
UC			UNI		#	UGS	3020	-	SPR		
	3175			A8958CEA				-		A3120L-	
UC	3517		UNI	UCN5804B	~	UGS	3030		SPR	UGS3130-	
UC	3620	۸	UNI	UDN2936W	*	UGS	3040	-	SPR	UGS3140-	
UC	3717	Α	UNI	UDN2953B	~	UGS	3119	-	A/SPR	A3121L-	
UC	3770		UNI	UDN2954W	~	UGS	3131	-	A/SPR	UGS3132-	
UCN	4202	Α	SPR	UCN5804B	~	UHP	181		SPR	UDN5706A	~
UCN	4203	A	SPR	UCN5804B	~	UHP	400	-1	SPR	UDN5706A	~
UCN	4204	В	SPR	UCN5804B		UHP	400	4	SPR	UDN5706A	~
UCN	4205	B-2	SPR	UCN5804B		UHP	402	-1	SPR	UDN5703A	≈

<sup>#</sup> European registration; manufactured by various companies including ITT, Philips, SGS/ATES, Siemens, Thomson-CSF, AEG-Telefunken, Valvo, & others.

<sup>≈</sup> Functional equivalent only; usually improved performance but not necessarily pin compatible.

# CROSS REFERENCE $UHP-\mu A$

C	Competitive	Part Nu	mber	Suggested		C	ompetitive	Part Nun	nber	Suggested	
Prefix	Base Number	Suffix	Mfg. Code(s)	Allegro Replacement	Notes	Prefix	Base Number	Suffix	Mfg. Code(s)	Allegro Replacement	Notes
UHP	402		SPR	UDN5703A	≈	ULN	2804	Α	MOT/SGS	ULN2804A	
UHP	403	-1	SPR	UDN5703A	≈	ULN	2804	D	ΙP	ULN2804LW	
UHP	403		SPR	UDN5703A	~	ULN	2804	N	IP	ULN2804A	
UHP	406	-1	SPR	UDN5706A	≈	ULN	2823	D	IP	ULN2823LW	
UHP	406		SPR	UDN5706A	≈	ULN	2823	N	IP	ULN2823A	
ULN	2001	Α	MOT/SGS	ULN2001A		ULN	3006	Т	SPR	A3121EU	
ULN	2001	AN	TI	ULN2001A		ULN	3008	M	SPR	UGN3501LI	≈
ULN	2001	N	IP	ULN2001A		ULN	3008	Т	SPR	UGN3501U	
ULN	2003	Α	MOT/SGS	ULN2003A		ULN	3827	Α	SPR	A3828EA	
ULN	2003	AD	Τί	ULN2003L		ULN	3847	EP	SPR	A3844EEP	
ULN	2003	AN	TI	ULN2003A		ULS	3006	Т	SPR	A3121LU	
ULN	2003	D	ΙP	ULN2003L		UPA	2001	С	NEC	ULN2001A	
ULN	2003	DI	SGS	ULN2003L		UPA	2003	С	NEC -	ULN2003A	
ULN	2003	N	IP/SIG	ULN2003A		UPA	2004	С	NEC	ULN2004A	
ULN	2004	Α	MOT/SGS	ULN2004A		XR	2001	Р	EXR	ULQ2001A	
ULN	2004	. AD	TI	ULN2004L		XR	2003	Р	EXR	ULQ2003A	
ULN	2004	AN	TI	ULN2004A		XR	2004	Р	EXR	ULQ2004A	
ULN	2004	D	IΡ	ULN2004L		XR	2013	CP	EXR	ULN2013A	
ULN	2004	DI	SGS	ULN2004L		XR	2201	CP	EXR	ULN2001A	
ULN	2004	N	IP/SIG	ULN2004A		XR	2203	CP	EXR	ULN2003A	
ULN	2013	N	ΙP	ULN2013A		XR	2204	CP	EXR	ULN2004A	
ULN	2023	D	ΙΡ	ULN2023L		XR	6118	Р	EXR	UDN6118A	
ULN	2023	N	iP	ULN2023A		XR	6118	P-2	EXR	UDN6118A-2	
ULN	2024	N	ΙP	ULN2024A		μΑ	9665	PC	FSC	ULN2001A	
ULN	2064	В	MOT/SGS	ULN2064B		μΑ	9667	PC	FSC	ULN2003A	
ULN	2064	Ν	IΡ	ULN2064B		μΑ	9668	PC	FSC	ULN2004A	
ULN	2064	NE	MOT/TI	ULN2064B			6	SS	MICR	UGN3501-	~
ULN	2065	В	MOT/SGS	ULN2065B			8	SS1E1	MICR	UGN3130U	≈
ULN	2065	N	ΙP	ULN2065B			- 8	SS3E1	MICR	UGN3121EU	~
ULN	2065	NE	MOT/TI	ULN2065B			8	SS5E1	MICR	UGN3130U	≈
ULN	2068	В	MOT/SGS	ULN2068B			8	SS7E1	MICR	UGN3120U	~
ULN	2068	N	IP	ULN2068B			55	SS16	MICR	UGN3120U	≈
ULN	2068	NE	TI	ULN2068B			65	SS2	MICR	UGN3113U	≈
ULN	2069	В	MOT/SGS	ULN2069B			65	SS4	MICR	UGN3113U	≈.
ULN	2069	N ·	. IP	ULN2069B			91	SS12-2	MICR	UGN3501U	≈
ULN	2069	NE	TI	ULN2069B			92	SS12-2	MICR	UGN3501U	≈
ULN	2401	Α	SPR	ULN2455A	*		103	SR	MICR	UGN3501-	≈
ULN	2801	A	MOT/SGS	ULN2801A			103	SR13A-1		A3121L-	≈
ULN	2801	N	ΙP	ULN2801A		1	103	SR17A-1		UGS3130-	≈
ULN	2803	Α	MOT/SGS	ULN2803A			103	SR5A-1	MICR	UGN3113-	≈
ULN	2803	D	ΙP	ULN2803LW			513	SS16	MICR	UGS3140U	≈
ULN	2803	N	iP	ULN2803A		l	517	SS16	MICR	UGS3132U	≈
J		••	••			I	0	55.0		2 300 1020	-

<sup>#</sup> European registration; manufactured by various companies including ITT, Philips, SGS/ATES, Siemens, Thomson-CSF, AEG-Telefunken, Valvo, & others.


<sup>≈</sup> Functional equivalent only; usually improved performance but not necessarily pin compatible.


### **CROSS REFERENCE**


С	ompetitive	Part Nun	nber	Suggested		C	ompetitive	nber	Suggested		
Prefix	Base Number	Suffix	Mfg. Code(s)	Allegro Replacement	Notes	Prefix	Base Number	Suffix	Mfg. Code(s)	Allegro Replacement	Note
	518	SS16	MICR	UGS3132U	≈						
	552		ITT	ULN2001A		l					
	556		ITT	ULN2003A		1					
	613	SS2	MICR	A3121E-	≈	l					
	613	SS2	MICR	A3121LU	<b>≈</b>						
	613	SS4	MICR	UGS3120U	≈	i					
	617	SS2	MICR	UGS3130-	~	i					
	617	SS2	MICR	UGS3130U	≈	İ					
	617	SS4	MICR	UGS3130U	~	İ					
	652		!TT	ULN2001A		ł					
	656		ITT	ULN2003A		ł					
	9665	PC	FSC	ULN2001A		ł					
	9667	PC	FSC	ULN2003A		l					
	9668	PC	FSC	ULN2004A		ł					
						l					


<sup>#</sup> European registration; manufactured by various companies including ITT, Philips, SGS/ATES, Siemens, Thomson-CSF, AEG-Telefunken, Valvo, & others.

<sup>≈</sup> Functional equivalent only; usually improved performance but not necessarily pin compatible.

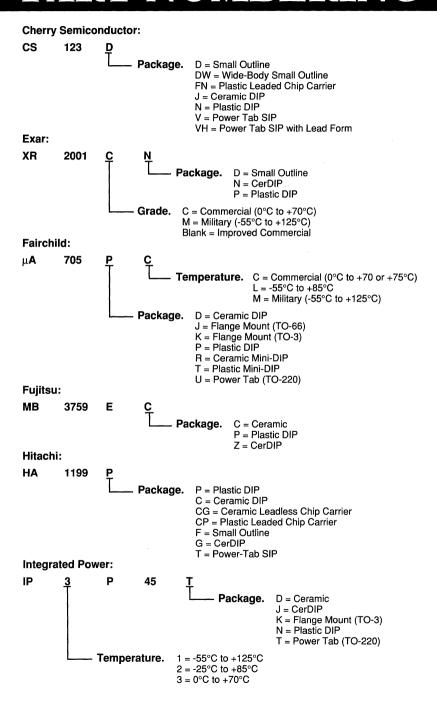

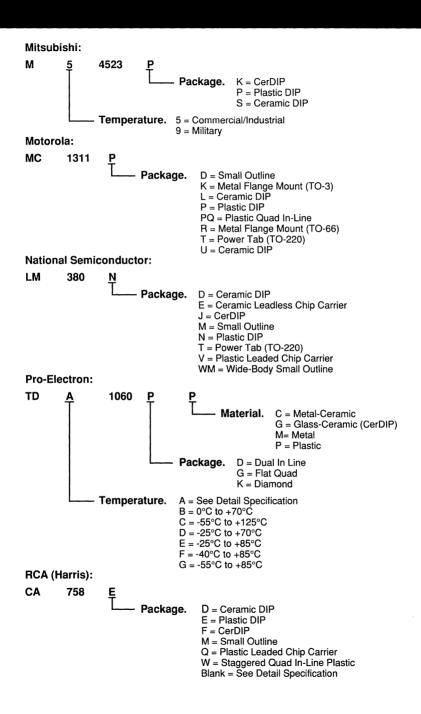

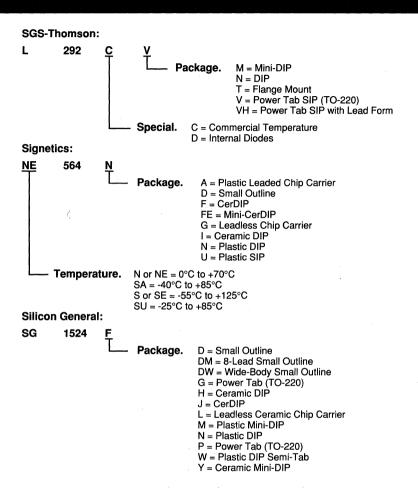

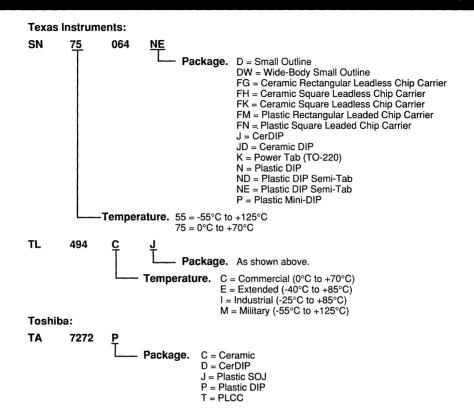



EUNDBALTSKORMALION & PRODUCTINDEX

SPROUGGERNSKERIUNSEUUDEN.

#### PERIPHERAL POWER & DISPLAY DRIVER ICS

**[**3]

HATETHUE ESENSORICS

MASS STORAGE APPLICATION ICS

AUTOMOTIVE, SIGNAL PROCESSING, & CONSUMER IC



DISCRETE TRANSISTORS, DIODES, & ARRAYS

76

QUALITY & RELIABILITY INFORMATION

PACKAGE INFORMATION




# SECTION 3. TECHNICAL DATA & APPLICATION NOTES for Peripheral Power and Display Driver ICs

in Numerical Order	Beginning at 3-1
Applications Information:	
Power ICs for Motor-Drive Applications	3-222
Integrated Circuits for Current-Sourcing Applications	3-229
Expanding the Frontiers of IC Interface for Electronic Displays	3-239
Trends in IC Interface for Electronic Displays	3-245
2936 3-Phase Brushless DC Motor Controller/Driver	3-251
Series 5800 BiMOS II Power Drivers	3-255
See Also:	
Reliability of Series 2000 and 2800 Darlington Drivers	Section 8
Reliability of Series 5800 BiMOS Drivers	Section 8
Reliability of Series 6100 High-Voltage Display Drivers	Section 8


# 2001 THRU 2024

#### HIGH-VOLTAGE, HIGH-CURRENT DARLINGTON ARRAYS

#### **ULN20XXL**



#### **ULN20XXA**



Dwg. No. A-9594

#### ABSOLUTE MAXIMUM RATINGS

Output Voltage, V <sub>CE</sub>
(ULN200X*, ULN2013A) <b>50 V</b>
(ULN202X*) 95 V
Input Voltage, V <sub>IN</sub>
Continuous Output Current, I <sub>C</sub>
(ULN200X*, ULN202X*) 500 mA
(ULN2013A) 600 mA
Continuous Input Current, I <sub>IN</sub> 25 mA
Power Dissipation, P <sub>D</sub>
(one Darlington pair) 1.0 W
(total package) See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C

Note that the ULN2000A series (dual in-line package) and ULN2000L series (small-outline IC package) are electrically identical and share a common pin number assignment.

Ideally suited for interfacing between low-level logic circuitry and multiple peripheral power loads, the Series ULN2000A/L high-voltage, high-current Darlington arrays feature continuous load current ratings to 600 mA for each of the seven drivers. At an appropriate duty cycle depending on ambient temperature and number of drivers turned ON simultaneously, typical power loads totaling over 260 W (400 mA x 7, 95 V) can be controlled. Typical loads include relays, solenoids, stepping motors, magnetic print hammers, multiplexed LED and incandescent displays, and heaters. All devices feature open collector outputs with integral clamp diodes.

The ULN2001A device is a general-purpose array that may be used with external input current limiting, or with most PMOS or CMOS logic directly.

The Series ULN20x3A/L has series input resistors selected for operation directly with 5 V TTL or CMOS. These devices will handle numerous interface needs—particularly those beyond the capabilities of standard logic buffers.

The Series ULN20x4A/L features series input resistors for operation directly from 6 to 15 V CMOS or PMOS logic outputs.

The Series ULN200xA/L is the standard Darlington array. The outputs are capable of sinking 500 mA and will withstand at least 50 V in the OFF state. Outputs may be paralleled for higher load current capability. The ULN2013A device is similar except that it will sink 600 mA. The Series ULN202xA/L will withstand 95 V in the OFF state.

These Darlington arrays are furnished in 16-pin dual in-line plastic packages (suffix A) and 16-lead surface-mountable SOICs (suffix L). All devices are pinned with outputs opposite inputs to facilitate ease of circuit board layout.

#### FEATURES


- TTL, DTL, PMOS, or CMOS Compatible Inputs
- Output Current to 600 mA
- Output Voltage to 95 V
- ☑ Transient-Protected Outputs
- Dual In-Line Plastic Package or Small-Outline IC Package

x = digit to identify specific device. Characteristic shown applies to family of devices with remaining digits as shown. See matrix on next page.

#### 2001 thru 2024 HIGH-VOLTAGE, HIGH-CURRENT DARLINGTON ARRAYS


#### PARTIAL SCHEMATICS

#### **ULN2001A** (Each Driver)




Dwg. No. A-9595

#### **ULN20X3A/L** (Each Driver)



Dwg. No. A-9651

#### **ULN20X4A/L** (Each Driver)




Dwg. No. A-9898A

#### **DEVICE NUMBER DESIGNATION**

V <sub>CE(MAX)</sub>	50V	50 V	95V
I <sub>C(MAX)</sub>	500 mA	600 mA	500 mA

Logic		Part Number	
General Purpose PMOS, CMOS	ULN2001A*	_	_
5 V TTL, CMOS	ULN2003A* ULN2003L*	ULN2013A*	ULN2023A* ULN2023L
6-15 V CMOS, PMOS	ULN2004A* ULN2004L*	_	ULN2024A

<sup>\*</sup>Also available for operation between -40°C and .+85°C. To order, change prefix from 'ULN' to 'ULQ'.



Dwg. No. GP-006

X = Digit to identify specific device. Specification shown applies to family of devices with remaining digits as shown. See matrix above.

#### 2001 thru 2024 HIGH-VOLTAGE, HIGH-CURRENT DARLINGTON ARRAYS

#### SERIES ULN2000A/L

#### ELECTRICAL CHARACTERISTICS at +25°C (unless otherwise noted).

		Test	Applicable			Lii	mits	
Characteristic	Symbol	Fig.	Devices	Test Conditions	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	1A	All	V <sub>CE</sub> = 50 V, T <sub>A</sub> = 25°C	_	< 1	50	μΑ
				V <sub>CE</sub> = 50 V, T <sub>A</sub> = 70°C	_	< 1	100	μА
,		1B	ULN2004*	$V_{CE} = 50 \text{ V}, T_A = 70^{\circ}\text{C}, V_{IN} = 1.0 \text{ V}$	_	< 5	500	μΑ
Collector-Emitter	V <sub>CE(SAT)</sub>	2	All	I <sub>C</sub> = 100 mA, I <sub>B</sub> = 250 μA	_	0.9	1.1	٧
Saturation Voltage				$I_{\rm C} = 200 \text{ mA}, I_{\rm B} = 350 \mu\text{A}$	_	1.1	1.3	V
				$I_{\rm C} = 350 \text{ mA}, I_{\rm B} = 500  \mu\text{A}$	_	1.3	1.6	V
Input Current	I <sub>IN(ON)</sub>	3	ULN2003*	V <sub>IN</sub> = 3.85 V	_	0.93	1.35	mA
			ULN2004*	V <sub>IN</sub> = 5.0 V	_	0.35	0.5	mA
				V <sub>IN</sub> = 12 V	_	1.0	1.45	mA
	I <sub>IN(OFF)</sub>	4	All	I <sub>C</sub> = 500 μA, T <sub>A</sub> = 70°C	50	65	_	μА
Input Voltage	V <sub>IN(ON)</sub>	5	ULN2003*	V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 200 mA		_	2.4	V
				$V_{CE} = 2.0 \text{ V}, I_{C} = 250 \text{ mA}$	_		2.7	٧
				$V_{CE} = 2.0 \text{ V}, I_{C} = 300 \text{ mA}$	-	_	3.0	٧
			ULN2004*	V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 125 mA		_	5.0	V
;				$V_{CE} = 2.0 \text{ V, } I_{C} = 200 \text{ mA}$		_	6.0	٧
				$V_{CE} = 2.0 \text{ V}, I_{C} = 275 \text{ mA}$	_	_	7.0	_ V
				V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 350 mA	_	_	8.0	٧
D-C Forward Current Transfer Ratio	h <sub>FE</sub>	2	ULN2001A	V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 350 mA	1000	_	_	_
Input Capacitance	C <sub>IN</sub>	_	All		_	15	25	pF
Turn-On Delay	t <sub>PLH</sub>	8	All	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>		0.25	1.0	μs
Turn-Off Delay	t <sub>PHL</sub>	8	All	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>	_	0.25	1.0	μs
Clamp Diode	I <sub>R</sub>	6	All	$V_{R} = 50 \text{ V}, T_{A} = 25^{\circ}\text{C}$	_		50	μА
Leakage Current				V <sub>R</sub> = 50 V, T <sub>A</sub> = 70°C	_		100	μΑ
Clamp Diode Forward Voltage	V <sub>F</sub>	7	All	I <sub>F</sub> = 350 mA		1.7	2.0	٧

<sup>\*</sup>Complete part number includes suffix to identify package style: A = DIP, L = SOIC.

# 2001 thru 2024 HIGH-VOLTAGE, HIGH-CURRENT DARLINGTON ARRAYS

TYPE ULN2013A ELECTRICAL CHARACTERISTICS at +25°C (unless otherwise noted).

		Test			Limits				
Characteristic	Symbol	Fig.	Test Conditions	Min.	Тур.	Max.	Units		
Output Leakage Current	I <sub>CEX</sub>	1A	V <sub>CE</sub> = 50 V, T <sub>A</sub> = 25°C	_	< 1	50	μΑ		
			V <sub>CE</sub> = 50 V, T <sub>A</sub> = 70°C	_	< 1	100	μА		
Collector-Emitter	V <sub>CE(SAT)</sub>	2	$I_{\rm C} = 200 \text{ mA}, I_{\rm B} = 350 \mu\text{A}$	_	1.1	1.3	٧		
Saturation Voltage			$I_{\rm C} = 350$ mA, $I_{\rm B} = 500$ $\mu{\rm A}$	<b>—</b>	<b>∌1.3</b>	1.6	٧		
			I <sub>C</sub> = 500 mA, I <sub>B</sub> = 600 μA	_	1.7	1.9	V		
Input Current	I <sub>IN(ON)</sub>	3	V <sub>IN</sub> = 3.85 V	_	0.93	1.35	mA		
	I <sub>IN(OFF)</sub>	4	$I_C = 500 \mu A, T_A = 70^{\circ}C$	50	65		μА		
Input Voltage	V <sub>IN(ON)</sub>	5	V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 250 mA	<u> </u>		2.7	V		
			V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 300 mA	-		3.0	V		
			V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 500 mA	_	_	3.5	V		
Input Capacitance	C <sub>IN</sub>	_		1 -	15	25	pF		
Turn-On Delay	t <sub>on</sub>	8	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>	1-	0.25	1.0	μs		
Turn-Off Delay	t <sub>OFF</sub>	- 8	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>		0.25	1.0	μs		
Clamp Diode	I <sub>R</sub>	. 6	V <sub>R</sub> = 50 V, T <sub>A</sub> = 25°C	<b>1</b> –		50	μА		
Leakage Current			V <sub>R</sub> = 50 V, T <sub>A</sub> = 70°C			100	μА		
Clamp Diode Forward Voltage	V <sub>F</sub>	7	I <sub>F</sub> = 350 mA	<u> </u>	1.7	2.0	V		
i oiwaiu voitage		-	I <sub>F</sub> = 500 mA	_	2.1	2.5	V		

# 2001 thru 2024 HIGH-VOLTAGE, HIGH-CURRENT DARLINGTON ARRAYS

#### SERIES ULN2020A/L


#### ELECTRICAL CHARACTERISTICS at +25°C (unless otherwise noted).


		Test	Applicable			Lir	nits	
Characteristic	Symbol	Fig.	Devices	Test Conditions	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	1A	All	V <sub>CE</sub> = 95 V, T <sub>A</sub> = 25°C	_	< 1	50	μΑ
				V <sub>CE</sub> = 95 V, T <sub>A</sub> = 70°C		< 1	100	μА
		1B	ULN2024A	$V_{CE} = 95 \text{ V}, T_A = 70^{\circ}\text{C}, V_{IN} = 1.0 \text{ V}$	-	< 5	500	μΑ
Collector-Emitter	V <sub>CE(SAT)</sub>	2	All	$I_{\rm C} = 100 \text{ mA}, I_{\rm B} = 250 \mu\text{A}$	_	0.9	1.1	V
Saturation Voltage				$I_{\rm C} = 200 \text{ mA}, I_{\rm B} = 350 \mu\text{A}$	_	1.1	1.3	V
				$I_{\rm C} = 350 \text{ mA}, I_{\rm B} = 500 \mu\text{A}$	_	1.3	1.6	V
Input Current	I <sub>IN(ON)</sub>	3	ULN2023*	V <sub>IN</sub> = 3.85 V	_	0.93	1.35	mA
			ULN2024A	V <sub>IN</sub> = 5.0 V	_	0.35	0.5	mA
				V <sub>IN</sub> = 12 V	_	1.0	1.45	mA
	I <sub>IN(OFF)</sub>	4	All	$I_C = 500 \mu\text{A},  T_A = 70^{\circ}\text{C}$	50	65	_	μА
Input Voltage	V <sub>IN(ON)</sub>	5	ULN2023*	V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 200 mA		_	2.4	٧
				V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 250 mA	-	_	2.7	٧
				V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 300 mA	-		3.0	٧
			ULN2024A	V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 125 mA	_	_	5.0	٧
			1	V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 200 mA			6.0	٧
				V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 275 mA	_	_	7.0	٧
				V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 350 mA	_	_	8.0	٧
Input Capacitance	C <sub>IN</sub>	—	All		_	15	25	pF
Turn-On Delay	t <sub>PLH</sub>	8	All	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>		0.25	1.0	μs
Turn-Off Delay	t <sub>PHL</sub>	8	All	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>	_	0.25	1.0	μs
Clamp Diode	I <sub>R</sub>	6	All	V <sub>R</sub> = 95 V, T <sub>A</sub> = 25°C	_		50	μΑ
Leakage Current			i	V <sub>R</sub> = 95 V, T <sub>A</sub> = 70°C	_		100	μΑ
Clamp Diode Forward Voltage	V <sub>F</sub>	7	All	I <sub>F</sub> = 350 mA	_	1.7	2.0	V


 $<sup>^{\</sup>star}$ Complete part number includes suffix to identify package style: A = DIP, L = SOIC.

# 2001 thru 2024 HIGH-VOLTAGE, HIGH-CURRENT DARLINGTON ARRAYS

#### TEST FIGURES







Dwg. No. A-9731A

FIGURE 1A




FIGURE 1B






FIGURE 2




Dwg. No. A-9734A

FIGURE 3




Dwg. No. A-9735A

**FIGURE 4** 



Dwg. No. A-9736A

FIGURE 5



ULN20X4\* Complete part number includes a final letter to indicate package.

X = Digit to identify specific device. Specification shown applies

ULN20X1\* ULN20X3\*

to family of devices with remaining digits as shown.


#### FIGURE 8

#### FIGURE 6


#### FIGURE 7

#### 2001 thru 2024 HIGH-VOLTAGE, HIGH-CURRENT DARLINGTON ARRAYS


#### PEAK COLLECTOR CURRENT AS A FUNCTION OF DUTY CYCLE (DUAL IN-LINE PACKAGED DEVICES)

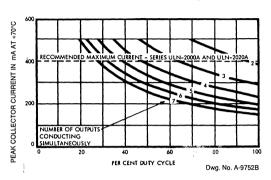

#### (SMALL OUTLINE PACKAGED DEVICES)

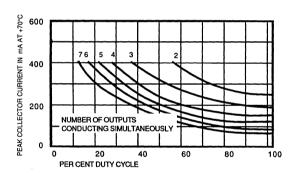


#### COLLECTOR CURRENT AS A FUNCTION OF SATURATION VOLTAGE




Dwg. No. A-9754C

#### TYPICAL APPLICATIONS




Dwg. No. A-9652



Dwg. No. A-9654A

# COLLECTOR CURRENT AS A FUNCTION OF INPUT CURRENT



Dwg. No. A-10,872B


#### 2001 thru 2024 HIGH-VOLTAGE, HIGH-CURRENT DARLINGTON ARRAYS

#### **TYPICAL APPLICATIONS**


# TIL OUTPUT Dwg. No. A-9653A

#### INPUT CURRENT AS A FUNCTION OF INPUT VOLTAGE


#### SERIES ULN20X3A/L



Dwg. No. A-9750B




#### SERIES ULN20X4A/L



Dwg. No. A-9899A

# 2061 THRU 2069

#### ULN2064/65B



Dwg. No. A-9765A

Soc Guido

#### ABSOLUTE MAXIMUM RATINGS at +25°C Free-Air Temperature for Any One Driver (unless otherwise noted)

Output Voltage V

Output voltage, v <sub>CEX</sub> See Guide
Output Sustaining Voltage,
V <sub>CE(SUS)</sub> See Guide
Output Current, I <sub>OUT</sub> (Note 1) 1.75 A
Input Voltage, V <sub>IN</sub> (Note 2) See Guide
Input Current, I <sub>B</sub> (Note 3) 25 mA
Supply Voltage,
V <sub>S</sub> (ULN2068B/LB & 2069B) <b>10 V</b>
Total Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range, (Note 4),
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to -150°C
4. Allowable combinations of autout aumont

- Allowable combinations of output current, number of outputs conducting, and duty cycle are shown on following pages.
- Input voltage is referenced to the substrate (no connection to other pins) for the ULN2061/62M, reference is ground for all other types.
- 3. Input current may be limited by maximum allowable input voltage.
- The ULN2065B and ULN2068B are also available for operation between -40°C and +85°C. Change third character from 'N' to 'Q'.

#### 1.5 A DARLINGTON SWITCHES

High-voltage, high-current Darlington arrays ULN2061M through ULN2069B are designed for interface between low-level logic and a variety of peripheral loads such as relays, solenoids, dc and stepper motors, magnetic print hammers, multiplexed LED and incandescent displays, heaters, and similar loads. Output OFF voltage ratings of 50 V and 80 V are available. In the DIP, the quad drivers can drive resistive loads to 480 watts (1.5 A x 80 V, 26% duty cycle). For inductive loads, sustaining voltages of 35 V and 50 V at 100 mA are specified.


Dual-driver arrays ULN2061M and the higher-voltage ULN2062M are used for common-emitter (externally connected) or emitter-follower applications. They are supplied in 8-pin plastic mini-DIPs.

Quad drivers ULN2064B/LB, ULN2065B, ULN2068B/LB, and ULN2069B are intended for use with TTL, low-speed TTL, and 5 V MOS logic. The ULN2065B and ULN2069B are selected for the 80 V minimum output breakdown specification. The ULN2068B/LB and ULN2069B have pre-driver stages and are recommended for applications requiring high gain (low input-current loading). Quad-driver arrays are supplied with heat-sink contact tabs in 16-pin plastic DIPs (suffix B) and 20-lead surface-mountable wide-body SOICs (suffix LB).

#### **FEATURES**

- TTL, DTL, MOS, CMOS Compatible Inputs
- Transient-Protected Outputs
- Loads to 480 Watts
- Heat-Sink Contact Tabs on Quad Arrays


Always order by complete part number, e.g., ULN2061M. See matrix on next page. Note that all devices are not available in all package types.

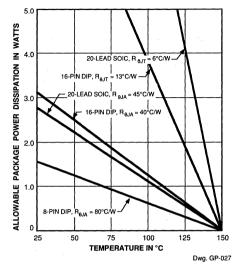

#### **SELECTION GUIDE**

Part Number*	Max. V <sub>CEX</sub>	Min. V <sub>CE(SUS)</sub>	Max. V <sub>IN</sub>	Application
ULN2061M ULN2062M	50 V 80 V	35 V 50 V	30 V 60 V	TTL, DTL, Schottky TTL, and 5 V CMOS
ULN2064B ULN2064LB	50 V	35 V	15 V	TTL, DTL, Schottky TTL, and 5 V CMOS
ULN2065B†	80 V	50 V	15 V	
ULN2068B† ULN2068LB	50 V	35 V	15 V	TTL, DTL, Schottky TTL, and 5 V CMOS
ULN2069B	80 V	50 V	15 V	

- \* Suffixes 'LB' are SOICs, 'B' and 'M' are DIPs.
- These devices are also available for operation between -40°C and +85°C. To order, change third character from 'N' to 'Q'.

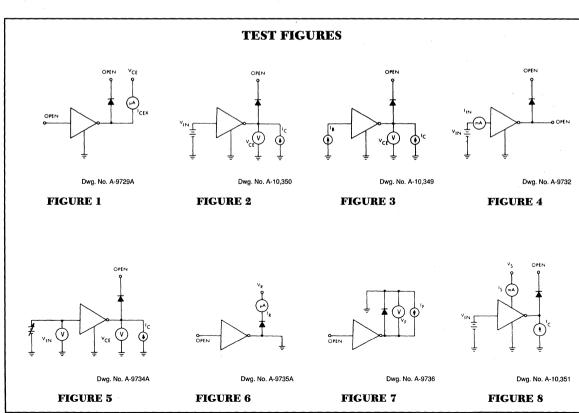


#### **PARTIAL SCHEMATIC**

# 8 0 0 C SUB 7.2K SUB 350 0 E

Dwg. No. A-10,352B

#### ULN2061/62M



Dwg. No. A-10,230A

#### ELECTRICAL CHARACTERISTICS at +25°C (unless otherwise noted).

		Test	Applicable		1	Limits	
Characteristic	Symbol	Fig.	Devices	Test Conditions	Min.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	1	ULN2061M	V <sub>CE</sub> = 50 V	-	100	μΑ
				V <sub>CE</sub> = 50 V, T <sub>A</sub> = 70°C	_	500	μA
			ULN2062M	V <sub>CE</sub> = 80 V	_	100	μA
		j		V <sub>CE</sub> = 80 V, T <sub>A</sub> = 70°C	_	500	μA
Output Sustaining Voltage	V <sub>CE(SUS)</sub>	2	ULN2061M	$I_C = 100 \text{ mA}, V_{IN} = 0.4 \text{ V}$	35		V
		Ì	ULN2062M	I <sub>C</sub> = 100 mA, V <sub>IN</sub> = 0.4 V	50	_	V
Collector-Emitter	V <sub>CE(SAT)</sub>	3	Both	$I_{\rm C} = 500 \text{ mA}, I_{\rm B} = 625 \mu\text{A}$	T -	1.1	V
Saturation Voltage		i		$I_{\rm C} = 750 \text{ mA}, I_{\rm B} = 935 \mu\text{A}$	T -	1.2	٧
				I <sub>C</sub> = 1.0 A, I <sub>B</sub> = 1.25 mA	T -	1.3	V
				$I_C = 1.25 \text{ A}^{**}, I_B = 2.0 \text{ mA}$	_	1.4	٧
		[	ULN2062M	I <sub>C</sub> = 1.5 A**, I <sub>B</sub> = 2.25 mA	_	1.5	V
Input Current	I <sub>IN(ON)</sub>	4	Both	V <sub>IN</sub> = 2.4 V	1.4	4.3	mA
	:	ļ		V <sub>IN</sub> = 3.75 V	3.3	9.6	mA
Input Voltage	V <sub>IN(ON)</sub>	5	Both	$V_{CE} = 2.0 \text{ V}, I_{C} = 1.0 \text{ A}$	1 -	2.0	V
		}	ULN2061M	V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 1.25 A**	_	2.5	٧
		}	ULN2062M	$V_{CE} = 2.0 \text{ V}, I_{C} = 1.5 \text{ A}^{**}$		2.5	V
Turn-On Delay	t <sub>PLH</sub>	_	Both	0.5 E <sub>in</sub> to 0.5 E <sub>out</sub>		1.0	μs
Turn-Off Delay	t <sub>PHL</sub>	_	Both	0.5 E <sub>in</sub> to 0.5 E <sub>out</sub>	_	1.5	μs
Clamp Diode Leakage Current	l <sub>R</sub>	6	ULN2061M	V <sub>R</sub> = 50 V	_	50	μΑ
				V <sub>R</sub> = 50 V, T <sub>A</sub> = 70°C	_	100	μA
			ULN2062M	V <sub>R</sub> = 80 V	_	50	μA
				V <sub>R</sub> = 80 V, T <sub>A</sub> = 70°C	_	100	μΑ
Clamp Diode Forward Voltage	V <sub>F</sub>	7	Both	I <sub>F</sub> = 1.0 A	_	1.75	٧
				I <sub>F</sub> = 1.5 A	_	2.0	V

\*\*Pulse-Test


#### 

#### ELECTRICAL CHARACTERISTICS at +25°C (unless otherwise noted).


		Test	Applicable			Limits	
Characteristic	Symbol	Fig.	Devices	Test Conditions	Min.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	1	ULN2064*	V <sub>CE</sub> = 50 V	_	100	μA
				V <sub>CE</sub> = 50 V, T <sub>A</sub> = 70°C	_	500	μA
			ULN2065B	V <sub>CE</sub> = 80 V	T-	100	μA
				V <sub>CE</sub> = 80 V, T <sub>A</sub> = 70°C	_	500	μA
Output Sustaining Voltage	V <sub>CE(SUS)</sub>	2	ULN2064*	I <sub>C</sub> = 100 mA, V <sub>IN</sub> = 0.4 V	35	_	٧
			ULN2065B	$I_{\rm C} = 100 \text{ mA}, V_{\rm IN} = 0.4 \text{ V}$	50		٧
Collector-Emitter	V <sub>CE(SAT)</sub>	3	Both	$I_{\rm C} = 500 \text{ mA}, I_{\rm B} = 625 \mu\text{A}$	T -	1.1	V
Saturation Voltage				I <sub>C</sub> = 750 mA, I <sub>B</sub> = 935 μA	_	1.2	V
		ļ		I <sub>C</sub> = 1.0 A, I <sub>B</sub> = 1.25 mA	_	1.3	٧
				I <sub>C</sub> = 1.25 A, I <sub>B</sub> = 2.0 mA		1.4	V
			ULN2065B	I <sub>C</sub> = 1.5 A, I <sub>B</sub> = 2.25 mA		1.5	V
Input Current	I <sub>IN(ON)</sub>	4	Both	V <sub>IN</sub> = 2.4 V	1.4	4.3	mA
				V <sub>IN</sub> = 3.75 V	3.3	9.6	mA
Input Voltage	V <sub>IN(ON)</sub>	5	Both	$V_{CE} = 2.0 \text{ V}, I_{C} = 1.0 \text{ A}$	_	2.0	V
			ULN2064*	V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 1.25 A	_	2.5	٧
			ULN2065B	$V_{CE} = 2.0 \text{ V}, I_{C} = 1.5 \text{ A}$		2.5	٧
Turn-On Delay	t <sub>PLH</sub>		Both	0.5 E <sub>in</sub> to 0.5 E <sub>out</sub>		1.0	μs
Turn-Off Delay	t <sub>PHL</sub>	_	Both	0.5 E <sub>in</sub> to 0.5 E <sub>out</sub>	_	1.5	μs
Clamp Diode Leakage Current	I <sub>R</sub>	6	ULN2064*	V <sub>R</sub> = 50 V	_	50	μА
				V <sub>R</sub> = 50 V, T <sub>A</sub> = 70°C	_	100	μA
	Ì		ULN2065B	V <sub>R</sub> = 80 V	_	50	μА
				V <sub>R</sub> = 80 V, T <sub>A</sub> = 70°C	_	100	μΑ
Clamp Diode Forward Voltage	V <sub>F</sub>	7	Both	I <sub>F</sub> = 1.0 A		1.75	V
		[		I <sub>F</sub> = 1.5 A	_	2.0	V


<sup>\*</sup> Complete part number includes suffix to identify package style: B = DIP with heat sink tabs, LB = SOIC with heat sink tabs.

#### **PARTIAL SCHEMATIC**



Dwg. No. A-10,354C







#### ELECTRICAL CHARACTERISTICS at +25°C, V<sub>S</sub> = 5.0 V (unless otherwise noted).

		Test	Applicable			Limits	
Characteristic	Symbol	Fig.	Devices	Test Conditions	Min.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	1	ULN2068*	V <sub>CE</sub> = 50 V	_	100	μA
				V <sub>CE</sub> = 50 V, T <sub>A</sub> = 70°C	_	500	μА
			ULN2069B	V <sub>CE</sub> = 80 V		100	μА
				$V_{CE} = 80 \text{ V}, T_{A} = 70^{\circ}\text{C}$	_	500	μA
Output Sustaining Voltage	V <sub>CE(SUS)</sub>	2	ULN2068*	I <sub>C</sub> = 100 mA, V <sub>IN</sub> = 0.4 V	35		V
			ULN2069B	$I_{\rm C} = 100 \text{ mA}, V_{\rm IN} = 0.4 \text{ V}$	50	_	٧
Collector-Emitter	V <sub>CE(SAT)</sub>	3	Both	$I_C = 500 \text{ mA}, V_{IN} = 2.75 \text{ V}$	_	1.1	V
Saturation Voltage				$I_C = 750 \text{ mA}, V_{IN} = 2.75 \text{ V}$	_	1.2	V
	ŀ	}		I <sub>C</sub> = 1.0 A, V <sub>IN</sub> = 2.75 V	_	1.3	V
				I <sub>C</sub> = 1.25 A, V <sub>IN</sub> = 2.75 V	_	1.4	V
	}	ŀ	ULN2069B	I <sub>C</sub> = 1.5 A, V <sub>IN</sub> = 2.75 V	_	1.5	٧
Input Current	I <sub>IN(ON)</sub>	4	Both	V <sub>IN</sub> = 2.75 V		550	μА
				V <sub>IN</sub> = 3.75 V		1000	μA
Input Voltage	V <sub>IN(ON)</sub>	5	ULN2068*	$V_{CE} = 2.0 \text{ V}, I_{C} = 1.25 \text{ A}$	_	2.75	V
			ULN2069B	$V_{CE} = 2.0 \text{ V}, I_{C} = 1.5 \text{ A}$	_	2.75	V
Supply Current	I <sub>s</sub>	8	Both	$I_C = 500 \text{ mA}, V_{IN} = 2.75 \text{ V}$	_	6.0	mA
Turn-On Delay	t <sub>PLH</sub>	<u> </u>	Both	0.5 E <sub>in</sub> to 0.5 E <sub>out</sub>	_	1.0	μs
Turn-Off Delay	t <sub>PHL</sub>	_	Both	$0.5 E_{in}$ to $0.5 E_{out}$ , $I_{C} = 1.25 A$	_	1.5	μs
Clamp Diode Leakage Current	I <sub>R</sub>	6	ULN2068*	V <sub>R</sub> = 50 V	_	50	μA
				V <sub>R</sub> = 50 V, T <sub>A</sub> = 70°C	_	100	μA
			ULN2069B	V <sub>R</sub> = 80 V	_	50	μА
				V <sub>R</sub> = 80 V, T <sub>A</sub> = 70°C	_	100	μA
Clamp Diode Forward Voltage	V <sub>F</sub>	7	Both	I <sub>F</sub> = 1.0 A	_	1.75	V
				l <sub>F</sub> = 1.5 A		2.0	V

<sup>\*</sup>Complete part number includes suffix to identify package style: B = DIP with heat sink tabs, LB = SOIC with heat sink tabs.

#### INPUT CURRENT AS A FUNCTION OF INPUT VOLTAGE AT +25°C







Dwg. No. A-10,363C

Dwg. No. A-12,306A

#### COLLECTOR CURRENT AS A FUNCTION OF INPUT CURRENT AT +25°C








Dwg. No. A-10,358C


Dwg. No. A-12,306A

# PEAK COLLECTOR CURRENT AS A FUNCTION OF DUTY CYCLE (DUAL IN-LINE PACKAGED DEVICES)






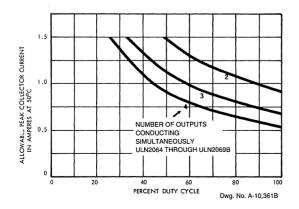

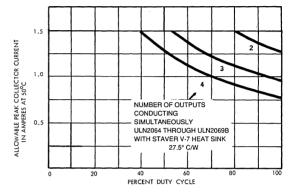



Dwg. No. A-10,398C

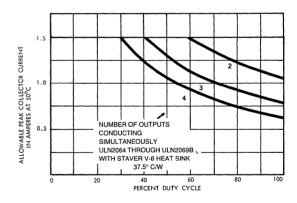


Dwg. No. A-10,400C


## PEAK COLLECTOR CURRENT AS A FUNCTION OF DUTY CYCLE (DUAL IN-LINE PACKAGED DEVICES, cont'd)

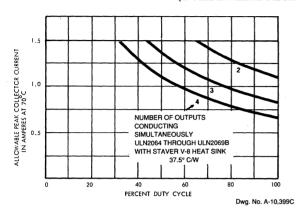

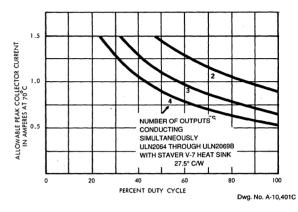


#### (ULN2064LB and ULN2068LB only)

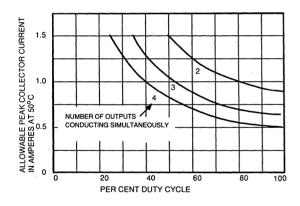

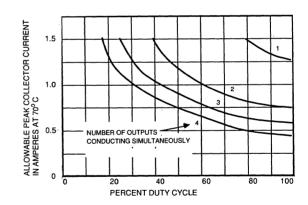

#### TYPICAL APPLICATION

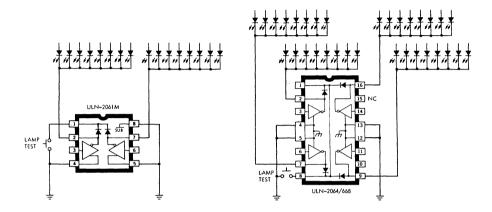

Dwg. No. B-1365

#### **COMMON-CATHODE LED DRIVERS**

(Type ULN2068B/LB is also applicable)

# 2540

#### QUAD DARLINGTON POWER DRIVER


Combining AND logic gates and inverting high-current bipolar outputs, the UDN2540B quad Darlington power driver provides interface between low-level signal-processing circuits and power loads totaling 360 W. Each of the four independent outputs can sink up to 1.8 A in the ON state with peak inrush currents to 2.5 A. The four power outputs are each comprised of an open-collector Darlington driver and an internal flyback/clamp diode for switching inductive leads. They feature a minimum breakdown and sustaining voltage of 50 V. The logic inputs are compatible with TTL and 5 V CMOS logic systems.

Typical applications include print heads, relays, solenoids, and dc stepping motors. The UDN2540B can also be used to drive high-current incandescent lamps, LEDS, and heaters. A similar device, specifically intended for driving a unipolar stepper motor in the two-phase drive format, is the UDN2544B.

The UDN2540B is supplied in a 16-pin batwing power DIP. The batwing construction provides for maximum package power dissipation in a standard DIP construction. At 25°C, and with only 1 sq. in. of copper foil at the ground tabs, the package is capable of safely dissipating 3.8 W.

#### **FEATURES**

- 1.8 A Continuous Output Current
- Output Voltage to 50 V
- TTL and 5 V CMOS Compatible Inputs
- Efficient Input/Output Pinning
- Integral Transient-Suppression Diodes
- Replaces L6221A



Dwg. No. A-11.561A

# ABSOLUTE MAXIMUM RATINGS at $T_A = 25^{\circ}C$

Output Voltage, V <sub>OUT</sub> 50 V
Output Current, IOUT (peak) 2.5 A
(continuous) 1.8 A
Logic Supply Voltage, V <sub>CC</sub> <b>7.0 V</b>
Input Voltage, V <sub>IN</sub> 7.0 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Bange

T<sub>S</sub> .....-55°C to +150°C

Always order by complete part number: UDN2540B .


#### 2540 QUAD DARLINGTON POWER DRIVER

## ELECTRICAL CHARACTERISTICS at T $_A$ = 25°C,T $_J \leq$ 150°C, V $_{CC}$ = 4.75 V to 5.25 V.

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	$V_{OUT} = 50 \text{ V}, V_{IN} = 0.8 \text{ V}, V_{EN} = 2.4 \text{ V}$	_	<1.0	100	μΑ
		$V_{OUT} = 50 \text{ V}, V_{IN} = 2.4 \text{ V}, V_{EN} = 0.8 \text{ V}$	_	<1.0	100	μА
Output Sustaining Voltage	V <sub>CE(sus)</sub>	I <sub>OUT</sub> = 1.8 A, L = 3.0 mH	50			V
Output Saturation Voltage	V <sub>CE(SAT)</sub>	$I_{OUT} = 600 \text{ mA}, V_{IN} = V_{EN} = 2.4 \text{ V}$	_	0.9	1.0	٧
		$I_{OUT} = 1.0 \text{ A, } V_{IN} = V_{EN} = 2.4 \text{ V}$	_	1.0	1.2	٧
		$I_{OUT} = 1.8 \text{ A}, V_{IN} = V_{EN} = 2.4 \text{ V}$	_	1.3	1.6	٧
Input Voltage	Logic 1	$V_{IN(1)}$ or $V_{EN(1)}$	2.4			٧
	Logic 0	$V_{IN(0)}$ or $V_{EN(0)}$	_	_	0.8	٧
Input Current	Logic 1	$V_{IN(1)}$ or $V_{EN(1)} = 2.4 \text{ V}$	_		10	μА
	Logic 0	$V_{IN(0)}$ or $V_{EN(0)} = 0.8 \text{ V}$	_	_	-100	μА
Total Supply Current	lcc	$V_{IN}^* = V_{EN} = 2.4 \text{ V}, V_{CC} = 5.0 \text{ V},$		14	20	mA
1	{	Outputs Open				
		$V_{IN}^{*} = V_{EN} = 0.8 \text{ V}, V_{CC} = 5.0 \text{ V}$	_	0.4	2.0	mA
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 1.0 A		1.3	1.6	V
		I <sub>F</sub> = 1.8 A	_	1.6	2.0	V
Clamp Diode Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 50 V		<1.0	100	μΑ

Typical Data is for design information only.

<sup>\*</sup>All inputs simultaneously, all other tests are performed with each input tested separately.




Dwg. No. GP-010B

#### TRUTH TABLE

ENABLE	IN <sub>N</sub>	OUT <sub>N</sub>
Н	Н	ON
_	L	OFF
L	Х	OFF

X = Don't care.

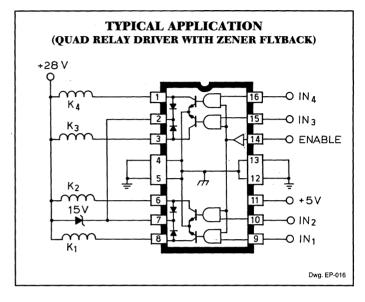


#### APPLICATIONS INFORMATION

A typical application is shown for driving four high-current relays, solenoids, or print heads. A Zener diode is used to increase the flyback voltage, providing a much faster inductive load turn-OFF current decay, resulting in faster dropout (reduced relay contact arcing), and improved performance. The maximum Zener voltage, plus the load supply voltage, plus the flyback diode forward voltage must not exceed the device's rated sustaining voltage.

With external control circuitry, the ENABLE input can be used for chopper (PWM) applications. If the ENABLE input is not used, it should be tied high.

All inputs will float high if open circuited.



# 2543

# PROTECTED QUAD POWER DRIVERS

Providing interface between low-level signal processing circuits and power loads to 240 W, the UDN2543B and UDQ2543B quad power drivers combine NAND logic gates and high-current bipolar outputs. Each of the four independent outputs can sink up to 700 mA in the ON state. The outputs have a minimum breakdown voltage of 60 V and a sustaining voltage of 35 V. The inputs are compatible with most TTL, DTL, LSTTL, and 5 V CMOS and PMOS logic systems.

Over-current protection has been designed into each channel of the UDN/UDQ2543B and typically occurs at 1 A. It protects any one channel from output short circuits with supply voltages up to 25 V. When the maximum output current is reached, that output stage is driven linearly. If the over-current condition continues, that output's thermal limiting will operate, limiting that output's power dissipation. The outputs also include transient suppression diodes for use with inductive loads such as relays, solenoids, or dc stepping motors.

Both devices are supplied in a 16-pin power DIP of batwing construction to provide for maximum package power dissipation. They are rated for continuous operation over the temperature range of -20°C to +85°C (UDN2543B) or for use in automotive applications over an extended temperature range as the UDQ2543B.

#### **FEATURES**

- 700 mA Output Current per Channel
- Output Voltage to 60 V
- Low Output-Saturation Voltage
- Integral Output Transient-Suppression Diodes
- TTL, CMOS, PMOS, NMOS Compatible Inputs
- Independent Over-Current Protection for Each Output

out <sub>4</sub>	16 IN <sub>4</sub>
К	2 IN <sub>3</sub>
оит <sub>3</sub>	14 ENABLE
GROUND	4 13 GROUND
GROUND	5 /// 12 GROUND
о <b>и</b> т <sub>2</sub>	□ V <sub>CC</sub>
K	10 IN <sub>2</sub>
outj	9 IN <sub>1</sub>

Dwg. No. A-11,561A

## ABSOLUTE MAXIMUM RATINGS at T<sub>A</sub> = 25°C


Output Voltage, V <sub>OUT</sub> 60 V
Over-Current Protected Output Voltage,
V <sub>OUT</sub>
Output Current, I <sub>OUT</sub> 1.0 A*
Supply Voltage, V <sub>CC</sub> 7.0 V
Input Voltage, V <sub>IN</sub> or V <sub>EN</sub> 18 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range, T <sub>A</sub>
(UDN2543B)20°C to +85°C
(UDQ2543B)40°C to +85°C
Storage Temperature Range,
T <sub>s</sub> 55°C to +150°C


\*Outputs are peak current limited at approximately 1.0 A per driver. See Circuit Description and Applications for further information.

Always order by complete part number:

Part Number	Operating Temperature
UDN2543B	-20°C to +85°C
UDQ2543B	-40°C to +85°C

#### 2543 PROTECTED QUAD POWER DRIVERS

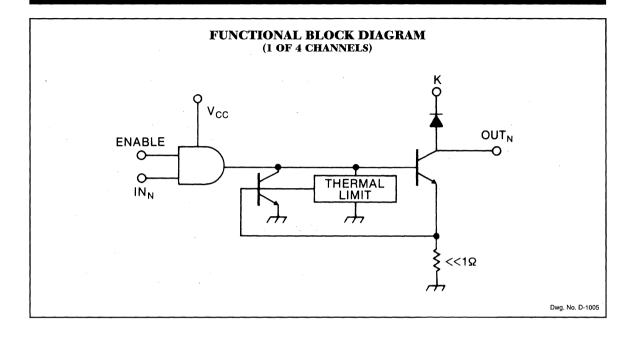



### 2543 PROTECTED QUAD POWER DRIVERS


#### ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $V_{CC}$ = 4.75 V to 5.25 V

				Limits	
Characteristic	Symbol	Test Conditions	Min.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	$V_{OUT} = 60 \text{ V}, V_{IN} = 0.8 \text{ V}, V_{EN} = 2.0 \text{ V}$	_	100	μΑ
		$V_{OUT} = 60 \text{ V}, V_{IN} = 2.0 \text{ V}, V_{EN} = 0.8 \text{ V}$	_	100	μΑ
Output Sustaining Voltage	V <sub>OUT(SUS)</sub>	$I_{OUT} = 100 \text{ mA}, V_{IN} = V_{EN} = 0.8 \text{ V}$	35		V
Output Saturation Voltage	V <sub>OUT(SAT)</sub>	$I_{OUT} = 100 \text{ mA}, V_{IN} = V_{EN} = 2.0 \text{ V}$	_	200	mV
		$I_{OUT} = 400 \text{ mA}, V_{IN} = V_{EN} = 2.0 \text{ V}$	_	400	mV
		$I_{OUT} = 700 \text{ mA}, V_{IN} = V_{EN} = 2.0 \text{ V}$	_	600	mV
Input Voltage	Logic 1	V <sub>IN(1)</sub> or V <sub>EN(1)</sub>	2.0		V
	Logic 0	V <sub>IN(0)</sub> or V <sub>EN(0)</sub>		0.8	٧
Input Current	Logic 1	$V_{IN(1)}$ or $V_{EN(1)} = 2.0 \text{ V}$	_	20	μΑ
	Logic 0	$V_{IN(0)}$ or $V_{EN(0)} = 0.8 \text{ V}$	_	-10	μА
Total Supply Current	l <sub>cc</sub>	$I_{OUT} = 700 \text{ mA}, V_{IN}^* = V_{EN} = 2.0 \text{ V}$	_	65	mA
		Outputs Open, V <sub>IN</sub> * = 0.8 V, V <sub>EN</sub> = 2.0 V	-	15	mA
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 1.0 A		1.6	V
		I <sub>F</sub> = 1.5 A		2.0	٧
Clamp Diode	I <sub>R</sub>	$V_{R} = 60 \text{ V}, V_{IN} = V_{EN} = 2.0 \text{ V},$	_	50	μΑ
Leakage Current		$D_1 + D_2$ or $D_3 + D_4$			

<sup>\*</sup> All inputs simultaneously, all other tests are performed with each input tested separately.

#### 2543 PROTECTED QUAD POWER DRIVERS

#### TYPICAL OUTPUT BEHAVIOR



#### CIRCUIT DESCRIPTION AND APPLICATION

#### INCANDESCENT LAMP DRIVER

High incandescent lamp turn-ON/in-rush currents can destroy semiconductor lamp drivers and contribute to poor lamp reliability. However, lamps with steady-state current ratings up to 500 mA can be driven with the UDN/UDQ2543B without the need for warming or current-limiting resistors.

When an incandescent lamp is initially turned ON, the cold filament is at minimum resistance and would normally allow a 10x to 12x in-rush current. With the UDN/UDQ2543B, during turn-ON, the high in-rush current is sensed by the internal low-value sense resistor. Drive current to the output stage is then diverted by the shunting transistor and the load current is momentarily limited to approximately 1.0 A. During this transition period, the output stage is driven in a linear fashion. During lamp warmup, the filament resistance increases to its maximum value, the output stage goes into saturation and applies full supply voltage to the lamp.

#### INDUCTIVE LOAD DRIVER

Bifilar (unipolar) stepper motors, relays, or solenoids can be driven directly. The internal flyback diodes prevent damage to the output transistors by suppressing the high-voltage spikes which occur when turning OFF an inductive load.


#### **FAULT CONDITIONS**

In the event of a shorted load, the load current will attempt to increase. As described above, the drive current to the affected output stage is diverted, causing the output stage to go linear, limiting the peak output current to approximately 1 A. As the power dissipation of that output stage increases, a thermal gradient sensing circuit will become operational, further decreasing the drive current to the affected output stage and reducing the output current to a value dependent on supply voltage and load resistance. If the fault condition is corrected, the output stage will return to its normal saturated condition.

Due to the independent operation of the four channels, only a single channel should be shorted at a time. Multiple overload conditions may be tolerated provided rated package power dissipation is not exceeded.

# **2544**

#### QUAD DARLINGTON POWER DRIVER



Dwg. No. PP-017

# ABSOLUTE MAXIMUM RATINGS at T<sub>1</sub> = 25°C

Output Voltage, V <sub>OUT</sub> 50 V Output Current, I <sub>OUT</sub>
(Peak)
(Continuous) 1.8 A
Logic Supply Voltage, V <sub>CC</sub>
Input Voltage, V <sub>IN</sub> 7.0 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C

Combining logic gates and high-current bipolar outputs, the UDN2544B quad Darlington power driver provides an interface between low-level logic circuitry and high-power loads. Each of the four outputs can sink up to 1.8 A in the ON state with peak inrush currents to 2.5 A. The four power outputs are each comprised of an open-collector Darlington driver and an internal flyback/clamp diode for switching inductive loads. They feature a minimum breakdown and sustaining voltage of 50 V. The logic inputs are compatible with TTL and 5 V CMOS logic systems.

This device is particularly well-suited for unipolar stepper motor drive applications. With complementary control inputs and an active-low ENABLE, the UDN2544B makes it easy to implement full stepping of a stepper motor with only two microcontroller/microprocessor control lines. Other typical applications include relay or solenoid driving and incandescent or LED lamp driving.

The UDN2544B is supplied in a 16-pin batwing power DIP. The batwing construction provides for maximum package power dissipation in a standard DIP construction. At 25°C, and with only 1 sq. in. of copper foil at the ground tabs, the package is capable of safely dissipating 3.8 W.

#### **FEATURES**

- 1.8 A Continuous Output Current
- Output Voltage to 50 V
- Inputs Configured for Unipolar Stepper Motors
- Active-Low Output Enable
- TTL and 5 V CMOS Compatible Inputs
- Integral Transient-Suppression Diodes

Always order by complete part number: UDN2544B

#### 2544 QUAD DARLINGTON POWER DRIVER

# ELECTRICAL CHARACTERISTICS at T $_A$ = +25°C, T $_J$ $\leq$ 150°C, V $_{\rm CC}$ = 4.75 V to 5.25 V.


				Limits		
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	V <sub>OUT</sub> = 50 V		<1.0	100	μА
Output Sustaining Voltage	V <sub>CE(sus)</sub>	I <sub>OUT</sub> = 1.8 A, L = 3.0 mH	50		_	٧
Output Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>OUT</sub> = 600 mA	-	0.9	1.0	V
		I <sub>OUT</sub> = 1.0 A	_	1.0	1.2	V
		I <sub>OUT</sub> = 1.8 A	_	1.3	1.6	٧
Input Voltage	Logic 1	V <sub>IN(1) or</sub> V <sub>EN(1)</sub>	2.4		_	V
	Logic 0	V <sub>IN(0) or</sub> V <sub>EN(0)</sub>	_	_	0.8	٧
Input Current	Logic 1	$V_{IN(1) \text{ or }} V_{EN(1)} = 2.4 \text{ V}$	_		10	μА
	Logic 0	V <sub>IN(0) or</sub> V <sub>EN(0)</sub> = 0.8 V	_		-100	μА
Total Supply Current	l <sub>cc</sub>	All Outputs ON, Outputs Open	_	14	20	mA
		All Outputs OFF	_	0.4	2.0	mA
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 1.0 A	_	1.3	1.6	V
		I <sub>F</sub> = 1.8 A		1.6	2.0	٧
Clamp Diode Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 50 V	_	< 1.0	100	μА

Typical Data is for design information only

#### TRUTH TABLE


ENABLE	IN <sub>1</sub>	OUT,	IN <sub>2</sub>	OUT <sub>2</sub>	IN <sub>3</sub>	OUT <sub>3</sub>	IN <sub>4</sub>	OUT <sub>4</sub>
L	Н	ON	Н	OFF	Н	OFF	Н	ON
	L	OFF	L	ON	L	ON	L	OFF
Н	Х	OFF	Х	OFF	Х	OFF	Х	OFF

X = Don't care




Dwg. No. GP-010B

#### 2544 QUAD DARLINGTON POWER DRIVER

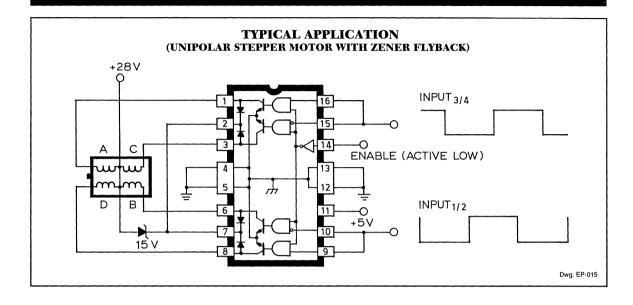

#### TRUTH TABLE

INPUTS		WINDINGS			
1/2	3/4	Α	В	С	D
L	Н	ON	ON	OFF	OFF
L	L	OFF	ON	ON	OFF
H	L	OFF	OFF	ON	ON
Н	Н	ON	OFF	OFF	ON



#### APPLICATIONS INFORMATION

A typical application is shown driving a four-phase unipolar stepper motor. Note that with the complimentary control inputs, only two logic signals are needed to drive the motor in the two-phase format. The two phase drive format illustrated, energizes two adjacent phases in each detent position (AB, BC, CD, DA) to provide an improved torque-speed product and greater detent torque.

A Zener diode can be used to increase the flyback voltage. The increased flyback voltage gives a much faster inductive load turn-OFF current decay resulting in improved motor performance. The maximum Zener voltage, plus the load supply voltage, plus the flyback diode forward voltage must not exceed the device's rated sustaining voltage.

With external control circuitry, the ENABLE input (active low) can be used for chopper (PWM) applications. If the ENABLE input is not used, it should be tied low.

All inputs will float high if open circuited.

# 2547

# PROTECTED QUAD POWER DRIVERS

Providing interface between low-level signal processing circuits and power loads, the UDN2547B and UDN2547EB quad power drivers combine logic gates and high-current bipolar outputs with complete output protection. Each of the four outputs will sink 600 mA in the ON state. The outputs have a minimum breakdown voltage of 60 V and a sustaining voltage of 40 V. The inputs are compatible with TTL and 5 V CMOS logic systems and include internal pull-down resistors to ensure that the outputs remain OFF if the inputs are open-circuited.

Over-current protection for each channel has been designed into these devices and is activated at approximately 1.3 A. It protects each output from short circuits with supply voltages up to 25 V. When a maximum driver output current is reached, that output drive is reduced linearly, maintaining a constant load current. If the over-current or short circuit condition continues, each channel has an independent thermal limit circuit which will sense the rise in junction temperature and turn OFF the individual channel that is at fault. Foldback circuitry decreases the output current if excessive voltage is present across the output and assists in keeping the device within its SOA (safe operating area).

Each output also includes diagnostics for increased device protection. If any output is shorted or opened, the diagnostics can signal the controlling circuitry through a common FAULT pin.

The UDN2547B/EB can be used to drive various resistive loads including incandescent lamps (without warming or limiting resistors). With the addition of external output clamp diodes, the UDN2547B/EB can be used to drive inductive loads such as relays, solenoids, or do stepping motors.

The UDN2547B is a 16-lead power DIP while the UDN2547EB is a 28-lead power PLCC for surface-mount applications. Both packages are of batwing construction to provide for maximum package power dissipation. They are rated for continuous operation over the temperature range of -20°C to +85°C. Similar devices for use in automotive applications, or over an extended temperature range, are available as the UDQ2547B and UDK2547EB.

# ABSOLUTE MAXIMUM RATINGS at T<sub>\*</sub> = 25°C

UDN/UDO2547B

OUT<sub>1</sub>

GROUND

GROUND

CONNECTION

OUT<sub>3</sub> 6

16 IN1

15 IN<sub>2</sub>

12

Vcc 11 SUPPLY

10 IN<sub>3</sub>

Dwg. No. PP-018

14 ENABLE

GROUND

GROUND


Output Voltage, V <sub>OUT</sub> 60 V
Over-Current Protected Output Voltage,
V <sub>OUT</sub> 25 V
Output Current, I <sub>OUT</sub> 1.3 A*
FAULT Output Voltage, V <sub>F</sub> 40 V
Supply Voltage, V <sub>CC</sub> 7.0 V
Input Voltage, V <sub>IN</sub> or V <sub>EN</sub> 7.0 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range, T <sub>A</sub>
Prefix 'UDK'40°C to +125°C
Prefix 'UDN'20°C to +85°C
Prefix 'UDQ'40°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C

\*Outputs are current limited at approximately 1.3 A per driver and junction temperature limited if current in excess of 1.3 A is attempted. See Circuit Description and Application for further information.


#### **FEATURES**

- 600 mA Output Current per Channel
- Independent Over-Current Protection for Each Driver
- Independent Thermal Protection for Each Driver
- Output Voltage to 60 V
- Output SOA Protection
- Low Output-Saturation Voltage
- TTL and 5 V CMOS Compatible Inputs
- Diagnostic FAULT Output


Always order by complete part number, e.g., UDN2547B



#### UDK/UDN2547EB

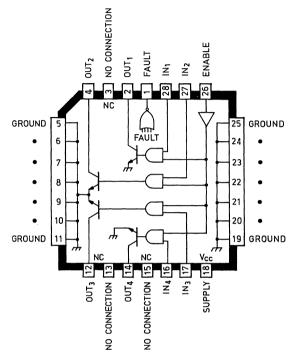

Dwg. No. PP-019

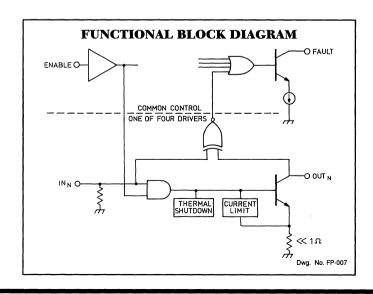

## ELECTRICAL CHARACTERISTICS at $T_A = +25$ °C, $V_{CC} = 4.75$ V to 5.5 V

		1	Li	mits		
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>OUT</sub>	V <sub>OUT</sub> = 60 V, V <sub>IN</sub> = 0.8 V, V <sub>EN</sub> = 2.0 V	_	30	100	μA
		V <sub>OUT</sub> = 60 V, V <sub>IN</sub> = 2.0 V, V <sub>EN</sub> = 0.8 V	_	30	100	μA
Output Sustaining Voltage	V <sub>OUT(SUS)</sub>	I <sub>OUT</sub> = 100 mA, V <sub>IN</sub> = 0.8 V, V <sub>CC</sub> = Open	40	_	_	٧
Output Saturation Voltage	V <sub>OUT(SAT)</sub>	I <sub>OUT</sub> = 400 mA	_		300	mV
		I <sub>OUT</sub> = 500 mA	-	_	400	mV
		I <sub>OUT</sub> = 600 mA	_	_	550	mV
Over-Current Limit	I <sub>OUT</sub>	5 ms PulseTest, V <sub>OUT</sub> = 5.0 V	_	1. 3	1.7	Α
Input Voltage	Logic 1	V <sub>IN(1)</sub> or V <sub>EN(1)</sub>	2.0		_	٧
•	Logic 0	V <sub>IN(0)</sub> or V <sub>EN(0)</sub>	_		0.8	٧
Input Current	Logic 1	$V_{IN(1)}$ or $V_{EN(1)} = 2.0 \text{ V}$	_		60	μA
	Logic 0	$V_{IN(0)}$ or $V_{EN(0)} = 0.8 \text{ V}$	10	_	_	μA
Fault Output Leakage Current	I <sub>F</sub>	V <sub>F</sub> = 40 V	1-	<1.0	2.0	μA
Fault Output Current	I <sub>F</sub>	V <sub>F</sub> = 40 V, Driver Outputs Open,				
		$V_{IN} = 0.8 \text{ V}, V_{EN} = 2.0 \text{ V}$	40	60	80	μA
Fault Output Saturation Voltage	V <sub>F(SAT)</sub>	I <sub>F</sub> = 30 μA	_	0.1	0.4	٧
Total Supply Current	I <sub>cc</sub>	All Outputs ON	_	45	50	mA
·		All Outputs OFF		6.0	10	mA
Thermal Shutdown	T <sub>J</sub>		-	165	_	°C
Thermal Hysteresis	TJ		T	15	_	°C


Typical Data is for design information only.

#### TRUTH TABLE

STATUS	IN <sub>N</sub>	ENABLE	OUT <sub>N</sub>	FAULT
Normal Load	Н	Н	L	Н
	, L	Н	∖ н	Н
ь. т	Х	L	Н	н
Over-Current or Short to Supply	Н	н	R	L
Thermal Fault	Н	Н	Н	L
Open Load or Short to Ground	L	Н	L	L

X = Don't care.

R = Linear drive, current limited.



#### CIRCUIT DESCRIPTION AND APPLICATION

The UDN2547B or UDN2547EB monitors its outputs for open or shorted conditions. Both conditions are sensed by comparing the input and output states. Note that the FAULT output is operational only if the ENABLE input is high. When a fault condition is sensed, the FAULT output will go to a low state. An external FAULT output filter capacitor is recommended to eliminate erroneous switching.

#### INCANDESCENT LAMP DRIVER

High incandescent lamp turn-ON/in-rush currents can contribute to poor lamp reliability and destroy semiconductor lamp drivers. Warming or current-limiting resistors protect both driver and lamp but use significant power either when the lamp is OFF or when the lamp is ON, respectively. Lamps with steady-state current ratings up to 600 mA can be driven by the UDN2547B/EB without the need for warming or current-limiting resistors.

When an incandescent lamp is initially turned ON, the cold filament is at minimum resistance and would normally allow a 10x to 12x in-rush current. With the UDN2547B/EB drivers, during turn-ON, the high in-rush current is sensed by the internal low-value sense resistor, drive current to the output stage is diverted by the shunting transistor, and the load current is limited to approximately 1.3 A. During this short transition period, the output driver is driven in a linear fashion. During lamp warmup, the filament resistance increases to its maximum value, the output driver goes into saturation and applies maximum rated voltage to the lamp.

#### INDUCTIVE LOAD DRIVER

With the addition of external clamp diodes, bifilar (unipolar) stepper motors and other inductive loads can be driven directly. The external diodes prevent damage to the output transistors by suppressing the highvoltage spikes which occur when turning OFF an inductive load.

#### **OVER-CURRENT CONDITIONS**

In the event of a shorted load, or stalled motor, the load current will attempt to increase. As described above, the drive current to the affected output stage is linearly reduced (limiting the load current to about 1.3 A), causing the output stage to go linear. As the junction temperature of the output stage increases, the thermal shutdown circuit will shut OFF the affected output. If the fault condition is corrected, the output driver will return to its normal saturated condition.

# 2549

#### PROTECTED QUAD POWER DRIVERS

Providing improved output current limiting, the UDN2549B and UDN2549BB quad power drivers combine NAND logic gates and high-current bipolar outputs with complete output protection. Each of the four outputs will sink 600 mA in the ON state. The outputs have a minimum breakdown voltage of 60 V and a sustaining voltage of 40 V. The inputs are compatible with TTL and 5 V CMOS logic systems.

Over-current protection for each channel has been designed into these devices and is activated at approximately 1 A. It protects each output from short circuits with supply voltages up to 25 V. When an output current trip point is reached, that output stage is driven linearly resulting in a reduced output current level. If an over-current or short circuit condition continues, the thermal limiting circuits will first sense the rise in junction temperature and then the rise in chip temperature, further decreasing the output current. Under worst-case conditions, the UDN2549B/EB will tolerate short-circuits on all outputs, simultaneously.

These devices can be used to drive various loads including incandescent lamps (without warming or limiting resistors) or inductive loads such as relays, solenoids, or dc stepping motors.

The UDN2549B is a 16-pin power DIP while the UDN2549EB is a 28-lead power PLCC for surface-mount applications. Both packages are of batwing construction to provide for maximum package power dissipation. They are rated for continuous operation over the temperature range of -20°C to +85°C. Similar devices for use in automotive applications, or over an extended temperature range, are available as the UDK or UDQ2549B and UDK or UDQ2549EB.

# ABSOLUTE MAXIMUM RATINGS at $T_A = 25^{\circ}C$

**UDN2549B** 

GROUND

GROUND

0UT<sub>2</sub> [

16 INA

15 IN<sub>2</sub>

14 ENABLE

13 GROUND

12 GROUND

11 V<sub>CC</sub>

10 IN<sub>2</sub>

J INI

Dwg. No. A-11.561A

Output Voltage, V <sub>OUT</sub> 60 V Over-Current Protected Output Voltage,
V <sub>OUT</sub>
Output Current, I <sub>OUT</sub> 1.0 A*
Supply Voltage, V <sub>CC</sub> 7.0 V
Input Voltage, V <sub>IN</sub> or V <sub>EN</sub> 7.0 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range, T <sub>A</sub>
Prefix 'UDK'40°C to +125°C
Prefix 'UDN'20°C to +85°C
Prefix 'UDQ'40°C to +85°C
Storage Temperature Range,
T -55°C to +150°C


\*Outputs are peak current limited at approximately 1.0 A per driver. See Circuit Description and Applications for further information.


#### **FEATURES**


- 600 mA Output Current per Channel
- Independent Over-Current Protection for Each Driver
- Thermal Protection for Device and Each Driver
- Output Voltage to 60 V
- Low Output-Saturation Voltage
- Integral Output Flyback Diodes
- TTL and 5 V CMOS Compatible Inputs
- Pin-Compatible With UDN2543B/EB

Always order by complete part number:

Part Number	Package
UDN2549B	16-Pin DIP
UDN2549EB	28-Lead PLCC

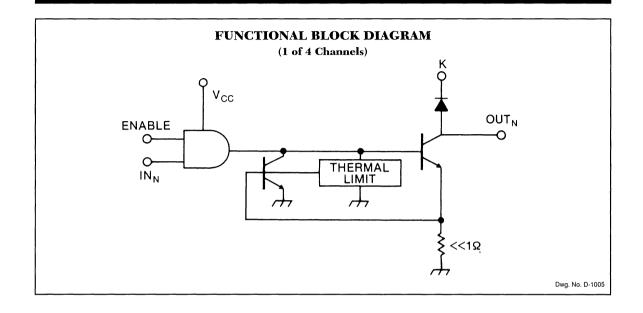

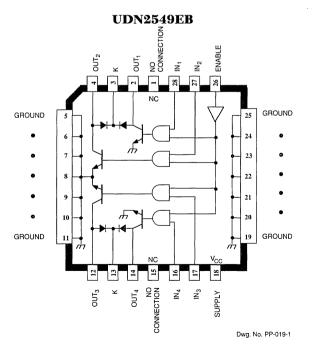



Dwg. No. GP-010B


#### ELECTRICAL CHARACTERISTICS at $T_A = +25^{\circ}C$ , $V_{CC} = 4.75 \text{ V to } 5.25 \text{ V}$

				L	imits	
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	$V_{OUT} = 60 \text{ V}, V_{IN} = 0.8 \text{ V}, V_{EN} = 2.0 \text{ V}$	_	<1.0	100	μΑ
		$V_{OUT} = 60 \text{ V}, V_{IN} = 2.0 \text{ V}, V_{EN} = 0.8 \text{ V}$	_	<1.0	100	μА
Output Sustaining Voltage	V <sub>OUT(SUS)</sub>	$I_{OUT} = 100 \text{ mA}, V_{IN} = V_{EN} = 0.8 \text{ V}$	40	_		V
Output Saturation Voltage	V <sub>OUT(SAT)</sub>	I <sub>OUT</sub> = 100 mA	_		200	mV
		I <sub>OUT</sub> = 400 mA		_	400	mV
		I <sub>OUT</sub> = 600 mA	_	_	600	mV
Over-Current Trip	I <sub>TRIP</sub>		_	1.0		Α
Input Voltage	Logic 1	V <sub>IN(1)</sub> or V <sub>EN(1)</sub>	2.0			٧
	Logic 0	V <sub>IN(0)</sub> or V <sub>EN(0)</sub>			0.8	٧
Input Current	Logic 1	$V_{IN(1)}$ or $V_{EN(1)} = 2.0 \text{ V}$	_	_	10	μА
	Logic 0	V <sub>IN(0)</sub> or V <sub>EN(0)</sub> = 0.8 V	_	_	-10	μА
Total Supply Current	I <sub>cc</sub>	$I_{OUT} = 600 \text{ mA}, V_{IN}^{-*} = V_{EN} = 2.0 \text{ V}$	_	_	65	mA
		All Outputs OFF	_	_	15	mA
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 1.0 A			1.7	V
Clamp Diode Leakage Current	I <sub>R</sub>	$V_{R} = 60 \text{ V}, D_{1} + D_{2} \text{ or } D_{3} + D_{4}$	_	_	50	μА
Thermal Limit	T		_	165	_	°C

Typical Data is for design information only.


<sup>\*</sup> All inputs simultaneously, all other tests are performed with each input tested separately.

#### TYPICAL OUTPUT CHARACTERISTIC



Dwg. GP-013

#### TYPICAL OUTPUT BEHAVIOR



Dwg. WP-008

#### CIRCUIT DESCRIPTION AND APPLICATION

#### INCANDESCENT LAMP DRIVER

High incandescent lamp turn-ON/in-rush currents can contribute to poor lamp reliability and destroy semiconductor lamp drivers. Warming or current-limiting resistors protect both driver and lamp but use significant power either when the lamp is OFF or when the lamp is ON, respectively. Lamps with steady-state current ratings up to 600 mA can be driven by the UDN2549B/EB without the need for warming or current-limiting resistors.

When an incandescent lamp is initially turned ON, the cold filament is at minimum resistance and would normally allow a 10x to 12x in-rush current. With the UDN2549B/EB drivers, during turn-ON, the high inrush current is sensed by the internal low-value sense resistor. Drive current to the output stage is then diverted by the shunting transistor, and the load current is momentarily limited to approximately 1.0 A. During this short transition period, the output current is reduced to a value dependent on supply voltage and filament resistance. During lamp warmup, the filament resistance increases to its maximum value. the output stage goes into saturation and applies maximum rated voltage to the lamp.

#### INDUCTIVE LOAD DRIVER

Bifilar (unipolar) stepper motors, relays, or solenoids can be driven directly. The internal flyback diodes prevent damage to the output transistors by suppressing the high-voltage spikes which occur when turning OFF an inductive load.

#### FAULT CONDITIONS

In the event of a shorted load, the load current will attempt to increase. As described above, the drive current to the affected output stage is reduced, causing the output stage to go linear, limiting the peak output current to approximately 1 A. As the power dissipation of that output stage increases, a thermal gradient sensing circuit will become operational, further decreasing the drive current to the affected output stage and reducing the output current to a value dependent on supply voltage and load resistance.

Continuous or multiple overload conditions causing the chip temperature to reach approximately 165°C will result in an additional reduction in output current to maintain a safe level.

If the fault condition is corrected, the output stage will return to its normal saturated condition.

# **SERIES 2580**

# UDN2580/85LW UDN2580/85A 18 15 14 12

Dwg. No. A-11,359

10 SUB/VFF

11

Note that the UDN2580/85A (dual in-line packages) and UDN2580/85LW (small-outline IC packages) are electrically identical and share a common pin number assignment.

#### 8-CHANNEL SOURCE DRIVERS

This versatile family of integrated circuits will work with many combinations of logic- and load-voltage levels, meeting interface requirements beyond the capabilities of standard logic buffers. Series UDN2580A/LW source drivers can drive incandescent, LED, or vacuum fluorescent displays. Internal transient-suppression diodes permit the drivers to be used with inductive loads such as relays, solenoids, do and stepping motors, and magnetic print hammers.

The Type UDN2580A and UDN2580LW are high-current source drivers used to switch the ground ends of loads that are directly connected to a -50 V supply. Typical loads are telephone relays, PIN diodes, and LEDs.

The UDN2585A and UDN2585LW are drivers designed for applications requiring low output saturation voltages. Typical loads are low-voltage LEDs and incandescent displays. The eight non-Darlington. 25 V outputs will simultaneously sustain continuous load currents of -120 mA at ambient temperatures to +70°C.

The UDN2588A has separate logic and driver supply lines. Its eight drivers can serve as an interface between positive logic (TTL, CMOS, PMOS) or negative logic (NMOS) and either negative or split-load supplies to -45 V. Selected devices (UDN2588A-1) may be operated to -65 V.

These drivers are packaged in plastic DIPs (suffix A) or surfacemountable wide-body SOICs (suffix LW), and are rated for operation over the temperature range of -20°C to +85°C.

#### **FEATURES**

- TTL, CMOS, PMOS, NMOS Compatible
- High Output Current Rating
- Internal Transient Suppression
- Efficient Input/Output Structure


Always order by complete part number, e.g., UDN2580A |.

#### **ABSOLUTE MAXIMUM RATINGS**

at 25°C Free-Air Temperature for any one driver (unless otherwise noted)

	UDN2580A/LW	UDN2585A/LW	UDN2588A	UDN2588A-1
Output Voltage, V <sub>CE</sub>	50 V	25 V	50 V	80 V
Supply Voltage, V <sub>S</sub> (ref. sub.)	50 V	25 V	50 V	80 V
Supply Voltage, V <sub>CC</sub> (ref. sub.)	_		50 V	80 V
Input Voltage, V <sub>IN</sub> (ref. V <sub>S</sub> )	-30 V	-20 V	-30 V	-30 V
Total Output Current, (I <sub>C</sub> + I <sub>S</sub> )	-500 mA	-250 mA	-500 mA	-500 mA
Substrate Current I <sub>SUB</sub>	3.0 A	2.0 A	3.0 A	3.0 A

Package Power Dissipation, P <sub>D</sub> (single output)	1.0 W
(total package)	See Graph
Operating Temperature Range, T <sub>A</sub>	20°C to +85°C
	-55°C to +150°C

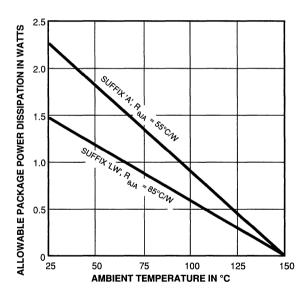

Dwg. No. GP-018A

For simplification, these devices are characterized on the following pages with specific voltages for inputs, logic supply ( $V_{\rm s}$ ), load supply ( $V_{\rm gc}$ ), and collector supply ( $V_{\rm cc}$ ). Typical use of the UDN2580A/LW is with negative referenced logic. The more common application of the UDN2585A/LW, UDN2588A, and UDN2588A-1 is with positive referenced logic supplies. In application, the devices are capable of operation over a wide range of logic and supply voltage levels:

#### TYPICAL OPERATING VOLTAGES

	OF ENGRIPHO 10				
v <sub>s</sub>	V <sub>IN(ON)</sub>	V <sub>IN(OFF)</sub>	v <sub>cc</sub>	V <sub>EE(MAX)</sub>	Device Type
0 V	-15 V to -3.6 V	-0.5 V to 0 V	NA	-25 V	UDN2585A/LW
				-50 V	UDN2580A/LW
+5 V	0 V to +1.4 V	+4.5 V to +5 V	NA	-20 V	UDN2585A/LW
				-45 V	UDN2580A/LW
14 1			5 V	-45 V	UDN2588A
				-75 V	UDN2588A-1
+12 V	0 V to +8.4 V	+11.5 V to +12 V	NA	-13 V	UDN2585A/LW
				-38 V	UDN2580A/LW
			12 V	-38 V	UDN2588A
				-68 V	UDN2588A-1
+15 V	0 V to +11.4 V	+14.5 V to +15 V	NA	-10V	UDN2585A/LW
				-35 V	UDN2580A/LW
			15 V	-35 V	UDN2588A
				-65 V	UDN2588A-1

NOTE: The substrate must be tied to the most negative point in the external circuit to maintain isolation between drivers and to provide for normal circuit operation.


# UDN2580A and UDN2580LW ELECTRICAL CHARACTERISTICS at $T_A = +25$ °C, $V_S = 0$ V, $V_{EE} = -45$ V (unless otherwise noted).


				Limits	
Characteristic	Symbol	Test Conditions	Min.	Max.	Units
Output Leakage	I <sub>CEX</sub>	$V_{IN} = -0.5 \text{ V}, V_{OUT} = V_{EE} = -50 \text{ V}$		50	μA
Current		$V_{IN} = -0.4 \text{ V}, V_{OUT} = V_{EE} = -50 \text{ V}, T_A = 70^{\circ}\text{C}$	_	100	μA
Output Sustaining Voltage	V <sub>CE(SUS)</sub>	V <sub>IN</sub> = -0.4 V, I <sub>OUT</sub> = -25 mA, Note 1	35		V
Output Saturation	V <sub>CE(SAT)</sub>	V <sub>IN</sub> = -2.4 V, I <sub>OUT</sub> = -100 mA		1.8	٧
		V <sub>IN</sub> = -3.0 V, I <sub>OUT</sub> = -225 mA	_	1.9	٧
		$V_{IN} = -3.6 \text{ V}, I_{OUT} = -350 \text{ mA}$	_	2.0	٧
Input Current	I <sub>IN(ON)</sub>	V <sub>IN</sub> = -3.6 V, I <sub>OUT</sub> = -350 mA	T	-500	μΑ
		V <sub>IN</sub> = -15 V, I <sub>OUT</sub> = -350 mA	_	-2.1	mA
	l <sub>IN(OFF)</sub>	$I_{OUT} = -500 \mu\text{A},  T_{A} = 70^{\circ}\text{C},  \text{Note 3}$	-50	_	μA
Input Voltage	V <sub>IN(ON)</sub>	I <sub>OUT</sub> = -100 mA, V <sub>CE</sub> 1.8 V, Note 4	_	-2.4	V
		I <sub>OUT</sub> = -225 mA, V <sub>CE</sub> 1.9 V, Note 4	_	-3.0	٧
		I <sub>OUT</sub> = -350 mA, V <sub>CE</sub> 2.0 V, Note 4	_	-3.6	V
	V <sub>IN(OFF)</sub>	I <sub>OUT</sub> = -500 μA, T <sub>A</sub> = 70°C	-0.2	_	V
Clamp Diode Leakage Current	I <sub>R</sub>	$V_{R} = 50 \text{ V}, T_{A} = 70^{\circ}\text{C}$	_	50	μΑ
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 350 mA		2.0	V
Input Capacitance	C <sub>IN</sub>		_	25	pF
Turn-On Delay	t <sub>PHL</sub>	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>	T -	5.0	μs
Turn-Off Delay	t <sub>PLH</sub>	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>	T -	5.0	μs

NOTES: 1. Pulsed test, t<sub>a</sub> 300 µs, duty cycle 2%.

- 2. Negative current is defined as coming out of the specified device pin.
- The I<sub>IN(OFF)</sub> current limit guarantees against partial turn-on of the output.
- The V<sub>IN(ON)</sub> voltage limit guarantees a minimum output source current per the specified conditions.
- 5. The substrate must always be tied to the most negative point and must be at least 4.0 V below  $\rm V_S$ .

#### **PARTIAL SCHEMATIC**





Dwg. No. A-11,358

Dwg. No. A-11,359

#### **UDN2585A AND UDN2585LW**


# ELECTRICAL CHARACTERISTICS at $T_A = +25^{\circ}C$ , $V_S = 0$ V, $V_{EE} = -20$ V (unless otherwise noted)

				Limits	
Characteristic	Symbol	Test Conditions	Min.	Max.	Units
Output Leakage	I <sub>CEX</sub>	$V_{IN} = -0.5 \text{ V}, V_{OUT} = V_{EE} = -25 \text{ V}$	_	50	μА
Current		$V_{IN} = -0.4 \text{ V}, V_{OUT} = V_{EE} = -25 \text{ V}, T_A = 70 ^{\circ}\text{C}$	_	100	μА
Output Sustaining Voltage	V <sub>CE(SUS)</sub>	V <sub>IN</sub> = -0.4 V, I <sub>OUT</sub> = -25 mA, Note 1	15	_	V
Output Saturation	V <sub>CE(SAT)</sub>	$V_{IN} = -4.6 \text{ V}, I_{OUT} = -60 \text{ mA}$	_	1.1	٧
Voltage		V <sub>IN</sub> = -4.6 V, I <sub>OUT</sub> = -120 mA	<b>—</b>	1.2	٧
Input Current	I <sub>IN(ON)</sub>	$V_{IN} = -4.6 \text{ V}, I_{OUT} = -120 \text{ mA}$	_	-1.6	mA
		$V_{IN} = -14.6 \text{ V}, I_{OUT} = -120 \text{ mA}$	_	-5.0	mA
Input Voltage	V <sub>IN(ON)</sub>	I <sub>OUT</sub> = -120 mA, V <sub>CE</sub> ≤1.2 V, Note 3	_	-4.6	V
	V <sub>IN(OFF)</sub>	$I_{OUT} = -100 \mu\text{A}, T_{A} = 70^{\circ}\text{C}$	-0.4		V
Clamp Diode Leakage Current	I <sub>R</sub>	$V_{R} = 25 \text{ V}, T_{A} = 70^{\circ}\text{C}$		50	μА
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 120 mA	_	2.0	V
Input Capacitance	C <sub>IN</sub>			25	pF
Turn-On Delay	t <sub>PHL</sub>	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>	-	5.0	μs
Turn-Off Delay	t <sub>PLH</sub>	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>		5.0	μѕ

NOTES: 1. Pulsed test,  $t_n \le 300 \,\mu\text{s}$ , duty cycle  $\le 2\%$ .

- 2. Negative current is defined as coming out of the specified device pin.
- 3. The  $V_{IN(ON)}$  voltage limit guarantees a minimum output source current per the specified conditions.
- 4. The substrate must always be tied to the most negative point and must be at least 4.0 V below V<sub>s</sub>.

#### PARTIAL SCHEMATIC



Dwg. No. A-11,359


#### **UDN2588A AND UDN2588A-1** ELECTRICAL CHARACTERISTICS at $T_A = +25^{\circ}C$ , $V_S = 5.0 \text{ V}$ , $V_{CC} = 5.0 \text{ V}$ , $V_{EE} = -40 \text{ V}$ (unless otherwise noted).


		Applicable			Limits	
Characteristic	Symbol	Devices	Test Conditions	Min.	Max.	Units
Output Leakage	I <sub>CEX</sub>	UDN2588A	$V_{IN} \ge 4.5 \text{ V}, V_{OUT} = V_{EE} = -45 \text{ V}$	-	50	μΑ
Current	}		$V_{IN} \ge 4.6 \text{ V}, V_{OUT} = V_{EE} = -45 \text{ V}, T_A = 70^{\circ}\text{C}$	–	100	μА
		UDN2588A-1	$V_{IN} \ge 4.5 \text{ V}, V_{OUT} = V_{EE} = -75 \text{ V}$		50	μА
			$V_{IN} \ge 4.6 \text{ V}, V_{OUT} = V_{EE} = -75 \text{ V}, T_A = 70^{\circ}\text{C}$	_	100	μА
Output Sustaining	V <sub>CE(SUS)</sub>	UDN2588A	V <sub>IN</sub> ≥4.6 V, I <sub>OUT</sub> = -25 mA, Note 1	35		<b>V</b>
Voltage		UDN2588A-1	$V_{IN} \ge 4.6 \text{ V}, V_{EE} = -70 \text{ V}, I_{OUT} = -25 \text{ mA}, \text{Note 1}$	50	_	٧
Output Saturation	V <sub>CE(SAT)</sub>	Both	V <sub>IN</sub> = 2.6 V, I <sub>OUT</sub> = -100 mA, Ref. V <sub>CC</sub>		1.8	٧
Voltage			$V_{IN} = 2.0 \text{ V}, I_{OUT} = -225 \text{ mA}, \text{Ref. V}_{CC}$	–	1.9	V
		1	$V_{IN} = 1.4 \text{ V}, I_{OUT} = -350 \text{ mA}, \text{Ref. V}_{CC}$	-	2.0	V
Input Current	I <sub>IN(ON)</sub>	Both	V <sub>IN</sub> = 1.4 V, I <sub>OUT</sub> = -350 mA		-500	μА
			$V_S = 15 \text{ V}, V_{EE} = -30 \text{ V}, V_{IN} = 0 \text{ V}, I_{OUT} = -350 \text{ mA}$		-2.1	mA
	I <sub>IN(OFF)</sub>	Both	$I_{OUT} = -500 \mu\text{A}, T_{A} = 70^{\circ}\text{C}, \text{Note 3}$	-50	_	μА
Input Voltage	V <sub>IN(ON)</sub>	Both	$I_{OUT} = -100 \text{ mA}, V_{CE} \le 1.8 \text{ V}, \text{Note 4}$		2.6	V
			I <sub>OUT</sub> = -225 mA, V <sub>CE</sub> ≤1.9 V, Note 4	-	2.0	V
			I <sub>OUT</sub> = -350 mA, V <sub>CE</sub> ≤2.0 V, Note 4	_	1.4	V
	V <sub>IN(OFF)</sub>	Both	I <sub>OUT</sub> = -500 μA, T <sub>A</sub> = 70°C	4.8	_	V
Clamp Diode Leakage Current	I <sub>R</sub>	UDN2588A	$V_{R} = 50 \text{ V}, T_{A} = 70^{\circ}\text{C}$	_	50	μА
Leakage Current		UDN2588A-1	$V_{R} = 80 \text{ V}, T_{A} = 70^{\circ}\text{C}$	_	50	μА
Clamp Diode Forward Voltage	V <sub>F</sub>	Both	I <sub>F</sub> = 350 mA	_	2.0	V
Input Capacitance	C <sub>IN</sub>	Both		_	25	pF
Turn-On Delay	t <sub>PHL</sub>	Both	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>	_	5.0	μs
Turn-Off Delay	t <sub>PLH</sub>	Both	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>		5.0	μs

NOTES: 1. Pulsed test,  $t_n \le 300 \,\mu\text{s}$ , duty cycle  $\le 2\%$ .

- 2. Negative current is defined as coming out of the specified device pin.
- 3. The  $I_{IN(OFF)}$  current limit guarantees against partial turn-on of the output.
- 4. The  $V_{IN(ON)}$  voltage limit guarantees a minimum output source current per the specified conditions.
- 5. The substrate must always be tied to the most negative point and must be at least 4.0 V below V<sub>s</sub>.
- $6.V_{CC}$  must be less positive than  $V_{S}$ .


#### PARTIAL SCHEMATIC






Dwg. No. A-11,361

#### ALLOWABLE PEAK COLLECTOR CURRENT AT 50°C AS A FUNCTION OF DUTY CYCLE

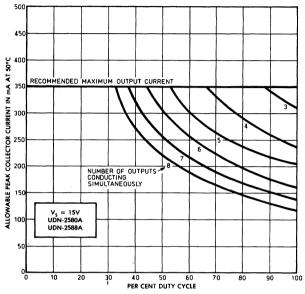



#### Dwg. No. A-11,107B

# ALLOWABLE PEAK COLLECTOR CURRENT AT 70°C AS A FUNCTION OF DUTY CYCLE

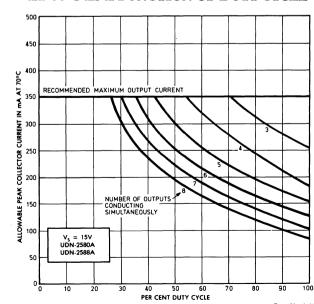

#### TYPICAL APPLICATIONS

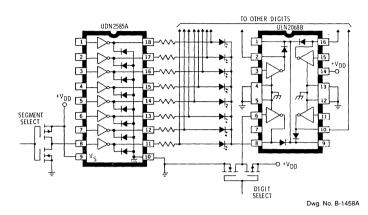





Dwg. No. A-11,356

COMMON-CATHODE LED DRIVER

#### TELECOMMUNICATIONS RELAY DRIVER (Negative Logic)





Dwg. No. A-11,362


Dwg. No. A-11,363

TELECOMMUNICATIONS RELAY DRIVER (Positive Logic)

# VACUUM-FLUORESCENT DISPLAY DRIVER (Split Supply)

# 2595

#### 8-CHANNEL SATURATED SINK DRIVERS

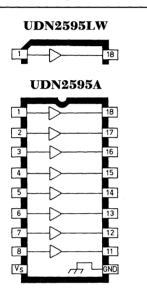

Dwg. No. A-11,407

#### ABSOLUTE MAXIMUM RATINGS at 25°C Free-Air Temperature for any one driver (unless otherwise noted)

Output Voltage, V <sub>CE</sub> 20 V
Supply Voltage, V <sub>S</sub> 20 V
Input Voltage, V <sub>IN</sub>
Output Current, I <sub>C</sub> 200 mA
Ground Terminal Current, I <sub>GND</sub> 1.6 A
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>c</sub> 55°C to +150°C

Note that the UDN2595A (dual in-line package) and UDN2595LW (small-outline IC package) are electrically identical and share a common pin number assignment.

Developed for use with low-voltage LED and incandescent displays requiring low output saturation voltage, the UDN2595A and UDN2595LW meet many interface needs, including those exceeding the capabilities of standard logic buffers. The eight non-Darlington outputs of each driver can continuously and simultaneously sink load currents of 100 mA at ambient temperatures of up to +75°C.

The eight-channel driver's active-low inputs can be driven directly from TTL, Schottky TTL, DTL, 5 to 16 V CMOS, and NMOS logic. All input connections are on one side of the package, output connections on the other, for simplified printed wiring board layouts.

These drivers are packaged in plastic DIPs (suffix A) or surface-mountable wide-body SOICs (suffix LW), and are rated for operation over the temperature range of -20°C to +85°C.

#### **FEATURES**

- Non-Inverting Function (Input Low = Output ON)
- 200 mA Current Rating
- 100 mA Continuous and Simultaneous (All outputs) to +85°C
- Low Saturation Voltage
- TTL, CMOS, NMOS Compatible
- Efficient Input/Output Pin Format
- DIP or SOIC Packaging

Always order by complete part number:


Part Number	Package
UDN2595A	18-Pin DIP
UDN2595LW	18-Lead Wide-Body SOIC


#### ELECTRICAL CHARACTERISTICS at $T_A = +25$ °C, $V_S = 5.0$ V (unless otherwise noted).

				Limits	
Characteristic	Symbol	Test Conditions	Min.	Max.	Units
Output Leakage	I <sub>CEX</sub>	V <sub>IN</sub> 4.5 V, V <sub>OUT</sub> = 20 V, T <sub>A</sub> = 25°C		50	μA
Current		V <sub>IN</sub> 4.6 V, V <sub>OUT</sub> = 20 V, T <sub>A</sub> = 70°C		100	μA
Output Saturation	V <sub>CE(SAT)</sub>	V <sub>IN</sub> = 0.4 V, I <sub>OUT</sub> = 50 mA		0.5	V
Voltage		V <sub>IN</sub> = 0.4 V, I <sub>OUT</sub> = 100 mA		0.6	V
Input Current	l <sub>IN(ON)</sub>	V <sub>IN</sub> = 0.4 V, I <sub>OUT</sub> = 100 mA	_	-1.6	mA
		V <sub>IN</sub> = 0.4 V, I <sub>OUT</sub> = 100 mA, V <sub>S</sub> = 15 V	_	-5.0	mA
Input Voltage	V <sub>IN(ON)</sub>	I <sub>OUT</sub> = 100 mA, V <sub>OUT</sub> 0.6 V	_	0.4	V
	V <sub>IN(OFF)</sub>	I <sub>OUT</sub> = 100 μA, T <sub>A</sub> = 70°C	4.6	_	V
Input Capacitance	C <sub>IN</sub>		_	25	pF
Supply Current	I <sub>s</sub>	V <sub>IN</sub> = 0.4 V, I <sub>OUT</sub> = 100 mA	_	6.0	mA
		$V_{IN} = 0.4 \text{ V}, I_{OUT} = 100 \text{ mA}, V_{S} = 15 \text{ V}$	_	20	mA

NOTES: 1. Negative current is defined as coming out of the specified device pin.

2. The  $V_{\rm IN(ON)}$  voltage limit guarantees a minimum output sink current per the specified conditions. 3.  $I_{\rm S}$  is measured with any one of eight drivers turned ON.

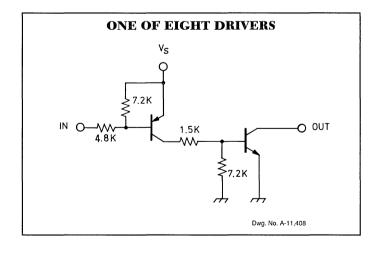



# 2596 AND 2597

# 8-CHANNEL SATURATED SINK DRIVERS

Low output saturation voltages at high load currents are provided by UDN2596A and UDN2597A sink driver ICs. These devices can be used as interface buffers between standard low-power digital logic (particularly MOS) and high-power loads such as relays, solenoids, stepping motors, and LED or incandescent displays. The eight saturated sink drivers in each device feature high-voltage, high-current open-collector outputs. Transient suppression clamp diodes and a minimum 35 V output sustaining voltage allow their use with many inductive loads.

The saturated (non-Darlington) NPN outputs provide low collectoremitter voltage drops as well as improved turn-off times due to an active pull-down function within the output predrive section. The UDN2596A is for use with output loads to 500 mA while the UDN2597A is for use with loads to 1 A. Adjacent outputs may be paralleled for higher load currents.

Inputs require very low input current and are activated by a low logic level consistent with the much greater sinking capability associated with NMOS, CMOS, and TTL logic. The UDN2596A and UDN2597A are rated for use with 5 V logic levels.

Both devices are furnished in 20-pin DIP packages with copper leadframes for improved thermal characteristics. The UDN2596A is also available for operation between -40°C and +85°C. To order, change the prefix from 'UDN' to 'UDQ'.

#### **FEATURES**

- Non-Inverting Function
- Low Output ON Voltages
- Up to 1.0 A Sink Capability
- 50 V Min. Output Breakdown
- Output Transient-Suppression Diodes
- Output Pull-Down for Fast Turn-Off
- TTL, CMOS Compatible Inputs

# ABSOLUTE MAXIMUM RATINGS at T<sub>\*</sub> = + 25°C

GND

OUT<sub>2</sub> 5

OUT<sub>3</sub> 6

IN₃ 8

IN₄ 9

V<sub>K</sub> 10

20 V<sub>CC</sub>

18 IN<sub>8</sub>

17 OUT<sub>8</sub>

16 OUT-

15 OUT<sub>6</sub>

14 OUT<sub>5</sub>

13 IN<sub>6</sub>

12 GND

11 IN<sub>5</sub>


Dwg. No. W-100

19 IN<sub>7</sub>

OutputVoltage,V <sub>CE</sub>
(UDN2596A) <b>500 mA</b>
(UDN2597A)
Supply Voltage, V <sub>CC</sub> 7.0 V
Input Voltage, V <sub>IN</sub> 7.0 V
Package Power Dissipation,
P <sub>D</sub>
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 65°C to +150°C

\*Derate at the rate of 18.2 mW/°C above T<sub>A</sub>= 25°C

#### ONE OF EIGHT DRIVERS

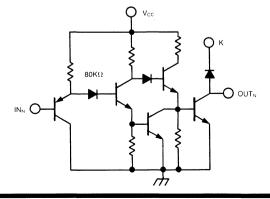


Dwg. No. W-101

# 2596 AND 2597 8-CHANNEL SATURATED SINK DRIVERS

#### ELECTRICAL CHARACTERISTICS at $T_A = +25$ °C, $V_{CC} = 5.0 \text{ V}$

		Applicable			Limits	
Characteristics	Symbol	Devices	Test Conditions	Min.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	Both	V <sub>OUT</sub> = 50 V, V <sub>IN</sub> = 2.4 V	_	10	μΑ
Output Sustaining Voltage	V <sub>CE(sus)</sub>	UDN2596A	I <sub>OUT</sub> = 300 mA, L = 2 mH	35		V
		UDN2597A	I <sub>OUT</sub> = 750 mA, L = 2 mH	35		V
Output Saturation Voltage	V <sub>CE(SAT)</sub>	UDN2596A	I <sub>OUT</sub> = 300 mA	_	0.5	V
		UDN2597A	I <sub>OUT</sub> = 750 mA	_	1.0	V
Clamp Diode Leakage Current	I <sub>R</sub>	Both	V <sub>R</sub> = 50 V	_	10	μA
Clamp Diode Forward Voltage	V <sub>F</sub>	UDN2596A	I <sub>F</sub> = 300 mA		1.8	٧
		UDN2597A	I <sub>F</sub> = 750 mA	_	1.8	V
Logic Input Current	I <sub>IN(0)</sub>	Both	V <sub>IN</sub> = 0.8 V	_	-15	μA
	I <sub>IN(1)</sub>	Both	V <sub>IN</sub> = 2.4 V	_	10	μA
Supply Current (per driver)	I <sub>CC(ON)</sub>	UDN2596A	V <sub>IN</sub> = 0.8 V		6.0	mA
		UDN2597A	V <sub>IN</sub> = 0.8 V		22	mA
	CC(OFF)	Both	V <sub>IN</sub> = 2.4 V	_	1.3	mA
Turn-On Delay	t <sub>pd0</sub>	Both	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>		3.0	μs
Turn-Off Delay	t <sub>pd1</sub>	Both	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>		2.0	μs

# TYPICAL APPLICATION DUAL STEPPER MOTOR DRIVE

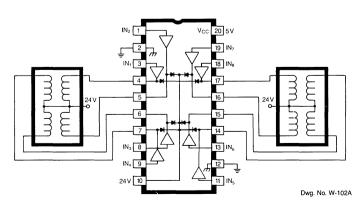


# RECOMMENDED OPERATING CONDITIONS

Type Number	Logic	I <sub>out</sub>
UDN2596A	5.0 V	300 mA
UDN2597A	5.0 V	750 mA

Note: Pins 2 and 12 must both be connected to power ground.

# 2801 THRU 2823

#### HIGH-VOLTAGE, HIGH-CURRENT DARLINGTON ARRAYS



Dwg. No. A-10,322A

#### **ABSOLUTE MAXIMUM RATINGS**

Output Voltage, V <sub>CE</sub>
(ULN280X*) 50 V
(ULN2823*) 95 V
Input Voltage, V <sub>IN</sub>
Continuous Output Current, I <sub>C</sub> <b>500 mA</b>
Continuous Input Current, I <sub>IN</sub> <b>25 mA</b>
Power Dissipation, P <sub>D</sub>
(one Darlington pair) 1.0 W
(total package) See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to + 85°C
Storage Temperature Range,
T <sub>s</sub> 55°C to +150°C

Note that the Series ULN2800A (dual in-line package) and Series ULN2800LW (small outline IC package) are electrically identical and share a

common pin number assignment.

Featuring continuous load current ratings to 600 mA for each of the eight drivers, the Series ULN2800A/LW high-voltage, high-current Darlington arrays are ideally suited for interfacing between low-level logic circuitry and multiple peripheral power loads. Typical power loads totaling over 300 W (400 mA x 8, 95 V) can be controlled at an appropriate duty cycle depending on ambient temperature and number of drivers turned ON simultaneously. Typical loads include relays, solenoids, stepping motors, magnetic print hammers, multiplexed LED and incandescent displays, and heaters. All devices feature open collector outputs with integral clamp diodes.

The ULN2801A device is a general-purpose array that may be used with external input current limiting, or with most PMOS or CMOS logic directly.

The Series ULN28x3A/LW has series input resistors selected for operation directly with 5 V TTL or CMOS. These devices will handle numerous interface needs—particularly those beyond the capabilities of standard logic buffers.

The Series ULN2804A/LW features series input resistors for operation directly from 6 to 15 V CMOS or PMOS logic outputs.

The Series ULN280xA/LW is the standard Darlington array. The outputs are capable of sinking 500 mA and will withstand at least 50 V in the OFF state. Outputs may be paralleled for higher load current capability. The ULN2823A/LW will withstand 95 V in the OFF state.

These Darlington arrays are furnished in 18-pin dual in-line plastic packages (suffix A) and 18-lead surface-mountable wide-body SOICs (suffix LW). All devices are pinned with outputs opposite inputs to facilitate ease of circuit board layout.


#### **FEATURES**

- TTL, DTL, PMOS, or CMOS Compatible Inputs
- Output Current to 500 mA
- Output Voltage to 95 V
- Transient-Protected Outputs
- Dual In-Line Plastic Package or Small-Outline IC Package

x = digit to identify specific device. Characteristic shown applies to family of devices with remaining digits as shown. See matrix on next page.


#### PARTIAL SCHEMATICS

#### **ULN2801A (Each Driver)**




Dwg. No. A-9595

#### **ULN28X3A/LW** (Each Driver)



Dwg. No. A-9651

#### **ULN2804A/LW** (Each Driver)




Dwg. No. A-9898A

#### DEVICE NUMBER DESIGNATION

V <sub>CE(MAX)</sub>	50 V	95 V
I <sub>C(MAX)</sub>	500 mA	500 mA

Logic		Part Number
General Purpose PMOS, CMOS	ULN2801A	-
5 V TTL, CMOS	ULN2803A* ULN2803LW*	ULN2823A* ULN2823LW*
6-15 V CMOS, PMOS	ULN2804A* ULN2804LW*	-

\* Also available for operation between -40°C and +85°C. To order, change prefix from 'ULN' to 'ULQ'.

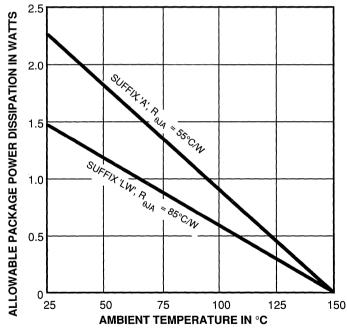

Dwg. No. GP-018A

X = Digit to identify specific device. Specification shown applies to family of devices with remaining digits as shown. See matrix above.

# SERIES ULN2800A/LW ELECTRICAL CHARACTERISTICS at +25°C (unless otherwise noted).

		Test	Applicable			Lir	mits	
Characteristic	Symbol	Fig.	Devices	Test Conditions	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	1A	All	V <sub>CE</sub> = 50 V, T <sub>A</sub> = 25°C	_	_	50	μΑ
				V <sub>CE</sub> = 50 V, T <sub>A</sub> = 70°C	_	_	100	μΑ
		1B	ULN2804*	$V_{CE} = 50 \text{ V}, T_A = 70^{\circ}\text{C}, V_{IN} = 1.0 \text{ V}$	_	_	500	μΑ
Collector-Emitter	V <sub>CE(SAT)</sub>	2	All	$I_{\rm C} = 100 \text{ mA}, I_{\rm B} = 250 \mu\text{A}$	_	0.9	1.1	V
Saturation Voltage			: :	$I_{\rm C} = 200 \text{ mA}, I_{\rm B} = 350 \mu\text{A}$		1.1	1.3	٧
				$I_{\rm C} = 350 \text{ mA}, I_{\rm B} = 500 \mu\text{A}$	_	1.3	1.6	٧
Input Current	I <sub>IN(ON)</sub>	3	ULN2803*	V <sub>IN</sub> = 3.85 V		0.93	1.35	mA
			ULN2804*	V <sub>IN</sub> = 5.0 V	_	0.35	0.5	mA
				V <sub>IN</sub> = 12 V	_	1.0	1.45	mA
	I <sub>IN(OFF)</sub>	4	All	$I_{\rm C} = 500 \mu\text{A},  T_{\rm A} = 70^{\circ}\text{C}$	50	65	_	μА
Input Voltage	V <sub>IN(ON)</sub>	5	ULN2803*	$V_{CE} = 2.0 \text{ V}, I_{C} = 200 \text{ mA}$	_	_	2.4	V
	:			$V_{CE} = 2.0 \text{ V, I}_{C} = 250 \text{ mA}$	_	_	2.7	V
				V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 300 mA	_		3.0	٧
			ULN2804*	V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 125 mA			5.0	V
				V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 200 mA	_	_	6.0	V
				$V_{CE} = 2.0 \text{ V, I}_{C} = 275 \text{ mA}$	_		7.0	V
			:	V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 350 mA		_	8.0	V
D-C Forward Current	h <sub>FE</sub>	2	ULN2801A	V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 350 mA	1000	_	_	
Transfer Ratio								
Input Capacitance	CIN	-	All		_	15	25	pF
Turn-On Delay	t <sub>ON</sub>	8	All	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>	_	0.25	1.0	μs
Turn-Off Delay	t <sub>OFF</sub>	8	All	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>	_	0.25	1.0	μs
Clamp Diode	I <sub>R</sub>	6	All	V <sub>R</sub> = 50 V, T <sub>A</sub> = 25°C	_		50	μА
Leakage Current	,			V <sub>R</sub> = 50 V, T <sub>A</sub> = 70°C			100	μА
Clamp Diode Forward Voltage	V <sub>F</sub>	7	All	I <sub>F</sub> = 350 mA		1.7	2.0	٧


<sup>\*</sup>Complete part number includes suffix to identify package style: A = DIP, LW = Wide-Body SOIC.

# TYPE ULN2823A/LW ELECTRICAL CHARACTERISTICS at +25°C (unless otherwise noted).

		Test			Lin	nits	
Characteristic	Symbol	Fig.	Test Conditions	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	1A	V <sub>CE</sub> = 95 V, T <sub>A</sub> = 25°C	_		50	μА
			V <sub>CE</sub> = 95 V, T <sub>A</sub> = 70°C	_	_	100	μА
Collector-Emitter	V <sub>CE(SAT)</sub>	2	$I_{\rm C} = 100 \text{ mA}, I_{\rm B} = 250 \mu\text{A}$	_	0.9	1.1	V
Saturation Voltage			$I_{\rm C} = 200$ mA, $I_{\rm B} = 350$ $\mu{\rm A}$	_	1.1	1.3	٧
			$I_{\rm C} = 350 \text{ mA}, I_{\rm B} = 500 \mu\text{A}$	_	1.3	1.6	٧
Input Current	I <sub>IN(ON)</sub>	3	V <sub>IN</sub> = 3.85 V	_	0.93	1.35	mA
	I <sub>IN(OFF)</sub>	4	$I_C = 500 \mu\text{A},  T_A = 70^{\circ}\text{C}$	50	65	_	μА
Input Voltage	V <sub>IN(ON)</sub>	5	$V_{CE} = 2.0 \text{ V}, I_{C} = 200 \text{ mA}$	<b>—</b>	_	2.4	٧
			$V_{CE} = 2.0 \text{ V}, I_{C} = 250 \text{ mA}$	_		2.7	٧
			V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 300 mA	_	_	3.0	٧
Input Capacitance	C <sub>IN</sub>	_		_	15	25	pF
Turn-On Delay	t <sub>ON</sub>	8	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>	_	0.25	1.0	μs
Turn-Off Delay	t <sub>OFF</sub>	8	0.5 E <sub>IN</sub> to 0.5 E <sub>OUT</sub>	_	0.25	1.0	μs
Clamp Diode	I <sub>R</sub>	6	V <sub>R</sub> = 95 V, T <sub>A</sub> = 25°C	<u> </u>	_	50	μА
Leakage Current			V <sub>R</sub> = 95 V, T <sub>A</sub> = 70°C	_	_	100	μА
Clamp Diode Forward Voltage	V <sub>F</sub>	7	I <sub>F</sub> = 350 mA	_	1.7	2.0	٧


#### **TEST FIGURES**

#### FIGURE 1A




Dwg. No. A-9729A

#### FIGURE 1B




Dwg. No. A-9730A

#### FIGURE 2




Dwg. No. A-9731A

#### FIGURE 3




Dwg. No. A-9732A

#### FIGURE 4




Dwg. No. A-9733A

#### FIGURE 5




Dwg. No. A-9734A

#### FIGURE 6




Dwg. No. A-9735A

#### FIGURE 7



Dwg. No. A-9736A


#### FIGURE 8




	V <sub>in</sub>	INPUT SO%
ULN28X1*	3.5 V	MA-DI
ULN28X3*	3.5 V	OUTPUT IPHL IPLH
ULN28X4*	12 V	50% 50%

- Complete part number includes a final letter to indicate package.
- X = Digit to identify specific device. Specification shown applies to family of devices with remaining digits as shown.


#### COLLECTOR CURRENT AS A FUNCTION OF SATURATION VOLTAGE




#### PEAK COLLECTOR CURRENT AS A FUNCTION OF DUTY CYCLE (DUAL IN-LINE PACKAGED DEVICES)

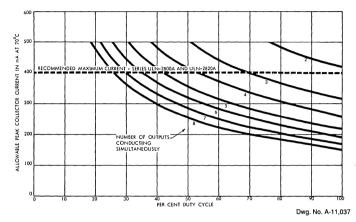

# COLLECTOR CURRENT AS A FUNCTION OF INPUT CURRENT




Dwg. No. A-10,872B

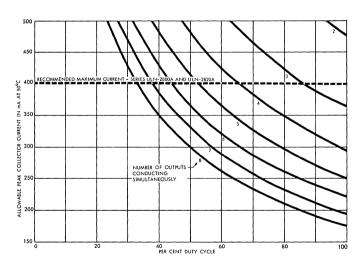


Dwg. No. A-10,380A


#### PEAK COLLECTOR CURRENT AS A FUNCTION OF DUTY CYCLE (SMALL OUTLINE PACKAGED DEVICES)

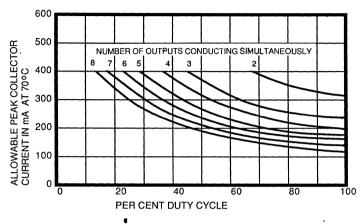


# INPUT CURRENT AS A FUNCTION OF INPUT VOLTAGE ULN2804A/LW



Dwg. No. A-9899A

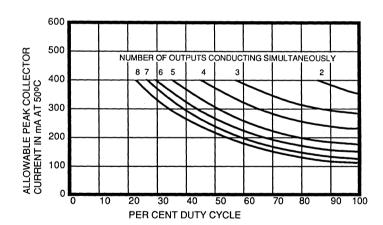


#### ULN28X3A/LW




Dwg. No. A-9756B

#### TYPICAL DISPLAY INTERFACE



Dwg. No. A-10,378



Dwg. No. A-10,384

# 2878 AND 2879

#### QUAD HIGH-CURRENT DARLINGTON SWITCHES

These quad Darlington arrays are designed to serve as interface between low-level logic and peripheral power devices such as solenoids, motors, incandescent displays, heaters, and similar loads of up to 320 W per channel. Both integrated circuits include transient-suppression diodes that enable use with inductive loads. The input logic is compatible with most TTL, DTL, LSTTL, and 5 V CMOS logic.

Type UDN2878W and UDN2879W 4 A arrays are identical except for output-voltage ratings. The former is rated for operation to 50 V (35 V sustaining), while the latter has a minimum output breakdown rating of 80 V (50 V sustaining). The lower-cost UDN2878W-2 and UDN2879W-2 are recommended for applications requiring load currents of 3 A or less. These less expensive devices are identical to the basic parts except for the maximum allowable load-current rating.

For maximum power-handling capability, all drivers are supplied in a 12-pin single in-line power-tab package. The tab needs no insulation. External heat sinks are usually required for proper operation of these devices.

#### **FEATURES**

- Output Currents to 4 A
- Output Voltages to 80 V
- Loads to 1280 W
- TTL, DTL, or CMOS Compatible Inputs
- Internal Clamp Diodes
- Plastic Single In-Line Package
- Heat-Sink Tab

Dwg. No. A-11,974


#### ABSOLUTE MAXIMUM RATINGS at +25°C Free-Air Temperature for any driver (unless otherwise noted)

Output Voltage, V <sub>CEX</sub>
(UDN2878W
& UDN2878W-2) 50 V
(UDN2879W
& UDN2879W-2) 80 V
Output Current, I <sub>C</sub>
(UDN2878W
& UDN2879W) 5.0 A
(UDN2878W-2
& UDN2979W-2) 4.0 A
Input Voltage, V <sub>IN</sub> 15 V
Input Current, I <sub>IN</sub>
Supply Voltage, V <sub>S</sub> 10 V
Total Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Ambient Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,


T<sub>S</sub>.....-55°C to +150°C

#### Always order by complete part number:

Part Number	Max. I <sub>c</sub>	Max. V <sub>CEX</sub>	Min. V <sub>CE (sus)</sub>
UDN2878W	5.0 A	50 V	35 V
UDN2878W-2	4.0 A	50 V	35 V
UDN2879W	5.0 A	80 V	50 V
UDN2879W-2	4.0 A	80 V	50 V

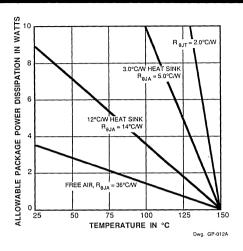

# PARTIAL SCHEMATIC One of 4 Drivers



Dwg. No. A-12,037


NOTE: Pin 3 must be connected to ground for proper operation.


#### ELECTRICAL CHARACTERISTICS at $V_S = 5.0 \text{ V}$ , $T_A = +25^{\circ}\text{C}$ (unless otherwise noted).

		Test	Applicable			Limits	
Characteristic	Symbol	Fig.	Devices	Test Conditions	Min.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	1	UDN2878W/W-2	V <sub>CE</sub> = 50 V	-	100	μΑ
				$V_{CE} = 50 \text{ V}, T_{A} = +70^{\circ}\text{C}$	_	500	μΑ
		}	UDN2879W/W-2	V <sub>CE</sub> = 80 V	_	100	μΑ
		1		V <sub>CE</sub> = 80 V, T <sub>A</sub> = +70°C	_	500	μΑ
Output Sustaining	V <sub>CE(sus)</sub>		UDN2878W	I <sub>C</sub> = 4 A, L = 10 mH	35	_	٧
Voltage			UDN2878W-2	I <sub>C</sub> = 3 A, L = 10 mH	35	_	٧
		İ	UDN2879W	I <sub>C</sub> = 4 A, L = 10 mH	50	_	V
	1		UDN2879W-2	I <sub>C</sub> = 3 A, L = 10 mH	50	_	٧
Collector-Emitter	V <sub>CE(SAT)</sub>	2	All	$I_{\rm C} = 500 \text{ mA}, V_{\rm IN} = 2.75 \text{ V}$	_	1.1	V
Saturation Voltage				I <sub>C</sub> = 1.0 A, V <sub>IN</sub> = 2.75 V	_	1.3	٧
				$I_C = 2.0 \text{ A}, V_{IN} = 2.75 \text{ V}$	_	1.5	V
				$f_C = 3.0 \text{ A}, V_{IN} = 2.75 \text{ V}$		1.9	٧
			UDN2878/79W	$I_{\rm C} = 4.0 \text{ A}, V_{\rm IN} = 2.75 \text{ V}$	_	2.4	٧
Input Current	I <sub>IN</sub>	3	All	V <sub>IN</sub> = 2.75 V	_	550	μА
				V <sub>IN</sub> = 3.75 V	_	1000	μΑ
Input Voltage	V <sub>IN(ON)</sub>	4	All	$V_{CE} = 2.2 \text{ V}, I_{C} = 3.0 \text{ A}$	_	2.75	٧
			UDN2878/79W	V <sub>CE</sub> = 2.2 V, I <sub>C</sub> = 4.0 A	_	2.75	٧
Supply Current per Driver	Is	7	All	$I_{\rm C} = 500 \text{ mA}, V_{\rm IN} = 2.75 \text{ V}$		6.0	mA
Turn-On Delay	t <sub>PLH</sub>	_	All	0.5 E <sub>in</sub> to 0.5 E <sub>out</sub>		1.0	μs
Turn-Off Delay	t <sub>PHL</sub>	_	All	$0.5 E_{in} \text{ to } 0.5 E_{out}, I_{C} = 3.0 A$	_	1.5	μs
Clamp Diode	I <sub>R</sub>	5	All	V <sub>R</sub> = 50 V		50	μΑ
Leakage Current				$V_{R} = 50 \text{ V}, T_{A} = +70^{\circ}\text{C}$	_	100	μΑ
			UDN2879W/W-2	V <sub>R</sub> = 80 V		50	μΑ
				$V_{R} = 80 \text{ V}, T_{A} = +70^{\circ}\text{C}$	_	100	μΑ
Clamp Diode	V <sub>F</sub>	6	All	I <sub>F</sub> = 3.0 A	_	2.5	V
Forward Voltage			UDN2878/79W	I <sub>F</sub> = 4.0 A	_	3.0	٧

Caution: High-current tests are pulse tests or require heat sinking.

#### **TEST FIGURES**









FIGURE 1

FIGURE 2

FIGURE 3



Dwg. No. A-9734A

FIGURE 4






FIGURE 5



Dwg. No. A-9736

FIGURE 6




Dwg. No. A-10,351

FIGURE 7


#### TYPICAL APPLICATIONS

#### STEPPER-MOTOR DRIVER


# INPUT WAVEFORMS X Y \( \overline{\text{T}} \o

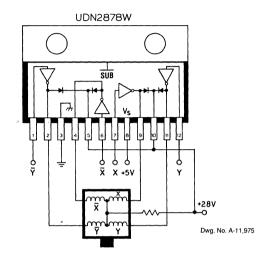

#### PRINT-HAMMER DRIVER

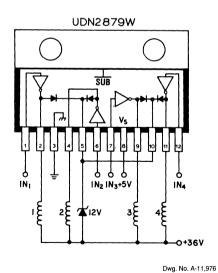

#### DIGIT DRIVER FOR MULTIPLEXED INCANDESCENT LAMP DISPLAY

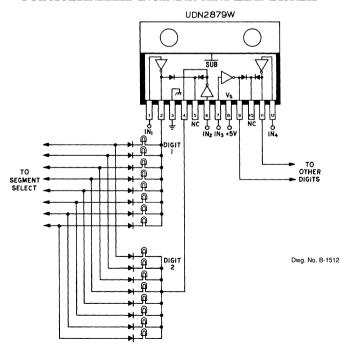

# 2916

#### DUAL FULL-BRIDGE PWM MOTOR DRIVERS

The UDN2916B, UDN2916EB, and UDN2916LB motor drivers are designed to drive both windings of a bipolar stepper motor or bidirectionally control two dc motors. Both bridges are capable of sustaining 45 V and include internal pulse-width modulation (PWM) control of the output current to 750 mA: The outputs have been optimized for a low output saturation voltage drop (less than 1.8 V total source plus sink at 500 mA).

For PWM current control, the maximum output current is determined by the user's selection of a reference voltage and sensing resistor. Two logic-level inputs select output current limits of 0, 33, 67, or 100% of the maximum level. A PHASE input to each bridge determines load current direction.

The bridges include both ground clamp and flyback diodes for protection against inductive transients. Internally generated delays prevent cross-over currents when switching current direction. Special power-up sequencing is not required. Thermal protection circuitry disables the outputs if the chip temperature exceeds safe operating limits.

The UDN2916B is supplied in a 24-pin dual in-line plastic batwing package with a copper lead-frame and heat sinkable tabs for improved power dissipation capabilities. The UDN2916EB is supplied in a 44-lead power PLCC for surface-mount applications. The UDN2916LB is supplied in a 24-lead surface-mountable SOIC. Their batwing construction provides for maximum package power dissipation in the smallest possible construction. The UDN2916B/EB/LB are also available for operation from -40°C to +85°C. To order, change the prefix from 'UDN' to 'UDQ'.

# ABSOLUTE MAXIMUM RATINGS at $T_J \le 150^{\circ}C$

**UDN2916B** 

SENSE 2

GROUND

GROUND

OUT<sub>2B</sub> 5

PHASE 2 10 θ2

VREF 2 11

RC<sub>2</sub> 12

24 LOAD SUPPLY

23] E<sub>1</sub>

22 SENSE 1

21 OUT 1B

19 GROUND

θ1 16 PHASE1

14 RC 1

V<sub>REF 1</sub>

13 LOGIC SUPPLY

Dwg. No. PP-005

18 GROUND

20 I<sub>01</sub>

Motor Supply Voltage, V <sub>BB</sub>
Output Current, I <sub>OUT</sub>
(Peak, $t_w \le 20 \mu s$ ) ±1.0 A
(Continuous) ±750 mA
Logic Supply Voltage, V <sub>CC</sub> 7.0 V
Logic Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>CC</sub> + 0.3 V
Output Emitter Voltage, V <sub>E</sub> 1.0 V
Reference Voltage, V <sub>REF</sub>
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>s</sub> 55°C to +150°C

Output current rating may be limited by duty cycle, ambient temperature, and heat sinking. Under any set of conditions, do not exceed the specified peak current rating or a junction temperature of +150°C.

#### **FEATURES**

- 750 mA Continuous Output Current
- 45 V Output Sustaining Voltage
- Internal Clamp Diodes
- Internal PWM Current Control
- Low Output Saturation Voltage
- Internal Thermal Shutdown Circuitry
- Similar to Dual PBL3717, UC3770

Always order by complete part number:


Part Number	Package
UDN2916B	24-Pin DIP
UDN2916EB	44-Lead PLCC
UDN2916LB	24-Lead SOIC

GROUND

#### **DUAL FULL-BRIDGE PWM MOTOR DRIVERS**

Dwg. No. PP-006


Dwg. No. PP-047




I 02 24 I 12 25 PHASE 2 [26]

Š

õ

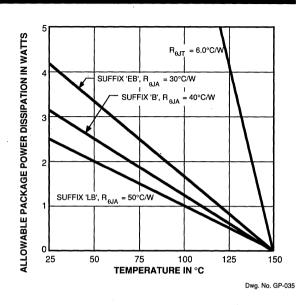

#### PWM CURRENT-CONTROL CIRCUITRY

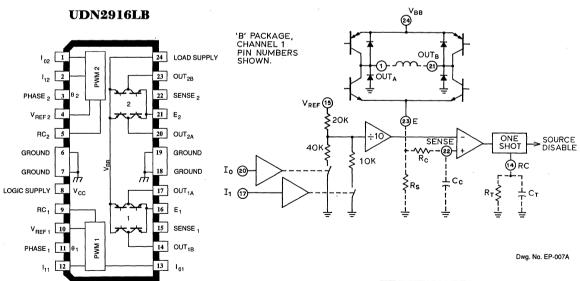

TRUTH TABLE

OUTA	OUT <sub>B</sub>
Н	L
L	Н
	OUT <sub>A</sub> H L

#### 2916 DUAL FULL-BRIDGE PWM MOTOR DRIVERS

ELECTRICAL CHARACTERISTICS at  $T_A$  = +25°C,  $V_{BB}$  = 45 V,  $V_{CC}$  = 4.75 V to 5.25 V,  $V_{REF}$  = 5.0 V (unless otherwise noted).

			}	Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units	
Output Drivers (OUT <sub>A</sub> or OUT <sub>B</sub> )							
Motor Supply Range	V <sub>BB</sub>		10		45	V	
Output Leakage Current	I <sub>CEX</sub>	V <sub>OUT</sub> = V <sub>BB</sub>	_	< 1.0	50	μА	
		V <sub>OUT</sub> = 0	_	<-1.0	-50	μА	
Output Sustaining Voltage	V <sub>CE(sus)</sub>	$I_{OUT} = \pm 750 \text{ mA, L} = 3.0 \text{ mH}$	45			٧	
Output Saturation Voltage	V <sub>CE(SAT)</sub>	Sink Driver, I <sub>OUT</sub> = +500 mA	_	0.4	0.6	٧	
		Sink Driver, I <sub>OUT</sub> = +750 mA	T -	1.0	1.2	٧	
		Source Driver, I <sub>OUT</sub> = -500 mA	_	1.0	1.2	٧	
		Source Driver, I <sub>OUT</sub> = -750 mA	_	1.3	1.5	٧	
Clamp Diode Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 45 V	_	< 1.0	50	μА	
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 750 mA		1.6	2.0	V	
Driver Supply Current	I <sub>BB(ON)</sub>	Both Bridges ON, No Load		20	25	mA	
	I <sub>BB(OFF)</sub>	Both Bridges OFF		5.0	10	mA	
Control Logic						<del>-</del> -	
Input Voltage	V <sub>IN(1)</sub>	All digital inputs	2.4	_	_	٧	
	V <sub>IN(0)</sub>	All digital inputs	T		0.8	٧	
Input Current	I <sub>IN(1)</sub>	V <sub>IN</sub> = 2.4 V	<b>†</b> – –	<1.0	20	μА	
		V <sub>IN</sub> = 0.8 V	] -	- 3.0	-200	μА	
Reference Voltage Range	V <sub>REF</sub>	Operating	1.5	_	7.5	٧	
Current Limit Threshold	V <sub>REF</sub> /V <sub>SENSE</sub>	I <sub>0</sub> = I <sub>1</sub> = 0.8 V	9.5	10	10.5	=	
(at trip point)		l <sub>0</sub> = 2.4 V, l <sub>1</sub> = 0.8 V	13.5	15	16.5	_	
		l <sub>0</sub> = 0.8 V, l <sub>1</sub> = 2.4 V	25.5	30	34.5	_	
Thermal Shutdown Temperature	T <sub>J</sub>		1 -	170		°C	
Total Logic Supply Current	I <sub>CC(ON)</sub>	I <sub>0</sub> = I <sub>1</sub> = 0.8 V, No Load	<del>-</del>	40	50	mA	
	I <sub>CC(OFF)</sub>	I <sub>0</sub> = I <sub>1</sub> = 2.4 V, No Load	_	10	12	mA	

#### APPLICATIONS INFORMATION

#### PWM CURRENT CONTROL:

The UDN2916B/EB/LB dual bridges are designed to drive both windings of a bipolar stepper motor. Output current is sensed and controlled independently in each bridge by an external sense resistor ( $R_{\rm s}$ ), internal comparator, and monostable multivibrator.


When the bridge is turned ON, current increases in the motor winding and it is sensed by the external sense resistor until the sense voltage ( $V_{\text{SENSE}}$ ) reaches the level set at the comparator's input:


$$I_{TRIP} = V_{REF}/10 R_{S}$$

The comparator then triggers the monostable which turns OFF the source driver of the bridge. The actual load current peak will be slightly higher than the trip point (especially for low-inductance loads) because of the internal logic and switching delays. This delay (t\_d) is typically 2  $\mu s$ . After turn-off, the motor current will normally decay, circulating through the ground-clamp diode and sink transistor. The source driver's OFF time (and therefore the magnitude of the current decrease) is determined by the monostable's external RC timing components, where  $t_{\rm off}=R_{\rm T}C_{\rm T}$  within the range of 20  $k\Omega$  to 100  $k\Omega$  and 100 pF to 1,000 pF.

When the source driver is re-enabled, the winding current (the sense voltage) is again allowed to rise to the comparator's threshold. This cycle repeats itself, maintaining the average motor winding current at the desired level.

Loads with high distributed capacitances may result in high turn-ON current peaks. This peak (appearing across  $\mathbf{R}_{\mathrm{S}}$ ) will attempt to trip the comparator, resulting in erroneous current control or high-frequency oscillations. An external  $\mathbf{R}_{\mathrm{C}}\mathbf{C}_{\mathrm{C}}$  time delay should be used to further delay the action of the comparator. Depending on load type, many applications will not require these external components (SENSE connected to E).

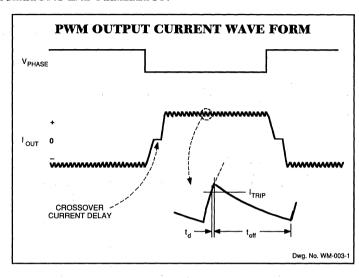

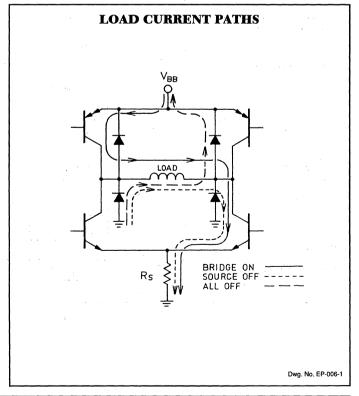

### LOGIC CONTROL OF OUTPUT CURRENT:

Two logic level inputs (I $_0$  and I $_1$ ) allow digital selection of the motor winding current at 100%, 67%, 33%, or 0% of the maximum level per the table. The 0% output current condition turns OFF all drivers in the bridge and can be used as an OUTPUT ENABLE function.

#### **CURRENT-CONTROL TRUTH TABLE**

l <sub>o</sub>	l <sub>1</sub>	Output Current
L	L	$V_{REF}/10 R_S = I_{TRIP}$
н	L	$V_{REF}/15 R_S = 2/3 I_{TRIP}$
L	н	$V_{REF}/30 R_S = 1/3 I_{TRIP}$
Н	Н	0

These logic level inputs greatly enhance the implementation of  $\mu P\text{-controlled}$  drive formats.

During half-step operations, the I $_0$  and I $_1$  allow the  $\mu P$  to control the motor at a constant torque between all positions in an eight-step sequence. This is accomplished by digitally selecting 100% drive current when only one phase is ON and 67% drive current when two phases are ON. Logic highs on both I $_0$  and I $_1$  turn OFF all drivers to allow rapid current decay when switching phases. This helps to ensure proper motor operation at high step rates.


The logic control inputs can also be used to select a reduced current level (and reduced power dissipation) for 'hold' conditions and/ or increased current (and available torque) for start-up conditions.

#### **GENERAL:**

To avoid excessive voltage spikes on the LOAD SUPPLY pin  $(V_{_{BB}})$ , a large-value capacitor ( $\ge$ 22  $\mu$ F) should be connected from  $V_{_{BB}}$  to ground as close as possible to the device. Under no circumstances should the voltage at LOAD SUPPLY exceed 45 V.

The PHASE input to each bridge determines the direction motor winding current flows. An internally generated deadtime (approximately 3 µs) prevents crossover currents that can occur when switching the PHASE input.

All four drivers in the bridge output can be turned OFF between steps ( $I_0 = I_1 \ge 2.4 \text{ V}$ ) resulting in a fast current decay through the internal output clamp and flyback diodes. The fast current decay is desirable in half-step and high-speed applications. The PHASE,  $I_0$ , and  $I_1$  inputs float high.



Varying the reference voltage (V $_{\rm REF}$ ) provides continuous control of the peak load current for micro-stepping applications, within the specified limits for V $_{\rm REF}$ .

Thermal protection circuitry turns OFF all drivers when the junction temperature reaches +170°C. It is only intended to protect the device from failures due to excessive junction temperature and should not imply that output short circuits are permitted. The output drivers are re-enabled when the junction temperature cools to +145°C.

The UDN2916B/EB/LB output drivers are optimized for low output saturation voltages—less than 1.8 V total (source plus sink) at 500 mA. Under normal operating conditions, when combined with the excellent thermal properties of the batwing package design, this allows continuous operation of both bridges simultaneously at 500 mA.

# **DUAL FULL-BRIDGE** PWM MOTOR DRIVER

The UDN2917EB motor driver is designed to drive both windings. of a bipolar stepper motor or bidirectionally control two dc motors. Both bridges are capable of sustaining 45 V and include internal pulse-width modulation (PWM) control of the output current to 1.5 A.

For PWM current control, the maximum output current is determined by the user's selection of a reference voltage and sensing resistor. Two logic-level inputs select output current limits of 0, 33%, 67%, or 100% of the maximum level. A PHASE input to each bridge determines load current direction. Active-low ENABLE inputs control the four drivers in each bridge.

The bridges include both ground clamp and flyback diodes for protection against inductive transients. Internally generated delays prevent cross-over currents when switching current direction. Special power-up sequencing is not required. Thermal protection circuitry disables the outputs if the chip temperature exceeds safe operating limits.

The UDN2917EB is supplied in a 44-lead power PLCC for surfacemount applications. Its batwing construction provides for maximum package power dissipation in the smallest possible construction.

### **FEATURES**

- 1.5 A Continuous Output Current
- 45 V Output Sustaining Voltage
- Internal Clamp Diodes
- Digital Control of Output Current
- Internal Thermal Shutdown Circuitry
- Similar to Dual PBL3770

GROUND OUT 2B I 20


Dwg. No. PP-021


### ABSOLUTE MAXIMUM RATINGS at $T_{\rm r} \le +150^{\circ}{\rm C}$

Motor Supply Voltage, V <sub>BB</sub> 45 V
Output Current, $I_{OUT}$ ( $t_w \le 20 \mu s$ ) $\pm 1.75 A$
(Continuous) ±1.5 A
Logic Supply Voltage, V <sub>CC</sub> 7.0 V
Logic Input Voltage Range,
V <sub>IN</sub> 0.3 V to +7.0 V
Output Emitter Voltage, V <sub>E</sub> 1.0 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T -55°C to +150°C

Output current rating may be limited by duty cycle, ambient temperature, and heat sinking. Under any set of conditions, do not exceed the specified peak current rating or a junction temperature of +150°C.

Always order by complete part number: **UDN2917EB** .

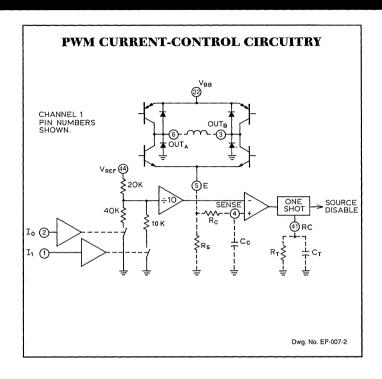

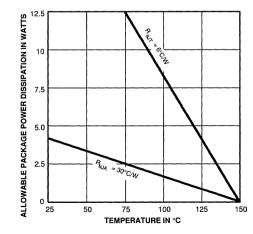

Dwg. No. GP-020B

### TRUTH TABLE

Enable	Phase	Out <sub>A</sub>	Out <sub>B</sub>
L	Н	Н	L
L	L	L	Н
Н	X	Z	Z

X = Don't care

Z = High impedance

# ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $V_{BB}$ = 45 V, $V_{CC}$ = 5.0 V, $V_{REF}$ = 5.0 V (unless otherwise noted).

			Limits			
Characteristic Symbol		Test Conditions		Тур.	Max.	Units
Output Drivers (OUT <sub>A</sub> or OUT <sub>B</sub> )						
Motor Supply Range	V <sub>BB</sub>		10		45	V
Output Leakage Current	I <sub>CEX</sub>	$V_{OUT} = V_{BB}$	-	<1.0	50	μА
		V <sub>OUT</sub> = 0	-	<-1.0	-50	μА
Output Sustaining Voltage	V <sub>CE(sus)</sub>	$I_{OUT} = \pm 1.5 \text{ A, L} = 3.5 \text{ mH}$	45			V
Output Saturation Voltage	V <sub>CE(SAT)</sub>	Sink Driver, I <sub>OUT</sub> = +1.0 A*	_	0.5	0.7	٧
		Sink Driver, I <sub>OUT</sub> = +1.5 A*	_	0.8	1.0	٧
		Source Driver, I <sub>OUT</sub> = -1.0 A*	_	1.8	1.9	V
}		Source Driver, I <sub>OUT</sub> = -1.5 A*	_	1.9	2.1	٧
Clamp Diode Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 45 V	_	<1.0	50	μА
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 1.5 A	_	1.6	2.0	V
Driver Supply Current	I <sub>BB(ON)</sub>	Both Bridges ON, No Load	_	9.0	12	mA
	I <sub>BB(OFF)</sub>	Both Bridges OFF	_	4.0	6.0	mA
Control Logic						
Input Voltage	V <sub>IN(1)</sub>	All Inputs	2.4	_	_	V
	V <sub>IN(0)</sub>	All Inputs	_	_	0.8	٧
Input Current	I <sub>IN(1)</sub>	V <sub>IN</sub> = 2.4 V	-	<1.0	20	μА
	I <sub>IN(0)</sub>	V <sub>IN</sub> = 0.8 V	_	-3.0	-200	μА
Reference Voltage Range	V <sub>REF</sub>	Operating	1.5	_	7.5	V
Current Limit Threshold	V <sub>REF</sub> /V <sub>SENSE</sub>	I <sub>0</sub> = I <sub>1</sub> = 0.8 V	9.5	10	10.5	_
(at trip point)		I <sub>0</sub> = 2.4 V, I <sub>1</sub> = 0.8 V	13.5	15	16.5	<u> </u>
		I <sub>0</sub> = 0.8 V, I <sub>1</sub> = 2.4 V	25.5	30	34.5	T -
Thermal Shutdown Temp.	T <sub>J</sub>			170	_	°C
Total Logic Supply Current	I <sub>CC(ON)</sub>	$I_0 = I_1 = V_{EN} = 0.8 \text{ V, No Load}$	_	90	105	mA
Ī	I <sub>CC(OFF)</sub>	I <sub>0</sub> = I <sub>1</sub> = 2.4 V, No Load	<del></del>	10	12	mA

Negative current is defined as coming out of (sourcing) the specified device pin.

Typical Data is for design information only.

<sup>\*</sup> Pulse test (<10 ms).

### **APPLICATIONS INFORMATION**

#### PWM CURRENT CONTROL:

The UDN2917EB dual bridge is designed to drive both windings of a bipolar stepper motor. Output current is sensed and controlled independently in each bridge by an external sense resistor ( $R_{\rm s}$ ), internal comparator, and monostable multivibrator.

When the bridge is turned ON, current increases in the motor winding and it is sensed by the external sense resistor until the sense voltage ( $V_{\text{SENSE}}$ ) reaches the level set at the comparator's input:


$$I_{TRIP} = V_{REF}/10 R_{S}$$


The comparator then triggers the monostable which turns OFF the source driver of the bridge. The actual load current peak will be slightly higher than the trip point (especially for low-inductance loads) because of the internal logic and switching delays. This delay (t\_d) is typically 2  $\mu s$ . After turn-off, the motor current will normally decay, circulating through the ground clamp diode and sink transistor. The source driver's OFF time (and therefore the magnitude of the current decrease) is determined by the monostable's external RC timing components, where t\_{off} = R\_{\tau}C\_{\tau} within the range of 20  $k\Omega$  to 100  $k\Omega$  and 200 pF to 500 pF.

When the source driver is re-enabled, the winding current (the sense voltage) is again allowed to rise to the comparator's threshold. This cycle repeats itself, maintaining the average motor winding current at the desired level.

Special circuitry has been included to prevent runaway current control when the fixed OFF time ( $t_{\rm off}$ ) is set too short. This circuitry prevents the source driver from being re-enabled until the load current has decayed to below the  $I_{\rm TRIP}$  level.

Loads with high distributed capacitances may result in high turn-ON current peaks. This peak (appearing across  $\mathbf{R}_s$ ) will attempt to trip the comparator, resulting in erroneous current control or high-frequency oscillations. An external  $\mathbf{R}_c\mathbf{C}_c$  low-pass filter may be needed to delay the action of the comparator.

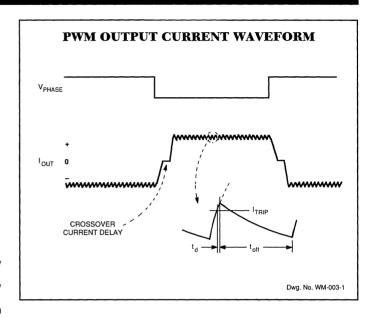

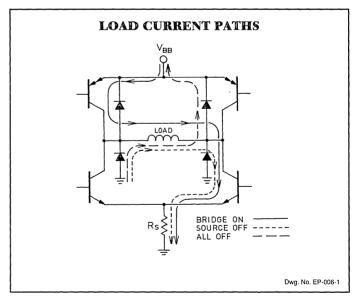

### CURRENT-CONTROL TRUTH TABLE

I <sub>o</sub>	I,	Output Current
L	L	$V_{REF}/10 R_{s} = I_{TRIP}$
Н	L	$V_{REF}/15 R_s = 2/3 I_{TRIP}$
L	Н	$V_{REF}/30 R_S = 1/3 I_{TRIP}$
Н	Н	0

#### LOGIC CONTROL OF OUTPUT CURRENT:

Two logic level inputs ( $I_0$  and  $I_1$ ) allow digital selection of the motor winding current at 100%, 67%, 33%, or 0% of the maximum level per the table. The 0% output current condition turns OFF all drivers in the bridge and can be used as an output enable function. These logic level inputs greatly enhance the implementation of  $\mu P$ -controlled drive formats.

During half-step operations, the  $I_0$  and  $I_1$  inputs allow the  $\mu P$  to control the motor at a constant torque between all positions in an eight-step sequence. This is accomplished by digitally selecting 100% drive current when only one phase is ON and 67% drive current when two phases are ON.

The logic control inputs can also be used to select a reduced current level (and reduced power dissipation) for 'hold' conditions and/or increased current (and available torque) for start-up conditions.

#### GENERAL:

To avoid excessive voltage spikes on the LOAD SUPPLY pin ( $V_{BB}$ ), a large-value capacitor ( $\geq$ 47  $\mu$ F) should be connected from  $V_{BB}$  to ground as close as possible to the device. Under no circumstances should the voltage at LOAD SUPPLY exceed 45 V.

The PHASE input to each bridge determines the direction motor winding current flows. An internally generated deadtime (approximately 3  $\mu$ s) prevents crossover currents that can occur when switching the PHASE input.

All four drivers in the bridge output can be turned OFF ( $V_{EN} \ge 2.4 \text{ V}$  or  $I_0 = I_1 \ge 2.4 \text{ V}$ ), resulting in a fast current decay through the internal output clamp and flyback diodes. The fast current decay is desirable in half-step and high-speed applications. All logic inputs float high; the ENABLE input must be tied low if it is not used.

Varying the reference voltage ( $V_{REF}$ ) provides continuous control of the peak load current for micro-stepping applications, within the specified limits for  $V_{REF}$ .

Thermal protection circuitry turns OFF all drivers when the junction temperature reaches +170°C. It is only intended to protect the device from failures due to excessive junction temperature and should not imply that output short circuits are permitted. The output drivers are re-enabled when the junction temperature cools to +145°C.

# DUAL FULL-BRIDGE PWM MOTOR DRIVER

The A2918SWH and A2918SWV motor drivers are designed to drive both windings of a bipolar stepper motor or bidirectionally control two dc motors. All bridges are capable of sustaining 45 V and include internal pulse-width modulation (PWM) control of the output current to 1.5 A.

For PWM current control, the maximum output current is determined by the user's selection of a reference voltage and sensing resistor. A PHASE input to each bridge determines load current direction. Active low ENABLE inputs control the four drivers in each bridge.

The bridges include both ground clamp and flyback diodes for protection against inductive transients. Internally generated delays prevent cross-over currents when switching current direction. Special power-up sequencing is not required. Thermal protection circuitry disables the outputs if the chip temperature exceeds safe operating limits.

The A2918SWH/V are supplied in an 18-lead power-tab package with staggered lead forming. The tab is internally insulated from the device and requires no external isolation.

### OUT1A 1 OUT<sub>2A</sub> 2 OUT<sub>2B</sub> 4 LOAD SPLY 5 SENSE<sub>2</sub> 6 ENABLE<sub>2</sub> 7 PHASE<sub>2</sub> 8 RC<sub>2</sub> 9 GROUND 10 LOGIC SPLY 11 RC<sub>1</sub> 12 PHASE 13 ENABLE<sub>1</sub> 14 PWM REFERENCE 15 TSD SENSE<sub>1</sub> 16 OUT<sub>1B</sub> 17

Dwg. PP-051

# ABSOLUTE MAXIMUM RATINGS at $T_J \le +150^{\circ}C$

Motor Supply Voltage, V <sub>BB</sub>
Output Current, $I_{OUT}$ ( $t_w \le 20 \mu s$ ) $\pm 1.75 A$ (Continuous) $\pm 1.5 A$
Logic Supply Voltage, V <sub>CC</sub> 7.0 V
Logic Input Voltage Range,
V <sub>IN</sub>
Output Emitter Voltage, V <sub>E</sub> 1.5 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> –20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> –40°C to +150°C


Output current rating may be limited by duty cycle, ambient temperature, and heat sinking. Under any set of conditions, do not exceed the specified peak current rating or a junction temperature of +150°C.

### **FEATURES**

- ±1.5 A Continuous Output Current
- 45 V Output Sustaining Voltage
- Internal PWM Current Control
- Low Output Saturation Voltage
- Internal Clamp Diodes
- Internal Thermal Shutdown Circuitry
- Similar to Dual PBL3718 or Dual PBL3770

Always order by complete part number:


Part Number	Application
A2918SWH	For Horizontal Mount
A2918SWV	For Vertical Mount

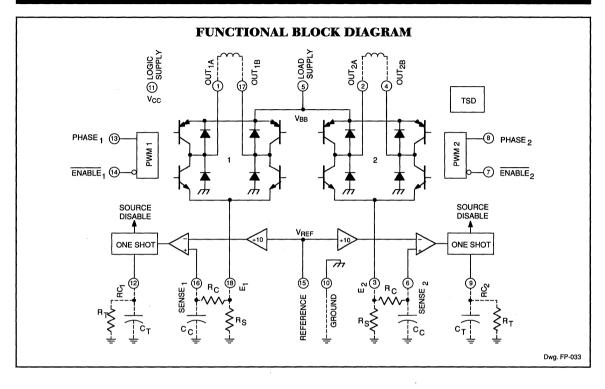

TRUTH TABLE

Enable	Phase	Out <sub>A</sub>	Out <sub>B</sub>
L	Н	Н	L
L	L	L	Н
Н	X	Z	Z

X = Don't care

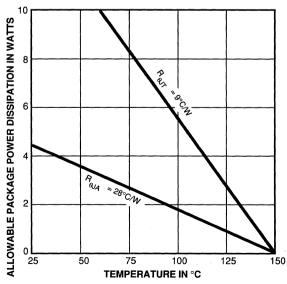

Dwg. GP-043

Z = High impedance


ELECTRICAL CHARACTERISTICS at  $T_A$  = +25°C,  $V_{BB}$  = 45 V,  $V_{CC}$  = 4.75 V to 5.25 V,  $V_{REF}$  = 5.0 V (unless otherwise noted).

				Limits			
Characteristic	Symbol	Symbol Test Conditions		Тур.	Max.	Units	
Output Drivers (OUT <sub>A</sub> or OUT <sub>B</sub>	)						
Motor Supply Range	V <sub>BB</sub>		10	_	45	٧	
Output Leakage Current	I <sub>CEX</sub>	$V_{OUT} = V_{BB}$	T -	<1.0	50	μА	
		V <sub>OUT</sub> = 0	_	<-1.0	<b>–</b> 50	μА	
Output Sustaining Voltage	V <sub>CE(sus)</sub>	$I_{OUT} = \pm 1.5 \text{ A, L} = 3.0 \text{ mH}$	45	_	_	٧	
Output Saturation Voltage	V <sub>CE(SAT)</sub>	Sink Driver, I <sub>OUT</sub> = +1.0 A		0.7	0.8	٧	
		Sink Driver, I <sub>OUT</sub> = +1.5 A	_	0.9	1.1	٧	
		Source Driver, I <sub>OUT</sub> = -1.0 A	_	1.8	2.0	٧	
		Source Driver, I <sub>OUT</sub> = −1.5 A		1.9	2.2	٧	
Clamp Diode Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 45 V	_	<1.0	50	μА	
Clamp Diode Forward Voltage V <sub>F</sub>		I <sub>F</sub> = 1.5 A	-	1.6	2.0	٧	
Driver Supply Current	I <sub>BB(ON)</sub>	Both Bridges ON, No Load		12	15	mA	
	I <sub>BB(OFF)</sub>	Both Bridges OFF	_	4.0	6.0	mA	
Control Logic							
Input Voltage	V <sub>IN(1)</sub>	All Inputs	2.4		_	٧	
	V <sub>IN(0)</sub>	All Inputs	_		0.8	٧	
Input Current	I <sub>IN(1)</sub>	V <sub>IN</sub> = 2.4 V	_	<1.0	20	μA	
	I <sub>IN(0)</sub>	V <sub>IN</sub> = 0.8 V	_	-3.0	-200	μА	
Reference Voltage Range	V <sub>REF</sub>	Operating	1.5	_	Vcc	٧	
Current Limit Threshold	V <sub>REF</sub> /V <sub>SENSE</sub>	At Trip Point 9		10	10.5		
Thermal Shutdown Temp.	TJ		_	170	_	°C	
Total Logic Supply Current	I <sub>CC(ON)</sub>	V <sub>EN</sub> = 0.8 V, No Load	_	105	140	mA	
	I <sub>CC(OFF)</sub>	V <sub>EN</sub> = 2.4 V, No Load	_	10	12	mA	

Negative current is defined as coming out of (sourcing) the specified device pin.

Typical Data is for design information only.

### PWM OUTPUT CURRENT WAVEFORM

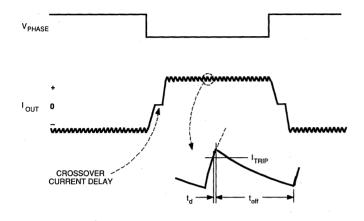

Dwg. WM-003-1

### APPLICATIONS INFORMATION

#### **PWM Current Control:**

The A2918SWH/V dual bridges are designed to drive both windings of a bipolar stepper motor. Output current is sensed and controlled independently in each bridge by an external sense resistor (R<sub>S</sub>), an internal comparator, and an internal monostable multivibrator.

When the bridge is turned ON, current increases in the motor winding and it is sensed by  $R_S$  until the sense voltage ( $V_{SENSE}$ ) reaches the level set at the comparator's input:

$$I_{TRIP} = V_{REF}/10 R_S$$

The comparator then triggers the monostable which turns OFF the source driver of the bridge. The actual load current peak will be slightly higher than the trip point (especially for low-inductance loads) because of internal logic and switching delays. This delay (t\_d) is 2  $\mu$ s typically. After turn-off, the motor current decays, circulating through the ground clamp diode and sink transistor. The source driver's OFF time t\_off, and therefore the magnitude of the current decrease, is determined by the monostable's external RC timing components, where t\_off = R\_TC\_T within the range of 20  $k\Omega$  to 100  $k\Omega$  and 200 pF to 500 pF.

When the source driver is re-enabled, the winding current (the sense voltage) again is allowed to rise to the comparator's threshold. This cycle repeats itself, maintaining the average motor winding current at the desired level.

Special circuitry has been included to prevent runaway current control when  $t_{\rm off}$  is set too short. This circuitry prevents the source driver from being re-enabled until the load current has decayed to below the  $l_{\rm TRIP}$  level.

Loads with high distributed capacitances may result in high turn-ON current peaks. This peak, appearing across  $R_{\rm S}$ , will attempt to trip the comparator, resulting in possible erroneous current control or high-frequency oscillations. An external  $R_{\rm C}C_{\rm C}$  low-pass filter may be used to delay the action of the comparator, and thus ignore turn-on spikes.

#### General:

To avoid excessive voltage spikes on the LOAD SUPPLY pin ( $V_{BB}$ ), a large-value capacitor ( $\geq$ 47  $\mu$ F) should be connected from  $V_{BB}$  to the ground pin as close as possible to the device. Under no circumstances should the voltage at  $V_{BB}$  exceed 45  $V_{\cdot}$ 


The PHASE input to each bridge determines the direction motor winding current flows. An internally generated deadtime, of approximately 3  $\mu$ s, prevents crossover currents that can occur when switching the PHASE input.

All four drivers in the bridge output can be turned OFF, with  $V_{\text{EN}} \geq 2.4$ , resulting in a fast current decay through the internal ground clamp and flyback diodes. The fast current decay is desirable in half-step and high-speed applications. The ENABLE input must be tied low if it is not used.

Varying the reference voltage ( $V_{\text{REF}}$ ) provides continuous control of the peak load current.


Thermal protection circuitry turns OFF all drivers when the junction temperature reaches approximately +170°C. It is intended only to protect the device from failures due to excessive junction temperature and should not imply that output short circuits are permitted. The output drivers are re-enabled when the junction temperature cools to approximately +145°C.

### LOAD CURRENT PATHS



Dwg. EP-006-1

# 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVERS



Dwg. No W-188

# ABSOLUTE MAXIMUM RATINGS at $T_v \le +150^{\circ}C$

Supply Voltage, V <sub>BB</sub> 45 V
Output Current, I <sub>OUT</sub> (continuous) ±2.0 A
(peak) ±3.0 A
Input Voltage Range, V <sub>IN</sub> 0.3 V to 15 V
Threshold Voltage, V <sub>THS</sub> 15 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C

Note: Output current rating may be limited by duty cycle, ambient temperature, and heat sinking. Under any set of conditions, do not exceed the specified peak current and a junction temperature of +150°C.

Combining logic and power, the UDN2936W and UDN2936W-120 provide commutation and drive for three-phase brushless dc motors. Each of the three outputs are rated at 45 V and  $\pm$ 2 A ( $\pm$ 3 A peak), and include internal ground clamp and flyback diodes. These drivers also feature internal commutation logic, PWM current control, and thermal shutdown protection.

The UDN2936W and UDN2936W-120 are compatible with single-ended digital or linear Hall effect sensors. The commutating logic is programmed for 60° (UDN2936W) or 120° (UDN2936W-120) electrical separation. Current control is accomplished by sensing current through an external sense resistor and pulse-width modulating the source drivers. Voltage thresholds and hysteresis can be externally set by the user. If desired, internal threshold and hysteresis defaults (300 mV, 7.5 percent) can be used. The UDN2936W/W-120 also include braking and direction control. Internal protection circuitry prevents crossover current when braking or changing direction.


For maximum power-handling capability, the UDN2936W and UDN2936W-120 are supplied in 12-pin single in-line power tab packages. An external heat sink may be required for high-current applications. The tab is at ground potential and needs no insulation.


### **FEATURES**

- 10 V to 45 V Operation
- ±3 A Peak Output Current
- Internal Clamp Diodes
- Internal PWM Current Control
- 60° or 120° Commutation Decoding Logic
- Thermal Shutdown Protection
- Compatible with Single-Ended or Differential Hall Effect Sensors
- Braking and Direction Control

Always order by complete part number:

Part Number	Sensor Inputs
UDN2936W	Single-Ended, 60° Separation
UDN2936W-120	Single-Ended, 120° Separation

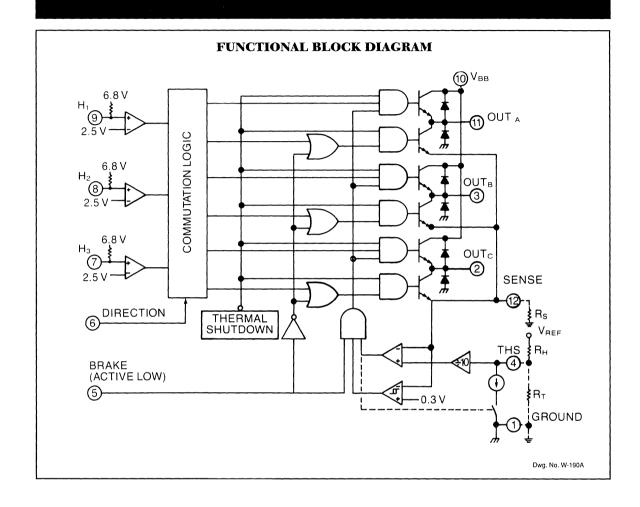



Dwg. No. GP-012A


### COMMUTATION TRUTH TABLE UDN2936W

Hall S	Hall Sensor Inputs					Outputs		
Н,	H <sub>2</sub>	H <sub>3</sub>	DIRECTION	BRAKE	OUTA	OUTB	OUT <sub>C</sub>	
High	High	High	Low	High	Z	Low	High	
High	High	Low	Low	High	High	Low	Z	
High	Low	Low	Low	High	High	Z	Low	
Low	Low	Low	Low	High	Z	High	Low	
Low	Low	High	Low	High	Low	High	Z	
Low	High	High	Low	High	Low	Z	High	
High	High	High	High	High	Z	High	Low	
High	High	Low	High	High	Low	High	Z	
High	Low	Low	High	High	Low	Z	High	
Low	Low	Low	High	High	Z	Low	High	
Low	Low	High	High	High	High	Low	Z	
Low	High	High	High	High	High	Z	Low	
X	Х	Х	X	Low	Low	Low	Low	

X= Irrelevant

Z = High Impedance

### TYPICAL APPLICATION

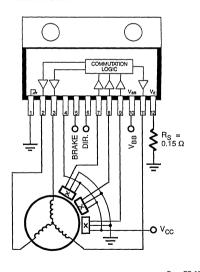

Dwg. EP-033

# COMMUTATION TRUTH TABLE UDN2936W-120

Hall Sensor Inputs				Outputs			
H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	DIRECTION	BRAKE	OUT	OUTB	OUT <sub>c</sub>
High	Low	High	Low	High	Z	Low	High
High	Low	Low	Low	High	High	Low	Z
High	High	Low	Low	High	High	Z	Low
Low	High	Low	Low	High	Z	High	Low
Low	High	High	Low	High	Low	High	Z
Low	Low	High	Low	High	Low	Z	High
High	Low	High	High	High	Z	High	Low
High	Low	Low	High	High	Low	High	Z
High	High	Low	High	High	Low	Z	High
Low	High	Low	High	High	Z	Low	High
Low	High	High	High	High	High	Low	Z
Low	Low	High	High	High	High	Z	Low
×	Χ	X	X	Low	Low	Low	Low

X= Irrelevant

Z = High Impedance

# ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $T_J$ $\leq$ +150°C, $V_{BB}$ = 45 V

					Limits	
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Supply Voltage Range	V <sub>BB</sub>	Operating	10		45	V
Supply Current	I <sub>BB</sub>	Outputs Open		32	40	mA
		V <sub>BRAKE</sub> = 0.8 V	-	42	50	mA
Thermal Shutdown Temperature	$T_J$			165		°C
Thermal Shutdown Hysteresis	$\DeltaT_{J}$			25		°C

### **Output Drivers**

Output Leakage Current	CEX	$V_{OUT} = V_{BB}$	T	_	50	μА
		V <sub>OUT</sub> = 0 V			-50	μА
Output Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>OUT</sub> = -1 A	T-	1.7	1.9	V
		I <sub>OUT</sub> = +1 A	_	1.1	1.3	V
		I <sub>OUT</sub> = -2 A		1.9	2.1	V
		I <sub>OUT</sub> = +2 A	_	1.4	1.6	V
Output Sustaining Voltage	V <sub>CE(sus)</sub>	I <sub>OUT</sub> = ±2 A, L = 2 mH	45		_	V
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 2 A		1.8	2.0	V
Clamp Diode Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 45 V			50	μА
Output Switching Time	t <sub>r</sub>	I <sub>OUT</sub> = ±2 A, Resistive Load		2.0		μѕ
	t <sub>f</sub>	I <sub>OUT</sub> = ±2 A, Resistive Load	_	2.0	_	μs
Turn-ON Delay	t <sub>on</sub>	Source Drivers, 0 to -2 A		1.25		μs
(Resistive Load)		Sink Drivers, 0 to +2 A		1.9		μs
Turn-OFF Delay	t <sub>off</sub>	Source Drivers, -2 A to 0		1.7		μs
(Resistive Load)		Sink Drivers, +2 A to 0		0.9	_	μs

Continued next page...

# ELECTRICAL CHARACTERISTICS at T $_A$ = +25°C, T $_J$ $\leq$ +150°C, V $_{BB}$ = 45 V continued

				Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units	
Control Logic							
Logic Input Voltage	V <sub>IN(1)</sub>	V <sub>DIR</sub> or V <sub>BRAKE</sub>	2.0	_	_	V	
	V <sub>IN(0)</sub>	V <sub>DIR</sub> or V <sub>BRAKE</sub>	_	_	0.8	٧	
Sensor Input Voltage Threshold	V <sub>IN</sub>	H <sub>1</sub> , H <sub>2</sub> , or H <sub>3</sub>	_	2.5	_	.V	
Input Current	I <sub>IN(1)</sub>	V <sub>DIR</sub> = 2 V		150	200	μА	
		V <sub>BRAKE</sub> = 2 V	_	<1.0	5.0	μА	
		V <sub>H</sub> = 5 V	-	-190	-220	μА	
	I <sub>IN(0)</sub>	V <sub>DIR</sub> = 0.8 V	-	35	50	μА	
		V <sub>BRAKE</sub> = 0.8 V	_	-5.0	-20	μА	
		V <sub>H</sub> = 0.8 V	_	-0.64	-1.0	mA	
	I <sub>THS</sub>	V <sub>THS</sub> ≥ 3.0 V	_	-8.0	-15	μА	
		V <sub>THS</sub> < 3.0 V, V <sub>SENSE</sub> < V <sub>THS</sub> /10.5		-15	-30	μА	
		V <sub>THS</sub> < 3.0 V, V <sub>SENSE</sub> > V <sub>THS</sub> /9.5	190	250	310	μА	
Current Limit Threshold		$V_{THS}/V_{SENSE}$ at trip point, $V_{THS} < 3.0 \text{ V}$	9.5	10	10.5		
Default Sense Trip Voltage	V <sub>SENSE</sub>	V <sub>THS</sub> ≥ 3.0 V	270	300	330	mV	
Default Hysteresis		V <sub>THS</sub> ≥ 3.0 V	_	7.5	_	%	
Deadtime	t <sub>d</sub>	BRAKE or DIRECTION	_	2.0	_	μs	

#### APPLICATIONS INFORMATION

The UDN2936W and UDN2936W-120 power drivers provide commutation logic and power outputs to drive three-phase brushless dc motors.

The UDN2936W and UDN2936W-120 are designed to interface with single-ended linear or digital Hall effect devices (HEDs). Internal pull-up resistors allow for direct use with open-collector digital HEDs. The  $H_{\rm M}$  inputs have 2.5 V thresholds.

The commutation logic provides decoding for HEDs with 60° (UDN2936W) or 120° (UDN2936W-120) electrical separation. At any one step in the logic sequencing, one half-bridge driver is sourcing current, one driver is sinking current, and one driver is in a high-impedance state (see Truth Table).

A logic low on the BRAKE pin turns ON the three sink drivers and turns OFF the three source drivers, essentially shorting the motor windings to ground. During braking, the back-electromotive force generated by the motor produces a current which dynamically brakes the motor. Depending upon the rotational velocity of the motor, this current can approach the locked rotor current level (which is limited only by the motor winding resistance). During braking the output current limiting circuitry is disabled and care should be taken to ensure that the back-EMF generated brake current does not exceed the maximum rating (3 A peak) of the sink drivers and ground clamp diodes.

Changing the logic level of the DIRECTION pin inverts the output states, thus reversing the direction of the motor. Changing the direction of a rotating motor produces a back-EMF current similar to when braking the motor. The load current should not be allowed to exceed the maximum rating (±3 A peak) of the drivers.

An internally generated dead time ( $t_d$ ) of approximately 2  $\mu s$  prevents potentially destructive crossover currents that can occur when changing direction or braking.

Motor current is internally controlled by pulse-width modulating the source drivers with a preset hysteresis format. Load current through an external sense resistor ( $R_{\rm S}$ ) is constantly monitored. When the current reaches the set trip point (determined by an external reference voltage or internal default), the source driver is disabled. Current recirculates through the ground clamp diode, motor winding, and sink driver. An internal constant-current sink reduces the trip point (hysteresis). When the decaying current reaches this lower threshold, the source driver is enabled again and the cycle repeats.

Thresholds and hysteresis can be set with external resistors or internal defaults can be used. With  $V_{THS} > 3.0 \text{ V}$ , the trip point is internally set at 300 mV with 7.5% hysteresis. Load current is then determined by the equation:

 $I_{TRIP} = 0.3/R_{s}$ 


With V $_{\rm THS}$  < 3.0 V, the threshold, hysteresis percentage, and peak current are set with external resistors according to the equations:

Threshold Voltage (
$$V_{THS}$$
) =  $V_{REF} \cdot R_T / (R_H + R_T)$   
Hysteresis Percentage =  $R_H / 50 V_{REF}$   
Load Trip Current ( $I_{TDIP}$ ) =  $V_{THS} / 10 R_S$ 


Percentage hysteresis is a fixed value independent of load current. The chopping frequency is a function of circuit parameters including load inductance, load resistance, supply voltage, hysteresis, and switching speed of the drivers.

The UDN2936W and UDN2936W-120 outputs are rated for normal operating currents of up to  $\pm 2$  A and startup currents to  $\pm 3$  A (see cautions above regarding braking and changing of motor direction). Internal power ground clamp and flyback diodes protect the outputs from the voltage transients that occur when switching inductive loads. All devices also feature thermal protection circuitry. If the junction temperature reaches +165°C, the thermal shutdown circuitry turns OFF all output drivers. The outputs are re-enabled when the junction cools down to approximately +140°C. This protection is only intended to protect the device from failures due to excessive junction temperature or loss of heat sinking and should not imply that output short circuits are permitted.

As with all high-power integrated circuits, the printed wiring board should utilize a heavy ground plane. For optimum performance, the drivers should be soldered directly into the board. The power supply should be decoupled with an electrolytic capacitorb (>10  $\mu$ F) as close as possible to the device supply pin ( $V_{\tiny DB}$ ).

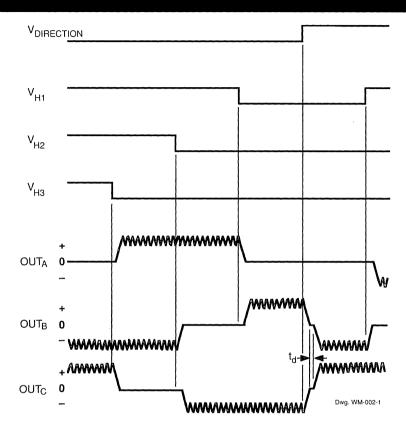

# TYPICAL HALL EFFECT SENSOR LOCATIONS



Dwg. No. W-193

# HIGH-CURRENT BIPOLAR HALF-BRIDGE MOTOR DRIVE

Designed for use as a general-purpose motor driver, the UDQ2943Z half-bridge driver combines high-current sink and source drivers with logic stages, level shifting, diode transient protection, and a voltage regulator for single-supply operation. Capable of operating in extremely harsh environments, this device can withstand high ambient temperatures, output overloads, and repeated power supply transient voltages without damage. The driver can be used in pairs for full-bridge operation, or as triplets in three-phase brushless dc motor-drive applications.

The input circuitry is compatible with TTL, low-voltage CMOS, and NMOS logic. Logic lockout prevents both source and sink drivers from turning ON simultaneously. Each driver is turned ON by an active-low input, making the UDQ2943Z especially desirable in many microprocessor applications. An accidental input open circuit will turn OFF the corresponding output. The device also provides an internally-generated dead time to prevent crossover currents during output switching. Monolithic, space-saving construction offers reliability unobtainable with discrete components.

Saturated output drivers provide for low saturation voltage at the maximum rated current. Internal short-circuit protection, activated at load currents above 1 A, protects the source driver from accidental short-circuits between the output and ground.

The UDQ2943Z driver is rated for continuous operation with inductive loads at supply voltages of up to 24 V. With the application of increased supply voltages (to 45 V maximum), a high-voltage protection circuit becomes operative, shutting OFF both output drivers. The internal thermal shutdown is triggered by a nominal junction temperature of 160°C.

Single-chip construction and a modified 5-lead power-tab TO-220 plastic package provide cost-effective and reliable systems designs. It also features excellent power dissipation ratings, minimum size, and ease of installation. The heat-sink tab is at ground potential and does not require insulation.

### ABSOLUTE MAXIMUM RATINGS

GROUND OUTPUT

SINK INPUT

Dwg. No. A-14.135

Supply Voltage, Range V <sub>S</sub> 8.5 V to 45 V*
Output Voltage, V <sub>CE(sus)</sub> 24 V
Input Voltage Range, V <sub>IN</sub> 0.3 V to +18 V
Continuous Output Current, I <sub>OUT</sub> ±1.0 A
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 40°C to +85°C
Storage Temperature Range


\*Internal high-voltage shutdown above 26 V.

T<sub>S</sub>..... -55°C to +150°C


### **FEATURES**

- ±1 A Output Current
- 8.5 V to 24 V Operating Range
- Withstands 45 V Supply Transients
- Crossover-Current Protected
- Logic-Compatible Inputs
- Saturated Output Drivers
- Output-Transient Protection
- Tri-State Output
- Internal Over-Voltage Protection
- Internal Short-Circuit Protection

### 2943 HIGH-CURRENT BIPOLAR HALF-BRIDGE MOTOR DRIVE

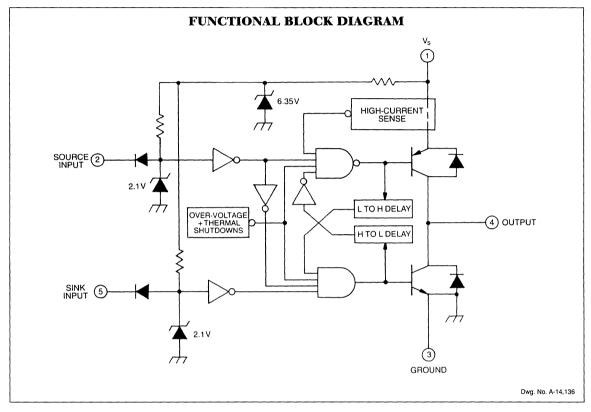

### ALLOWABLE POWER DISSIPATION AS A FUNCTION OF AMBIENT TEMPERATURE



Dwg. No. GP-014

### LOGIC TRUTH TABLE


Source Driver Pin 2	Sink Driver Pin 5	Output Pin 4
Low	Low	High
Low	High	High
High	Low	Low
High	High	High Z

### 2943 HIGH-CURRENT BIPOLAR HALF-BRIDGE MOTOR DRIVE


### ELECTRICAL CHARACTERISTICS at $T_A = +25$ °C, $V_S = +24$ V (unless otherwise noted).


Observatoristic	0	Source Driver	Sink Driver	Output				nits	
Characteristic	Symbol	Input, Pin 2	Input, Pin 5	Pin 4	Other	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	2.4 V	2.4 V	οv			-10	-100	μΑ
		2.4 V	2.4 V	45 V	-	_	10	100	μΑ
Output Sustaining Voltage	V <sub>CE(sus)</sub>	2.4 V	0.8 to 2.4 V	1.0 A	Fig. 1A	24		_	٧
		0.8 to 2.4 V	2.4 V	-1.0 A	Fig. 1B	24		_	V
Output Saturation Voltage	V <sub>CE(SAT)</sub>	0.8 V	2.4 V	-1.0 A	_	_	1.2	1.8	V
		2.4 V	0.8 V	1.0 A	_	-	0.6	1.0	٧
Short-Circuit Source Current	I <sub>SC</sub>	0.8 V	2.4 V	0 V	_	1.1		1.8	Α
Logic Input Voltage	V <sub>IN(1)</sub>	_	_	_	_	2.0	_	_	٧
	V <sub>IN(0)</sub>	_	_	_	_	_	_	0.8	V
Input Current	I <sub>IN(1)</sub>	2.4 V	2.4 V	NC	_	_	10	100	μА
	I <sub>IN(0)</sub>	0.8 V	0.8 V	NC	_	_	-50	-150	μА
Clamp Diode Forward Voltage	V <sub>F</sub>	NC	NC	1.0 A	Fig. 2	_	1.5	2.0	V
Logic Supply Current	I <sub>S</sub>	2.4 V	2.4 V	NC	_	_	15	20	mA
		2.4 V	0.8 V	NC	_	_	55	70	mA
		0.8 V	2.4 V	NC	-	_	25	35	mA
Thermal Shutdown Temperature	TJ	_		_		_	160		°C
Over-Voltage Shutdown	Vs	_	_	_	_	26	_		V
Propagation Delay	t <sub>PD</sub>	2.4 V	2.4 V to 0.8 V	1.0 A	Fig. 3	_	0.6	1.0	μs
		0.8 to 2.4 V	2.4 V	-1.0 A	Fig. 4	_	1.0	2.5	μs
		2.4 V	0.8 to 2.4 V	1.0 A	Fig. 3	_	1.1	2.5	μs
		2.4 to 0.8 V	2.4 V	-1.0 A	Fig. 4		0.6	1.0	μs
Dead Time	t <sub>d</sub>	_	_	_	_	_	2.0	_	μs


Note: Positive (negative) current is defined as going into (coming out of) the specified device pin.



# HIGH-CURRENT BIPOLAR HALF-BRIDGE MOTOR DRIVE







Dwg. No. A-14,138

Dwg. No. A-14,139

Dwg. No. A-14,140

Figure 1A

Figure 1B

Figure 2






Figure 3





Figure 4

# QUAD HIGH-CURRENT, HIGH-VOLTAGE SOURCE DRIVER



Dwg. No. A-13,054

# ABSOLUTE MAXIMUM RATINGS at +25°C Free-Air Temperature

Supply Voltage Range, V <sub>S</sub> 10 V to 60 V
Output Current, IOIIT (dc)4 A
(peak)5 A
Input Voltage, V <sub>IN</sub> 15 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>s</sub> 55°C to +150°C

Output current rating will be limited by ambient temperature, duty cycle, heat sinking, air flow, and number of outputs conducting. Under any set of conditions, do not exceed the -5.0 A peak current and a junction temperature of +150°C.

Capable of driving loads to 4 A at supply voltages to 60 V (inductive loads to 35 V), the UDN2944W is a quad high-current, high-voltage source driver. Each of the four power drivers can provide space- and cost-saving interface between low-level signal-processing circuits and high-power loads in harsh environments.

Individual supply lines have been provided for each pair of drivers so that different supplies can be used to drive multiple loads. The controlling inputs are TTL or CMOS compatible. The outputs include transient-suppression diodes for inductive loads.

This quad Darlington array is designed to serve as an interface between low-level circuitry and peripheral-power loads such as solenoids, motors, incandescent displays, heaters, and similar loads of up to 240 W per channel. The UDN2944W is an ideal complement to the UDN2878W quad 4 A sink driver.


For maximum power-handling capability, the UDN2944W driver is supplied in a 12-pin single in-line, power-tab package that allows efficient attachment of an external heat sink for maximum allowable package power dissipation. An external heat sink is usually required for proper operation of this device. The tab is at ground potential and needs no insulation.


### **FEATURES**

- Output Current to 4 A
- Output Voltage to 60 V
- Loads to 960 W
- Integral Output Suppression Diodes
- TTL and CMOS Compatible Inputs
- Plastic Single In-Line Package
- Heat-Sink Tab

Always order by complete part number: UDN2944W .

# 2944 QUAD HIGH-CURRENT, HIGH-VOLTAGE SOURCE DRIVER

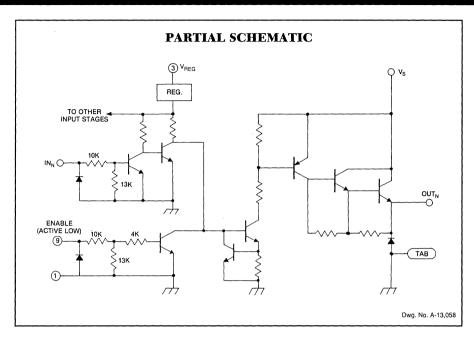

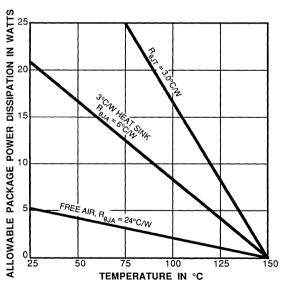

### TRUTH TABLE

INPUT	ENABLE	OUTPUT
L	Ĺ	L
l H	L	Н
L	Н	L
Н	Н	L

NOTE: Pin 3 must be connected to  $\rm V_{S}$  for operation of input logic gates.


Dwg. GP-012

# 2944 QUAD HIGH-CURRENT, HIGH-VOLTAGE SOURCE DRIVER

ELECTRICAL CHARACTERISTICS at  $T_A$  = +25°C,  $T_J$  ≤ +150°C,  $V_S$  = 60 V,  $V_{ENABLE}$  = 0 V (unless otherwise noted).


				Limits	
Characteristic	Symbol	Test Conditions	Min.	Max.	Units
Supply Voltage Range	V <sub>s</sub>		10	60	V
Output Leakage Current	I <sub>CEX</sub>	V <sub>OUT</sub> = 0 V, V <sub>ENABLE</sub> = 2.4 V	_	50	μА
Output Sustaining Voltage	V <sub>CE(sus)</sub>	I <sub>OUT</sub> = -4 A, L = 3 mH	35		V
Output Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>OUT</sub> = -1 A, V <sub>IN</sub> = 2.4 V	_	1.8	V
		I <sub>OUT</sub> = -4 A, V <sub>IN</sub> = 2.4 V		2.5	V
Input Voltage	Logic 1	V <sub>IN(1)</sub> or V <sub>ENABLE(1)</sub>	2.0	_	V
	Logic 0	V <sub>IN(0)</sub> or V <sub>ENABLE(0)</sub>	_	0.8	V
Input Current	Logic 1	$V_{IN(1)}$ or $V_{ENABLE(1)} = 2.4 \text{ V}$	_	220	μА
		V <sub>IN(1)</sub> or V <sub>ENABLE(1)</sub> = 12 V	_	1.5	mA
	Logic 0	$V_{IN(0)}$ or $V_{ENABLE(0)} = 0.8 \text{ V}$	_	50	μА
Total Supply Current	Is	All drivers ON, All outputs open		25	mA
Clamp Diode Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 60 V	_	50	μА
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 4 A		2.2	V
Turn-On Delay	t <sub>ON</sub>	$0.5  E_{in}  to  0.5  E_{out},  R_{L} = 15 \Omega$	_	2.0	μs
Turn-Off Delay	t <sub>OFF</sub>	$0.5 E_{in}$ to $0.5 E_{out}$ , $R_{L} = 15\Omega$		10	μs

NOTE: Negative current is defined as coming out of (sourcing) the device being tested.

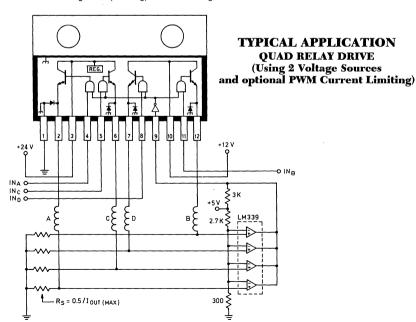

# 2953 AND 2954

# FULL-BRIDGE PWM MOTOR DRIVERS



Dwg. No. A-13,024

# ABSOLUTE MAXIMUM RATINGS at $T_y \le +150$ °C

J
Motor Supply Voltage, $V_{BB}$ 50 V
Output Current, I <sub>OUT</sub>
(Peak) ±3.5 A
(Continuous) ±2.0 A
Flyback Diode Voltage, V <sub>K</sub> V <sub>BB</sub>
Minimum Clamp Diode Voltage,
V <sub>A</sub> Ground
Logic Supply Voltage, V <sub>CC</sub> <b>7.0 V</b>
Logic Input Voltage,
V <sub>PHASE</sub> , V <sub>ENABLE</sub> V <sub>BB</sub>
Sense Voltage, V <sub>SENSE</sub> 1.5 V
Reference Voltage, V <sub>RFE</sub> /BRAKE 15 V
Package Power Dissipation,
P <sub>D</sub> See Graphs
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C

The UDN2953B and UDN2954W are designed for bidirectional control of dc or stepper motors with continuous output currents to 2 A and peak start-up currents as high as 3.5 A. For pulse-width modulated (chopped-mode) operation, the output current is determined by the user's selection of a reference voltage and sensing resistor while the OFF pulse duration is set by an external RC timing network. PWM operation is characterized by maximum efficiency and low power-dissipation levels. Extensive internal circuit protection includes thermal shutdown with hysteresis, transient-suppression diodes, and crossover current protection.

When the  $V_{REF}/\overline{BRAKE}$  pin is low (<0.8 V), the braking function is enabled. This turns both <u>sink drivers OFF</u> and the source drivers are turned ON. When  $V_{REF}/\overline{BRAKE}$  is set above 2.4 V, that voltage (and the current sensing resistor) determines the load current trip point. An RC TIMING pin is available to use for an internal one-shot to control load current decay time.

The UDN2953B driver is supplied in a 16-pin dual-in-line plastic package with copper heat-sink contact tabs. The lead configuration enables easy attachment of a heat sink while fitting a standard integrated circuit socket or printed wiring board layout. The UDN2954W, for higher package power dissipation requirements, is supplied in a 12-pin single in-line power tab package. In any package style, the heat sink is at ground potential and needs no insulation.

### **FEATURES**


- 50 V Output Voltage Rating
- 2 A Continuous Output Rating
- Internal Flyback Diodes
- Thermal Shutdown
- Crossover Current Protection
- BRAKE, ENABLE, and Current-Limit Functions

Always order by complete part number:

Part Number	Package		
UDN2953B	16-Pin DIP		
UDN2954W	12-Pin Power-Tab SIP		


### 2953 AND 2954 FULL-BRIDGE PWM MOTOR DRIVERS

### **UDN2953B**



Dwg. No. GP-010B

### **UDN2954W**




Dwg. No. GP-012A

### TRUTH TABLE


Output Enable	Phase	V <sub>REF</sub> /BRAKE	Out <sub>A</sub>	Out <sub>B</sub>
Low	High	> 2.4 V	High	Low
Low	Low	> 2.4 V	Low	High
High	Х	> 2.4 V	Open	Open
Х	Χ	< 0.8 V	High	High

X = Irrelevant

### FUNCTIONAL BLOCK DIAGRAM

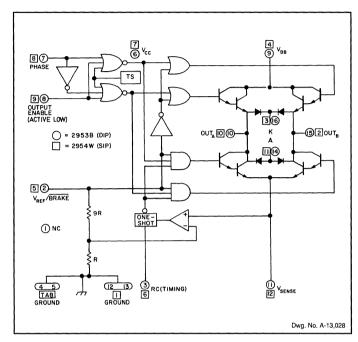

### **UDN2954W**



Dwg. No. A-13,023

### 2953 AND 2954 FULL-BRIDGE PWM MOTOR DRIVERS


ELECTRICAL CHARACTERISTICS at T  $_A$  = +25°C, T  $_J$   $\le$  +150°C, V  $_{BB}$  = 50 V, V  $_{CC}$  = 5 V, V  $_{SENSE}$  = 0 V, RC = 20 k $\Omega/470$  pF to Ground.

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Output Drivers (OUT <sub>A</sub> or OUT <sub>B</sub>	)					
Output Supply Range	V <sub>BB</sub>		6.5		50	V
Output Leakage Current	I <sub>CEX</sub>	V <sub>ENABLE</sub> = 5 V, V <sub>OUT</sub> = V <sub>BB</sub> , (note)	_		50	μА
		V <sub>ENABLE</sub> = 5 V, V <sub>OUT</sub> = 0 V, (note)	-	_	-50	μА
Output Sustaining Voltage	V <sub>CE(sus)</sub>	I <sub>OUT</sub> = ±2 A, L = 2 mH	50			V
Output Saturation Voltage	V <sub>CE(SAT)</sub>	$V_{ENABLE} = 0 \text{ V}, I_{OUT} = \pm 0.5 \text{ A}$	-	1.0	1.2	V
		$V_{ENABLE} = 0 \text{ V}, I_{OUT} = \pm 1.0 \text{ A}$	_	1.2	1.4	V
		$V_{ENABLE} = 0 \text{ V, } I_{OUT} = \pm 2.0 \text{ A}$	_	1.5	1.8	V
Clamp Diode Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 50 V			50	μА
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 2 A	_	1.8	2.2	V
Motor Supply Current	I <sub>BB(ON)</sub>	V <sub>ENABLE</sub> = 0.8 V, V <sub>REF</sub> = 2.4 V, No Load	_	20	30	mA
	I <sub>BB(OFF)</sub>	V <sub>ENABLE</sub> = V <sub>REF</sub> = 2.4 V, No Load	_	2.5	3.5	mA
		V <sub>ENABLE</sub> = 5 V, V <sub>REF</sub> = 0.8 V, No Load	_	40	60	mA
Control Logic						
Logic Supply Range	V <sub>cc</sub>		4.5	5.0	5.5	V
Logic Input Current	I <sub>IN(1)</sub>	All Inputs = 2.4 V		<-1.0	-10	μА
	I <sub>IN(0)</sub>	All Inputs = 0.8 V	-	-50	-200	μА
Logic Input Voltage	V <sub>IN(1)</sub>	All Inputs	2.4			V
	V <sub>IN(0)</sub>	All Inputs	_		0.8	V
V <sub>REF</sub> Open-Circuit Voltage	V <sub>REF(OPEN)</sub>	I <sub>REF</sub> = 0		V <sub>cc</sub> /2		V
Current Limit Threshold		V <sub>REF</sub> /V <sub>SENSE</sub> at Trip Point	9.5	10	10.5	
Turn-On Delay	t <sub>on</sub>	All Drivers	_	1.0		μs
Turn-Off Delay	t <sub>off</sub>	All Drivers	T	1.0		μs
Thermal Shutdown Temp.	T <sub>J</sub>			165		°C
Logic Supply Current	l <sub>cc</sub>	V <sub>ENABLE</sub> = V <sub>REF</sub> = 2.4 V		15	20	mA
		V <sub>ENABLE</sub> = 0.8 V, V <sub>REF</sub> = 2.4 V	-	22	30	mA

NOTE: Tests performed at OUT<sub>B</sub> with  $V_{PHASE} = 0.8 \text{ V}$  and at OUT<sub>A</sub> with  $V_{PHASE} = 2.4 \text{ V}$ 

### 2953 AND 2954 FULL-BRIDGE PWM MOTOR DRIVERS

#### TYPICAL APPLICATION



Dwg, No. A-12,649B

NOTE: Pin 3 must be connected to an RC network as shown, or to V<sub>CC</sub>. It must **NOT** be left unconnected.

### **APPLICATIONS INFORMATION**

The UDN2953B and UDN2954W full-bridge motor drivers are ideal for driving bidirectional dc servo, brushless dc, and 2-phase bipolar stepper motors with various current-control formats. Output current can be controlled by using an external sense resistor ( $\rm R_{\rm SENSE}$ ) and an optional RC network and reference voltage for PWM current control, or by using an external PWM source.

The output current trip point is set by:

$$I_{TRIP} = \frac{V_{REF}}{10 R_{SENSE}}$$

where the reference voltage (V<sub>REF</sub>) can be between 2.4 V and 15 V. If left unconnected, V<sub>REF</sub> defaults to V<sub>CC</sub>/2\_(see Figure 1).

When the bridge is turned ON, current increases in the motor and is sensed by the external sense resistor. When the current through the sense resistor reaches the trip point, the internal comparator triggers a monostable which turns OFF the sink drivers. As shown in Figure 2, the actual load current peak will be slightly higher than the trip point (especially for low-inductance loads) because of the internal logic and switching delays. This delay ( $t_{\rm s}$ ) is typically 2 µs.

After the sink drivers turn OFF, the motor current decays, circulating through the source driver and flyback diode. The sink driver's OFF time (and therefore the magnitude of the current decrease) is determined by the monostable's external RC timing components, where  $t_{\rm off}=RC$  within the range of 20  $k\Omega$  to 100  $k\Omega$  and 200 pF to 500 pF. If the RC pin is tied to  $V_{\rm cc}$ , internal timing circuitry is activated, allowing current control without an external RC network. The internally generated  $t_{\rm off}$  is approximately 12  $\mu s$  at  $V_{\rm cc}=5$  V and  $T_{\rm A}=+25\,^{\circ}{\rm C}$ , increasing slightly with increasing temperatures. With RC tied to  $V_{\rm cc}$ ,  $I_{\rm cc}$  will increase by approximately 6 mA.

When the sink driver is re-enabled, the motor current is again allowed to rise to the trip point. This cycle repeats itself, maintaining the average motor current at the desired level.

Average motor current can also be controlled with external current control logic by using the OUTPUT ENABLE pin. Toggling the OUTPUT ENABLE pin shuts OFF both the source and sink drivers. Both the flyback and ground-clamp diodes conduct during turn-OFF (anodes (A pin) connected to ground and cathodes (K pin) connected to  $V_{\rm gB}$ ), resulting in a very fast current decay. If the internal current control circuitry is not used, the RC pin should be connected to ground through a 20  $k\Omega$  (minimum) resistor.

A logic low at the  $V_{\rm REF}$ /BRAKE pin turns ON both source drivers and turns OFF both sink drivers, essentially shorting both ends of the motor winding to the motor supply. In this condition, the back-electromotive force (back-EMF) generated by the motor produces a current which dynamically brakes the motor. Depending upon the rotational velocity of the motor, this current level can approach that of a locked-rotor condition (which is limited only by the resistance of the motor winding). The internal current control circuitry is not operational when the brake function is used. Therefore, care should be exercised when braking to

Figure 1

V<sub>REF/BRAKE</sub>

SOK

V<sub>REF/BRAKE</sub>

BRAKE

LOGIC


45K

 $\mathsf{R}_{\mathsf{sense}}$ 

Dwg. No. A-13.025

Figure 2

5K 5

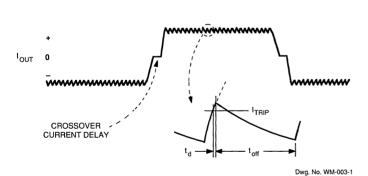

ensure that the current generated by the back-EMF never exceeds the absolute maximum rating of the drivers.

With bidirectional dc servo motors, the PHASE pin can be used for direction control. Similar to dynamically braking a motor, changing the direction of a rotating motor produces a current generated by the back-EMF. Again, this current should not be allowed to exceed the absolute maximum rating.

An internally generated deadtime (approximately 3  $\mu$ s) prevents crossover currents that can occur when switching phases or braking.

Thermal protection circuitry turns OFF all drivers when the junction temperature typically reaches 165°C. It is only intended to protect the device from failures due to excessive junction temperature and should not imply that output short circuits are permitted. The thermal shutdown has a hysteresis of approximately 8°C.

The printed wiring board should utilize a heavy ground plane. For optimum performance, the driver should be soldered directly into the board. The load supply  $(V_{BB})$  should be decoupled with an electrolytic capacitor ( $\geq$ 10  $\mu$ F) as close as possible to the driver.

#### **CURRENT CONTROL OPTIONS**


	Circuit Terminal				
Control Option	V <sub>REF</sub> /BRAKE	RC (TIMING)	V <sub>SENSE</sub>	OUTPUT ENABLE	
No PWM	V <sub>CC</sub> or High	≥20 kΩ to Ground	Ground	Low	
PWM with Internal Timing	V <sub>CC</sub> or High	V <sub>cc</sub>	R <sub>SENSE</sub>	Low	
PWM with External Timing	2.4 V or 15 V* or V <sub>CC</sub>	20-100 kΩ/200-500 pF	R <sub>SENSE</sub>	Low	
External PWM	V <sub>CC</sub> or High	≥20 kΩ to Ground	R <sub>SENSE</sub> †	Toggle†	

<sup>\*</sup> Programmed reference, i.e., A/D converter.

 $V_{\mathsf{PHASE}}$ 

<sup>†</sup> Primarily, closed-loop speed and/or current control applications. I<sub>TRIP</sub> can be peak (or default) limit for protecting motor and /or driver IC.

# HIGH-CURRENT HALF-BRIDGE PRINTHEAD/MOTOR DRIVER—WITH INTERNAL CURRENT SENSING AND CONTROL

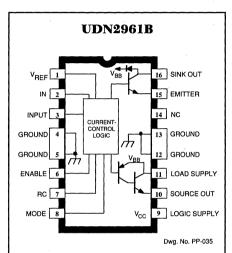

#### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V <sub>BB</sub> 45 V
Output Current, I <sub>OUT</sub> (continuous) ±3.4 A
$(t_w \le 20 \mu s, 10\% \text{ duty cycle}) \dots \pm 4.0 \text{ A}$
Logic Supply Voltage, V <sub>CC</sub> 7.0 V
Input Voltage Range,
V <sub>IN</sub> 0.3 V to +7.0 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Junction Temperature, T <sub>J</sub> +150°C*
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C

Output current rating may be restricted to a value determined by system concerns and factors. These include: system duty cycle and timing, ambient temperature, and use of any heatsinking and/or forced cooling. For reliable operation, the specified maximum junction temperature should not be exceeded.

\* Fault conditions that produce excessive junction temperature will activate device thermal shutdown circuitry. These conditions can be tolerated, but should be avoided.

The UDN2961B and UDN2961W are 3.4 A half bridges designed specifically for driving solenoid printheads, stepper motors, and dc motors. The UDN2961B/W consists of a power source driver output, a power sink driver output, a flyback recovery diode, internal current sensing circuitry, and a user-selectable fixed off-time chopper circuit.

The output drivers are capable of sustaining 45 V with continuous currents of  $\pm 3.4$  A and peak transient currents of  $\pm 4$  A permitted. The outputs have been optimized for a low output saturation voltage (typically 2.6 V total source plus sink drops at 3.4 A).

For output current control, load current is sensed internally and limited by chopping the output driver(s) in a user-selectable fixed off-time PWM mode. The maximum output current is determined by the user's selection of a reference voltage. The MODE pin determines whether the current control circuitry will chop in a slow current-decay mode (only the source driver switching) or in a fast current-decay mode (source and sink switching). A user-selectable blanking window prevents false triggering of the current control circuitry during chopping.

The UDN2961B is supplied in a 16-pin dual in-line plastic batwing package with a copper lead-frame and heat sinkable tabs for improved power dissipation capabilities. For higher power dissipation requirements, the UDN2961W is supplied in a 12-pin single in-line power tab package.


### **FEATURES**


- 3.4 A, 45 V Source and Sink Drivers
- Internal Current Sensing
- User-Selectable Fixed Off-Time PWM Current Control
- Internal Flyback Diode
- Low Output Saturation Voltage
- Chip Enable
- Fast or Slow Current-Decay Modes
- Programmable Blanking Window
- Internal Thermal Shutdown Circuitry

Always order by complete part number:


Part Number	Package
UDN2961B	16-Pin DIP
UDN2961W	12-Pin Power-Tab SIP

### 2961 HIGH-CURRENT HALF-BRIDGE PRINTHEAD/MOTOR DRIVER



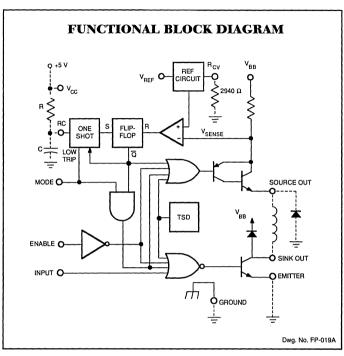

### **UDN2961W**

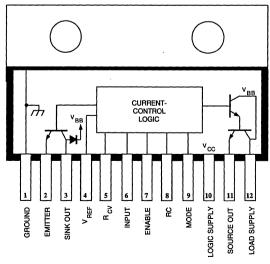

Dwg. No. PP-036

### 2961 HIGH-CURRENT HALF-BRIDGE PRINTHEAD/MOTOR DRIVER

# ELECTRICAL CHARACTERISTICS at T<sub>A</sub> = +25°C, V<sub>BB</sub> = 45 V, V<sub>CC</sub> = 4.75 V to 5.25 V, R<sub>CV</sub> = 2940 $\Omega$ (unless otherwise noted).

	Symbol Test Conditions	Limits				
Characteristic		Test Conditions	Min.	Тур.	Max.	Units
Output Drivers						
Output Leakage Current	I <sub>CEX</sub>	V <sub>EN</sub> = 0.8 V, V <sub>SOURCE</sub> = 0 V	I -	<-1.0	-100	μΑ
		V <sub>EN</sub> = 0.8 V, V <sub>SINK</sub> = 45 V	T	<1.0	100	μΑ
Output Saturation Voltage	V <sub>CE(SAT)</sub>	Source Driver, I <sub>OUT</sub> = -3.4 A	T -	1.6	2.2	V
		Source Driver, I <sub>OUT</sub> = -3.0 A	1 -	1.5		٧
		Sink Driver, I <sub>OUT</sub> = 3.4 A	_	1.0	1.4	٧
		Sink Driver, I <sub>OUT</sub> = 3.0 A	1 -	0.9	_	٧
Output Sustaining Voltage	V <sub>CE(sus)</sub>	I <sub>OUT</sub> = ±3.4 A, L = 3 mH	45			V
Recovery Diode Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 45 V	T -	<1.0	100	μΑ
Recovery Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 3.4 A	T -		2.0	٧
Motor Supply Current	I <sub>BB(on)</sub>	V <sub>EN</sub> = 2.0 V, V <sub>IN</sub> = 0.8 V, No Load	1 -		70	mA
	I <sub>BB(off)</sub>	V <sub>EN</sub> = 0.8 V	<b>T</b>		2.5	mA
Output Rise Time	t,	Source Driver, I <sub>OUT</sub> = -3.4 A	<b>†</b> =		600	ns
	1 1	Sink Driver, I <sub>OUT</sub> = 3.4 A	<del>                                     </del>		600	ns
Output Fall Time	t,	Source Driver, I <sub>OUT</sub> = -3.4 A	<b>†</b>		600	ns
		Sink Driver, I <sub>OUT</sub> = 3.4 A	-		600	ns
Control Logic						
Logic Input Voltage	V <sub>IN(1)</sub>		2.0	_	_	V
	V <sub>IN(0)</sub>		-	_	0.8	V
Logic Input Current	I <sub>IN(1)</sub>	V <sub>IN</sub> = 5.0 V			10	μА
	I <sub>IN(0)</sub>	V <sub>IN</sub> = 0 V	<b>1</b> —	_	-1.0	mA
Reference Input Current	I <sub>REF</sub>	V <sub>REF</sub> = 5.0 V	1 =		50	μΑ
Transconductance	I <sub>TRIP</sub> /V <sub>REF</sub>	V <sub>REF</sub> = 1.0 V	0.9	1.0	1.1	A/V
		V <sub>REF</sub> = 3.2 V	0.9	1.0	1.1	A/V
Logic Supply Current	Icc	V <sub>EN</sub> = 2.0 V, V <sub>IN</sub> = 0.8 V, No Load	T -		160	mA
4		V <sub>EN</sub> = 0.8 V	T -		15	mA
Turn On Delay	t <sub>pd(on)</sub>	Source Driver	T -		600	ns
		Sink Driver	T -		600	ns
Turn Off Delay	t <sub>pd(off)</sub>	Source Driver	T -		2.0	μs
		Sink Driver	T -	_	2.0	μs
Thermal Shutdown Temperature	T,		T -	165		°C

Negative current is defined as coming out of (sourcing) the specified device terminal.

### HIGH-CURRENT HALF-BRIDGE PRINTHEAD/MOTOR DRIVER

### APPLICATIONS INFORMATION

The UDN2961B/W is a high current half-bridge designed to drive a number of inductive loads such as printer solenoids, stepper motors, and dc motors. Load current is sensed internally and is controlled by pulsewidth modulating (PWM) the output driver(s) in a fixed off-time, variable-frequency format. The peak current level is set by the user's selection of a reference voltage. A slow current-decay mode (chopping only the source driver) or a fast current-decay mode (chopping both the source and sink drivers) can be selected via the MODE pin.

### PWM CURRENT CONTROL

A logic low on the MODE pin sets the current-control circuitry into the slow-decay mode. The RS flip-flop is set initially, and both the source driver and the sink driver are turned ON when the INPUT pin is at a logic low. As current in the load increases, it is sensed by the internal sense resistor until the sense voltage equals the trip voltage of the comparator. At this time, the flip-flop is reset and the source driver is turned OFF. Over the range of  $V_{\rm REF} = 0.8~\rm V$  to  $3.4~\rm V$ , the output current trip point transfer function is a direct linear function of the reference voltage:


$$I_{TRIP} = V_{RFF}$$

To ensure an accurate chop current level ( $\pm 10\%$ ), an external 2940  $\Omega\pm 1\%$  resistor ( $R_{cv}$ ) is used. The actual load current peak will be slightly higher than the trip point (especially for low-inductance loads) because of the internal logic and switching delays (typically 1.5  $\mu$ s). After the source driver turns OFF, the load current decays, circulating through an external ground clamp diode, the load, and the sink transistor. The source driver's OFF time (and therefore the magnitude of the current decrease) is determined by the one-shot's external RC timing components:

$$t_{OFF} = RC$$

within the range of 20 k $\Omega$  to 100 k $\Omega$  and 100 pF to 1000 pF. When the one-shot times out, the flip-flop is set again, the source driver is re-enabled, and the load current again is allowed to rise to the set peak value and trip the comparator. This cycle repeats itself, maintaining the average load current at the desired level.

A logic high on the MODE pin sets the current-control circuitry into the fast-decay

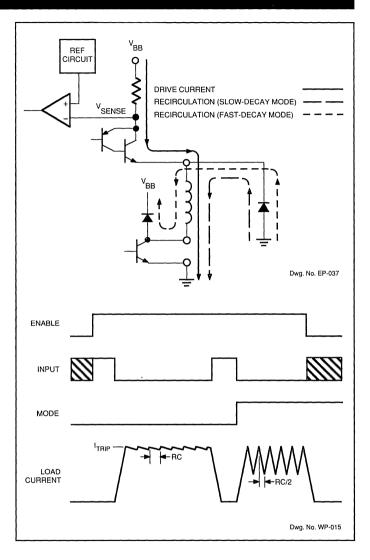

mode. When the peak current threshold is detected, the flip-flop is reset and both the source driver and the sink driver turn OFF. Load current decays quickly through the external ground clamp diode, the load, and the internal flyback diode. In the fast-decay mode, the OFF time period is one-half the time that is set by the external RC network for the slow-decay mode:

$$t_{OFF} = \frac{RC}{2}$$

The amount of ripple current, when chopping in the fast-decay mode, is considerably higher than when chopping in the slow-decay mode.

#### HIGH-CURRENT HALF-BRIDGE PRINTHEAD/MOTOR DRIVER

The frequency of the PWM current control is determined by the time required for the load current to reach the set peak threshold (a function of the load characteristics and  $V_{BB}$ ) plus the OFF time of the switching driver(s) (set by the external RC components).

To prevent false resetting of the flip-flop, due to switching transients and noise, a blanking time for the comparator can be set by the user where  $t_B\approx 3600~x$  C in the slow-decay mode or  $t_B\approx 2400~x$  C in the fast-decay mode. For C between 100 pF and 1000 pF,  $t_B$  is in  $\mu s$ .

#### POWER CONSIDERATIONS

The UDN2961B/W outputs are optimized for low power dissipation. The sink driver has a maximum saturation voltage drop of only 1.4 V at 3.4 A, while the source driver has a 2.2 V drop at -3.4 A. Device power dissipation is minimized in the slow-decay mode, as the chopping driver (the source driver) is ON for less than 50% of the chop period. When the source driver is OFF during a chop cycle, power is dissipated on chip only by the sink driver; the rest of the power is dissipated through the external ground clamp diode. In the fast-decay mode, the ON time of the chopping drivers (both the source driver and the sink driver) may be greater than 50%, and the power dissipation will be greater.

#### **GENERAL**


A logic low on the ENABLE pin prevents the source driver and the sink driver from turning ON, regardless of the state of the INPUT pin or the supply voltages. With the ENABLE pin high, a logic low on the INPUT pin turns ON the output drivers.

To protect against inductive load voltage transients, an external ground clamp diode is required. A fast-recovery diode is recommended to reduce power dissipation in the UDN2961B/W. The blanking time prevents false triggering of the current sense comparator, which can be caused by the recovery current spike of the ground clamp diode when the chopping source driver turns ON.

The load supply  $(V_{BB})$  should be well decoupled with a capacitor placed as close as possible to the device.

The EMITTER pin should be connected to a high-current power ground.

Thermal shutdown protection circuitry is activated and turns OFF both output drivers at

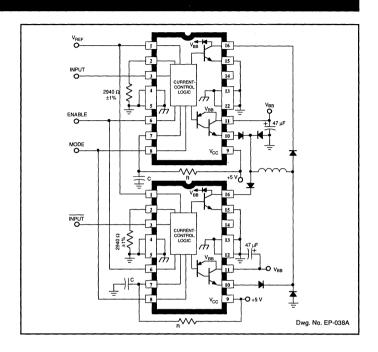

a junction temperature of typically +165°C. It is intended only to protect the device from catastrophic failures due to excessive junction temperatures and should not imply that output short circuits are permitted. The output drivers are re-enabled when the junction temperature cools down to approximately +145°C.


#### MOTOR DRIVER APPLICATIONS

Two UDN2961B/Ws can be cross connected as shown to form a full-bridge driver circuit. Two full-bridge circuits are needed to drive a two-phase bipolar stepper motor. When in a full-bridge configuration, one INPUT signal must be logically inverted from the other INPUT signal to prevent the simultaneous conduction of a source driver from one half-bridge and the sink driver from the other half-bridge. In order to prevent cross-over currents, a turn-ON delay time of 3  $\mu s$  is needed between the time an INPUT signal for one of the half bridges goes high and the INPUT signal for the other half bridge goes low.

In addition to the two external ground clamp diodes, diodes in series with the load to the SINK OUT are needed in a full-bridge configuration. These series diodes prevent the sink drivers from conducting on the inverse mode, which can occur when the opposite half-bridge ground clamp diode is conducting and forces the sink driver collector below ground.

If fast current decay is used (MODE = logic high) or pulse width modulation of the load-current direction is used, diodes in series with the load to the SOURCE OUT are needed. These series diodes prevent the SOURCE OUT from inverse conducting during the recirculation period and thereby prevent shoot-through currents from occuring as the drivers turn back ON.

# DUAL SOLENOID/MOTOR DRIVER —PULSE-WIDTH MODULATED CURRENT CONTROL



Dwg. No. D-1001

# ABSOLUTE MAXIMUM RATINGS at $T_1 \le +150^{\circ}C$

Supply Voltage, V <sub>CC</sub> 45 V
Peak Output Current, I <sub>OUT</sub> ±4 A
Input Voltage Range,
V <sub>IN</sub> 0.3 V to +7.0 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T -55°C to +150°C

NOTE: Output current rating may be limited by duty cycle, ambient temperature, and heat sinking Under any set of conditions, do not exceed the specified peak current and a junction temperature of +150°C.

Using PWM to minimize power dissipation and maximize load efficiency, the UDN2962W dual driver is recommended for impact printer solenoids and stepper motors. It is comprised of two source/sink driver pairs rated for continuous operation to  $\pm 3$  A. It can be connected to drive two independent loads or a single load in the full-bridge configuration. Both drivers include output clamp/flyback diodes, input gain and level shifting, a voltage regulator for single-supply operation, and pulse-width modulated output-current control circuitry. Inputs are compatible with most TTL, DTL, LSTTL, and low-voltage CMOS or PMOS logic.

The peak output current and hysteresis for each source/sink pair is set independently. Output current, threshold voltage, and hysteresis are set by the user's selection of external resistors. At the specified output-current trip level, the source driver turns OFF. The internal clamp diode then allows current to flow without additional input from the power supply. When the lower current trip point is reached, the source driver turns back ON.


The UDN2962W is in a 12-pin single in-line power tab package. The tab is at ground potential and needs no insulation. For high-current or high-frequency applications, external heat sinking may be required.


#### **FEATURES**

- 4 A Peak Output
- 45 V Min. Sustaining Voltage
- Internal Clamp Diodes
- TTL/PMOS/CMOS Compatible Inputs
- High-Speed Chopper

Always order by complete part number: UDN2962W.

# 2962 DUAL PWM SOLENOID/MOTOR DRIVER

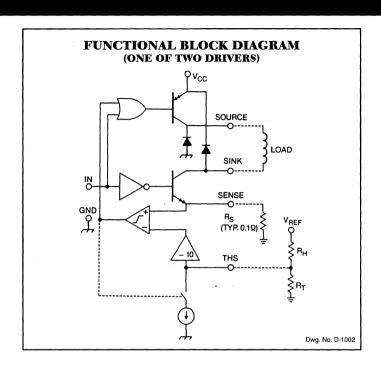



#### TRUTH TABLE

V <sub>IN</sub>	V <sub>SENSE</sub>	SOURCE DRIVER	SINK DRIVER
High	NA	Off	Off
Low	$<$ V $_{THS}$ /10	On	On
Low	>V <sub>THS</sub> /10	Off	On

## 2962 DUAL PWM SOLENOID/MOTOR DRIVER

# ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $T_J$ ≤ +150°C, $V_{CC}$ = 45 V, $V_{SENSE}$ = 0 V (unless otherwise noted).

				L	imits	
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Supply Voltage Range	V <sub>cc</sub>	Operating	20		45	٧
Output Drivers						
Output Leakage Current	I <sub>CEX</sub>	V <sub>IN</sub> = 2.4 V, V <sub>SOURCE</sub> = 0 V		<-1.0	-100	μА
		$V_{IN} = 2.4 \text{ V}, V_{SINK} = 45 \text{ V}$	_	<1.0	100	μА
Output Saturation Voltage	V <sub>CE(SAT)</sub>	Source Drivers, I <sub>LOAD</sub> = 3.0 A	T =	2.1	2.3	V
		Source Drivers, I <sub>LOAD</sub> = 1.0 A	_	1.7	2.0	V
		Sink Drivers, I <sub>LOAD</sub> = 3.0 A	_	1.7	2.0	٧
		Sink Drivers, I <sub>LOAD</sub> = 1.0 A	_	1.1	1.3	V
Output Sustaining Voltage	V <sub>CE(sus)</sub>	$I_{OUT} = \pm 3.0 \text{ A, L} = 3.5 \text{ mH}$	45	_	_	٧
Output Current Regulation	$\Delta I_{OUT}$	V <sub>THS</sub> = 0.6 V to 1.0 V, L = 3.5 mH	-		±25	%
	i	V <sub>THS</sub> = 1.0 V to 2.0 V, L = 3.5 mH	_		±10	%
•		V <sub>THS</sub> = 2.0 V to 5.0 V, L = 3.5 mH	_	_	±5.0	%
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 3.0 A	T -	1.7	2.0	٧
Output Rise Time	t <sub>r</sub>	I <sub>LOAD</sub> = 3.0 A, 10% to 90%, Resistive Load	T -	0.5	1.0	μs
Output Fall Time	t <sub>f</sub>	I <sub>LOAD</sub> = 3.0 A, 90% to 10%, Resistive Load	_	0.5	1.0	μs
Control Logic						
Logic Input Voltage	V <sub>IN(1)</sub>		2.4			٧
	V <sub>IN(0)</sub>		T -	_	0.8	٧
Logic Input Current	l <sub>IN(1)</sub>	V <sub>IN</sub> = 2.4 V	-	1.0	10	μА
	I <sub>IN(0)</sub>	V <sub>IN</sub> = 0.8 V	-	-20	-100	μА
	I <sub>THS(ON)</sub>	$V_{THS} \ge 500 \text{ mV}, V_{SENSE} \le V_{THS}/10.5$	_	-2.0	_	μА
	I <sub>THS(HYS)</sub>	$V_{SENSE} \ge V_{THS}/9.5, V_{THS} = 0.6 \text{ V to } 5.0 \text{ V}$	140	200	260	μА
V <sub>THS</sub> /V <sub>SENSE</sub> Ratio	_	At Trip Point, V <sub>THS</sub> = 2.0 V to 5.0 V	9.5	10	10.5	T -
Supply Current	l <sub>cc</sub>	V <sub>IN</sub> = 2.4 V, Outputs OFF		8.0	12	mA
(Total Device)		V <sub>IN</sub> = 0.8 V, Outputs Open	_	25	40	mA
Propagation Delay Time	t <sub>pd</sub>	50% V <sub>IN</sub> to 50% V <sub>OUT</sub> , Turn OFF	_		2.5	μs
(Resistive Load)		50% V <sub>IN</sub> to 50% V <sub>OUT</sub> , Turn ON			3.0	μs
		100% V <sub>SENSE</sub> to 50% V <sub>OUT</sub> *	I –	_	3.0	μs

<sup>\*</sup> Where  $V_{SENSE} \ge V_{THS}/9.5$ 

NOTE: Negative current is defined as coming out of (sourcing) the specified device pin.

#### 2962 DUAL PWM SOLENOID/MOTOR DRIVER

#### CIRCUIT DESCRIPTION AND APPLICATIONS INFORMATION

The UDN2962W high-current driver is intended for use as a free-running, pulse-width modulated solenoid driver.

**Circuit Description.** In operation, the source and sink drivers are both turned ON by a low level at the input. The load current rises with time as a function of the load inductance, total circuit resistance, and supply voltage and is sensed by the external sense resistor ( $R_{\rm s}$ ). When the load current reaches the trip point ( $I_{\rm TRIP}$ ), the comparator output goes high and turns OFF the source driver. The actual load current will peak slightly higher than  $I_{\rm TRIP}$  because of the internal logic and switching delays.

After the source driver is turned OFF, the load current continues to circulate through the sink driver and an internal ground clamp diode. The rate of current decay is a function of the load inductance and total circuit resistance.

An internal constant current sink reduces the trip point (hysteresis) until the decaying load current reaches the lower threshold, when the comparator output goes low and the source driver is again turned ON. Load current is again allowed to rise to the trip point and the cycle repeats.

Maximum load current and hysteresis is determined by the user.

Determining Maximum Load Current and Hysteresis. Trip current (I $_{\text{TRIP}}$ ) is determined as a function of resistance R $_{\text{S}}$  and the threshold voltage, V $_{\text{THS}}$ :

$$I_{TRIP} = \frac{V_{THS}}{10 R_s}$$

where  $V_{THS} = 10 \cdot V_{SENSE} = 0.6 \text{ V to } 5.0 \text{ V}.$ 

Hysteresis percentage (H) is determined by resistance  $\rm R_{\rm H}$  and is independent of the load current:

$$H = \frac{R_H}{50 \cdot V_{REF}}$$

The chopping frequency is asynchronous and a function of the system and circuit parameters, including load inductance, supply voltage, hysteresis setting, and switching speed of the driver.

Resistance R<sub>T</sub> is determined as:


$$R_{T} = \frac{R_{H}V_{THS}}{V_{DEF} - V_{THS}}$$

Note that if  $V_{THS} = V_{REF}$ , then  $R_T = \infty$ .


Circuit Layout. To prevent interaction between channels, each of the two high-level power ground returns (the low side of the sense resistors) must be returned independently to the low-level signal ground (pin 1). The circuit common (pin 1) can then be routed to the system ground.

The printed wiring board should utilize a heavy ground plane. For optimum performance, the driver should be soldered directly into the board.

The power supply  $(V_{cc})$  should be decoupled with an electrolytic capacitor ( $\geq$ 10  $\mu$ F) as close as possible to pin 7.




#### TYPICAL WAVESHAPES




Dwg. WP-006

#### APPLICATIONS INFORMATION

# RESISTOR R<sub>H</sub> VALUE AS A FUNCTION OF HYSTERESIS



# RESISTOR $R_T$ VALUE AS A FUNCTION OF PEAK LOAD CURRENT



Dwg. No. A-12,417

Dwg. No. A-12,416

#### **MOUNTING POWER TAB DEVICES**

Power-tab packages are efficient thermal dissipators when properly utilized. In application, the following precautions should be taken:

- Always fasten the tab to the heat sink before the leads are soldered to fixed terminals.
- Strain relief must be provided if there is any probability of axial stress to the leads.
- Thermal grease (Dow Corning 340 or equivalent) should always be used. Thermal compounds are better heat conductors than air but not a good substitute for flat mating surfaces.
- The mounting surface should be flat to within 0.002 inch/inch (0.05 mm/mm).
- Brute force mounting to poorly finished heat sinks can cause internal stresses which damage silicon chips and insulation parts. Mounting torque should be between 4 and 8 inch pounds (0.45 to 0.90 Nm.)
- The mounting holes should be as clean as possible with no burrs or ridges.
- 7. Use appropriate hardware including a lock washer or torque washer.
- If insulating bushings are used, they should be of dialylphthalate, fiberglass-filled polycarbonate, or fiberglass-filled nylon. Unfilled nylon should be avoided.

# 2981 THRU 2984

# UDN2982/84LW 1 1 18 UDN2981-84A 11 16 17 16 17 18 17 11 11 12 18 UND N2981-84A

#### Dwg. No. A-10, 243

# ABSOLUTE MAXIMUM RATINGS at 25°C Free-Air Temperature

Output Voltage Range, V <sub>CE</sub> (UDN2981A &
UDN2981A & UDN2982A/LW) 5 V to 50 V
(UDN2983A & UDN2984A/LW) <b>35 V to 80 V</b>
Input Voltage, V <sub>IN</sub>
(UDN2981A & UDN2983A) 15 V
(UDN2982A/LW &
UDN2984A/LW) <b>20 V</b>
Output Current, I <sub>OUT</sub> 500 mA
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C

Note that the UDN2982/84A (dual in-line package) and UDN2982/84LW (small-outline IC package), respectively, are electrically identical and share a

common pin number assignment.

#### 8-CHANNEL SOURCE DRIVERS

Recommended for high-side switching applications that benefit from separate logic and load grounds, these devices encompass load supply voltages to 80 V and output currents to -500 mA. The UDN2981A through UDN2984A/LW 8-channel source drivers are useful for interfacing between low-level logic and high-current loads. Typical loads include relays, solenoids, lamps, stepper and/or servo motors, print hammers, and LEDs.

All devices may be used with 5 V logic systems — TTL, Schottky TTL, DTL, and 5 V CMOS. The UDN2981A and UDN2982A/LW are interchangeable, will withstand a maximum output OFF voltage of 50 V, and operate to a minimum of 5 V; the UDN2983A and UDN2984A/LW drivers are interchangeable, will withstand an output voltage of 80 V, and operate to a minimum of 35 V. All devices in this series integrate input current limiting resistors and output transient suppression diodes, and are activated by an active high input.

The suffix 'A' (all devices) indicates an 18-lead plastic dual in-line package with copper lead frame for optimum power dissipation. Under normal operating conditions, these devices will sustain 120 mA continuously for each of the eight outputs at an ambient temperature of +50°C and a supply of 15 V.

The suffix 'LW' (UDN2982LW and UDN2984LW only) indicates a surface-mountable wide-body SOIC package. All devices are also available for operation between -40°C and +85°C. To order, change the prefix from 'UDN' to 'UDQ'.

#### **FEATURES**

- TTL. DTL. PMOS, or CMOS Compatible Inputs
- 500 mA Output Source Current Capability
- Transient-Protected Outputs
- Output Breakdown Voltage to 80 V
- DIP or SOIC Packaging

Always order by complete part number, e.g., **UDN2981A**. Note that all devices are not available in both package types.

# ELECTRICAL CHARACTERISTICS at $T_A = +25$ °C (unless otherwise specified).

		Applicable		Test		Lir	nits	
Characteristic	Symbol	Devices	Test Conditions	Fig.	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	UDN2981/82†	$V_{IN} = 0.4 \text{ V}^*, V_{S} = 50 \text{ V}, T_{A} = +70^{\circ}\text{C}$	1	_		200	μА
		UDN2983/84†	$V_{IN} = 0.4 \text{ V}^*, V_S = 80 \text{ V}, T_A = +70^{\circ}\text{C}$	1	_	_	200	μА
Collector-Emitter			V <sub>IN</sub> = 2.4 V, I <sub>OUT</sub> = -100 mA	2	_	1.6	1.8	٧
Saturation Voltage	V <sub>CE(SAT)</sub>	All	V <sub>IN</sub> = 2.4 V, I <sub>OUT</sub> = -225 mA	2	_	1.7	1.9	V
	[ ]		V <sub>IN</sub> = 2.4 V, I <sub>OUT</sub> = -350 mA	2	_	1.8	2.0	٧
Input Current		UDN2981/83A	V <sub>IN</sub> = 2.4 V	3	_	140	200	μА
	I <sub>IN(ON)</sub>		V <sub>IN</sub> = 3.85 V	3	_	310	450	μА
		UDN2982/84†	V <sub>IN</sub> = 2.4 V	3	_	140	200	μА
	]		V <sub>IN</sub> = 12 V	3	_	1.25	1.93	mA
Output Source Current	l <sub>out</sub>	UDN2981/83A	V <sub>IN</sub> = 2.4 V, V <sub>CE</sub> = 2.0 V	2	-350	_	_	mA
		UDN2982/84†	$V_{IN} = 2.4 \text{ V}, V_{CE} = 2.0 \text{ V}$	2	-350	_	_	mA
Supply Current (Outputs Open)	Is	UDN2981/82†	$V_{IN} = 2.4 \text{ V}^*, V_{S} = 50 \text{ V}$	4	_	_	10	mA
(Outputs Open)		UDN2983/84†	$V_{IN} = 2.4 \text{ V}^*, V_S = 80 \text{ V}$	4	_	_	10	mA
Clamp Diode	l <sub>R</sub>	UDN2981/82†	$V_{R} = 50 \text{ V}, V_{IN} = 0.4 \text{ V}^{*}$	5	_	_	50	μА
Leakage Current		UDN2983/84†	$V_{R} = 80 \text{ V}, V_{IN} = 0.4 \text{ V}^{*}$	5	_	_	50	μА
Clamp Diode Forward Voltage	V <sub>F</sub>	All	I <sub>F</sub> = 350 mA	6	_	1.5	2.0	٧
Turn-On Delay	t <sub>ON</sub>	All	$0.5 E_{IN}$ to $0.5 E_{OUT}$ , $R_L = 100\Omega$ ,	_	_	1.0	2.0	μs
			V <sub>S</sub> = 35 V		L			
Turn-Off Delay	t <sub>off</sub>	All	$0.5 E_{IN}$ to $0.5 E_{OUT}$ , $R_{L} = 100\Omega$ ,	-		5.0	10	μs
L	L		V <sub>S</sub> = 35 V, See Note					


NOTES: Turn-off delay is influenced by load conditions. Systems applications well below the specified output loading may require timing considerations for some designs, i.e., multiplexed displays or when used in combination with sink drivers in a totem pole configuration.


Negative current is defined as coming out of (sourcing) the specified device terminal.

<sup>\*</sup> All inputs simultaneously.

<sup>†</sup> Complete part number includes suffix to identify package style: A = DIP, LW = SOIC.

#### **ONE OF EIGHT DRIVERS**

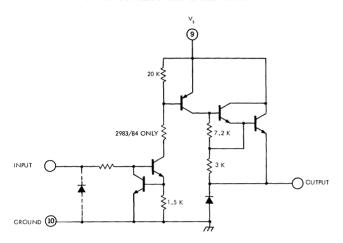




Dwg. No. A=10,242B

Dwg. GP-018A


#### **TEST FIGURES**

FIGURE 1




Dwg. No. A-11,083

FIGURE 2




Dwg. No. A-11,084

FIGURE 3




Dwg. No. A-11,085

#### FIGURE 4




Dwg. No. A-11,086

#### FIGURE 5



Dwg. No. A-11,087


#### FIGURE 6




Dwg. No. A-11,088

#### ALLOWABLE PEAK COLLECTOR CURRENT AS A FUNCTION OF DUTY CYCLE

#### **SERIES UDN2980A**

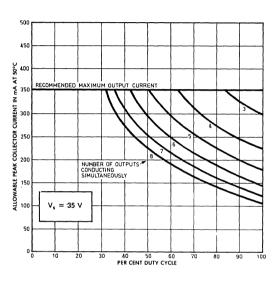

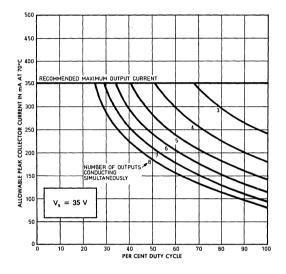


Dwg. No. A-11,106B


Dwg. No. A-11,111B

#### SERIES UDN2981/82A

500

450

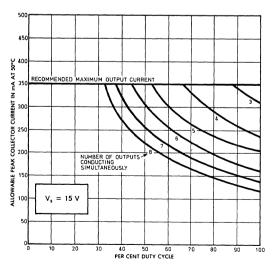

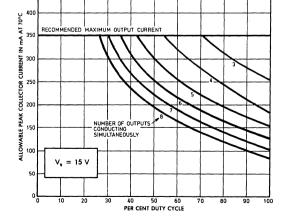


Dwg. No. A-11,107B


Dwg. No. A-11,108B

#### ALLOWABLE PEAK COLLECTOR CURRENT AS A FUNCTION OF DUTY CYCLE

#### SERIES UDN2983/84A

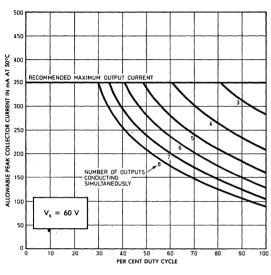


Dwg. No. A-11,109B

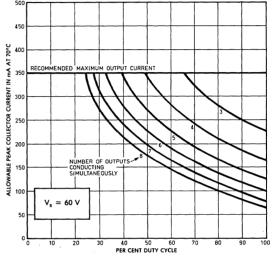


#### Dwg. No. A-11,110B

# INPUT CURRENT AS A FUNCTION OF INPUT VOLTAGE




# TYPICAL ELECTROSENSITIVE PRINTER APPLICATION

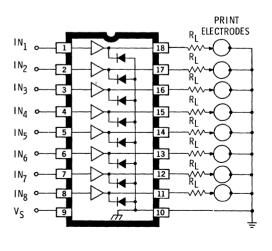

Dwg. No. A-11,115B

Dwg. No. A-11,113A

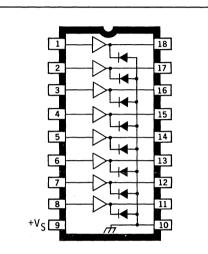

Dwg. No. A-10.243

# ABSOLUTE MAXIMUM RATINGS at $T_A = 25^{\circ}C$

A
Driver Supply Voltage, V <sub>S</sub> 30 V
Continuous Output Current,
I <sub>OUT</sub> 250 mA
Input Voltage, V <sub>IN</sub> 20 V
Package Power Dissipation,
P <sub>D</sub> 2.2 W*
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C
<u>.</u>

\*Derate at the rate of 18 mW/°C above T<sub>A</sub>= 25°C

## 8-CHANNEL SOURCE DRIVER

Recommended for applications requiring separate logic and load grounds, load supply voltages to 30 V, and load currents to 250 mA, the UDN2985A source driver is used as an interface between standard low-power digital logic and LEDs, relays and solenoids. The outputs feature saturated transistors for low collector-emitter saturation voltages.

The UDN2985A driver is for use with 5 V logic systems—TTL, Schottky TTL, DTL, and CMOS. This device has a minimum output breakdown rating of 30 V with a minimum output sustaining voltage of 15 V. The output is switched ON by an active high input level.


Under normal operating conditions, this device can source up to 120 mA for each of the eight outputs at an ambient temperature of 75°C and a supply voltage of 15 V. It incorporates input current-limiting resistors and output transient suppression diodes.

The UDN2985A source driver is supplied in an 18-lead dual in-line package. All inputs are on one side of the package, output pins on the other, to simplify printed wiring board layout.

#### **FEATURES**

- TTL, DTL, or CMOS Compatible Inputs
- 250 mA Output Source Current Capability
- Output Transient-Suppression Diodes
- 30 V Minimum Output Breakdown Voltage
- Low Output-Saturation Voltage

#### PARTIAL SCHEMATIC DIAGRAM 1 OF 8 DRIVERS

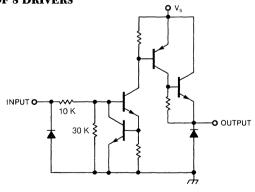

Dwg. No. DS-1013

Always order by complete part number: UDN2985A .


## 2985 8-CHANNEL SOURCE DRIVER

# ELECTRICAL CHARACTERISTICS at $T_A = 25$ °C, $V_S = 30$ V (unless otherwise noted).

			Limits			
Characteristics	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	V <sub>IN</sub> = 0.4 V, V <sub>OUT</sub> = 0 V	_	<-1.0	-100	μА
Output Sustaining Voltage	V <sub>CE(sus)</sub>	l <sub>OUT</sub> = -120 mA, L = 3 mH	15	-	_	V
Output Saturation Voltage	V <sub>CE(SAT)</sub>	V <sub>IN</sub> = 2.4, I <sub>OUT</sub> = -60 mA	_	0.8	1.1	V
		V <sub>IN</sub> = 2.4, I <sub>OUT</sub> = -120 mA	_	0.9	1.2	V
Input Current Voltage	I <sub>IN(ON)</sub>	V <sub>IN</sub> = 2.4 V		90	225	μА
And the second second		V <sub>IN</sub> = 5.0 V	_	280	650	μА
	I <sub>IN(OFF)</sub>	V <sub>IN</sub> = 0.4 V	_	. 10	15	μА
Supply Current (outputs open)	I <sub>s</sub>	$V_{S} = 30 \text{ V}, V_{IN} = 2.4 \text{ V}$		10	15	mA
Clamp Diode Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 30 V, T <sub>A</sub> = 70°C		<1.0	50	μА
Clamp Diode Foward Voltage	V <sub>F</sub>	I <sub>F</sub> = 120 mA		1.1	2.0	V
Turn-On Delay	t <sub>ON</sub>		_	0.5	1.0	μs
Turn-Off Delay	t <sub>OFF</sub>		_	5.0	10	μs


NOTE: Negative current is defined as coming out of (sourcing) the specified device pin.

#### **COMMON-CATHODE LED DRIVER**

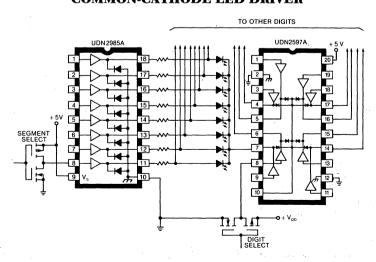

Dwg. No. DS-1014

# 8-CHANNEL SOURCE DRIVER WITH OVER-CURRENT PROTECTION



Dwg. No. A-13,285

# ABSOLUTE MAXIMUM RATINGS at T<sub>A</sub> = +25°C

Driver Supply Voltage, V <sub>S</sub>
Output Sustaining Voltage, V <sub>CE(sus)</sub> <b>35 V</b>
Continuous Output Current,
l <sub>OUT</sub>
FAULT Output Voltage, V <sub>CE</sub> 35 V
FAULT Output Current, I <sub>C</sub> 30 mA
Input Voltage, V <sub>IN</sub>
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C
* Outputs are disabled at approximately -500 mA

per driver.

Providing over-current protection for each of its eight sourcing outputs, the UDN2987A driver is used as an interface between standard low-level logic and relays, motors, solenoids, LEDs, and incandescent lamps. The device includes thermal shutdown and output transient protection/clamp diodes for use with sustaining voltages to 35 V.

In this driver, each channel includes a latch to turn OFF that channel if the maximum channel current is exceeded. All channels are disabled if the thermal shutdown is activated. A common FAULT output is used to indicate either chip thermal shutdown or any over-current condition. All outputs are enabled by pulling the common OE/R input high. When OE/R is low, all outputs are inhibited and the eight latches are reset. The UDN2987A is supplied in a 20-lead dual in-line plastic package.

Under normal operating conditions, each of eight outputs will source in excess of 100 mA continuously at an ambient temperature of  $25^{\circ}$ C and a supply of 35 V. The over-current fault circuit will protect the device from short-circuits to ground with supply voltages of up to 35 V.


The inputs are compatible with 5 V and 12 V logic systems—TTL, Schottky TTL, DTL, PMOS, and CMOS. In all cases, the output is switched ON by an active high input level.


#### **FEATURES**

- 350 mA Output Source Current
- Over-Current Protected
- Internal Ground Clamp Diodes
- Output Breakdown Voltage 35 V, Minimum
- TTL, DTL, PMOS, or CMOS Compatible Inputs
- Internal Thermal Shutdown


Always order by complete part number: UDN2987A .

## 2987 8-CHANNEL SOURCE DRIVER






#### **OVER-CURRENT FAULT SENSE**



#### **OUTPUT CURRENT WAVESHAPES**

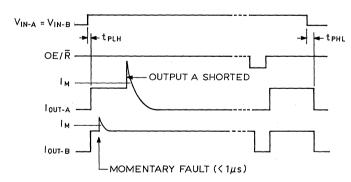

Dwg. No. A-13,293

## 2987 8-CHANNEL SOURCE DRIVER

# ELECTRICAL CHARACTERISTICS at $T_A$ = 25°C, $V_{OE}$ = 2.4 V, $V_S$ = 35 V (unless otherwise noted).


			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Functional Supply Range	V <sub>s</sub>		7.0	_	35	٧
Output Leakage Current	I <sub>CEX</sub>	V <sub>IN</sub> = 0.4 V*	_	<-5.0	-200	μА
Output Sustaining Voltage	V <sub>OUT(sus)</sub>	I <sub>OUT</sub> = -350 mA, L = 2.0 mH	35	_	_	V
Output Saturation Voltage	V <sub>OUT(SAT)</sub>	V <sub>IN</sub> = 2.4 V, I <sub>OUT</sub> = -100 mA		1.6	1.8	V
		$V_{IN} = 2.4 \text{ V}, I_{OUT} = -225 \text{ mA}$	_	1.7	1.9	V
		$V_{IN} = 2.4 \text{ V}, I_{OUT} = -350 \text{ mA}$		1.8	2.0	٧
Channel Shutdown Threshold	I <sub>M</sub>	V <sub>IN</sub> = 2.4 V	-400	-500		mA
FAULT Leakage Current	I <sub>CEX</sub>	V <sub>CC</sub> = 35 V	_	<1.0	100	μА
FAULT Saturation Voltage	V <sub>CE(SAT)</sub>	$I_C = 30 \text{ mA}$	_	0.3	0.8	٧
Input Voltage	V <sub>IN(ON)</sub>		2.4		_	V
	V <sub>IN(OFF)</sub>		_	_	0.4	V
Input Current	I <sub>IN(ON)</sub>	V <sub>IN</sub> = 2.4 V	_	125	170	μΑ
		V <sub>IN</sub> = 5.0 V		840	1020	μΑ
		V <sub>IN</sub> = 12 V	_	1500	1800	μΑ
	I <sub>IN(OFF)</sub>	V <sub>IN</sub> = 0.4 V	_	_	15	μА
Clamp Diode Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 35 V, T <sub>A</sub> = 70°C	T		50	μΑ
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 350 mA		1.5	1.8	V
Supply Current	I <sub>S(ON)</sub>	V <sub>IN</sub> = 2.4 V*, Outputs Open		13	18	mA
	I <sub>S(OFF)</sub>	V <sub>IN</sub> = 0.4 V*	_	8.0	12	mA
Thermal Shutdown	TJ			165		°C
Thermal Hysteresis	$\DeltaT_J$			15		°C
Propagation Delay Time	t <sub>PLH</sub>	$R_L = 100\Omega$		0.3	0.6	μs
	t <sub>PHL</sub>	$R_L = 100\Omega$		2.0	4.0	μs
Dead Time	t <sub>d</sub>		_	1.0		μs

<sup>\*</sup>All inputs simultaneously.

#### ALLOWABLE OUTPUT CURRENT AS A FUNCTION OF DUTY CYCLE

AT +25°C

400

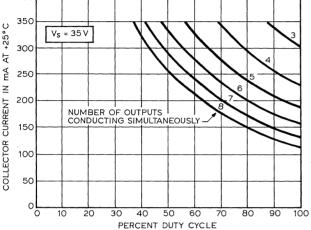

Dwg. No. A-13,288

#### AT +50°C 400 350 +50°C Vs = 35 V 300 Ą ٩ 250 COLLECTOR CURRENT IN 200 NUMBER OF OUTPUTS 150 CONDUCTING SIMULTANEOUSLY 100 50 20 40 50 60 70 80 90 30 PERCENT DUTY CYCLE

Dwg. No. A-13,289

#### APPLICATIONS INFORMATION AND CIRCUIT DESCRIPTION

As with all power integrated circuits, the UDN2987A has a maximum allowable output current rating. The 500 mA rating does not imply that operation at that value is permitted or even obtainable. The channel output current trip point is specified as -400 mA, minimum: therefore, attempted operation at current levels greater than -400 mA may cause a fault indication and channel shutdown. The device is tested at a maximum of -350 mA and that is the recommended maximum output current per driver. It provides protection for current overloads or shorted loads up to 35 V.


All outputs are enabled by pulling the OE/R input high. When OE/R is low or allowed to float (internal pull-down), all outputs are inhibited and the latches are reset. Note that the RESET pulse duration (OE/R low) should be at least 1 us. This will ensure safe operation under attempted RESET conditions with a shorted load. The latches are also reset during power-up, regardless of the state of the OE/R input.

The load current causes a small voltage drop across the internal low-value sense resistor. This voltage is compared to the voltage drop across a reference resistor with a constant current. The two resistors are matched to eliminate errors due to manufacturing tolerances or temperature effects. Each channel includes a comparator and its own latch. An over-current fault ( $V_{\rm SENSE} > V_{\rm REF}$ ) will set the affected latch and shut down only that channel. All other channels will continue to operate normally. The latch includes a 1 µs delay (t\_) to prevent unwanted triggering due to crossover currents generated when switching inductive loads. For an abrupt short circuit, the delay and output switching times will allow a brief, permissable current in excess of the trip current before the output driver is turned OFF.

A common thermal shutdown disables all outputs if the chip temperature exceeds +165°C. At thermal shutdown, all latches are reset. The outputs are disabled until the chip cools down to about +150°C (thermal hysteresis).

A common open-collector FAULT output is used to indicate any channel over-current condition or chip thermal shutdown.

### **DUAL H-BRIDGE MOTOR DRIVERS**



Dwg. No. A-12,455

# ABSOLUTE MAXIMUM RATINGS at $T_v \le +150^{\circ}C$

NOTE: Output current rating may be limited by chopping frequency, ambient temperature, airflow, and heat sinking. Under any set of conditions, do not exceed the specified maximum current and a

junction temperature of +150°C.

Cost-effective monolithic drive electronics for bipolar stepper and dc (brush) servo motors to 40 V and 500 mA is very practical with the UDN2993B and UDN2993LB. These dual full-bridge motion control ICs integrate separate inputs, level shifting for upper power outputs, control logic, integral inductive transient protection, and source (upper) and sink (lower) drivers in an H-bridge configuration. The single-chip power IC provides improved space utilization and reliability unmatched by discrete component circuitry.

Excepting the power supply connections, the two H-bridges are independent. An ENABLE input is provided for each bridge and permits pulse-width modulation (PWM) through the use of external circuitry. PWM drive techniques provide the benefits of reduced power dissipation, improved motor performance (especially torque), and positively affect system efficiency. Separate PHASE inputs for each bridge determine the direction of current flow in the load. Additionally, each pair of (sink) emitters are terminated to package connections. This allows the use of current-sensing circuitry. Both devices incorporate an intrinsic "dead time" to preclude high crossover (or cross-conduction) currents during changes in direction (phase).

These devices are packaged in plastic DIPs (suffix B) or surface-mountable wide-body SOICs (suffix LB) with copper lead frames for optimum power dissipation without heat sinks. The lead configurations allow automatic insertion, fit standard IC sockets or printed wiring board layouts, and enable easy attachment of a heat sink for maximum power-handling capability. The heat-sink tabs are at ground potential and require no insulation.

Dual full-bridge drivers with peak current ratings of  $\pm 3$  A are supplied as the UDN2998W.

#### FEATURES

- Output Voltage to 40 V
- Crossover Current Protection
- TTL/NMOS/CMOS Compatible Inputs
- Low Input Current
- Internal Clamp Diodes
- DIP or SOIC Packaging

Always order by complete part number:

Part Number	Package
UDN2993B	16-Pin DIP
UDN2993LB	20-Lead Wide-Body SOIC

## 2993 DUAL H-BRIDGE MOTOR DRIVERS

#### **UDN2993LB** SUPPLY 1 VBB V<sub>DD</sub> 20 LOGIC SUPPLY 19 ENABLE B ENABLEA 2 18 PHASE B LOGIC LOGIC PHASE<sub>A</sub> 3 GROUND GROUND GROUND GROUND 5 GROUND GROUND GROUND GROUND OUT1A 8 13 OUT 18 OUT2A 9 12 OUT28 VEA 10

FUNCTIONAL BLOCK DIAGRAM
(One of Two Drivers)

PHASE

PHASE

GROUND


DELAY


Dwg. No. A-12,447

Dwg. No. A-14,340

Enable Input	Phase Input	Output 1	Output 2
High	High	Low	High
High	Low	High	Low
Low	High	Low	Open
Low	Low	Open	Low

TRUTH TABLE





## 2993 DUAL H-BRIDGE MOTOR DRIVERS

ELECTRICAL CHARACTERISTICS at  $T_A$  = +25°C,  $V_{BB}$  = 40 V,  $V_{DD}$  = 5 V,  $V_E$  = 0 V,  $T_J \leq$  +150°C Figure 1 (unless otherwise noted).

				Lir	nits	
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Output Drivers						
Operating Voltage Range	V <sub>BB</sub>		10	_	40	٧
Output Leakage Current	I <sub>CEX</sub>	$V_{ENABLE} = 0.8 \text{ V}, V_{OUT} = V_{BB}, \text{Note 2}$	_	< 1.0	10	μΑ
		V <sub>ENABLE</sub> = 0.8 V, V <sub>OUT</sub> = 0 V, Note 2		< -1.0	-10	μΑ
Output Saturation Voltage	V <sub>CE(SAT)</sub>	V <sub>ENABLE</sub> = 2.4 V, I <sub>OUT</sub> = 500 mA		1.6	1.8	٧
		V <sub>ENABLE</sub> = 2.4 V, I <sub>OUT</sub> = -500 mA	_	1.6	2.0	٧
Output Sustaining Voltage	V <sub>CE(sus)</sub>	I <sub>OUT</sub> = ±500 mA, Figure 2, Note 2	40	50	_	٧
Motor Supply Current	I <sub>BB(ON)</sub>	V <sub>ENABLE</sub> = 2.4 V, Outputs Open, Note 2	_	1.0	3.0	mA
	I <sub>BB(OFF)</sub>	V <sub>ENABLE</sub> = 0.8 V, Outputs Open, Note 2	_	250	300	μΑ
Source Driver Rise Time	t,	I <sub>OUT</sub> = -500 mA, V <sub>BB</sub> = 30 V	_	-75		ns
Source Driver Fall Time	t <sub>i</sub>	I <sub>OUT</sub> = -500 mA, V <sub>BB</sub> = 30 V	_	280	_	ns
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 500 mA	_	1.6	1.8	>
Control Logic (PHASE or ENA	BLE)					
Logic Input Current	I <sub>IN(1)</sub>	V <sub>PHASE</sub> or V <sub>ENABLE</sub> = 2.4 V	_	< 1.0	10	μΑ
	I <sub>IN(0)</sub>	V <sub>PHASE</sub> or V <sub>ENABLE</sub> = 0.8 V	_	-200	-300	μΑ
Logic Input Voltage	V <sub>IN(1)</sub>		2.4		_	V
	V <sub>IN(0)</sub>		_	_	0.8	٧
Logic Supply Current	l <sub>DD</sub>		_	14	20	mA
Turn-On Delay Time	t <sub>pd0</sub>	ENABLE Input to Source Drivers	_	250	_	ns
Turn-Off Delay Time	t <sub>pd1</sub>	ENABLE Input to Source Drivers	_	500	_	ns


NOTES: 1. Each driver is tested separately.

<sup>2.</sup> Test is performed with  $V_{PHASE}$  = 0.8 V and then repeated for  $V_{PHASE}$  = 2.4 V.


<sup>3.</sup> Negative current is defined as coming out of (sourcing) the specified device pin.

## 2993 DUAL H-BRIDGE MOTOR DRIVERS

# TYPICAL APPLICATION 2-PHASE BIPOLAR STEPPER MOTOR DRIVE (Chopper Mode)




Dwg. No. A-12,453



Dwg. No. A-12,454


#### **TEST FIGURES**

#### FIGURE 1



Dwg. No. A-12,449

#### FIGURE 2



Dwg. No. A-12,450

# DUAL FULL-BRIDGE MOTOR DRIVER

As an interface between low-level logic and solenoids, brushless dc motors, or stepper motors, the UDN2998W dual full-bridge driver will operate inductive loads up to 50 V with continuous output currents of up to 2 A per bridge or peak (start-up) currents to 3 A. The control inputs are compatible with TTL, DTL, and 5 V CMOS logic. Except for a common supply voltage and thermal shutdown, the two drivers in each package are completely independent.

For external PWM control, an Output Enable for each bridge circuit is provided and the sink driver emitters are pinned out for connection to external current-sensing resistors. The chopper drive mode is characterized by low power dissipation levels and maximum efficiency. A PHASE input to each bridge determines load-current direction.


Extensive circuit protection is provided on-chip. Both ground-clamp and flyback diodes for each bridge are provided. A thermal shutdown circuit disables the load drive if chip temperature rating (package power dissipation) is exceeded. Internally-generated delays provide crossover-current protection.

The UDN2998W is packaged in a 12-pin single in-line power tab package for high power capabilities. Driving either of the bridges at the full 2 A dc rating requires the use of an external heat-sink. The tab is at ground potential and needs no insulation.

A similar dual full-bridge driver for use with continuous load currents to  $\pm 500$  mA is the UDN2993B.

#### **FEATURES**

- ±3 A Peak Output Current
- Output Voltage to 50 V
- Integral Output Suppression Diodes
- Output Current Sensing
- TTL/CMOS Compatible Inputs
- Internal Thermal Shutdown Circuitry
- Crossover-Current Protected



Dwg. No. W-106


# ABSOLUTE MAXIMUM RATINGS at $T_{_{\rm I}} \le +150^{\circ} C$


Supply Voltage, V <sub>BB</sub> 50 V
Output Current, I <sub>OUT</sub> (DC) ±2 A
(Peak) ±3 A
Sink Driver Emitter Voltage, V <sub>E</sub> 1.5 V
Logic Input Voltage Range,
V <sub>PHASE</sub> or V <sub>ENABLE</sub> 0.3 V to 15 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C

NOTE: Output current rating may be limited by chopping frequency, ambient temperature, air flow, or heat sinking. Under any set of conditions, do not exceed the specified current rating or a junction temperature of +150°C.

Always order by complete part number: UDN2998W .

## 2998 DUAL FULL-BRIDGE MOTOR DRIVER

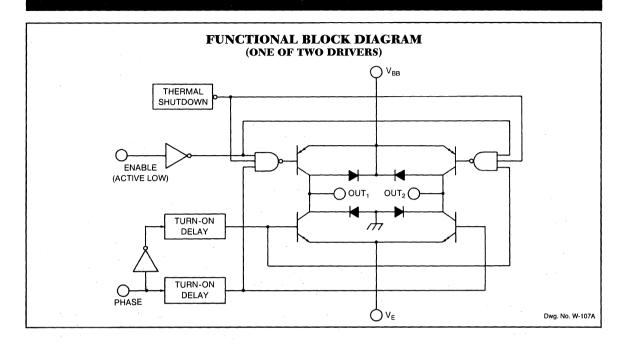



To maintain isolation between integrated circuit components and to provide for normal transistor operation, the ground tab must be connected to the most negative point in the external circuit.

#### TRUTH TABLE

ENABLE INPUT	PHASE INPUT	OUTPUT 1	OUTPUT 2
Low	High	High	Low
Low	Low	Low	High
High	High	Open	Low
High	Low	Low	Open

# 2998 **DUAL FULL-BRIDGE MOTOR DRIVER**


# ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $T_J$ ≤ +150°C, $V_{BB}$ = 50 V


	1		Limits				
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units	
Output Drivers							
Operating Voltage Range	V <sub>BB</sub>		10	_	50	٧	
Output Leakage Current	I <sub>CEX</sub>	V <sub>OUT</sub> = 50 V, V <sub>ENABLE</sub> = 2.0 V, Note 2	_	<5.0	50	μА	
		V <sub>OUT</sub> = 0, V <sub>ENABLE</sub> = 2.0 V, Note 2	_	<-5.0	-50	μА	
Output Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>OUT</sub> = 1 A, Sink Driver	-	1.2	1.4	٧	
		I <sub>OUT</sub> = 2 A, Sink Driver	_	1.7	1.9	٧	
		I <sub>OUT</sub> = -1 A, Source Driver	-	1.7	1.9	٧	
		I <sub>OUT</sub> = -2 A, Source Driver	_	2.0	2.2	٧	
Output Sustaining Voltage	V <sub>CE(sus)</sub>	I <sub>OUT</sub> = ±2 A, L = 3.5 mH, Note 2	50		_	V	
Source Driver Rise Time	t <sub>r</sub>	I <sub>OUT</sub> = -2 A		500		ns	
Source Driver Fall Time	t <sub>f</sub>	I <sub>OUT</sub> = -2 A	_	750	_	ns	
Deadtime	t <sub>d</sub>	I <sub>OUT</sub> = ±2 A	_	2.5		μs	
Clamp Diode Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 50 V	DUT = 50 V, V <sub>ENABLE</sub> = 2.0 V, Note 2		50	μА	
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 2 A	-	—       <5.0			
Supply Current	I <sub>BB</sub>	$V_{ENABLE(1)} = V_{ENABLE(2)} = 0.8 \text{ V}$	_	30	35	mA	

Logic Input Voltage	V <sub>IN(0)</sub>		_	_	8.0	٧
	V <sub>IN(1)</sub>		2.0			٧
Logic Input Current	I <sub>IN(0)</sub>	V <sub>PHASE</sub> or V <sub>ENABLE</sub> = 0.8 V	_	-5.0	-25	μΑ
	I <sub>IN(1)</sub>	V <sub>PHASE</sub> or V <sub>ENABLE</sub> = 2.0 V		<1.0	10	μА
Turn-On Delay Time	t <sub>pd0</sub>	ENABLE Input to Source Drivers	_	0.4	1.0	μs
Turn-Off Delay Time	t <sub>pd1</sub>	ENABLE Input to Source Drivers	_	2.0	4.0	μs


NOTES: 1. Each driver is tested separately.

2. Test is performed with  $V_{PHASE} = 0.8 \text{ V}$  and then repeated for  $V_{PHASE} = 2.0 \text{ V}$ . 3. Negative current is defined as coming out of (sourcing) the specified device pin.



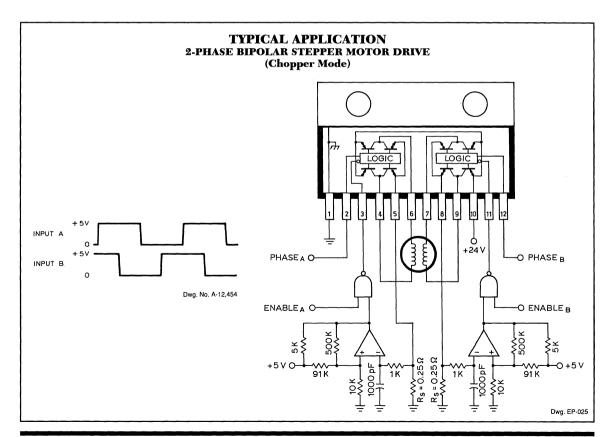

# POWER OPERATIONAL AMPLIFIER



As a combination general-purpose operational amplifier and power booster, Type ULN3751Z integrated circuit simplifies circuit design, reduces component count, and enhances system reliability.

This power op amp features high-impedance differential inputs, a unity-gain stable amplifier that needs no external compensation, and a high-current power output. Typical applications include use as voice-coil motor drivers, linear servo amplifiers, power oscillators, bipolar voltage regulators, and audio power drivers.

The ULN3751Z is for applications demanding up to  $\pm 3.5$  A of output current. It is furnished in a modified 5-lead JEDEC-style TO-220 plastic package. The heat sink tab is at substrate potential and must be insulated from ground when the device is used with a split supply.

#### **FEATURES**

- ±3 V to ±13 V Operation
- High Output Swing
- Peak Output Current to ±3.5 A
- Low Input Offset
- 90 dB Typical Open-Loop Gain
- Internal Thermal Shutdown
- High Common-Mode Input Range
- Unity Gain Stable
- Pin Compatible with L165, L465, SG1173

# ABSOLUTE MAXIMUM RATINGS at $T_A = +25^{\circ}C$


Always order by complete part number: **ULN3751Z**.

# 3751 POWER OPERATIONAL AMPLIFIER

# ELECTRICAL CHARACTERISTICS at $T_A$ = 25°C, $T_J$ $\leq$ +150°C, $V_S$ = $\pm 6.0~V$ (unless otherwise noted).

		Limits					
Characteristic	Test Conditions	Min.	Тур.	Max.	Units		
Functional Supply Voltage Range	+V <sub>S</sub> to -V <sub>S</sub>	6.0	_	26	V		
Quiescent Supply Current			40	60	mA		
Input Bias Current	$V_{IN} = 0$ , $I_{OUT} = 0$	_	-60	-1000	nA		
Input Offset Voltage	V <sub>IN</sub> = 0, I <sub>OUT</sub> = 0	_	±2.0	±10	mV		
Input Offset Current	V <sub>IN</sub> = 0, I <sub>OUT</sub> = 0		10	100	nA		
Input Noise Voltage <sup>†</sup>	BW = 40 Hz to 15 kHz		4.0	_	μV		
Input Noise Current <sup>†</sup>	BW = 40 Hz to 15 kHz	<u> </u>	60	_	pA		
Crossover Distortion <sup>†</sup>	$P_{OUT} = 50 \text{ mW}, R_L = 4\Omega$	_	<0.05		%		
Common Mode Rejection	$\Delta V_{CM} = 2 V$	60	85		dB		
Input Common Mode Range <sup>†</sup>	Positive	_	+V <sub>S</sub> - 2 V	_	V		
	Negative .	_	-V <sub>S</sub> - 0.3 V	_	V		
Open-Loop Voltage Gain	f = 0	80	90	_	dB		
Slew Rate	$V_{IN} = V_{OUT} = 6 \text{ Vpp, } R_L = \infty$	1.0	2.3		V/µs		
Gain-Bandwidth Product <sup>†</sup>	A <sub>V</sub> = 40 dB	T -	900		kHz		
Output Voltage Swing	I <sub>OUT</sub> = 1.0 A	4.5	4.7	_	V		
	I <sub>OUT</sub> = -1.0 A	-4.5	-4.7	_	V		
Supply Voltage Rejection	+V <sub>S</sub> , Δ V = 1 V	60	85	_	dB		
	-V <sub>S</sub> , Δ V = 1 V	60	80	_	dB		
Thermal Shutdown Temp.†		<b> </b>	160		°C		


<sup>&</sup>lt;sup>†</sup> Typical values given for circuit design information only.

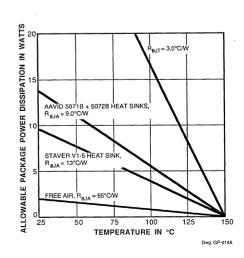


#### TYPICAL APPLICATIONS

#### **UNITY GAIN VOLTAGE FOLLOWER**

#### LINEAR VOLTAGE REGULATOR







Dwg. No. A-12,551

Dwg. No. A-12,553A

#### NON-INVERTING POWER AMPLIFIER

# HIGH-POWER LINEAR REGULATOR (Short-Circuit Protected)






Dwg. No. A-12,552

Dwg. No. A-12,554B


## 3751 <u>POWER OPERATIONAL AMPLIFIER</u>

#### TYPICAL APPLICATIONS

#### WIEN BRIDGE OSCILLATOR/MOTOR DRIVER




# VIDEO MONITOR VERTICAL DEFLECTION AMP.




Dwg. No. A-12,376B

Dwg. No. A-12,375A

# SIMPLIFIED SERVO APPLICATION WITH CONTROL TRANSFORMERS



#### SINGLE-ENDED POSITION SERVO WITH SENSE POTENTIOMETER




Dwg. No. A-14,250

Dwg. No. A-12,556

# 5703 AND 5706

# QUAD 2-INPUT PERIPHERAL/POWER DRIVERS —TRANSIENT-PROTECTED OUTPUTS

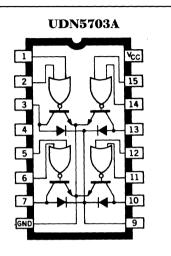

Dwg. No. A-9869

# ABSOLUTE MAXIMUM RATINGS at $T_A = +25$ °C

Supply Voltage, V <sub>CC</sub> 7.0 V
Input Voltage, V <sub>IN</sub>
Output Off-State Voltage,
V <sub>OFF</sub>
Output On-State Sink Current,
I <sub>ON</sub> 600 mA
Suppression Diode Off-StateVoltage,
11
V <sub>OFF</sub>
Suppression Diode On-State Current,
l <sub>ON</sub> 600 mA
Power Dissipation, P <sub>D</sub> 2.0 W*
Each Driver 0.8 W
Operating Free-Air Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C
*Derate at the rate of 16.7 mW/°C above

 $T_{\Delta} = +25^{\circ}C$ 

These 16-lead quad 2-input peripheral/power drivers are bipolar monolithic integrated circuits containing AND or OR logic gates, high-current switching transistors, and transient-suppression diodes on the same chip. The four output transistors are capable of simultaneously sinking 300 mA continuously at ambient temperatures of up to +70°C. In the OFF state, these drivers will withstand at least 80 V.

Series UDN5700A quad drivers are ideally suited for interface between low-level or high-level logic and high-current/high-voltage loads. Typical applications include driving peripheral loads such as incandescent lamps, light-emitting diodes, memories, and heaters.

The integral transient-suppression diodes allow their use with inductive loads such as relays, solenoids, or stepping motors without the need of discrete diodes.

Both devices are furnished in 16-pin DIP packages with copper leadframes for improved thermal characteristics. The UDN5703A is also available for operation between -40°C and +85°C. To order, change its prefix from 'UDN' to 'UDQ'.

#### **FEATURES**

- Two Logic Types
- DTL/TTL/PMOS/CMOS Compatible Inputs
- Low Input Current
- 300 mA Continuous Output Current
- Standoff Voltage of 80 V

Always order by complete part number:

Part Number	Description
UDN5703A	Quad OR Driver
UDN5706A	Quad AND Driver

# 5703 AND 5706 QUAD PERIPHERAL/POWER DRIVERS

#### RECOMMENDED OPERATING CONDITIONS

	Min.	Nom.	Max.	Units	
Supply Voltage (V <sub>CC</sub> )	4. 75	5.0	5.25	V	
Operating Temperature Range	0	+25	+85	°C	
Current into any output (ON state)	_		300	mA	

#### **ELECTRICAL CHARACTERISTICS over operating temperature range (unless otherwise noted).**

			Test Conditions			Limits					
Characteristic	Symbol	Temp.	v <sub>cc</sub>	Driven Input	Other Input	Output	Min.	Тур.	Max.	Units	Notes
"1" Input Voltage	V <sub>IN(1)</sub>	-	MIN	-	_	_	2.0			V	
"0" Input Voltage	V <sub>IN(0)</sub>	_	MIN	_	_		_	_	0.8	V	
"0" Input Current	I <sub>IN(0)</sub>		MAX	0.4 V	30 V	_	_	-50	-100	μА	2
"1" Input Current	I <sub>IN(1)</sub>		MAX	30 V	0 V	_			10	μА	2
Input Clamp Voltage	V <sub>LK</sub>	_	MIN	-12 mA		_	_	_	-1.5	٧	

## SWITCHING CHARACTERISTICS at $V_{CC} = 5.0 \text{ V}$ , $T_A = 25^{\circ}\text{C}$

				Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units	Notes
Turn-on Delay Time	t <sub>pd0</sub>	$V_S = 70 \text{ V}, R_L = 465 \Omega \text{ (10 Watts)},$ $C_L = 15 \text{ pF}$	-	200	500	ns	3
Turn-off Delay Time	t <sub>pd1</sub>	$V_S = 70 \text{ V}, R_L = 465 \Omega \text{ (10 Watts)},$ $C_L = 15 \text{ pF}$	_	300	750	ns	3

NOTES: 1. Typical values are at  $V_{CC} = 5.0 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

2. Each input tested separately.

3. Voltage values shown in the test circuit waveforms are with respect to network ground terminal.

4. Capacitance values specified include probe and test fixture capacitance.

#### INPUT PULSE CHARACTERISTICS

V <sub>IN(0)</sub> = 0 V	t <sub>f</sub> = 7 ns	t <sub>p</sub> = 1μs
$V_{IN(1)} = 3.5 \text{ V}$	$t_r = 14 \text{ ns}$	PRR = 500 kHz


# 5703 AND $5\overline{706}$ **QUAD PERIPHERAL/POWER DRIVERS**


#### **UDN5703A QUAD OR DRIVER ELECTRICAL CHARACTERISTICS** over operating temperature range (unless otherwise noted).


		Test Conditions						Limits				
Characteristic	Symbol	Temp.	v <sub>cc</sub>	Driven Input	Other Input	Output	Min.	Тур.	Max.	Units	Notes	
"1" Output Reverse Current	OFF		MIN	2.0 V	0 V	80 V			100	μА	_	
		_	OPEN	2.0 V	0 V	80 V		_	100	μА		
"0" Output Voltage	V <sub>ON</sub>	_	MIN	0.8 V	V8.0	150 mA	-	0.35	0.5	V	_	
		_	MIN	0.8 V	0.8V	300 mA		0.5	0.7	V	-	
Diode Leakage Current	I <sub>LK</sub>	NOM	NOM	0 V	0 V	OPEN		_	200	μА	3	
Diode Forward Voltage Drop	V <sub>D</sub>	NOM	NOM	V <sub>cc</sub>	V <sub>cc</sub>	_	_	1.5	1.75	V	4	
"1" Level Supply Current	l <sub>CC(1)</sub>	NOM	MAX	5.0 V	5.0 V	_	_	16	25	mA	1,2	
"0" Level Supply Current	l <sub>CC(0)</sub>	NOM	MAX	0 V	0 V	_		72	100	mA	1,2	

NOTES: 1. Typical values are at  $V_{CC} = 5.0 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

- 2. Per package
- 3. Diode leakage current measured at  $V_R = V_{off (min)}$ . 4. Diode forward voltage drop measured at  $I_r = 300$  mA.
- 5. Capacitance values specified include probe and test fixture capacitance.







Dwg. No. A-9123A

Dwg. No. A-7628C

Dwg. No. A-9869


## 5703 AND 5706 **QUAD PERIPHERAL/POWER DRIVERS**


#### **UDN5706A QUAD AND DRIVER ELECTRICAL CHARACTERISTICS over operating temperature range (unless otherwise noted).**


		Test Conditions									
Characteristic	Symbol	Temp.	v <sub>cc</sub>	Driven Input	Other Input	Output	Min.	Тур.	Max.	Units	Notes
"1" Output Reverse Current	l <sub>OFF</sub>		MIN	2.0 V	2.0 V	80 V	_		100	μΑ	_
			OPEN	2.0 V	2.0 V	80 V	_		100	μА	_
"0" Output Voltage	V <sub>ON</sub>		MIN	0.8 V	V <sub>cc</sub>	150 mA	_	0.35	0.5	V	_
			MIN	0.8 V	V <sub>cc</sub>	300 mA		0.5	0.7	٧	_
Diode Leakage Current	I <sub>LK</sub>	NOM	NOM	0 V	0 V	OPEN		_	200	μΑ	3
Diode Forward Voltage Drop	V <sub>D</sub>	NOM	NOM	V <sub>cc</sub>	V <sub>cc</sub>			1.5	1.75	٧	4
"1" Level Supply Current	I <sub>CC(1)</sub>	NOM	MAX	5.0 V	5.0 V		_	16	24	mA	1,2
"0" Level Supply Current	I <sub>CC(0)</sub>	NOM	MAX	0 V	0 V	_		70	98	mA	1,2

NOTES: 1. Typical values are at  $V_{CC} = 5.0 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

- 2. Per package
- 3. Diode leakage current measured at  $V_R = V_{off (min)}$ . 4. Diode forward voltage drop measured at  $I_f = 300$  mA.
- 5. Capacitance values specified include probe and test fixture capacitance.








Dwg. No. A-7878A

Dwg. No. A-7628C

Dwg. No. A-9866

# **DUAL PERIPHERAL AND POWER DRIVER** — TRANSIENT PROTECTED OUTPUTS



Dwg. No. A-9789

#### ABSOLUTE MAXIMUM RATINGS

Consta Valtage V
Supply Voltage, V <sub>CC</sub> 7.0 V
Input Voltage, V <sub>IN</sub> 30 V
Output Off-State Voltage,
V <sub>OFF</sub>
<del>-</del> .,
Output On-State Sink Current,
I <sub>ON</sub> 600 mA
Suppression Diode Off-State Voltage,
V <sub>OFF</sub>
=
Suppression Diode On-State Current,
I <sub>ON</sub> 600 mA
Power Dissipation at T <sub>A</sub> = 25°C, P <sub>D</sub>
Package 1.5 W*
Each Driver
Operating Free-Air Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C
-

\*Derate at the rate of 12.5 mW/°C above  $T_A = 25$ °C.

This "mini-DIP" dual peripheral and power driver is a bipolar monolithic integrated circuit incorporating NOR logic gates, high-current switching transistors, and transient suppression diodes on the same chip. The two output transistors are capable of simultaneously sinking 300 mA continuously at ambient temperatures of up to +70°C. In the OFF state, this driver will withstand at least 80 V.

The UDN5713M dual driver is ideally suited for interface between low-level or high-level logic and high-current/high-voltage loads. Typical applications include driving peripheral loads such as incandescent lamps, light-emitting diodes, memories, and heaters with a load current of up to 600 mA.

The integral transient suppression diodes allow the use of these drivers with inductive loads such as relays, solenoids, or stepping motors without the need for discrete diodes. Similar devices with four drivers per package are the 5703 and 5706.

#### **FEATURES**

- DTL/TTL/PMOS/CMOS Compatible Inputs
- Low Input Current
- 300 mA Continuous Output Current
- Stand-off Voltage of 80 V

Always order by complete part number, e.g., UDN5713M |

## 5713 DUAL PERIPHERAL AND POWER DRIVER

#### RECOMMENDED OPERATING CONDITIONS

	Min.	Nom.	Max.	Units	
Supply Voltage (V <sub>CC</sub> )	4.75	5.0	5.25	V	
Operating Temperature Range	. 0	+25	+85	°C	
Current into any output (ON state)		_	300	mA	

#### ELECTRICAL CHARACTERISTICS over operating temperature range (unless otherwise noted).

		Test Conditions					Limits				
Characteristic	Symbol	Temp.	v <sub>cc</sub>	Driven Input	Other Input	Output	Min.	Тур.	Max.	Units	Notes
"1" Input Voltage	V <sub>IN(1)</sub>	_	MIN	_	_	_	2.0	_	_	· V	
"0" Input Voltage	V <sub>IN(0)</sub>		MIN		_	_		_	0.8	٧	_
"0" Input Current at all Inputs except Strobe	I <sub>IN(0)</sub>	_	MAX	0.4 V	30 V	_	_	-50	-100	μА	2
"0" Input Current at Strobe	I <sub>IN(0)</sub>	_	MAX	0.4 V	30 V	_	_	-100	-200	μА	-
"1" Input Current at all Inputs except Strobe	   <sub>IN(1)</sub>	_	MAX	30 V	0 V	_	_	_	10	μА	2
"1" Input Current at Strobe	I <sub>IN(1)</sub>	_	MAX	30 V	0 V	_	_	_	20	μА	_
Input Clamp Voltage	V <sub>IK</sub>	_	MIN	-12 mA	_	_	_	_	-1.5	٧	_

## SWITCHING CHARACTERISTICS at $V_{CC} = 5.0 \text{ V}$ , $T_A = 25^{\circ}\text{C}$

				Limits					
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units	Notes		
Turn-on Delay Time	t <sub>pd0</sub>	$V_S = 70 \text{ V}, R_L = 465 \Omega \text{ (10 Watts)},$ $C_L = 15 \text{ pF}$	_	200	500	ns	3		
Turn-off Delay Time	t <sub>pd1</sub>	$V_S = 70 \text{ V}, R_L = 465 \Omega \text{ (10 Watts)},$ $C_L = 15 \text{ pF}$	-	300	750	ns	3		

NOTES: 1. Typical values are at  $V_{CC} = 5.0 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

2. Each input tested separately.

3. Voltage values shown in the test circuit waveforms are with respect to network ground terminal.

4. Capacitance values specified include probe and test fixture capacitance.

#### **INPUT PULSE CHARACTERISTICS**

$V_{IN(0)} = 0 V$	t <sub>f</sub> = 7 ns	t <sub>p</sub> = 1 μs
$V_{IN(1)} = 3.5 \text{ V}$	t <sub>r</sub> = 14 ns	PRR = 500 kHz


## 5713 DUAL PERIPHERAL AND POWER DRIVER

#### **ELECTRICAL CHARACTERISTICS** over operating temperature range (unless otherwise noted).


			Test Conditions						Limits				
Characteristic	Symbol	Temp.	v <sub>cc</sub>	Driven Input	Other Input	Output	Min.	Тур.	Max.	Units	Notes		
"1" Output Reverse Current	l <sub>OFF</sub>		MIN	2.0 V	0 V	80 V		_	100	μА	-		
		_	OPEN	2.0 V	0 V	80 V	_		100	μА	_		
"0" Output Voltage	V <sub>ON</sub>	_	MIN	0.8 V	0.8 V	150 mA	_	0.35	0.5	٧	_		
		-	MIN	0.8 V	0.8 V	300 mA		0.5	0.7	٧	_		
Diode Leakage Current	I <sub>LK</sub>	NOM	NOM	0 V	0 V	OPEN		_	200	μА	3		
Diode Forward Voltage Drop	V <sub>D</sub>	NOM	NOM	V <sub>cc</sub>	V <sub>cc</sub>	_	_	1.5	1.75	٧	4		
"1" Level Supply Current	l <sub>CC(1)</sub>	NOM	MAX	5.0 V	5.0 V	_	_	8.0	13	mA	1,2		
"0" Level Supply Current	l <sub>CC(0)</sub>	NOM	MAX	0 V	0 V			36	50	mA	1, 2		

NOTES: 1. Typical values are at  $V_{CC} = 5.0 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

- 2. Per package.
- 3. Diode leakage current measured at  $V_{\rm p}$  = 80 V.
- 4. Diode forward voltage drop measured at  $I_F = 300$  mA.
- 5. Capacitance values specified include probe and test fixture capacitance.



Dwg. No. A-9123A



Dwg. No. A-7628C

## UCN5800L 14 UCN5800A CLEAR 1 V<sub>DD</sub> 13 LOGIC SUPPLY STROBE 2 IN<sub>1</sub> 3 12 OUT OUT<sub>2</sub> 11 IO OUT OUT GROUND 7 COMMON

Dwg No A-10 499D

#### **ABSOLUTE MAXIMUM RATINGS** at +25°C Free-Air Temperature

Output Voltage, V <sub>CE</sub> 50 V
Supply Voltage, V <sub>DD</sub> 15 V
Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>DD</sub> + 0.3 V
Continuous Collector Current,
l <sub>C</sub>
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C

Note that the UCN5800A (dual in-line package) and UCN5800L (small-outline IC package) are electrically identical and share a common pin number assignment.

Caution: CMOS devices have input static protection but are susceptible to damage when exposed to extremely high static electrical charges.

## **BIMOS II LATCHED DRIVERS**

The UCN5800A/L and UCN5801A/EP latched-input BiMOS ICs merge high-current, high-voltage outputs with CMOS logic. The CMOS input section consists of 4 or 8 data ('D' type) latches with associated common CLEAR, STROBE, and OUTPUT ENABLE circuitry. The power outputs are bipolar npn Darlingtons. This merged technology provides versatile, flexible interface. These BiMOS power interface ICs greatly benefit the simplification of computer or microprocessor I/O. The UCN5800A and UCN5800L each contain four latched drivers; the UCN5801A and UCN5801EP contain eight latched drivers.

The UCN5800A/L and UCN5801A/EP supersede the original BiMOS latched-input driver ICS (UCN4400A and UCN4801A). These second-generation devices are capable of much higher data input rates and will typically operate at better than 5 MHz with a 5 V logic supply. Circuit operation at 12 V affords substantial improvement over the 5 MHz figure.

The CMOS inputs are compatible with standard CMOS and NMOS circuits. TTL circuits may mandate the addition of input pull-up resistors. The bipolar Darlington outputs are suitable for directly driving many peripheral/power loads: relays, lamps, solenoids, small dc motors, etc.

All devices have open-collector outputs and integral diodes for inductive load transient suppression. The output transistors are capable of sinking 500 mA and will withstand at least 50 V in the OFF state. Because of limitations on package power dissipation, the simultaneous operation of all drivers at maximum rated current can only be accomplished by a reduction in duty cycle. Outputs may be paralleled for higher load current capability.


The UCN5800A is furnished in a standard 14-pin DIP; the UCN5800L in a surface-mountable SOIC: the UCN5801A in a 22-pin DIP with 0.400" (10.16 mm) row centers; the UCN5801EP in a 28-lead PLCC. All devices are also available for operation between -40°C and +85°C. To order, change the prefix from 'UCN' to 'UCQ'.

#### **FEATURES**


- 4.4 MHz Minimum Data Input Rate
- High-Voltage, High-Current Outputs
- Output Transient Protection
- CMOS, NMOS, TTL Compatible Inputs
- Internal Pull-Down Resistors
- Low-Power CMOS Latches

Always order by complete part number: UCN5801EP .


# 5800 AND 5801 Bimos II Latched Drivers

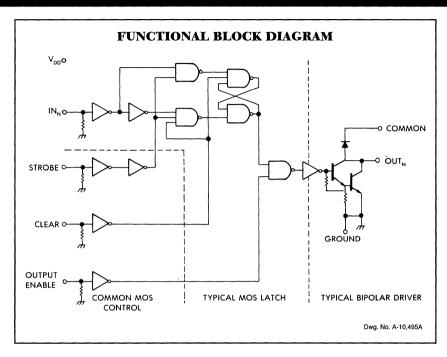

#### **UCN5801A**



Dwg. No. A-10,498D

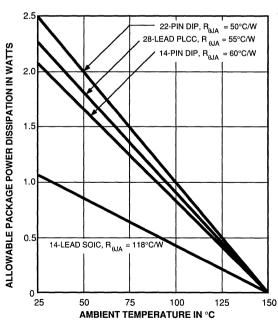

Dwg. No. GP-023


## 5800 AND 5801 BIMOS II LATCHED DRIVERS

# ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $V_{DD}$ = 5 V (unless otherwise noted).


	l i			L	imits.	
Characteristic	Symbol	Test Conditions	Min.	Тур.	Мах.	Units
Output Leakage Current	I <sub>CEX</sub>	V <sub>CE</sub> = 50 V, T <sub>A</sub> = +25°C		_	50	μΑ
		V <sub>CE</sub> = 50 V, T <sub>A</sub> = +70°C	_		100	μА
Collector-Emitter	V <sub>CE(SAT)</sub>	I <sub>C</sub> = 100 mA	_	0.9	1.1	V
Saturation Voltage		I <sub>C</sub> = 200 mA	_	1.1	1.3	٧
		I <sub>C</sub> = 350 mA, V <sub>DD</sub> = 7.0 V	_	1.3	1.6	٧
Input Voltage	V <sub>IN(0)</sub>		_		1.0	V
	V <sub>IN(1)</sub>	V <sub>DD</sub> = 12 V	10.5	_	_	٧
		V <sub>DD</sub> = 10 V	8.5		_	٧
		V <sub>DD</sub> = 5.0 V (See Note)	3.5	_	_	V
Input Resistance	R <sub>IN</sub>	V <sub>DD</sub> = 12 V	50	200	_	kΩ
		V <sub>DD</sub> = 10 V	50	300	_	kΩ
		$V_{DD} = 5.0 \text{ V}$	50	600		kΩ
Supply Current	I <sub>DD(ON)</sub>	V <sub>DD</sub> = 12 V, Outputs Open		1.0	2.0	mA
	(Each Stage)	V <sub>DD</sub> = 10 V, Outputs Open	_	0.9	1.7	mA
	",	V <sub>DD</sub> = 5.0 V, Outputs Open	_	0.7	1.0	mA
	I <sub>DD(OFF)</sub>	V <sub>DD</sub> = 12 V, Outputs Open, Inputs = 0 V		_	200	μА
	(Total)	$V_{DD} = 5.0 \text{ V}$ , Outputs Open, Inputs = 0 V	_	50	100	μА
Clamp Diode Leakage Current	I <sub>R</sub>	$V_{R} = 50 \text{ V}, T_{A} = +25^{\circ}\text{C}$			50	μΑ
Leakage Current		$V_{R} = 50 \text{ V}, T_{A} = +70^{\circ}\text{C}$	_	_	100	μΑ
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 350 mA	_	1.7	2.0	V

NOTE: Operation of these devices with standard TTL or DTL may require the use of appropriate pull-up resistors to insure a minimum logic "1".

#### TYPICAL INPUT CIRCUIT




#### UCN5801EP



Dwg. No. A-12,520

Dwg. No. PP-037

# 5800 AND 5801 Bimos II LATCHED DRIVERS

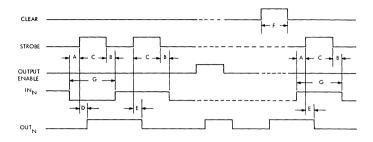

Dwg. No. A-10,895A

# TIMING CONDITIONS (Logic Levels are $V_{\rm DD}$ and Ground)

A.	Minimum Data Active Time Before Strobe Enabled (Data Set-Up Time)
В.	Minimum Data Active Time After Strobe Disabled (Data Hold Time)
C.	Minimum Strobe Pulse Width
D.	Typical Time Between Strobe Activation and Output On to Off Transition
E.	Minimum Time Between Strobe Activation and Output Off to On Transition
F.	Minimum Clear Pulse Width
G.	Minimum Data Pulse Width

Information present at an input is transferred to its latch when the STROBE is high. A high CLEAR input will set all latches to the output OFF condition regardless of the data or STROBE input levels. A high OUTPUT ENABLE will set all outputs to the OFF condition, regardless of any other input conditions. When the OUTPUT ENABLE is low, the outputs depend on the state of their respective latches.

#### TRUTH TABLE


			OUTPUT OUT <sub>IN</sub>		T <sub>IN</sub>
IN <sub>N</sub>	STROBE	CLEAR	ENABLE	t-1	t
0	1	0	0	Х	OFF
1	1	0	0	Χ	ON
X	X	1	X	Х	OFF
X	X	Х	1	Х	OFF
Х	0	0	0	ON	ON
X	0	0	0	OFF	OFF

X = irrelevant

t-1 = previous output state

t = present output state

# TYPICAL APPLICATION UNIPOLAR STEPPER-MOTOR DRIVE

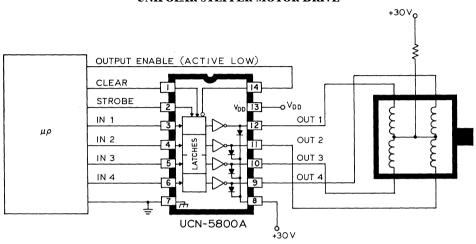


Dwg. No. B-1537

#### UNIPOLAR WAVE DRIVE

# 

#### **UNIPOLAR 2-PHASE DRIVE**



Dwg. No. A-11,446


Dwg. No. A-11,447

OUT 3 -

OUT 4 ----

# 5804

# Bimos II Unipolar Stepper-motor translator/driver



Dwg. No. W-194

#### **ABSOLUTE MAXIMUM RATINGS**

Output Voltage, V <sub>CE</sub>
V <sub>CE (sus)</sub>
Output Sink Current, I <sub>OUT</sub> 1.5 A
Logic Supply Voltage, V <sub>DD</sub> 7.0 V
Input Voltage, V <sub>IN</sub> 7.0 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C

Combining low-power CMOS logic with high-current and highvoltage bipolar outputs, the UCN5804B BiMOS II translator/driver provides complete control and drive for a four-phase unipolar stepper-motor with continuous output current ratings to 1.25 A per phase (1.5 A startup) and 35 V.

The CMOS logic section provides the sequencing logic, DIRECTION and OUTPUT ENABLE control, and a power-ON reset function. Three stepper-motor drive formats, wave-drive (one-phase), two-phase, and half-step are externally selectable. The inputs are compatible with standard CMOS, PMOS, and NMOS circuits. TTL or LSTTL may require the use of appropriate pull-up resistors to ensure a proper input-logic high.

The wave-drive format consists of energizing one motor phase at a time in an A-B-C-D (or D-C-B-A) sequence. This excitation mode consumes the least power and assures positional accuracy regardless of any winding inbalance in the motor. Two-phase drive energizes two adjacent phases in each detent position (AB-BC-CD-DA). This sequence mode offers an improved torque-speed product, greater detent torque, and is less susceptible to motor resonance. Half-step excitation alternates between the one-phase and two-phase modes (A-AB-B-BC-C-CD-D-DA), providing an eight-step sequence.

The bipolar outputs are capable of sinking up to 1.5 A and withstanding 50 V in the OFF state (sustaining voltages up to 35 V). Ground clamp and flyback diodes provide protection against inductive transients. Thermal protection circuitry disables the outputs when the chip temperature is excessive.


The UCN5804B is rated for operation over the temperature range of  $-20^{\circ}$ C to  $+85^{\circ}$ C. It is supplied in a 16-pin dual in-line plastic batwing package with a copper lead frame and heat-sinkable tabs for improved power dissipation capabilities.

#### **FEATURES**

- 1.5 A Maximum Output Current
- 35 V Output Sustaining Voltage
- Wave-Drive, Two-Phase, and Half-Step Drive Formats
- Internal Clamp Diodes
- Output Enable and Direction Control
- Power-ON Reset
- Internal Thermal Shutdown Circuitry


Always order by complete part number: UCN5804B .

# 5804 Bimos II unipolar stepper-motor translator/driver




Dwg. No. GP-010B

#### TYPICAL INPUT CIRCUIT



vg. No. EP-010-5

#### TYPICAL OUTPUT DRIVER



Dwg. No. EP-021-4

#### TRUTH TABLE


Drive Format	Pin 9	Pin 10
Two-Phase	L	L
One-Phase	Н	L
Half-Step	L	Н
Step-Inhibit	Н	Н

# 5804 Bimos II unipolar stepper-motor translator/driver

# ELECTRICAL CHARACTERISTICS at $T_A$ = 25°C, $T_J$ $\leq$ 150°C, $V_{DD}$ = 4.5 V to 5.5 V (unless otherwise noted).

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	V <sub>OUT</sub> = 50 V	_	10	50	μА
Output Sustaining Voltage	V <sub>CE(sus)</sub>	I <sub>OUT</sub> = 1.25 A, L = 3 mH	35			V
Output Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>OUT</sub> = 700 mA		1.0	1.2	V
		I <sub>OUT</sub> = 1 A		1.1	1.4	V
		I <sub>OUT</sub> = 1.25 A	_	1.2	1.5	V
Clamp Diode Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 50 V	_	10	50	μА
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 1.25 A		1.5	3.0	V
Input Current	I <sub>IN(1)</sub>	$V_{IN} = V_{DD}$		0.5	5.0	μА
	I <sub>IN(0)</sub>	V <sub>IN</sub> = 0.8 V	_	-0.5	-5.0	μΑ
Input Voltage	V <sub>IN(1)</sub>	V <sub>DD</sub> = 5 V	3.5		5.3	V
	V <sub>IN(0)</sub>		-0.3	_	0.8	V
Supply Current	I <sub>DD</sub>	2 Outputs ON	_	20	30	mA
Turn-Off Delay	t <sub>ON</sub>	50% Step Inputs to 50% Output			10	μs
Turn-On Delay	t <sub>OFF</sub>	50% Step Inputs to 50% Output			10	μs
Thermal Shutdown Temperature	T <sub>J</sub>			165		°C

#### **TIMING CONDITIONS**

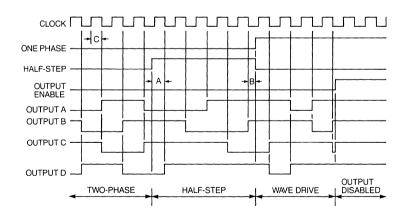

Dwg. No. W-110A

A. Minimum Data Set Up Time	100 ns
B. Minimum Data Hold Time	100 ns
C. Minimum Sten Input Pulse Width	500 ns

# **5804**

# Bimos II Unipolar Stepper-motor translator/driver

← DIRECTION = 1

#### APPLICATIONS INFORMATION

Internal power-ON reset (POR) circuitry resets OUTPUT<sub>A</sub> (and OUTPUT<sub>D</sub> in the two-phase drive format) to the ON state with initial application of the logic supply voltage. After reset, the circuit then steps according to the tables.

The outputs will advance one sequence position on the high-to-low transition of the STEP INPUT pulse. Logic levels on the HALF-STEP and ONE-PHASE inputs will determine the drive format (one-phase, two-phase, or half-step). The DIRECTION pin determines the rotation sequence of the outputs. Note that the STEP INPUT must be in the low state when changing the state of ONE-PHASE, HALFSTEP, or DIRECTION to prevent erroneous stepping.

All outputs are disabled (OFF) when OUT-PUT ENABLE is at a logic high. If the function is not required, OUTPUT ENABLE should be tied low. In that condition, all outputs depend only on the state of the step logic.

During normal commutation of a unipolar stepper motor, mutual coupling between the motor windings can force the outputs of the UCN5804B below ground. This condition will cause forward biasing of the collector-tosubstrate junction and source current from the output. For many L/R applications, this substrate current is high enough to adversely affect the logic circuitry and cause misstepping. External series diodes (Schottky are recommended for increased efficiency at low voltage operation) will prevent substrate current from being sourced through the outputs. Alternatively, external ground clamp diodes will provide a preferred current path from ground when the outputs are pulled below around.

Internal thermal protection circuitry disables all outputs when the junction temperature reaches approximately 165°C. The outputs are enabled again when the junction cools down to approximately 145°C.

#### WAVE-DRIVE SEQUENCE

	Half Step	= L, One F	Phase = H	
Step	Α	В	С	D
POR	ON	OFF	OFF	OFF
1	ON	OFF	OFF	OFF
2	OFF	ON	OFF	OFF
3	OFF	OFF	ON	OFF
4	OFF	OFF	OFF	ON
	POR 1 2 3	Step         A           POR         ON           1         ON           2         OFF           3         OFF	Step         A         B           POR         ON         OFF           1         ON         OFF           2         OFF         ON           3         OFF         OFF	POR ON OFF OFF  1 ON OFF OFF  2 OFF ON OFF  3 OFF OFF ON

#### TWO-PHASE DRIVE SEQUENCE


Cton				
этер	Α	В	С	D
POR	ON	OFF	OFF	ON
1	ON	OFF	OFF	ON
2	ON-	ON	OFF	OFF
3	OFF	ON	ON	OFF
4	OFF	OFF	ON	ON
	1 2 3	POR ON 1 ON 2 ON 3 OFF	POR ON OFF 1 ON OFF 2 ON ON 3 OFF ON	POR         ON         OFF         OFF           1         ON         OFF         OFF           2         ON         ON         OFF           3         OFF         ON         ON

#### HALF-STEP DRIVE SEQUENCE

		Half Step	= H, One F	Phase = L	
	Step	Α	В	С	D
	POR	ON	OFF	OFF	OFF
	1	ON	OFF	OFF	OFF
	2	ON	ON	OFF	OFF
- 1	3	OFF	ON	OFF	OFF
	4	OFF	ON	ON	OFF
5	5	OFF	OFF	ON	OFF
	6	OFF	OFF	ON	ON
	7	OFF	OFF	OFF	ON
	8	ON	OFF	OFF	ON

**→DIBECTION - H** 


# TYPICAL APPLICATION L/R STEPPER-MOTOR DRIVE

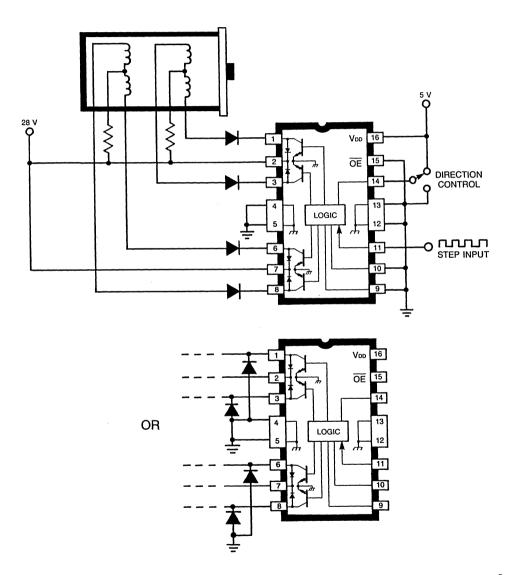

Dwg. No. EP-029A

# 5810-F

# **BIMOS II 10-BIT SERIAL-INPUT,** LATCHED SOURCE DRIVERS WITH ACTIVE DMOS PULL-DOWNS



Dwa. No. PP-029

#### ABSOLUTE MAXIMUM RATINGS at $T_A = 25^{\circ}C$

Logic Supply Voltage, V <sub>DD</sub> 15 V
Driver Supply Voltage, V <sub>BB</sub> 60 V
(suffix '-1') 80 V
Continuous Output CurrentRange,
l <sub>OUT</sub> 40 to +15 mA
Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>DD</sub> + 0.3 V
Package Power Dissipation, Pp
(UCN5810AF)
(UCN5810EPF) 1.78 W*
(UCN5810LWF) 1.56 W*
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,

\*Derate linearly to 0 W at +150°C.

Caution: CMOS devices have input static protection but are susceptible to damage when exposed to extremely high static electrical charges.

T<sub>S</sub> . . . . . . . . . . . -55°C to +150°C

Note that the UCN5810AF (dual in-line package) and UCN5810LWF (small-outline IC package) are electrically identical and share a common pin number assignment.

The UCN5810AF, UCN5810EPF, and UCN5810LWF combine a 10-bit CMOS shift register and accompanying data latches, control circuitry, bipolar sourcing outputs with DMOS active pull-downs. Designed primarily to drive vacuum-fluorescent displays, the 60 V and -40 mA output ratings also allow these devices to be used in many other peripheral power driver applications. Selected devices (suffix '-1') have maximum output ratings of 80 V. The UCN5810AF/EPF/LWF feature reduced supply requirements (active DMOS pull-downs) and lower saturation voltages when compared with the original UCN5810A.

The CMOS shift register and latches allow direct interfacing with microprocessor-based systems. With a 5 V logic supply, serial-data input rates are typically over 5 MHz, with significantly higher speeds obtainable at 12 V. Use with TTL may require appropriate pull-up resistors to insure an input logic high.

A CMOS serial data output enables cascade connections in applications requiring additional drive lines. Similar devices are available as the UCN5811A (12 bits), UCN5812AF/EPF (20 bits) and UCN5818AF/ EPF (32 bits).

The UCN5810AF/EPF/LWF output source drivers are NPN Darlingtons capable of sourcing up to 40 mA. The DMOS active pull-downs are capable of sinking up to 15 mA. For inter-digit blanking, all of the output drivers can be disabled and the DMOS sink drivers turned on by the BLANKING input high.

The UCN5810AF is furnished in an 18-pin dual in-line plastic package. The UCN5810EPF is furnished in a 20-lead plastic chip carrier. The UCN5810LWF is furnished in a wide-body, small-outline plastic package (SOIC) with gull-wing leads and 0.300" lead row spacing. Copper lead frames, reduced supply current requirements, and lower output saturation voltages allow all devices to source 25 mA from all outputs continuously, over the entire operating temperature range. All 60 V devices (without the '-1' suffix) are also available for operation between -40°C and +85°C. To order, change the prefix from 'ÚCN' to 'UCQ'.


#### **FEATURES**

- High-Speed Source Drivers
- 60 V or 80 V Minimum Output Breakdown
- Active DMOS Pull-Downs
- Low Output Saturation Voltages
- Low-Power CMOS Logic and Latches
- 3.3 MHz Minimum Data Input Rate
- Improved Replacements for TL4810B

Always order by complete part number, e.g., UCN5810AF-1.

## 5810-F 10-BIT SERIAL-INPUT, LATCHED SOURCE DRIVERS WITH ACTIVE DMOS PULL-DOWNS


#### UCN5810EPF




Dwg. No. A-14,354

# FUNCTIONAL BLOCK DIAGRAM CLOCK C SERIAL DATA IN SERIAL PARALLEL SHIFT REGISTER SERIAL DATA OUT STROBE O LATCHES BLANKING O OVEN

#### **UCN5810LWF**




Dwg. PP-029-1




Dwg. No. GP-024A

#### TYPICAL INPUT CIRCUIT



Dwg. No. EP-010-4A\*

#### TYPICAL OUTPUT DRIVER



Dwg. No. A-14,219

## 5810-F 10-BIT SERIAL-INPUT, LATCHED SOURCE DRIVERS WITH ACTIVE DMOS PULL-DOWNS


# ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $V_{BB}$ = 60 V (UCN5810AF/EPF/LWF) or 80 V (suffix '-1') unless otherwise noted.

			Limits	@ V <sub>DD</sub>	= 5 V	Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Min.	Тур.	Мах.	Units
Output Leakage Current	I <sub>CEX</sub>	V <sub>OUT</sub> = 0 V, T <sub>A</sub> = +70°C	_	-5.0	-15	_	-5.0	-15	μА
Output Voltage	V <sub>OUT(1)</sub>	I <sub>OUT</sub> = -25 mA, V <sub>BB</sub> = 60 V	58	58.5		58	58.5	_	V
		I <sub>OUT</sub> = -25 mA, V <sub>BB</sub> = 80 V*	78	78.5	_	78	78.5	_	٧
	V <sub>OUT(0)</sub>	I <sub>OUT</sub> = 1 mA	1-	1.0	1.5	_	_	_	V
		I <sub>OUT</sub> = 2 mA				_	1.0	1.5	V
Output Pull-Down Current	I <sub>OUT(0)</sub>	V <sub>OUT</sub> = 5 V to V <sub>BB</sub>	2.0	3.5		-		_	mA
		V <sub>OUT</sub> = 20 V to V <sub>BB</sub>	1-	_		8.0	13	_	mA
Input Voltage	V <sub>IN(1)</sub>		3.5		5.3	10.5		12.3	V
	V <sub>IN(0)</sub>		-0.3	_	+0.8	-0.3	_	+0.8	٧
Input Current	I <sub>IN(1)</sub>	$V_{IN} = V_{DD}$			100			240	μА
	I <sub>IN(0)</sub>	V <sub>IN</sub> = 0.8 V	-	-0.05	-0.5		-0.1	-1.0	μА
Serial Data Output Voltage	V <sub>OUT(1)</sub>	I <sub>OUT</sub> = -200 μA	4.5	4.7	_	11.7	11.8		٧
	V <sub>OUT(0)</sub>	I <sub>OUT</sub> = 200 μA	T-	200	250	_	100	200	mV
Maximum Clock Frequency	f <sub>clk</sub>		3.3	5.0			7.5	_	MHz
Supply Current	I <sub>DD(1)</sub>	All Outputs High	T -	100	300		200	500	μА
	I <sub>DD(0)</sub>	All Outputs Low	-	100	300	_	200	500	μА
	I <sub>BB(1)</sub>	Outputs High, No Load	T -	0.7	2.0	_	0.7	2.0	mA
	I <sub>BB(0)</sub>	Outputs Low	T -	10	100	_	10	100	μА
Blanking to Output Delay	t <sub>PHL</sub>	C <sub>L</sub> = 30 pF, 50% to 50%	-	2000		_	1000	_	ns
	t <sub>PLH</sub>	C <sub>L</sub> = 30 pF, 50% to 50%	-	1000		_	850	_	ns
Output Fall Time	t <sub>f</sub>	C <sub>L</sub> = 30 pF, 90% to 10%	_	1450		_	650		ns
Output Rise Time	t <sub>r</sub>	C <sub>L</sub> = 30 pF, 10% to 90%		650			700		ns

Negative current is defined as coming out of (sourcing) the specified device pin.

 $<sup>^{\</sup>star}$  UCN5810AF-1, UCN5810EPF-1, and UCN5810LWF-1 only.

## 5810-F 10-BIT SERIAL-INPUT, LATCHED SOURCE DRIVERS WITH ACTIVE DMOS PULL-DOWNS

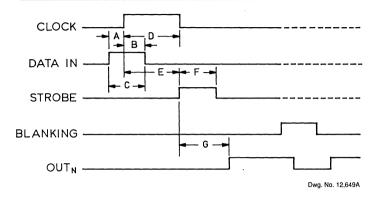

TIMING CONDITIONS ( $T_A = +25^{\circ}C$ , Logic Levels are  $V_{pp}$  and Ground)

 V<sub>DD</sub> = 5.0 V

 A. Minimum Data Active Time Before Clock Pulse (Data Set-Up Time).
 75 ns

 B. Minimum Data Active Time After Clock Pulse (Data Hold Time).
 75 ns

 C. Minimum Data Pulse Width
 150 ns

 D. Minimum Clock Pulse Width
 150 ns

 E. Minimum Time Between Clock Activation and Strobe
 300 ns

 F. Minimum Strobe Pulse Width
 100 ns

 G. Typical Time Between Strobe Activation and Output Transistion
 500 ns

Serial Data present at the input is transferred to the shift register on the logic "0" to logic "1" transition of the CLOCK input pulse. On succeeding CLOCK pulses, the registers shift data information towards the SERIAL DATA OUTPUT. The SERIAL DATA must appear at the input prior to the rising edge of the CLOCK input waveform.

Information present at any register is transferred to the respective latch when the STROBE is high (serial-to-parallel conversion). The latches will continue to accept new data as long as the STROBE is held high. Applications where the latches are bypassed (STROBE tied high) will require that the BLANKING input be high during serial data entry.

When the BLANKING input is high, the output source drivers are disabled (OFF); the DMOS sink drivers are ON. The information stored in the latches is not affected by the BLANKING input. With the BLANKING input low, the outputs are controlled by the state of their respective latches.

#### TRUTH TABLE

Serial		Shift Register Contents				- 1 1					Lat	ch (	Conte	ents			Output Contents						
Data Input	Clock		l <sub>2</sub>	l <sub>3</sub>		I <sub>N-1</sub>	I <sub>N</sub>	Data Output	Strobe Input	i <sub>1</sub>	l <sub>2</sub>	I <sub>3</sub>		I <sub>N-1</sub>	I <sub>N</sub>	Bianking	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>		I <sub>N-1</sub>	I <sub>N</sub>	
Н	۲	Н	R <sub>1</sub>	R <sub>2</sub>		R <sub>N-2</sub>	R <sub>N-1</sub>	R <sub>N-1</sub>															
L	7	L	R <sub>1</sub>	R <sub>2</sub>		R <sub>N-2</sub>	R <sub>N-1</sub>	R <sub>N-1</sub>															
Х	L	$R_1$	R <sub>2</sub>	$R_3$		R <sub>N-1</sub>	R <sub>N</sub>	R <sub>N</sub>															
		Х	Х	Х		Х	Х	X	L	R <sub>1</sub>	R <sub>2</sub>	R <sub>3</sub>		R <sub>N-1</sub>	$R_N$								
		$P_1$	P <sub>2</sub>	P <sub>3</sub>		P <sub>N-1</sub>	P <sub>N</sub>	P <sub>N</sub>	Н	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>		P <sub>N-1</sub>	$P_N$	L	P <sub>1</sub>	P <sub>2</sub>	$P_3$		P <sub>N-1</sub>	P <sub>N</sub>	
								}		Х	Х	Х		Х	Х	Н	L	L	L		L	L	

 $L = Low\ Logic\ Level \quad H = High\ Logic\ Level \quad X = Irrelevant \quad P = Present\ State \quad R = Previous\ State$ 

# 5811

# BiMOS II 12-BIT SERIAL-INPUT, LATCHED SOURCE DRIVER

Designed primarily for use with vacuum-fluorescent displays, the UCN5811A smart power BiMOS II driver features low-output saturation voltages and high output switching speed. These devices contain CMOS shift registers, data latches, and control circuitry, and bipolar high-speed sourcing outputs with DMOS active pull-down circuitry. The high-speed shift register and data latches allow direct interface with microprocessor-based systems. A CMOS serial data output enables cascade connections in applications requiring additional drive lines.


The UCN5811A features 60 V and -40 mA output ratings, allowing it to be used in many other peripheral power driver applications. It can be used as an improved replacement for the SN75512B. The Allegro devices do not require special power-up sequencing.

The UCN5811A has been designed with BiMOS II logic for improved data entry rates. With a 5 V supply, it will typically operate above 5 MHz. At 12 V, significantly higher speeds are obtained. Use of this device with TTL may require the use of appropriate pull-up resistors to ensure a proper input logic high.

This device is supplied in a 20-pin plastic dual in-line package. It can be operated over the ambient temperature range of -20°C to +85°C. Copper lead frames and low output saturation voltages allow all outputs to be operated at 25 mA continuously at ambient temperatures of up to 76°C.

#### **FEATURES**

- 3.3 MHz Guaranteed Data Input Rate
- Low-Power CMOS Logic and Latches
- **High-Speed Source Drivers**
- Active Pull-Downs
- Low-Output Saturation Voltages
- Improved Replacement for SN75512B




Dwa. No. W-180


#### ABSOLUTE MAXIMUM RATINGS at $T_{\cdot} = 25^{\circ}C$

A.
Logic Supply Voltage, $V_{DD}$ 15 V
Driver Supply Voltage, V <sub>BB</sub> 60 V
Continuous Output Current,
I <sub>OUT</sub> 40 to +25 mA
Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>DD</sub> +0.3 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C


Always order by complete part number: **UCN5811A**.

# 5811 Bimos II 12-BIT SERIAL-INPUT, LATCHED SOURCE DRIVER

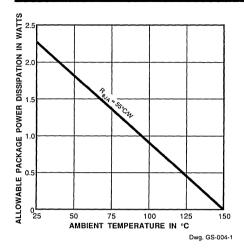

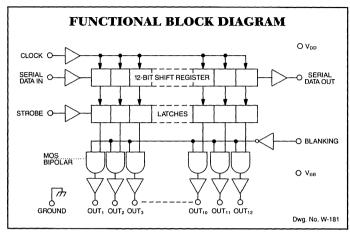


#### TYPICAL INPUT CIRCUIT




Dwg. No. A-13,035

#### TYPICAL OUTPUT DRIVER



#### **TIMING WAVESHAPES**



Dwg. No. W-184


# 5811 Bimos II 12-BIT SERIAL-INPUT, LATCHED SOURCE DRIVER

# ELECTRICAL CHARACTERISTICS at $T_A = +25$ °C, $V_{BB} = 60$ V unless otherwise noted.

			Limits @ V <sub>DD</sub> = 5 V			Limits			
Characteristic	Symbol	Test Conditions	MIn.	Тур.	Max.	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	V <sub>OUT</sub> = 0 V, T <sub>A</sub> = +70°C	_	-5.0	-15	_	-5.0	-15	μA
Output Voltage	V <sub>OUT(H)</sub>	I <sub>OUT</sub> = -25 mA, V <sub>BB</sub> = 60 V	58	58.5		58	58.5		٧
	V <sub>OUT(L)</sub>	I <sub>OUT</sub> = 1 mA	T -	2.0	3.0	_	_		٧
		I <sub>OUT</sub> = 2 mA	T -	_		_	2.0	3.0	٧
Output Pull-Down Current	I <sub>OUT(L)</sub>	V <sub>OUT</sub> = 10 V to V <sub>BB</sub>	2.5	4.0			_		mA
		V <sub>OUT</sub> = 40 V to V <sub>BB</sub>	-	_	_	15	18		mA
Input Voltage	V <sub>IN(1)</sub>		3.5		5.3	10.5		12.3	٧
	V <sub>IN(0)</sub>		-0.3		+0.8	-0.3	_	+0.8	٧
Input Current	I <sub>IN(1)</sub>	$V_{IN} = V_{DD}$	-	0.05	0.5		0.1	1.0	μА
	I <sub>IN(0)</sub>	V <sub>IN</sub> = 0.8 V	-	-0.05	-0.5		-1.0	-1.0	μA
Serial Data Output Voltage	V <sub>OUT(H)</sub>	l <sub>OUT</sub> = -200 μA	4.5	4.7	_	11.7	11.8	_	٧
	V <sub>OUT(L)</sub>	l <sub>OUT</sub> = 200 μA	1-	200	250	_	100	200	mV
Maximum Clock Frequency	f <sub>clk</sub>		3.3	5.0		_	7.5	_	MHz
Supply Current	I <sub>DD(H)</sub>	All Outputs High	-	3.0	5.0	_	15	20	mA
	I <sub>DD(L)</sub>	All Outputs Low	T -	2.5	4.0	_	7.0	10	mA
	I <sub>BB(H)</sub>	Outputs High, No Load	-	7.5	12	_	7.5	12	mA
	I <sub>BB(L)</sub>	Outputs Low	-	10	100		10	100	μΑ
Blanking to Output Delay	t <sub>PHL</sub>	C <sub>L</sub> = 30 pF	T -	300	550	_	125	150	ns
	t <sub>PLH</sub>	C <sub>L</sub> = 30 pF	-	250	450	-	170	200	ns
Output Fall Time	t,	C <sub>L</sub> = 30 pF	1-	1000	1250		250	300	ns
Output Rise Time	t,	C <sub>L</sub> = 30 pF	1-	150	170		150	170	ns

Negative current is defined as coming out of (sourcing) the specified device pin.

## 5811 Bimos II 12-Bit Serial-Input, Latched Source Driver



# TIMING CONDITIONS $(T_A = +25^{\circ}C, Logic Levels \ are \ V_{DD} \ and \ Ground)$

 Serial Data present at the input is transferred to the shift register on the logic "0" to logic "1" transition of the CLOCK input pulse. On succeeding CLOCK pulses, the registers shift data information toward the SERIAL DATA OUTPUT. The SERIAL DATA must appear at the input prior to the rising edge of the CLOCK input waveform.

Information present at any register is transferred to the respective latch when the STROBE is high (serial-to-parallel conversion). The latches will continue to accept new data as long as the STROBE is held high. Applications where the latches are bypassed (STROBE tied high) will require that the BLANKING input be high during serial data entry.

When the BLANKING input is high, the output source drivers are disabled (OFF); the DMOS sink drivers are ON. the information stored in the latches is not affected by the BLANKING input. With the BLANKING input low, the outputs are controlled by the state of their respective latches.

#### TRUTH TABLE


Serial			hift	Regi	ster	Conte	ents	Serial	Latch Conten					tents			Output Contents						
Data Input	Clock	,	l <sub>2</sub>	l <sub>3</sub>		I <sub>N-1</sub>	I <sub>N</sub>	Data Output	Strobe Input	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	•••	I <sub>N-1</sub>	I <sub>N</sub>	Blanking	i,	l <sub>2</sub>	I <sub>3</sub>		I <sub>N-1</sub>	I <sub>N</sub>	
Н	۲	Н	R <sub>1</sub>	R <sub>2</sub>		R <sub>N-2</sub>	R <sub>N-1</sub>	R <sub>N-1</sub>															
L	7	L	R <sub>1</sub>	$R_2$		R <sub>N-2</sub>	R <sub>N-1</sub>	R <sub>N-1</sub>															
Х	L	R <sub>1</sub>	R <sub>2</sub>	R <sub>3</sub>		R <sub>N-1</sub>	R <sub>N</sub>	R <sub>N</sub>															
		Х	Х	Х		Х	Х	Х	L	R <sub>1</sub>	$R_2$	$R_3$		R <sub>N-1</sub>	$R_N$								
		$P_1$	P <sub>2</sub>	P <sub>3</sub>		P <sub>N-1</sub>	P <sub>N</sub>	P <sub>N</sub>	Н	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>		P <sub>N-1</sub>	$P_N$	L	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>		P <sub>N-1</sub>	P <sub>N</sub>	
										Х	Х	Х		Х	Х	Н	L	L	L		L	L	

L = Low Logic Level H = High Logic Level X = Irrelevant P = Present State R = Previous State

# 5812-F

# **BiMOS II 20-BIT SERIAL-INPUT.** LATCHED SOURCE DRIVERS WITH ACTIVE DMOS PULL-DOWNS

#### UCN5812EPF



Dwg No A-14.356

#### ABSOLUTE MAXIMUM RATINGS at $T_{\Lambda} = 25^{\circ}C$

Logic Supply Voltage, V <sub>DD</sub>
Driver Supply Voltage, V <sub>BB</sub> 60 V
(suffix '-1') 80 V
Continuous Output Current Range,
I <sub>OUT</sub> 40 to +15 mA
Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>DD</sub> +0.3 V
Package Power Dissipation, P <sub>D</sub>
(UCN5812AF) 3.12 W*
(UCN5812EPF)
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C

\* Derate at rate of 25 mW/ $^{\circ}$ C above  $T_{A} = + 25 ^{\circ}$ C † Derate at rate of 15 mW/°C above  $T_A^{\circ}$  = + 25°C

Caution: Allegro CMOS devices have input static protection but are susceptible to damage when exposed to extremely high static electrical charges.

Note that the UCN5812AF (dual in-line package) and UCN5812EPF (PLCC package) are electrically identical and share a common pin number assignment.

The UCN5812AF/EPF combine a 20-bit CMOS shift register, data latches, and control circuitry with high-voltage bipolar source drivers and active DMOS pull-downs for reduced supply current requirements. Although designed primarily for vacuum-fluorescent displays, the high-voltage, high-current outputs also allow them to be used in other peripheral power driver applications. They are improved versions of the original UCN5812A/EP.

The CMOS shift register and latches allow direct interfacing with microprocessor-based systems. Data input rates are typically over 5 MHz with a 5 V logic supply, and over 7.5 MHz at 12 V. Especially useful for inter-digit blanking, the BLANKING input disables the output source drives and turns on the DMOS sink drivers. Use with TTL may require the use of appropriate pull-up resistors to ensure an input logic high.

A CMOS serial data output enables cascade connections in applications requiring additional drive lines. Similar devices are available as the UCN5810AF/LWF (10 bits), UCN5811A (12 bits), and UCN5818AF/EPF (32 bits).

The output source drivers are high-voltage PNP-NPN Darlingtons with a minimum breakdown of 60 V and are capable of sourcing up to 40 mA. Selected devices (suffix '-1') feature 80 V minimum breakdowns. The DMOS active pull-downs are capable of sinking up to 15 mA.

The UCN5812AF is supplied in a 28-pin dual in-line plastic package with 0.600" (15.24 mm) row spacing. For surface-mounting, the UCN5812EPF is furnished in 28-lead plastic chip carrier (quad pack) with 0.050"(1.22 mm) centers. Copper lead-frames, reduced supply current requirements and lower output saturation voltages, allow continuous operation, with all outputs sourcing 25 mA, of the UCN5812AF over the operating temperature range, and the UCN5812EPF up to +75°C. All 60 V devices (without the '-1' suffix) are also available for operation between -40°C and +85°C. To order, change the prefix from 'UCN' to 'UCQ'.


#### **FEATURES**

- High-Speed Source Drivers
- 60 V or 80 V Source Outputs
- Active DMOS Pull-Downs
- Low-Output Saturation Voltages
- Low-Power CMOS Logic and Latches
- 3.3 MHz Minimum Data Input Rate
- Reduced Supply Current Requirements
- Improved Replacement for TL5812


Always order by complete part number, e.g., | UCN5812AF-1 | .

## 5812-F 20-BIT SERIAL-INPUT, LATCHED SOURCE DRIVERS WITH ACTIVE DMOS PULL-DOWNS


#### UCN5812AF



Dwg. No. A-12,270

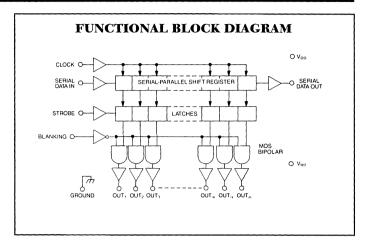


#### TYPICAL INPUT CIRCUIT



Dwg. No. A-13,035

#### TYPICAL OUTPUT DRIVER



Dwg. No. A-14,219

# 5812-F 20-BIT SERIAL-INPUT, LATCHED SOURCE DRIVERS WITH ACTIVE DMOS PULL-DOWNS


# ELECTRICAL CHARACTERISTICS at $T_A = +25^{\circ}C$ , $V_{BB} = 60 \text{ V}$ (UCN5812AF/EPF) or 80 V (suffix '-1') unless otherwise noted.

			Limits	s @ V <sub>DD</sub>	= 5 V	Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	V <sub>OUT</sub> = 0 V, T <sub>A</sub> = +70°C	T-	-5.0	-15	_	-5.0	-15	μА
Output Voltage	V <sub>OUT(1)</sub>	I <sub>OUT</sub> = -25 mA, V <sub>BB</sub> = 60 V	58	58.5		58	58.5		V
		I <sub>OUT</sub> = -25 mA, V <sub>BB</sub> = 80 V*	78	78.5	_	78	78.5	_	V
	V <sub>OUT(0)</sub>	I <sub>OUT</sub> = 1 mA	-	2.0	3.0	_			V
		I <sub>OUT</sub> = 2 mA	1-	_			2.0	3.5	V
Output Pull-Down Current	I <sub>OUT(0)</sub>	V <sub>OUT</sub> = 5 V to V <sub>BB</sub>	2.0	3.5				_	mA
		V <sub>OUT</sub> = 20 V to V <sub>BB</sub>	-	_	_	8.0	13	_	mA
Input Voltage	V <sub>IN(1)</sub>		3.5	-	5.3	10.5		12.3	V
	V <sub>IN(0)</sub>		-0.3	_	+0.8	-0.3	_	+0.8	V
Input Current	I <sub>IN(1)</sub>	$V_{IN} = V_{DD}$	1-	0.05	0.5	_	0.1	1.0	μА
	I <sub>IN(0)</sub>	V <sub>IN</sub> = 0.8 V	1-	-0.05	-0.5	_	-0.1	-1.0	μА
Serial Data Output Voltage	V <sub>OUT(1)</sub>	I <sub>OUT</sub> = -200 μA	4.5	4.7		11.7	11.8	_	V
Output Voltage	V <sub>OUT(0)</sub>	I <sub>OUT</sub> = 200 μA	T -	200	250	_	100	200	mV
Maximum Clock Frequency	f <sub>clk</sub>		3.3	5.0		_	7.5		MHz
Supply Current	I <sub>DD(1)</sub>	All Outputs High	-	100	300	-	200	500	μА
	I <sub>DD(0)</sub>	All Outputs Low	1-	100	300	_	200	500	μА
	I <sub>BB(1)</sub>	Outputs High, No Load	T -	1.5	2.5	_	1.5	2.5	mA
*	I <sub>BB(0)</sub>	Outputs Low	-	10	100	_	10	100	μА
Blanking to Output Delay	t <sub>PHL</sub>	C <sub>L</sub> = 30 pF, 50% to 50%	1-	2000	_		1000		ns
	t <sub>PLH</sub>	C <sub>L</sub> = 30 pF, 50% to 50%	1-	1000	_	_	850	_	ns
Output Fall Time	t <sub>f</sub>	C <sub>L</sub> = 30 pF, 90% to 10%	1-	1450		_	650		ns
Output Rise Time	t <sub>r</sub>	C <sub>L</sub> = 30 pF, 10% to 90%	1-	650	_	_	700		ns

Negative current is defined as coming out ot (sourcing) the specified device pin.

<sup>\*</sup> UCN5812AF-1 and UCN5812EPF-1 only.

## 5812-F 20-BIT SERIAL-INPUT, LATCHED SOURCE DRIVERS WITH ACTIVE DMOS PULL-DOWNS



# TIMING CONDITIONS (T<sub>A</sub> = +25°C, Logic Levels are V<sub>pp</sub> and Ground)

 V<sub>DD</sub> = 5.0 V

 A. Minimum Data Active Time Before Clock Pulse (Data Set-Up Time)
 75 ns

 B. Minimum Data Active Time After Clock Pulse (Data Hold Time)
 75 ns

 C. Minimum Data Pulse Width
 150 ns

 D. Minimum Clock Pulse Width
 150 ns

 E. Minimum Time Between Clock Activation and Strobe
 300 ns

 F. Minimum Strobe Pulse Width
 100 ns

 G. Typical Time Between Strobe Activation and Output Transistion
 500 ns

Serial Data present at the input is transferred to the shift register on the logic "0" to logic "1" transition of the CLOCK input pulse. On succeeding CLOCK pulses, the registers shift data information towards the SERIAL DATA OUTPUT. The SERIAL DATA must appear at the input prior to the rising edge of the CLOCK input waveform.

Information present at any register is transferred to the respective latch when the STROBE is high (serial-to-parallel conversion). The latches will continue to accept new data as long as the STROBE is held high. Applications where the latches are bypassed (STROBE tied high) will require that the BLANKING input be high during serial data entry.

When the BLANKING input is high, the output source drivers are disabled (OFF); the DMOS sink drivers are ON, the information stored in the latches is not affected by the BLANKING input. With the BLANKING input low, the outputs are controlled by the state of their respective latches.

#### TRUTH TABLE

Serial	, ,				Serial				ch (		Output Contents									
Data Input	Clock Input		l <sub>2</sub>	l <sub>3</sub>	 I <sub>N-1</sub>	I <sub>N</sub>	Data Output	Strobe Input	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	 I <sub>N-1</sub>	i <sub>N</sub>	Blanking	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>		I <sub>N-1</sub>	I <sub>N</sub>
Н	۲	Н	R <sub>1</sub>	$R_2$	 R <sub>N-2</sub>	R <sub>N-1</sub>	R <sub>N-1</sub>													
L	۲	L	R <sub>1</sub>	$R_2$	 R <sub>N-2</sub>	R <sub>N-1</sub>	R <sub>N-1</sub>													
Х	٦	R <sub>1</sub>	$R_2$	R <sub>3</sub>	 R <sub>N-1</sub>	$R_N$	R <sub>N</sub>													
		Χ	Х	Х	 X	Х	Х	L	R <sub>1</sub>	$R_2$	$R_3$	 R <sub>N-1</sub>	$R_N$							
		Ρ,	$P_2$	$P_3$	 P <sub>N-1</sub>	$P_N$	P <sub>N</sub>	Н	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>	 P <sub>N-1</sub>	$P_N$	L	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>		P <sub>N-1</sub>	P <sub>N</sub>
									Х	Χ	Х	 Х	Х	Н	L	L	L		L	L

 $L = Low\ Logic\ Level \quad H = High\ Logic\ Level \quad X = Irrelevant \quad P = Present\ State \quad R = Previous\ State$ 

# 5815

# BiMOS II 8-BIT LATCHED SOURCE DRIVERS

Designed primarily for use with high-voltage vacuum-fluorescent displays, the UCN5815A and UCN5815EP BiMOS II integrated circuits consist of eight NPN Darlington source drivers with output pull-down resistors, a CMOS latch for each driver, and common STROBE, BLANKING, and ENABLE functions. Selected devices (suffix "-1") have maximum output ratings of 80 V and 40 mA per driver. In all other respects, they are identical to the 60 V devices without the suffix.

BiMOS II devices have considerably better data-input rates than the original BiMOS circuits. With a 5 V logic supply, they will typically operate above 5 MHz. With a 12 V supply, significantly higher speeds are obtained. The CMOS inputs cause minimum loading and are compatible with standard CMOS and NMOS logic commonly found in microprocessor designs. TTL circuits may require the use of appropriate pull-up resistors.

The bipolar outputs may be used as segment, dot (matrix), bar, or digit drivers in vacuum-fluorescent displays. All eight outputs can be activated simultaneously at ambient temperatures in excess of 75°C. To simplify printed wiring board layout, output connections are opposite the inputs. A minimum component display subsystem, requiring few or no discrete components, can be assembled using the UCN5815A/EP with the UCN5810AF/EPF/LWF, UCN5812AF/EPF, or UCN5818AF/EPF serial-to-parallel latched driver.

Suffix 'A' devices are furnished in a standard 22-pin plastic DIP; suffix 'EP' indicates a 28-lead PLCC.

#### **FEATURES**

- 4.4 MHz Minimum Date-Input Rate
- High-Voltage Source Outputs
- CMOS, NMOS, TTL Compatible Inputs
- Low-Power CMOS Latches
   Internal Pull-Down Resistors
- Wide Supply-Voltage Range

Dwg. No. A-10,987

# ABSOLUTE MAXIMUM RATINGS at +25°C Free-Air Temperature

Output Voltage, V <sub>OUT</sub>
Course to lago, tout
(Suffix '-1') 80 V
Logic Supply Voltage Range,
V <sub>DD</sub> 4.5 V to 15 V
Load Supply Voltage Range,
V <sub>BB</sub> 5.0 V to 60 V
(Suffix '-1') 5.0 V to 80 V
Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>DD</sub> + 0.3 V
Continuous Output Current,
I <sub>ОИТ</sub> 40 mA
Package Power Dissipation, P <sub>D</sub>
(UCN5815A/A-1) 2.5 W*
(UCN5815EP/EP-1) 2.27 W*
,
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>s</sub> 55°C to +150°C
1 <sub>0</sub>

Caution: CMOS devices have input static protection but are susceptible to damage when exposed to extremely high static electrical charges.

\* Derate linearly to 0 W at +150°C.

Always order by complete part number:

Part Number	Package	Max V <sub>OUT</sub>
UCN5815A	22-Pin DIP	60 V
UCN5815A-1		80 V
UCN5815EP	28-Lead PLCC	60 V
UCN5815EP-1	-	80 V


# **5815**

# **BIMOS II 8-BIT LATCHED SOURCE DRIVERS**

ELECTRICAL CHARACTERISTICS at  $T_A$  = +25°C,  $V_{BB}$  = 60 V,  $V_{DD}$  = 5 V and 12 V (unless otherwise noted).


				Limits		
Characteristic	Symbol	Test Conditions	Min.	Max.	Units	
Output OFF Voltage	V <sub>out</sub>		_	1.0	V	
Output ON Voltage	V <sub>out</sub>	I <sub>OUT</sub> = -25 mA, V <sub>BB</sub> = 60 V	57.5		V	
		$I_{OUT} = -25 \text{ mA}, V_{BB} = 80 \text{ V}, \text{ Suffix "-1" only}$	77.5	_	V	
Output Pull-Down Current	I <sub>OUT</sub>	$V_{OUT} = V_{BB}$	400	850	μА	
		$V_{BB} = V_{OUT} = 80 \text{ V, Suffix "-1" only}$	550	1150	μА	
Output Leakage Current	l <sub>out</sub>	T <sub>A</sub> = 70°C		-15	μА	
Input Voltage	V <sub>IN(1)</sub>	V <sub>DD</sub> = 5.0 V	3.5	5.3	V	
		V <sub>DD</sub> = 12 V	10.5	12.3	V	
	V <sub>IN(0)</sub>		-0.3	+0.8	٧	
Input Current	I <sub>IN(1)</sub>	$V_{DD} = V_{IN} = 5.0 \text{ V}$	_	100	μА	
		$V_{DD} = V_{IN} = 12 \text{ V}$	_	240	μА	
Input Impedance	Z <sub>IN</sub>	$V_{DD} = 5.0 \text{ V}$	50	_	kΩ	
Supply Current	l <sub>BB</sub>	All outputs ON, All outputs open		10.5	mA	
		All outputs OFF, All outputs open	_	100	μА	
	I <sub>DD</sub>	V <sub>DD</sub> = 5.0 V, All outputs OFF, All inputs = 0 V	_	100	μА	
		V <sub>DD</sub> = 12 V, All outputs OFF, All inputs = 0 V	_	200	μА	
		V <sub>DD</sub> = 5.0 V, One output ON, All inputs = 0 V		1.0	mA	
		V <sub>DD</sub> = 12 V, One output ON, All inputs = 0 V		3.0	mA	

NOTE: Positive (negative) current is defined as going into (coming out of) the specified device pin.

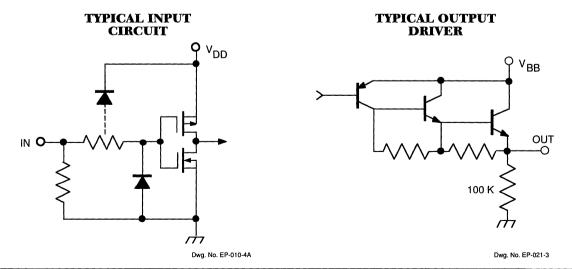

## 5815 Bimos II 8-BIT LATCHED SOURCE DRIVERS

#### UCN5815EP




Dwg. No. A-14,357

Information present at an input is transferred to its latch when the STROBE and ENABLE are high. The latches will continue to accept new data as long as both STROBE and ENABLE are held high. With either STROBE or ENABLE in the low state, no information can be loaded into the latches.

When the BLANKING input is high, all of the output buffers are disabled (OFF) without affecting the information stored in the latches. With the BLANKING input low, the outputs are controlled by the state of the latches.

The timing conditions shown above guarantee a 4.4 MHz minimum data input rate with a 5 V supply. Typically, input rates above 5 MHz are permitted. With a 12 V supply, rates in excess of 10 MHz are possible.



#### TIMING CONDITIONS

 $(V_{DD} = 5 \text{ V}, T_A = +25^{\circ}\text{C}, \text{Logic Levels are } V_{DD} \text{ and Ground})$ 

A.	Minimum Data Active Time Before Strobe Enabled (Data Set-Up Time)
В.	Minimum Data Active Time After Strobe Disabled (Data Hold Time)
C.	Minimum Strobe Pulse Width
D.	Typical Time Between Strobe Activation and Output ON to OFF Transition
E.	Typical Time Between Strobe Activation and Output
	OFF to ON Transition 500 ns
F.	Minimum Data Pulse Width 225 ns

#### TRUTH TABLE

INPUTS					T <sub>N</sub>
IN <sub>N</sub>	STROBE	ENABLE	BLANK	T-1	T
0	1	1	0	Х	0
1	1	1	0	Х	1
Х	X	X	1	Х	0
Х	0	X	0	1	1
Х	0	X	0	0	0
Х	X	0	0	1	1
Х	Х	0	0	0	0

X = irrelevant

T-1 = previous output state

T = present output state

# 5816

# 4-TO-16 LINE LATCHED DECODER/DRIVERS

The UCN5816A and UCN5816EP 4-to-16 line latched decoder/drivers combine low-power CMOS inputs and logic with 16 high-current, high-voltage bipolar outputs. The CMOS inputs cause minimal loading and are compatible with standard CMOS, PMOS, and NMOS logic. TTL or DTL circuits may require the use of appropriate pull-up resistors to ensure an input logic high. The logic operates over a supply range of 5 V to 12 V. A CHIP ENABLE function can be used with two devices for 5-to-32 line decoding applications.

The 16 bipolar power outputs are open-collector 60 V Darlington drivers capable of sinking 350 mA continuously. Internal transient-suppression diodes provide protection for use with inductive loads. For ink-jet printer applications, the A5817SEP addressable 28-line decoder/driver is recommended.

The UCN5816A is supplied in a 28-pin dual in-line plastic package with 0.600" (15.24 mm) row spacing. The UCN5816EP is furnished in a 28-lead plastic chip carrier (quad pack) for minimum-area surface-mount applications. Both devices will drive 350 mA loads continuously over the full operating temperature range.

#### **FEATURES**

- Addressable Data Entry
- 60 V Minimum Output Breakdown
- CMOS, PMOS, NMOS, TTL Compatible Inputs
- Low-Power CMOS Logic and Latches
- Output Transient Protection
- Output Enable and Strobe Functions

UCN5816EP

UCN5816EP

DIODE 0.7 S IN A STANLAR

Dwg. No. PP-030

# ABSOLUTE MAXIMUM RATINGS at $T_A = 25^{\circ}C$


Output Voltage, V <sub>CE</sub>
Logic Supply Voltage, V <sub>DD</sub> 15 V
Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>DD</sub> + 0.3 V
Output Current, I <sub>C</sub> 500 mA
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C


Caution: CMOS devices have input static protection but are susceptible to damage when exposed to extremely high static electrical charges.

Always order by complete part number:

Part Number	Package
UCN5816A	28-Pin DIP
UCN5816EP	28-Lead PLCC

## 5816 4-TO-16 LINE LATCHED DECODER/DRIVERS






Dwg. No. PP-031


Dwg. No. GP-028-1A

#### TYPICAL INPUT CIRCUITS


#### TYPICAL OUTPUT DRIVER



Dwg. EP-010-4



Dwg. EP-010-3




Dwg. EP-021-4

# 5816 4-TO-16 LINE LATCHED DECODER/DRIVERS

# ELECTRICAL CHARACTERISTICS at $T_A = 25^{\circ}C$ , $V_{DD} = 5$ V (unless otherwise specified).

				Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units	
Output Leakage Current	I <sub>CEX</sub>	V <sub>CE</sub> = 60 V, T <sub>A</sub> = +25°C	-	_	50	μА	
Output Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>C</sub> = 100 mA		0.9	1.1	V	
		I <sub>C</sub> = 200 mA		1.1	1.3	٧	
		I <sub>C</sub> = 350 mA, V <sub>DD</sub> = 7.0 V	_	1.3	1.6	٧	
Input Voltage	V <sub>IN(0)</sub>		-0.3		0.8	٧	
	V <sub>IN(1)</sub>	V <sub>DD</sub> = 12 V	10.5	_	_	٧	
		V <sub>DD</sub> = 5.0 V	3.5	_	5.3	V	
Input Resistance	R <sub>IN</sub>	V <sub>DD</sub> = 12 V	50	200		kΩ	
		V <sub>DD</sub> = 5.0 V	100	600		kΩ	
Supply Current	I <sub>DD(ON)</sub>	V <sub>DD</sub> = 12 V, Outputs Open	-	2.0	3.0	mA	
	l	V <sub>DD</sub> = 5.0 V, Outputs Open		1.0	1.5	mA	
	I <sub>DD(OFF)</sub>	All Drivers OFF, All Inputs = 0 V, OE = V <sub>DD</sub> = 5.0 V	_	_	100	μА	
		All Drivers OFF, All Inputs = 0 V, OE = V <sub>DD</sub> = 12 V	_		200	μА	
Clamp Diode	I <sub>R</sub>	V <sub>R</sub> = 60 V, T <sub>A</sub> = +25°C	<u> </u>		50	μА	
Leakage Current		V <sub>R</sub> = 60 V, T <sub>A</sub> = +70°C	_		100	μА	
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 350 mA	_	1.5	2.0	V	

## 5816 4-TO-16 LINE LATCHED DECODER/DRIVERS



p/o Dwg. No. A-10,895A

# TIMING CONDITIONS (Logic Levels are V<sub>DD</sub> and Ground)

Information present at the inputs is transferred to the latches when the STROBE is high. The latches will continue to accept new data as long as the STROBE is held high. With the STROBE in the low state, no information can be loaded into the latches. Depending on the four address inputs, the 4-to-16 line decoder enables one of the 16 output sink drivers. When the OUTPUT ENABLE is high, all of the outputs are disabled (OFF) without affecting the information stored in the latches. When the OUTPUT ENABLE is low, the outputs are controlled by the information in the latches. When the CHIP ENABLE is low, all of the outputs are disabled (OFF). With two decoder/drivers and an inverter, the CHIP ENABLE function can be used for 5-to-32 line decoding applications.

#### TRUTH TABLE

STROBE	CHIP ENABLE	IN <sub>D</sub> (MSB)	IN <sub>C</sub>	IN <sub>B</sub>	IN <sub>A</sub> (LSB)	OUTPUT ENABLE	OUTPUTS (OFF unless otherwise specified)
1	1	0	0	0	0	0	OUT <sub>0</sub> ON
1	1	0	0	0	1	0	OUT, ON
1	1	0	0	1	0	0	OUT <sub>2</sub> ON
1	1	0	0	1	1	0	OUT <sub>3</sub> ON
1	1	0	1	0	0	0	OUT <sub>4</sub> ON
1	1	0	1	0	1	0	OUT <sub>5</sub> ON
1	1	0	1	1	0	0	OUT <sub>6</sub> ON
1	1	0	1	1	1	0	OUT, ON
1	1	1	0	0	0	0	OUT <sub>8</sub> ON
1	1	1	0	0	1	0	OUT <sub>9</sub> ON
1	1	1	0	1	0	0	OUT <sub>10</sub> ON
1	1	1	0	1	1	0	
1	1	1	1	0	0	0	OUT <sub>12</sub> ON
1	1	1	1	0	1	0	OUT <sub>13</sub> ON
1	1	1	1	1	0	0	OUT <sub>14</sub> ON
1	1	1	1	1	1	0	OUT <sub>15</sub> ON
0	1	X	Χ	Х	X	0	Q <sub>o</sub>
x	0	Х	Χ	Χ	X	X	All OFF
X	Х	Х	Х	X	Х	1	All OFF

 $Q_0$  = The output condition prior to the high-to-low transition of the STROBE input.

X = Irrelevant

# 5817

# ADDRESSABLE 28-LINE DECODER/DRIVER


Intended for use in ink-jet printer applications, the A5817SEP addressable 28-line decoder/driver combines low-power CMOS inputs and logic with 28 high-current, high-voltage bipolar outputs. A 4-to-14 line decoder determines the selected output driver (n) in each 14-driver bank. Two independent output enable inputs (active low) then provide the final decoding to activate 1- or 2-of-28 outputs (OUT $_{\rm An}$  and/or OUT $_{\rm Bn}$ ). Special internal circuitry is programmed at the time of manufacture to adjust the output pulse timing and thereby the energy the device delivers to the ink-jet print head.

The CMOS inputs cause minimal loading and are compatible with standard CMOS, PMOS, and NMOS logic. Use with TTL or DTL circuits may require appropriate pull-up resistors to ensure an input logic high. The internal CMOS logic operates from a 5 V supply. A CHIP ENABLE function is provided to lock out the drivers during system power up. The 28 bipolar power outputs are open-collector 30 V Darlington drivers capable of sinking 500 mA at ambient temperatures up to 85°C.

The A5817SEP is furnished in a 44-lead plastic chip carrier (quad pack) for minimum-area, surface-mount applications.

#### **FEATURES**

- Controlled Characteristics for Ink-Jet Printers
- Addressable Data Entry
- CMOS, PMOS, NMOS Compatible Inputs
- Low-Power CMOS Logic



Dwg. PP-050

# ABSOLUTE MAXIMUM RATINGS at $T_A = 25^{\circ}C$

Output Voltage, V <sub>CE</sub> 30	٧
Logic Supply Voltage, V <sub>DD</sub> 7.0	٧
Input Voltage Range,	

T<sub>A</sub> .....-20°C to +85°C


Storage Temperature Range,

T<sub>S</sub> ...... -55°C to +150°C


\*Derate linearly to 0 W at T<sub>J</sub> = 150°C.

Caution: CMOS devices have input static protection but are susceptible to damage when exposed to extremely high static electrical charges.


Always order by complete part number: A5817SEP .

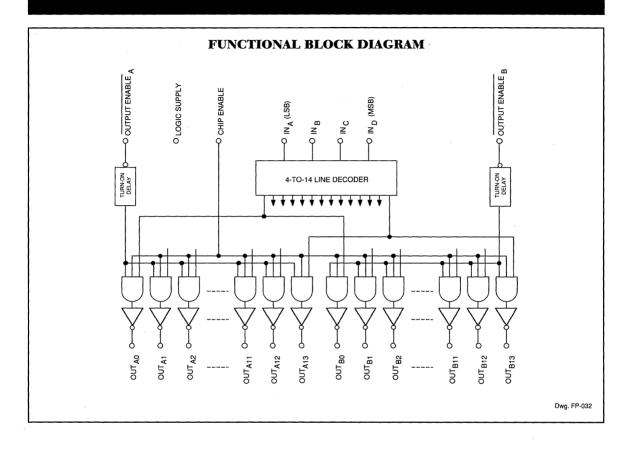

#### TYPICAL INPUT CIRCUIT



#### TYPICAL OUTPUT DRIVER




Dwg. EP-010-1

Dwg. EP-021-7


ELECTRICAL CHARACTERISTICS at  $T_A = +25$ °C,  $V_{DD} = 5.0$  V.

				Lii	mits	
Characteristic	Symbol	Test Conditions	Min	Тур	Max	Units
Output Drivers						
Output Leakage Current	I <sub>CEX</sub>	V <sub>CE</sub> = 30 V	T	<1.0	100	μА
Output Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>OUT</sub> = 450 mA	0.85	1.15	1.45	٧
		I <sub>OUT</sub> = 400 mA	0.8	1.1	1.4	٧
Unclamped Inductive Load Current		$V_{CC}$ = 30 V, L = 3 $\mu$ H, R <sub>L</sub> = 56 $\Omega$ , I <sub>L</sub> = 500 mA, Test Fig.		See Note		_
Turn-On Time	t <sub>PHL</sub>	$V_{CC} = 21 \text{ V, R}_{L} = 39 \Omega$	125	225	475	ns
Fall Time	t <sub>f</sub>	$V_{CC} = 21 \text{ V}, R_L = 39 \Omega$	_	20		ns
Turn-Off Time	t <sub>PLH</sub>	$V_{CC} = 21 \text{ V}, R_L = 39 \Omega$	175	250	400	ns
Rise Time	t,	$V_{CC} = 21 \text{ V}, R_L = 39 \Omega$	T -	50		ns
Control Logic	· · · · · · · · · · · · · · · · · · ·					
Logic Input Voltage	V <sub>IN(1)</sub>		3.5	_	_	٧
	V <sub>IN(0)</sub>		_		0.8	٧
Logic Input Current	I <sub>IN(1)</sub>	V <sub>IN</sub> = 5.0 V	_	<1.0	100	μА
	I <sub>IN(0)</sub>	V <sub>IN</sub> = 0 V	I -	<-1.0	-100	μА
Input Resistance	R <sub>IN</sub>		50			kΩ
Supply Current	I <sub>DD(ON)</sub>	Two Outputs ON		6.0	10.0	mA
	I <sub>DD(OFF)</sub>	All Drivers OFF, All Inputs = 0 V, OE <sub>A</sub> = OE <sub>B</sub> = V <sub>DD</sub>	-		600	μА

Note: Device will turn off and meet all specifications after test.

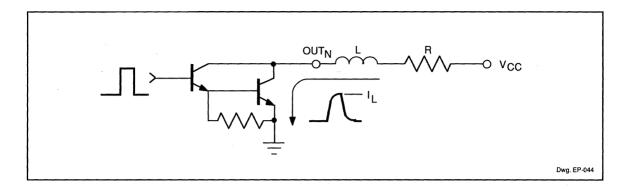

#### UNCLAMPED INDUCTIVE LOAD CURRENT TEST FIGURE

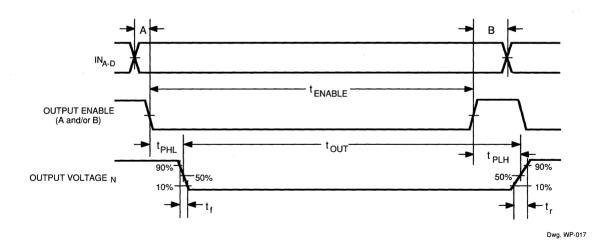

# TIMING CONDITIONS (Logic Levels are V<sub>DD</sub> and Ground)

#### APPLICATIONS INFORMATION

This device is intended specifically for, although certainly not limited to, driving ink-jet print heads. In this application, a certain minimum energy (a function of load voltage and output pulse duration) is required for proper operation, while excessive energy will degrade the life of the print head. The output pulse duration ( $t_{\text{OuT}}$ ) is equal to  $t_{\text{ENBLE}} + t_{\text{PLH}} - t_{\text{PHL}}$ , where  $t_{\text{PHL}}$  is adjusted during manufacture to compensate for variations in the output saturation voltage ( $V_{\text{CF(SAT)}}$ ).

For the A5817SEP, the relationship between  $t_{OUT}$  and  $t_{ENARLE}$  at  $T_{A}=25^{\circ}C$  is:

$$t_{OUT} = t_{ENABLE} + 25 \text{ ns} + ([V_{CE(SAT)} (act) - V_{CE(SAT)} (typ)]$$
  
x 330 ns) ± 110 ns.

For most applications, this will result in a driver contribution to energy error of less than ±4%.

A logic low on the CHIP ENABLE input will prevent the drivers from turning ON, regardless of the state of other inputs or the logic supply voltage. The CHIP ENABLE input has a slow response time and should not be used as a high-speed control line. For proper operation, all ground terminals should be connected to a common ground on the printed wiring board. The IC (Internal Connection) terminals are used to program the turn-on time of the device and MUST be left electrically unconnected (floating) for proper operation.

Depending on the four address inputs, the 4-to-14 line decoder selects one driver from each of the 14 output A and B banks of sink drivers according to the Decoder Truth Table. The state of the selected outputs is determined by the OUTPUT ENABLE inputs as shown in the Enable Truth Table.

#### **DECODER TRUTH TABLE**

IN <sub>D</sub> (MSB)	IN <sub>C</sub>	IN <sub>B</sub>	IN <sub>A</sub> (LSB)	N
0	0	0	0	0
0	0	0	1	1
0	0	1	0	2
0	0	1	1	3
0	1	0	0	4
0	1	0	1	5
0	1	1	0	6
0	1	1	1	7
1	0	0	0	8
1	0	0	1	9
1	0	1	0	10
1	0	1	1	11
1	1	0	0	12
1	1	0	1	13
1	1	1	0	ALL OFF
1	1	1	1	ALL OFF


#### **ENABLE TRUTH TABLE**

CHIP ENABLE	OUTPUT ENABLE <sub>A</sub>	OUTPUT ENABLE <sub>B</sub>	OUTPUTS (OFF unless otherwise specified. For the value of N see the Decoder Truth Table)
0	Х	Х	ALL OFF
1	1	1	ALL OFF
1	0	1	OUT <sub>AN</sub> ON
1	1	0	OUT <sub>BN</sub> ON
1	0	0	OUT <sub>AN</sub> ON, OUT <sub>BN</sub> ON

X = Irrelevant

# 5818-F

# BiMOS II 32-BIT SERIAL-INPUT, LATCHED SOURCE DRIVERS WITH ACTIVE DMOS PULL-DOWNS



# ABSOLUTE MAXIMUM RATINGS at $T_A = 25^{\circ}C$

Logic Supply Voltage, V <sub>DD</sub> 15 V
Driver Supply Voltage, V <sub>BB</sub> 60 V
(suffix '-1')
Continuous Output Current,
I <sub>OUT</sub> 40 to +15 mA
Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>DD</sub> + 0.3 V
Package Power Dissipation, P <sub>D</sub>
(UCN5818AF) 3.5 W*
(UCN5818EPF) 2.5 W†
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C

\* Derate at rate of 28 mW/°C above  $T_A = +25$ °C † Derate at rate of 20 mW/°C above  $T_A = +25$ °C

Caution: CMOS devices have input static protection but are susceptible to damage when exposed to extremely high static electrical charges. Designed primarily for use with vacuum fluorescent displays, the UCN5818AF and UCN5818EPF smart power BiMOS II drivers combine CMOS shift registers, data latches, and control circuitry, with bipolar high-speed sourcing outputs and DMOS active pull-down circuitry. The high-speed shift register and data latches allow direct interfacing with microprocessor LSI-based systems. A CMOS serial data output enables cascade connections in applications requiring additional drive lines. Both devices feature 60 V and -40 mA output ratings, allowing them to be used in many other peripheral power driver applications. Selected devices (suffix '-1') have maximum output ratings of 80 V. In all other respects, devices with and without the '-1' suffix are identical.

These smart power drivers have been designed with BiMOS II logic for improved data entry rates. With a 5 V supply, they will typically operate above 5 MHz. At 12 V, significantly higher speeds are obtained. Use of these devices with TTL may require the use of appropriate pullup resistors to ensure an input logic high. All devices can be operated over the ambient temperature range of -20°C to +85°C.

The UCN5818AF is supplied in a 40-pin plastic dual in-line package with 0.600" (15.24 mm) row spacing. A copper lead frame, reduced supply current requirement, and low output saturation voltage permits operation with minimum junction temperature rise. The 'A' package allows all 32 outputs to be operated at -25 mA continuously over the operating temperature range.

For high-density packaging applications, the UCN5818EPF is furnished in a 44-lead plastic chip carrier (quad pack) for surface mounting on solder lands with 0.050" (1.27 mm) centers. The PLCC allows -25 mA continuous operation of all outputs simultaneously at ambient temperatures to 60°C.

Similar devices are available as the UCN5810AF/LWF (10 bits), UCN5811A (12 bits), and UCN5812AF/EPF (20 bits).


#### **FEATURES**

- 60 V or 80 V Source Outputs
- High-Speed Source Drivers
- Active DMOS Pull-Downs
- Low-Output Saturation Voltages
- Low-Power CMOS Logic and Latches
- 3.3 MHz Minimum Data Input Rate
- Reduced Supply Current Requirements
- Improved Replacements for SN75518N/FN


Always order by complete part number:

Part Number	Package	Max. V <sub>BB</sub>
UCN5818AF	40-Pin DIP	60 V
UCN5818AF-1		80 V
UCN5818EPF	44-Lead PLCC	60 V
UCN5818EPF-1		80 V

## 5818-F 32-BIT SERIAL-INPUT, LATCHED SOURCE DRIVERS WITH ACTIVE DMOS PULL-DOWNS




Dwg. No. A-12,269A

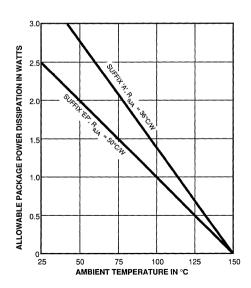


FUNCTIONAL BLOCK DIAGRAM

CLOCK O
SERIAL OSERIAL ### TYPICAL INPUT CIRCUIT



Dwg. No. A-13,035

#### TYPICAL OUTPUT DRIVER



Dwg. No. GP-025

Dwg. No. A-14,219

### 5818-F 32-BIT SERIAL-INPUT, LATCHED SOURCE DRIVERS WITH ACTIVE DMOS PULL-DOWNS


# ELECTRICAL CHARACTERISTICS at $T_A$ = + 25°C, $V_{BB}$ = 60 V (UCN5818AF/EPF) or 80 V (suffix '-1') unless otherwise noted.

			Limits	@ V <sub>DD</sub>	= 5 V	Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	V <sub>OUT</sub> = 0 V, T <sub>A</sub> = +70°C	-	-5.0	-15	-	-5.0	-15	μА
Output Voltage	V <sub>OUT(1)</sub>	I <sub>OUT</sub> = -25 mA, V <sub>BB</sub> = 60 V	58	58.5	_	58	58.5	_	V
		I <sub>OUT</sub> = -25 mA, V <sub>BB</sub> = 80 V*	78	78.5		78	78.5	_	V
	V <sub>OUT(0)</sub>	I <sub>OUT</sub> = 1 mA	-	2.0	3.0	_	_		V
		I <sub>OUT</sub> = 2 mA	-	_	_	_	2.0	3.5	. V
Output Pull-Down Current	I <sub>OUT(0)</sub>	V <sub>OUT</sub> = 5 V to V <sub>BB</sub>	2.0	3.5	_	_			mA
		V <sub>OUT</sub> = 20 V to V <sub>BB</sub>	-	_	_	8.0	13	_	mA
Input Voltage	V <sub>IN(1)</sub>		3.5	_	5.3	10.5		12.3	V
	V <sub>IN(0)</sub>		-0.3		+0.8	-0.3	_	+0.8	٧
Input Current	I <sub>IN(1)</sub>	$V_{IN} = V_{DD}$	-	0.05	0.5	_	0.1	1.0	μА
	I <sub>IN(0)</sub>	V <sub>IN</sub> = 0.8 V	T -	-0.05	-0.5	_	-0.1	-1.0	μА
Serial Data Output Voltage	V <sub>OUT(1)</sub>	I <sub>OUT</sub> = -200 μA	4.5	4.7	_	11.7	11.8		٧
	V <sub>OUT(0)</sub>	I <sub>OUT</sub> = 200 μA	T -	200	250	_	100	200	mV
Maximum Clock Frequency	f <sub>clk</sub>		3.3	5.0		_	7.5		MHz
Supply Current	I <sub>DD(1)</sub>	All Outputs High	-	100	300	_	200	500	μА
	I <sub>DD(0)</sub>	All Outputs Low	T	100	300	_	200	500	μА
	l <sub>BB(1)</sub>	Outputs High, No Load	T -	3.0	6.0	_	1.5	3.0	mA
	I <sub>BB(0)</sub>	Outputs Low	T -	10	100	_	10	100	μА
Blanking to Output Delay	t <sub>PHL</sub>	C <sub>L</sub> = 30 pF, 50% to 50%	_	800	2000	_	400	1000	ns
	t <sub>PLH</sub>	C <sub>L</sub> = 30 pF, 50% to 50%	-	350	650	_	200	500	ns
Output Fall Time	t,	C <sub>L</sub> = 30 pF, 90% to 10%	-	850	1450	_	400	650	ns
Output Rise Time	t <sub>r</sub>	C <sub>L</sub> = 30 pF, 10% to 90%	T-	350	650	_	300	700	ns

Negative current is defined as coming out ot (sourcing) the specified device pin.

<sup>\*</sup> UCN5818AF-1 and UCN5818EPF-1 only.

### 5818-F 32-BIT SERIAL-INPUT, LATCHED SOURCE DRIVERS WITH ACTIVE DMOS PULL-DOWNS

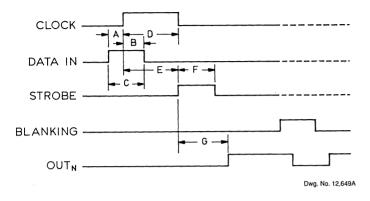

TIMING CONDITIONS ( $T_A = +25^{\circ}\text{C}$ , Logic Levels are  $V_{DD}$  and Ground)

 Serial Data present at the input is transferred to the shift register on the logic "0" to logic "1" transition of the CLOCK input pulse. On succeeding CLOCK pulses, the registers shift data information towards the SERIAL DATA OUTPUT. The SERIAL DATA must appear at the input prior to the rising edge of the CLOCK input waveform.

Information present at any register is transferred to the respective latch when the STROBE is high (serial-to-parallel conversion). The latches will continue to accept new data as long as the STROBE is held high. Applications where the latches are bypassed (STROBE tied high) will require that the BLANKING input be high during serial data entry.

When the BLANKING input is high, the output source drivers are disabled (OFF); the DMOS sink drivers are ON, the information stored in the latches is not affected by the BLANKING input. With the BLANKING input low, the outputs are controlled by the state of their respective latches.

### TRUTH TABLE

Serial			hift	Regi	ster	Conte	ents	Serial		Latch Contents						Output Contents						
Data Input	Clock		l <sub>2</sub>	I <sub>3</sub>		I <sub>N-1</sub>	I <sub>N</sub>	Data Output	Strobe Input	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>		I <sub>N-1</sub>	I <sub>N</sub>	Blanking	I,	l <sub>2</sub>	l <sub>3</sub>		I <sub>N-1</sub>	I <sub>N</sub>
Н	7	Н	R,	R <sub>2</sub>		R <sub>N-2</sub>	R <sub>N-1</sub>	R <sub>N-1</sub>														
L	7	L	R <sub>1</sub>	R <sub>2</sub>		R <sub>N-2</sub>	R <sub>N-1</sub>	R <sub>N-1</sub>														
Х	L	R,	R <sub>2</sub>	$R_3$		R <sub>N-1</sub>	R <sub>N</sub>	R <sub>N</sub>														
		Х	Х	Х		Х	Х	Х	L	R <sub>1</sub>	R <sub>2</sub>	R <sub>3</sub>		R <sub>N-1</sub>	$R_N$							
		P <sub>1</sub>	$P_2$	P <sub>3</sub>		P <sub>N-1</sub>	P <sub>N</sub>	P <sub>N</sub>	Н	P <sub>1</sub>	P <sub>2</sub>	$P_3$		P <sub>N-1</sub>	$P_N$	L	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>		P <sub>N-1</sub>	P <sub>N</sub>
Ì										Х	Χ	Х		Х	Х	Н	L	L	L		L	L

L = Low Logic Level H = High Logic Level X = Irrelevant P = Present State R = Previous State

# 5821 THRU 5823

### Bimos II 8-BIT SERIAL-INPUT, LATCHED DRIVERS

A merged combination of bipolar and MOS technology gives these devices an interface flexibility beyond the reach of standard logic buffers and power driver arrays. The three devices in this series each have an eight-bit CMOS shift register and CMOS control circuitry, eight CMOS data latches, and eight bipolar current-sinking Darlington output drivers. Except for maximum driver output voltage ratings, the UCN5821A, UCN5822A, and UCN5823A are identical.

BiMOS II devices have much higher data-input rates than the original BiMOS circuits. With a 5 V logic supply, they will typically operate at better than 5 MHz. With a 12 V supply, significantly higher speeds are obtained. The CMOS inputs are compatible with standard CMOS and NMOS logic levels. TTL circuits may require the use of appropriate pull-up resistors. By using the serial data output, the drivers can be cascaded for interface applications requiring additional drive lines.

### **FEATURES**

- 3.3 MHz Minimum Data Input Rate
- CMOS, NMOS, TTL Compatible
- Internal Pull-Down Resistors
- Low-Power CMOS Logic & Latches
- High-Voltage Current-Sink Outputs
- 16-Pin Dual In-Line Plastic Package

CLOCK 1 16 OUT1 SERIAL DATA IN 2 15 OUT<sub>2</sub> LOGIC GROUND 3 OUT V<sub>DD</sub> 4 13 SERIAL DATA OUT 5 12 OUT 5 STROBE 6 11 OUTs OUTPUT ENABLE 7 10 OUT 7 POWER GROUND 8 9 OUT<sub>8</sub>

Dwg. No. PP-026

## ABSOLUTE MAXIMUM RATINGS at 25°C Free-Air Temperature


Output Voltage, V <sub>OUT</sub>
(UCN5821A) 50 V
(UCN5822A)
(UCN5823A)
Logic Supply Voltage, V <sub>DD</sub> 15 V
Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>DD</sub> + 0.3 V
Continuous Output Current,
I <sub>OUT</sub>
Package Power Dissipation,
P <sub>D</sub>
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C


\*Derate at the rate of 16.7 mW/°C above  $T_A = +25$ °C Caution: CMOS devices have input static protection but are susceptible to damage when exposed to extremely high static electrical charges.


Always order by complete part number:

Part Number	Max. V <sub>OUT</sub>
UCN5821A	50 V
UCN5822A	80 V
UCN5823A	100 V

### 5821 thru 5823 Bimos II 8-BIT SERIAL-INPUT, LATCHED DRIVERS








Number of Outputs ON (I <sub>OUT</sub> = 200 mA		Max. Allowable Duty Cycle at Ambient Temperature of									
V <sub>DD</sub> = 12 V)	25°C	40°C	50°C	60°C	70°C						
8	90%	79%	72%	65%	57%						
7	100%	90%	82%	74%	65%						
6	100%	100%	96%	86%	76%						
5	100%	100%	100%	100%	91%						
4	100%	100%	100%	100%	100%						
3	100%	100%	100%	100%	100%						
2	100%	100%	100%	100%	100%						
1	100%	100%	100%	100%	100%						

### TYPICAL OUTPUT DRIVER




### 5821 thru 5823 Bimos II 8-BIT SERIAL-INPUT, LATCHED DRIVERS

### ELECTRICAL CHARACTERISTICS at $T_A = +25$ °C, $V_{DD} = 5$ V, (unless otherwise specified).

		Applicable		Limits				
Characteristic	Symbol	Devices	Test Conditions	Min.	Max.	Units		
Output Leakage Current	I <sub>CEX</sub>	UCN5821A	V <sub>OUT</sub> = 50 V	_	50	μА		
			V <sub>OUT</sub> = 50 V, T <sub>A</sub> = +70°C	_	100	μΑ		
		UCN5822A	V <sub>OUT</sub> = 80 V	_	50	μА		
			V <sub>OUT</sub> = 80 V, T <sub>A</sub> = +70°C	-	100	μΑ		
		UCN5823A	V <sub>OUT</sub> = 100 V	-	50	μА		
			V <sub>OUT</sub> = 100 V, T <sub>A</sub> = +70°C	1	100	μА		
Collector-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>	ALL	I <sub>OUT</sub> = 100 mA	_	1.1	٧		
Saturation voltage			I <sub>OUT</sub> = 200 mA	-	1.3	٧		
			$I_{OUT} = 350 \text{ mA}, V_{DD} = 7.0 \text{ V}$	1	1.6	٧		
Input Voltage	V <sub>IN(0)</sub>	ALL		-	8.0	٧		
	V <sub>IN(1)</sub>	ALL	V <sub>DD</sub> = 12 V	10.5	_	٧		
		•	V <sub>DD</sub> = 10 V	8.5	_	٧		
			V <sub>DD</sub> = 5.0 V	3.5	_	V		
Input Resistance	R <sub>IN</sub>	ALL	V <sub>DD</sub> = 12 V	50	_	kΩ		
			V <sub>DD</sub> = 10 V	50	-	kΩ		
			V <sub>DD</sub> = 5.0 V	50	-	kΩ		
Supply Current	I <sub>DD(ON)</sub>	ALL	One Driver ON, V <sub>DD</sub> = 12 V	-	4.5	mA		
			One Driver ON, V <sub>DD</sub> = 10 V	_	3.9	mA		
			One Driver ON, V <sub>DD</sub> = 5.0 V	-	2.4	mA		
	I <sub>DD(OFF)</sub>	ALL	$V_{DD} = 5.0 \text{ V}$ , All Drivers OFF, All Inputs = 0 V	-	1.6	mA		
			V <sub>DD</sub> = 12 V, All Drivers OFF, All Inputs = 0 V	_	2.9	mA		

### 5821 thru 5823 Bimos II 8-Bit serial-input, latched drivers



# TIMING CONDITIONS ( $V_{DD} = 5.0 \text{ V}$ , $T_A = +25^{\circ}\text{C}$ , Logic Levels are $V_{DD}$ and Ground)

Α.	Minimum Data Active Time Before Clock Pulse (Data Set-Up Time)	. 75 ns
В.	Minimum Data Active Time After Clock Pulse (Data Hold Time)	. 75 ns
C.	Minimum Data Pulse Width	150 ns
D.	Minimum Clock Pulse Width	150 ns
E.	Minimum Time Between Clock Activation and Strobe	300 ns
F.	Minimum Strobe Pulse Width	100 ns
G.	Typical Time Between Strobe Activation and Output Transition	500 ns

Serial Data present at the input is transferred to the shift register on the logic "0" to logic "1" transition of the CLOCK input pulse. On succeeding CLOCK pulses, the registers shift data information towards the SERIAL DATA OUTPUT. The SERIAL DATA must appear at the input prior to the rising edge of the CLOCK input waveform.

Information present at any register is transferred to its respective latch when the STROBE is high (serial-to-parallel conversion). The latches will continue to accept new data as long as the STROBE is held high. Applications where the latches are bypassed (STROBE tied high) will require that the ENABLE input be high during serial data entry.

When the ENABLE input is high, all of the output buffers are disabled (OFF) without affecting the information stored in the latches or shift register. With the ENABLE input low, the outputs are controlled by the state of the latches.

### TRUTH TABLE

Serial	1	s	hift I	Regi	ster Conte	ents	Serial			Lat	ch (	Contents			Output Contents			
Data Input	Clock Input	l <sub>4</sub>	l <sub>2</sub>	l <sub>3</sub>		I <sub>8</sub>	Data Output	Strobe Input			Output Enable	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>		I <sub>8</sub>		
Н	7	Н	R <sub>1</sub>	R <sub>2</sub>		R <sub>7</sub>	R <sub>7</sub>											
L	7	L	R <sub>1</sub>	$R_2$		R <sub>7</sub>	R <sub>7</sub>											
Х	l	R,	$R_2$	R <sub>3</sub>		R <sub>8</sub>	R <sub>8</sub>							Ì				ĺ
		X	Х	Х		Х	Х	L	R <sub>1</sub>	$R_2$	$R_3$	R <sub>8</sub>	]					
		P <sub>1</sub>	P <sub>2</sub>	$P_3$		P <sub>8</sub>	P <sub>8</sub>	Н	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>	P <sub>8</sub>	L	P <sub>1</sub>	$P_2$	$P_3$		P <sub>8</sub>
									Х	Х	Х	X	Н	Н	Н	Н		Н

L = Low Logic Level H = High Logic Level X = Irrelevant P = Present State R = Previous State

# $\mathbf{5829}$

### 9-BIT SERIAL-INPUT, LATCHED SINK DRIVER

Intended primarily to drive high-current, dot matrix 9- and 24-wire printer solenoids, the UCN5829EB serial-input, latched sink driver provides a complete driver function with a minimum external parts count. Included on chip are constant-frequency PWM current control for each output driver, a user-defined output enable timeout, current sensing, and thermal shutdown.

The 9-bit CMOS shift register and latches allow operation with most microprocessor/LSI-based systems. With a 5 V logic supply, these BiMOS devices will operate at data input rates greater than 3.3 MHz. The CMOS inputs cause minimum loading and are compatible with standard CMOS, PMOS, NMOS, and TTL circuits. A CMOS serial data output allows cascade connections in applications requiring additional drive lines as required for 24-wire printheads.

The device features nine open-collector Darlington drivers, each rated at 50 V and 1.6 A. Current-control for each output is provided by an internal current-sensing resistor and a constant-frequency chopper circuit. An external high-side driver can be used to optimize print head performance. It is enabled by an on-chip driver during the output enable timeout. Internal logic sequencing prevents false output operation during power up. Other high-current devices for driving dot matrix printheads are the UDN2961B/W and UDN2962W.

The UCN5829EB is supplied in a 44-lead power PLCC. Its batwing construction provides for maximum package power dissipation in a minimum-area, surface-mountable package.

### ABSOLUTE MAXIMUM RATINGS

SHIET DEGISTED

LATCHES

33

32

Dwg. No. PP-028A

ONE-SHOT

15

Output Voltage, V <sub>OUT</sub> 50 V
Output Current, I <sub>OUT</sub>
(Continuous) 1.6 A
(Peak)
Logic Supply Voltage, V <sub>DD</sub>
Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>DD</sub> + 0.3 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Junction Temperature, T <sub>J</sub> +150°C*
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C


\* Fault conditions that produce excessive junction temperature will activate device thermal shutdown circuitry. These conditions can be tolerated, but should be avoided.


Caution: This CMOS device has input static protection but is susceptible to damage when exposed to extremely high static electrical charges.

### **FEATURES**

- 1.6 A Continuous Output Current
- 50 V Minimum Sustaining Voltage
- Internal Current Sensing
- Constant-Frequency PWM Current Control
- Control for External High-Side Driver
- 3.3 MHz Guaranteed Data Input Rate
- Low-Power CMOS Logic & Latches
- Internal Pull-Ups for TTL Compatibility
- User-Defined Output Enable Timeout
- Internal Thermal Shutdown Circuitry


Always order by complete part number: **UCN5829EB** .

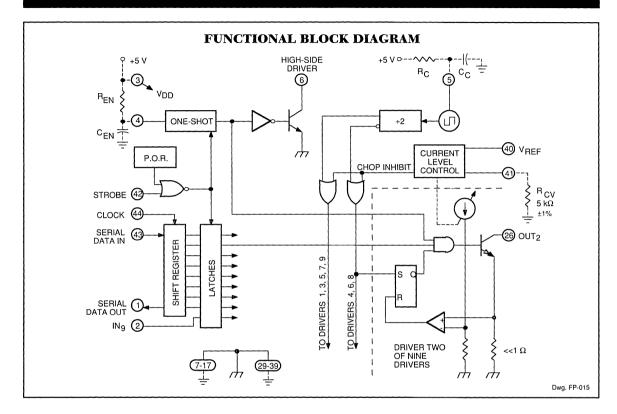




### 5829 9-BIT SERIAL-INPUT, LATCHED SINK DRIVER

### TYPICAL INPUT CIRCUITS



### TYPICAL OUTPUT DRIVER



Dwg. No. EP-021-2

Limits

# ELECTRICAL CHARACTERISTICS at T $_{\rm A}$ = +25°C, V $_{\rm DD}$ = 5 V, in Test Circuit/Typical Application (unless otherwise noted).

	1		1		iiiii		
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units	
Output Power Drivers (OUT, throu	igh OUT <sub>9</sub> ) with V	V <sub>REF</sub> ≥4.5 V					
Output Leakage Current	I <sub>out</sub>	V <sub>OUT</sub> = 50 V	T -	1.0	100	μА	
Output Saturation Voltage	V <sub>OUT(SAT)</sub>	I <sub>OUT</sub> = 1.0 A		1.0	1.5	V	
		I <sub>OUT</sub> = 1.6 A		1.5	1.9	V	
Output Sustaining Voltage	V <sub>OUT(sus)</sub>	I <sub>OUT</sub> = 1.6 A, L = 2.5 mH	50			V	
Control Logic							
HSD Output Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>C</sub> = 20 mA	_	0.5	1.0	٧	
Logic Input Voltage	V <sub>IN(1)</sub>		3.5		5.3	V	
	V <sub>IN(0)</sub>		-0.3		0.8	V	
Logic Input Current	I <sub>IN</sub>	V <sub>IN</sub> = 5.0 V	_	-	1.0	μА	
		V <sub>IN</sub> = 0.8 V		-90	-180	μΑ	
Reference Input Current	I <sub>REF</sub>	V <sub>REF</sub> = 3.0 V	T -	500	900	μΑ	
Logic Supply Current	I <sub>DD</sub>	All Drivers OFF	_	15	25	mA	
$(V_{REF} = 2.0 \text{ V})$		All Drivers ON, No Load	T -	55	75	mA	
Maximum Clock Frequency	f <sub>clk</sub>		3.3	5.0	_	MHz	
Serial Data Output Voltage	V <sub>OUT(1)</sub>	I <sub>OUT</sub> = -200 μA	4.5	4.7	_	V	
	V <sub>OUT(0)</sub>	l <sub>OUT</sub> = 200 μA		250	_	mV	
Clock to Serial Data Out Delay	t <sub>PD</sub>	C <sub>L</sub> = 30 pF			300	ns	
Thermal Shutdown Temperature	T <sub>J</sub>			165	_	°C	

Continued next page...

### 9-BIT SERIAL-INPUT, LATCHED SINK DRIVER

# ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $V_{DD}$ = 5 V, in Test Circuit/Typical Application (unless otherwise noted).

			Limits							
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units				
Chopping Characteristics (T <sub>J</sub> = +	25°C to +150°C) w	vith Fast Clamp Diodes								
Enable Timeout	t <sub>EN</sub>	$R_{EN} = 20 \text{ k}\Omega, C_{EN} = 0.01 \text{ μF}$	190	200	210	μs				
Chopping Frequency	f <sub>ch</sub>	$R_{C} = 20 \text{ k}\Omega, C_{C} = 250 \text{ pF}$	90	100	110	kHz				
Duty Cycle Range	dc	t <sub>on</sub> / t <sub>on</sub> + t <sub>off</sub>	15		< 50	%				
Chop Current Level	I <sub>TRIP</sub>	$V_{REF} = 2.0 \text{ V}, f_{ch} < 100 \text{ kHz}$	0.9	1.0	1.1	Α				
		V <sub>REF</sub> = 2.8 V, f <sub>ch</sub> < 100 kHz	1.26	1.4	1.54	Α				
Output Current Control Range	V <sub>REF</sub>		1.0		3.2	V				
	I <sub>TRIP</sub>		0.5	_	1.6	Α				
Delay	t <sub>d</sub>	$I_{TRIP}$ to $I_{OUT(P)}$ , $T_A = +25^{\circ}C$		300	500	ns				
Chop Inhibit Voltage Range	V <sub>REF</sub>		4.5	_	V <sub>DD</sub> + 0.3	V				


Negative current is defined as coming out of (sourcing) the specified device terminal.

### **EXTERNAL HIGH-SIDE DRIVERS**


### **NMOS**

# V<sub>BB</sub> + 10 V V<sub>BB</sub>

### **PMOS**




### CHARGE-PUMP CIRCUITRY FOR SINGLE-SUPPLY OPERATION



Dwg. No. EP-027 Dwg. No. EP-028 Dwg. No. EP-026

# TEST CIRCUIT AND TYPICAL APPLICATION

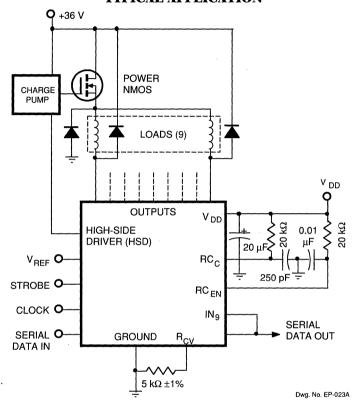


### TRUTH TABLE

Serial Data	Clock	Shift Register Contents*	Serial Data	Strobe	Latch Contents*	Output Contents*	HSD
Input	Input	l <sub>1</sub> l <sub>2</sub> l <sub>9</sub>	Output	Input	l <sub>1</sub> l <sub>2</sub> l <sub>9</sub>	l <sub>1</sub> l <sub>2</sub> l <sub>9</sub>	OUTPUT
Н	1	H R <sub>1</sub> R <sub>8</sub>	R <sub>7</sub>				
L	7	L R <sub>1</sub> R <sub>8</sub>	R <sub>7</sub>	Н	X	Н	L
Х	1	R <sub>1</sub> R <sub>2</sub> R <sub>9</sub>	R <sub>8</sub>				
		X X X	· X	Н	R <sub>1</sub> R <sub>2</sub> R <sub>9</sub>		
		P <sub>1</sub> P <sub>2</sub> P <sub>9</sub>	P <sub>8</sub>	L	P <sub>1</sub> P <sub>2</sub> P <sub>9</sub>	$\bar{P}_1  \bar{P}_2  \dots  \bar{P}_9$	Н

<sup>\*</sup> Serial Data Output connected to Inputo.

L = Low Logic Level H = High Logic Level X = Irrelevant P = Present State R = Previous State

# 9-BIT SERIAL-INPUT, LATCHED SINK DRIVER

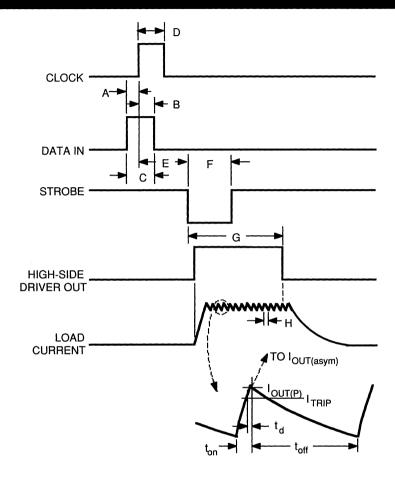

Dwg. No. WP-011A

# TIMING CONDITIONS $T_{_{A}} = +25^{\circ}\text{C}, \text{ Logic Levels are } V_{_{DD}} \text{ and Ground}$

A. Minimum Data Active Time Before Clock Pulse (Data Set-Up Time)	s
B. Minimum Data Active Time After Clock Pulse (Data Hold Time)	s
C. Minimum Data Pulse Width	S
D. Minimum Clock Pulse Width	s
E. Minimum Time Between Clock Activation and Strobe 500 ns	s
F. Minimum Strobe Pulse Width 500 ns	S
G. Enable Timeout, t <sub>FN</sub>	N
H. Chop Period*, t <sub>on</sub> + t <sub>off</sub>	c
$^{\star}$ Chopping is disabled if V $_{REF}$ is greater than 4.5 V.	

### APPLICATIONS INFORMATION

The UCN5829EB is designed to drive high-current, 9- or 24-wire (3 devices cascaded) dot matrix impact printer solenoids. The internal CMOS control logic:

- selects the operating channels from a 9- or 24-bit word previously loaded into the shift register,
- controls the peak load current of the output drivers via nine constant-frequency switch-mode current choppers,
- 3) sets a user-defined print enable time, and
- turns ON an external high-side driver during the print enable interval.

Data present at the SERIAL DATA INPUT is transferred to the shift register on the low-to-high transition of the CLOCK input pulse. The data must appear at the input prior to the rising edge of the clock input waveform. On succeeding clock pulses, the registers shift data information towards the SERIAL DATA OUTPUT. Information present at any register is transferred to its respective latch on the high-to-low transition of the STROBE (serial-to-parallel conversion). Drivers that have a logic high stored in their latch will be enabled for a set time interval ( $t_{\rm EN}$ ) generated by an internal one-shot. The output current is internally sensed and controlled in a fixed-frequency chopper format. Between strobe pulses, a new data word can be clocked in for the next print enable cycle.

### PRINT ENABLE TIME

A high-to-low transition of the STROBE input starts an internal one-shot which sets the print enable time ( $t_{\text{EN}}$ ) of the output drivers and the external high-side driver. The print enable time is determined by an external resistor (50 k $\Omega$  max) and capacitor (100 pF min) at RC<sub>EN</sub> as

$$t_{EN} = R_{EN} C_{EN}$$

The print enable time can also be controlled from a microprocessor. In this mode, the internal one-shot is operated as an output disable function. In this mode,  $R_{\rm EN}$  and  $C_{\rm EN}$  are not used; instead a 10 k $\Omega$  series resistor is connected between RC $_{\rm EN}$  and an externally generated output disable pulse. As before, on the high-to-low STROBE transition, the outputs will be enabled. They will remain enabled until a low-to-high logic (23.3 V) DISABLE transition at RC $_{\rm EN}$ .

When operating in a continuous chopping mode, and neither print enable timeout nor output disable are desired, RC<sub>EN</sub> should be grounded.

### **HIGH-SIDE DRIVER**

To reduce the current decay time at the end of a print enable cycle, an external high-side driver can be used and controlled by the HIGH-SIDE DRIVER (HSD) output. The HSD is designed to drive an external N-channel MOSFET (with accompanying charge pump circuitry). During the print enable time ( $t_{\rm EN}$ ), the internal high-side driver is OFF, allowing the external high-side driver to be ON. If the external high-side driver is a P-channel device (eliminating the need for charge-pump circuitry), the HSD signal must be inverted for correct operation.

If an external high-side driver is used, an external ground clamp diode is also required.

### **OUTPUT CURRENT CONTROL**

Each of the nine channels consists of a power Darlington sink driver, internal low-value current-sensing resistor, comparator, and an R/S flip-flop. The output current is sensed and controlled independently in each channel by means of a fixed-frequency chopper which sets the flip-flop and allows the output to turn ON. As the current increases in the load it is sensed by the internal sense resistor until the sense voltage equals the trip voltage of the comparator. At this time, the flip-flop is reset and the output is turned OFF. Over the range of  $V_{\rm REF}\,=\,1.0$  V to 3.2 V, the output current trip point is a linear function of the reference voltage:

$$I_{TRIP} = V_{REF}/2$$

To ensure an accurate chop current level, an external 5 k $\Omega$  resistor ( $R_{cv}$ ) is used. The actual load current peak will be slightly higher than the trip point (especially for low-inductance loads) because of the internal logic and switching delays (typically 300 ns). After turn-off, the load current decays, circulating through the load and an external clamp diode. The output driver will stay OFF until the next chop pulse sets the flip-flop, turning ON the output, and allowing load current to rise again. The cycle repeats, maintaining the average printhead current at the desired level.

The chop pulse frequency is determined by an external resistor and capacitor at  $RC_c$ :

$$f_{ch} = \frac{1}{2 R_C C_C}$$

To reduce the power supply and ground noise developed when operating nine channels synchronously, the outputs are split into two groups (OUTPUTS 2, 4, 6, 8 and OUTPUTS 1, 3, 5, 7, 9) for chopping pulses.

The chopping function is disabled when  $V_{\rm REF} > 4.5$  V. To prevent operation at higher than allowable current levels,  $V_{\rm REF}$  should not exceed 3.2 V, except to disable the chopping function.

### **DUTY CYCLE LIMITS**

For correct operation of the UCN5829EB, the duty cycle must be between 15% and 50% with 20% to 40% recommended. The lower limit is due to internal lockout circuitry while the upper limit guarantees synchronous operation. The duty cycle (dc) can be calculated as

$$dc = \frac{t_{on}}{t_{on} + t_{off}} \approx \frac{I_{OUT(P)} / I_{OUT(asym)} + V_d / V_c}{1 + V_d / V_c}$$

where  $I_{OUT(asym)}$  = the asymptotic current value =  $v_c/R_L$ 

 $v_{d}$  = discharge voltage across the load =  $V_{HSD}$  +  $V_{DIODE}$ 

 $\rm v_c = charge\ voltage\ across\ the\ load\ =\ V_{BB}$  -  $\rm V_{OUT(SAT)}$  -  $\rm V_{HSD}$ 

For most practical cases, correct operation can be achieved if  $I_{\text{OUT(asym)}}/I_{\text{OUT(P)}} > 2.5$ .

### 9-BIT SERIAL-INPUT, LATCHED SINK DRIVER

### **GENERAL**

For applications with 9-wire printheads, SERIAL DATA OUT should be connected to  $\rm IN_9$ . For 24-wire printhead applications, three devices (eight channels per device) are cascaded by connecting SERIAL DATA OUT to the next SERIAL DATA IN.

Each of the CMOS logic inputs have internal pull-up resistors for TTL compatibility.

An external transient-protection flyback diode is required at each output. Fast recovery diodes are recommended to reduce power dissipation in the UCN5829EB. Internal filtering prevents false triggering of the current sense comparator which can be caused by the recovery current spike of the diodes when the outputs turn ON.

The SUPPLY terminal should be well decoupled with a capacitor placed as close as possible to the device. Internal power-ON reset circuitry prevents false output triggering during power up.

Thermal protection circuitry is activated and turns OFF all drivers at a junction temperature of typically +165°C. The thermal shutdown is independent of all other functions. It should not be used as another control input but is intended only to protect the chip from catastrophic failures due to excessive junction temperatures. The output drivers are re-enabled when the junction temperature cools down to approximately +145°C.

### TYPICAL APPLICATION

Shown is a typical application with the UCN5829EB controlling a chop current of 1 A through a 3 mH, 9  $\Omega$  load. To check the duty cycle and  $I_{\text{OUT(asym}}/I_{\text{OUT(P)}}$  restrictions

where 
$$\begin{aligned} v_{d} &= V_{HSD} + V_{DIODE} \approx 1.5 + 1.5 = 3 \\ v_{c} &= V_{BB} - V_{OUT(SAT)} - V_{HSD} = 36 - 1.5 - 1.5 = 33 \\ I_{OUT(asym)} &= v_{c}/R_{L} = 33/9 = 3.67 \end{aligned}$$
 then 
$$I_{OUT(asym)}/I_{OUT(P)} = 3.67/1 = 3.67$$

The condition of  $I_{\text{OUT(asym})}/I_{\text{OUT(P)}} > 2.5$  is met and the duty cycle will be within the proscribed limits. The actual duty cycle is

$$dc = \frac{I_{OUT(P)}/I_{OUT(asym)} + V_d/V_c}{1 + V_d/V_c} = \frac{1.0/3.67 + 2.5/33}{1 + 2.5/33} = 32\%$$

For a 50 kHz chopping frequency and a 250  $\mu s$  print enable time, the remaining component values are

with 
$$C_c=250$$
 pF and  $C_{EN}=0.01~\mu F$  then  $R_c=1/(2~f_{ch}~C_c)=1/(2~x~50~x~10^3~x~250~x~10^{-12})=40~k\Omega$  and  $R_{EN}=t_{EN}/~C_{EN}=250~x~10^{-6}/~10~x~10^{-9}=25~k\Omega$ 

# 5832

### BiMOS II 32-BIT SERIAL-INPUT, LATCHED DRIVERS

Intended originally to drive thermal printheads, Types UCN5832A and UCN5832EP have been optimized for low output-saturation voltage, high-speed operation, and pin configurations most convenient for the tight space requirements of high-resolution printheads. The integrated circuits can also be used to drive multiplexed LED displays or incandescent lamps at up to 150 mA peak current. The combination of bipolar and MOS technologies gives BiMOS II arrays an interface flexibility beyond the reach of standard buffers and power driver circuits.

The devices each have 32 bipolar npn open-collector saturated drivers, a CMOS data latch for each of the drivers, two 16-bit CMOS shift registers, and CMOS control circuitry. The high-speed CMOS shift registers and latches allow operation with most microprocessor-based systems. Use of these drivers with TTL may require input pull-up resistors to ensure an input logic high. MOS serial data outputs permit cascading for interface applications requiring additional drive lines.

The UCN5832A is supplied in a 40-pin dual in-line plastic package with 0.600" (15.24 mm) row spacing. Under normal operating conditions, this device will allow all outputs to sustain 100 mA continuously without derating. The UCN5832EP is supplied in a 44-lead plastic leaded chip carrier for minimum area, surface-mount applications. Both devices are also available for operation from -40°C to +85°C. To order, change the prefix from 'UCN' to 'UCQ'.

Similar 32-bit serial-input latched source drivers are available as UCN5818AF/EPF. High-voltage, high-current 8-bit devices are available in Series UCN5820A and UCN5840A/EP/LW.

### **FEATURES**

- 5 MHz Typical Data Input Rate
- Low-Power CMOS Logic and Latches
- 40 V Current Sink Outputs
- Low Saturation Voltage

п							
			UC	N58:	32A		
	LOGIC SUPPLY	1 V <sub>DD</sub>				40	CLOCK
	SERIAL DATA IN	2		Γ		39	SERIAL DATA OUT OUTPUT
	GROUND	4		, 上		38	EÑA BLE
	STROBE	4			>	37	оит <sub>32</sub>
	out <sub>1</sub>				∤⊳	36	OUT <sub>31</sub>
	0UT <sub>2</sub>					35	оит <sub>30</sub>
	0UT <sub>3</sub>					34	0UT <sub>29</sub>
	OUT <sub>4</sub>					33	OUT <sub>28</sub>
	0UT <sub>5</sub>		S E	<sub>\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\</sub>	s  H>	32	OUT <sub>27</sub>
	оит <sub>6</sub>		LATCHES REGISTER	REGI STER	LATCHES	31	оит <sub>26</sub>
	оит <sub>7</sub>		7 8	E		30	OUT <sub>25</sub>
	OUT <sub>8</sub>					29	out <sub>24</sub>
	out <sub>9</sub>	ⅎ				28	OUT <sub>23</sub>
	оит <sub>10</sub>	14				27	OUT <sub>22</sub>
	OUT	<b>□</b>				26	OUT <sub>21</sub>
	оит <sub>12</sub>			} }	H>	25	оит <sub>20</sub>
	оит <sub>13</sub>			} }	H>	24	оит <sub>19</sub>
	оит <sub>14</sub>				H>	23	оит <sub>18</sub>
	0UT <sub>15</sub>					22	OUT <sub>17</sub>
	' OUT <sub>16</sub>	20	J _ L			21	INTERNAL CONNECTION
	1						

### ABSOLUTE MAXIMUM RATINGS at +25°C Free-Air Temperature


at +20 Clice-An Temperature
Output Voltage, V <sub>OUT</sub> 40 V
Logic Supply Voltage, V <sub>DD</sub> 15 V
Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>DD</sub> + 0.3 V
Continuous Output Current,
l <sub>оит</sub>
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C


Caution: CMOS devices have input-static protection but are susceptible to damage when exposed to extremely high static electrical charges.

Always order by complete part number:


Part Number	Package
UCN5832A	40-Pin DIP
UCN5832EP	44-Lead PLCC

### 5832 Bimos II 32-Bit Serial-Input, Latched Drivers





### UCN5832EP




### 5832 Bimos II 32-Bit Serial-Input, latched drivers

# ELECTRICAL CHARACTERISTICS at $T_A = +25^{\circ}C$ , $V_{DD} = 5$ V (unless otherwise noted).

Characteristic	Symbol	Test Conditions	Min.	Max.	Units	
Output Leakage Current	I <sub>CEX</sub>	V <sub>OUT</sub> = 40 V, T <sub>A</sub> = 70°C		10	μА	
Collector-Emitter	V <sub>CE(SAT)</sub>	I <sub>OUT</sub> = 50 mA	_	275	mV	
Saturation Voltage		I <sub>OUT</sub> = 100 mA	250	550	mV	
Input Voltage	V <sub>IN(1)</sub>		3.5	5.3	٧	
	V <sub>IN(0)</sub>		-0.3	+0.8	V	
Input Current	I <sub>IN(1)</sub>	V <sub>IN</sub> = 3.5 V		1.0	μА	
	  IN(0)	V <sub>IN</sub> = 0.8 V	_	-1.0	μА	
Input Impedance	Z <sub>IN</sub>	V <sub>IN</sub> = 3.5 V	3.5		MΩ	
Serial Data Output Resistance	R <sub>out</sub>		_	20	kΩ	
Supply Current	I <sub>DD</sub>	One output ON, I <sub>OUT</sub> = 100 mA	_	5.0	mA	
		All outputs OFF	_	50	μΑ	
Output Rise Time	t <sub>r</sub>	I <sub>OUT</sub> = 100 mA, 10% to 90%	_	1.0	μs	
Output Fall Time	t <sub>f</sub>	I <sub>OUT</sub> = 100 mA, 90% to 10%		1.0	μs	


NOTE: Positive (negative) current is defined as going into (coming out of) the specified device pin.

### TYPICAL INPUT CIRCUIT




Dwg. No. A-12,379A

### TYPICAL OUTPUT DRIVER



### 5832 <u>Bimos II 32-Bit Serial-Input, Latched Drivers</u>



# TIMING CONDITIONS (Logic Levels are $V_{DD}$ and Ground)

 Serial Data present at the input is transferred to the shift register on the logic "0" to logic "1" transition of the CLOCK input pulse. On succeeding CLOCK pulses, the registers shift data information towards the SERIAL DATA OUTPUT. The SERIAL DATA must appear at the input prior to the rising edge of the CLOCK input waveform.

Information present at any register is transferred to its respective latch when the STROBE is high (serial-to-parallel conversion). The latches will continue to accept new data as long as the STROBE is held high. Applications where the latches are bypassed (STROBE tied high) will require that the OUTPUT ENABLE input be low during serial data entry.

When the OUTPUT ENABLE input is low, all of the output buffers are disabled (OFF) without affecting the information stored in the latches or shift register. With the OUTPUT ENABLE input high, the outputs are controlled by the state of the latches.

### TRUTH TABLE

Serial			hift	Regi	ster	Conte	ents	Serial			Lat	ch (	Cont	ents		Output		0	utp	ıt C	onten	ts
Data Input	Clock Input	ı	l <sub>2</sub>	I <sub>3</sub>		I <sub>N-1</sub>	I <sub>N</sub>	Data Output	Strobe Input	I <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>		I <sub>N-1</sub>	I <sub>N</sub>	Enable Input	I <sub>1</sub>	I <sub>2</sub>	l <sub>3</sub>		I <sub>N-1</sub>	I <sub>N</sub>
Н	7	Н	R <sub>1</sub>	R <sub>2</sub>		R <sub>N-2</sub>	R <sub>N-1</sub>	R <sub>N-1</sub>														
L	7	L	R <sub>1</sub>	R <sub>2</sub>		R <sub>N-2</sub>	R <sub>N-1</sub>	R <sub>N-1</sub>									}					
X	L	R <sub>1</sub>	R <sub>2</sub>	R <sub>3</sub>		R <sub>N-1</sub>	R <sub>N</sub>	R <sub>N</sub>									Ì					
		Х	Х	Х		X	Х	X	L	R <sub>1</sub>	R <sub>2</sub>	R <sub>3</sub>		R <sub>N-1</sub>	$R_N$							
		$P_1$	P <sub>2</sub>	P <sub>3</sub>		P <sub>N-1</sub>	$P_N$	P <sub>N</sub>	Н	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>		P <sub>N-1</sub>	$P_N$	Н	P <sub>1</sub>	P	<sub>2</sub> P <sub>3</sub>		P <sub>N-1</sub>	P <sub>N</sub>
										Х	Χ	Х		Х	Х	L ·	Н	Н	Н		Н	Н

 $L = Low\ Logic\ Level \quad H = High\ Logic\ Level \quad X = Irrelevant \quad P = Present\ State \quad R = Previous\ State$ 

# 5833

### BiMOS II 32-BIT SERIAL-INPUT, LATCHED DRIVERS


Designed to reduce logic supply current, chip size, and system cost, the UCN5833A/EP integrated circuits offer high-speed operation for thermal printers. These devices can also be used to drive multiplexed LED displays or incandescent lamps within their 125 mA peak output current rating. The combination of bipolar and MOS technologies gives BiMOS II smart power ICs an interface flexibility beyond the reach of standard buffers and power driver circuits.

These 32-bit drivers have bipolar open-collector npn Darlington outputs, a CMOS data latch for each of the drivers, a 32-bit CMOS shift register, and CMOS control circuitry. The high-speed CMOS shift registers and latches allow operation with most microprocessor-based systems at data input rates above 3.3 MHz. Use of these drivers with TTL may require input pull-up resistors to ensure an input logic high.

The UCN5833A is supplied in a 40-pin dual in-line plastic package with 0.600" (15.24 mm) row spacing. At an ambient temperature of +75°C, all outputs of the DIP-packaged device will sustain 50 mA continuously. For high-density applications, the UCN5833EP is available. This 44-lead plastic chip carrier (quad pack) is intended for surface-mounting on solder lands with 0.050" (1.27 mm) centers. CMOS serial data outputs permit cascading for applications requiring additional drive lines.

### **FEATURES**

- 5 MHz Typical Data Input Rate
- 30 V Minimum Output Breakdown
- Darlington Current-Sink Outputs
- Low-Power CMOS Logic and Latches

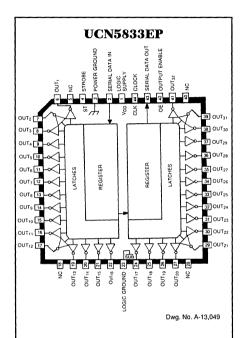

## ABSOLUTE MAXIMUM RATINGS at +25°C Free-Air Temperature

Output Voltage, V <sub>OUT</sub>
Logic Supply Voltage, V <sub>DD</sub> 7.0 V
Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>DD</sub> + 0.3 V
Continuous Output Current,
I <sub>OUT</sub> (each output) 125 mA
Package Power Dissipation, $P_D$
(UCN5833A) 3.5 W*

T<sub>S</sub> .....-55°C to +150°C


\* Derate linearly to 0 W at +150°C.

Caution: CMOS devices have input static protection but are susceptible to damage when exposed to extremely high static electrical charges.


Always order by complete part number:

Part Number	Package
UCN5833A	40-Pin DIP
UCN5833EP	44-Lead PLCC


### 5833 Bimos II 32-Bit Serial-Input, latched drivers




Dwg. No. A-13,048



### TYPICAL INPUT CIRCUIT



### TYPICAL OUTPUT DRIVER



Dwg. No. A-13,051

### 5833 Bimos II 32-Bit Serial-Input, latched drivers

### ELECTRICAL CHARACTERISTICS at $T_A = +25^{\circ}C$ , $V_{DD} = 5$ V (unless otherwise noted).


				Limits	
Characteristic	Symbol	Test Conditions	Min.	Max.	Units
Output Leakage Current	CEX	V <sub>OUT</sub> = 30 V, T <sub>A</sub> = 70°C	_	10	μА
Collector-Emitter	V <sub>CE(SAT)</sub>	I <sub>OUT</sub> = 50 mA	_	1.2	٧
Saturation Voltage		I <sub>OUT</sub> = 100 mA	_	1.7	٧
Input Voltage	V <sub>IN(1)</sub>		3.5	5.3	٧
	V <sub>IN(0)</sub>		-0.3	+0.8	V
Input Current	  IN(1)	V <sub>IN</sub> = 5.0 V	_	1.0	μА
	I <sub>IN(0)</sub>	V <sub>IN</sub> = 0 V	_	-1.0	μА
Serial Output Voltage	V <sub>OUT(1)</sub>	I <sub>OUT</sub> = -200 μA	4.5	<del></del>	V
	V <sub>OUT(0)</sub>	I <sub>OUT</sub> = 200 μA	_	0.3	٧
Supply Current	I <sub>DD</sub>	One output ON, I <sub>OUT</sub> = 100 mA	_	1.0	mA
		All outputs OFF		50	μА
Output Rise Time	t <sub>r</sub>	I <sub>OUT</sub> = 100 mA, 10% to 90%	_	500	ns
Output Fall Time	t <sub>i</sub>	I <sub>OUT</sub> = 100 mA, 90% to 10%	_	500	ns

NOTE: Positive (negative) current is defined as going into (coming out of) the specified device pin.

### TRUTH TABLE

Serial		s	hift	Regi	ster	Conte	ents	Serial	ata Strobe		Lat	ch (	Cont	ents		Output		0	utpı	ut C	onten	its
Data Input	Clock Input	I <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>		I <sub>N-1</sub>	I <sub>N</sub>	Data Output		i <sub>1</sub>	I <sub>2</sub>	l <sub>3</sub>		i <sub>N-1</sub>	ľ	Enable Input	I <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>		I <sub>N-1</sub>	I <sub>N</sub>
Н	7	H	R <sub>1</sub>	R <sub>2</sub>		R <sub>N-2</sub>	R <sub>N-1</sub>	R <sub>N-1</sub>														
L	7	L	R <sub>1</sub>	R <sub>2</sub>		R <sub>N-2</sub>	R <sub>N-1</sub>	R <sub>N-1</sub>														
Х	Z	R <sub>1</sub>	$R_2$	R <sub>3</sub>		R <sub>N-1</sub>	R <sub>N</sub>	R <sub>N</sub>														
		Х	Х	Х		Х	X	Х	L	R <sub>1</sub>	R <sub>2</sub>	R <sub>3</sub>		R <sub>N-1</sub>	$R_N$							
		P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>		P <sub>N-1</sub>	P <sub>N</sub>	P <sub>N</sub>	Н	P <sub>1</sub>	P <sub>2</sub>	$P_3$		P <sub>N-1</sub>	$P_N$	Н	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>		P <sub>N-1</sub>	P <sub>N</sub>
										Х	Х	Х		Х	Х	L	Н	Н	Н		Н	Н

 $L = Low\ Logic\ Level \quad H = High\ Logic\ Level \quad X = Irrelevant \quad P = Present\ State \quad R = Previous\ State$ 



Dwg. No. A-12,276A

# TIMING CONDITIONS $(V_{DD} = 5.0 \text{ V}, \text{Logic Levels are } V_{DD} \text{ and Ground})$

A.	Minimum Data Active Time Before Clock Pulse	
	(Data Set-Up Time)	75 ns
B.	Minimum Data Active Time After Clock Pulse	
	(Data Hold Time)	75 ns
C.	Minimum Data Pulse Width	150 ns
D.	Minimum Clock Pulse Width	150 ns
E.	Minimum Time Between Clock Activation and Strobe	300 ns
F.	Minimum Strobe Pulse Width	100 ns
G.	Typical Time Between Strobe Activation and	
	Output Transition	500 ns

Serial Data present at the input is transferred to the shift register on the logic "0" to logic "1" transition of the CLOCK input pulse. On succeeding CLOCK pulses, the registers shift data information towards the SERIAL DATA OUTPUT. The SERIAL DATA must appear at the input prior to the rising edge of the CLOCK input waveform.

Information present at any register is transferred to its respective latch when the STROBE is high (serial-to-parallel conversion). The latches will continue to accept new data as long as the STROBE is held high. Applications where the latches are bypassed (STROBE tied high) will require that the OUTPUT ENABLE input be low during serial data entry.

When the OUTPUT ENABLE input is low, all of the output buffers are disabled (OFF) without affecting the information stored in the latches or shift register. With the OUTPUT ENABLE input high, the outputs are controlled by the state of the latches.

# THRU

### **BiMOS II 8-BIT SERIAL-INPUT,** LATCHED DRIVERS

The merging of low-power CMOS logic and bipolar output power drivers permit Series UCN5840A/LW integrated circuits to be used in a wide variety of peripheral power driver applications. The three basic devices in this series each have an eight-bit CMOS shift register and CMOS control circuitry, eight CMOS data latches, and eight bipolar current-sinking Darlington output drivers. The 500 mA NPN Darlington outputs, with integral transient-suppression diodes, are suitable for use with relays, solenoids, and other inductive loads. Except for the maximum driver output voltage ratings, the UCN5841A/LW, UCN5842A/LW, and UCN5843A/LW are identical. The UCN5843A/LW offers premium performance with a minimum output-breakdown voltage rating of 100 V (50 V sustaining). All drivers can be operated with a split supply where the negative supply is up to -20 V.


BiMOS II devices have higher data-input rates than the earlier BiMOS circuits. With a 5 V logic supply, they will typically operate at better than 5 MHz. With a 12 V supply, significantly higher speeds are obtained. The CMOS inputs are compatible with standard CMOS and NMOS logic levels. TTL circuits may require the use of appropriate pullup resistors. By using the serial data output, drivers can be cascaded for interface applications requiring additional drive lines.

Suffix 'A' devices are furnished in a standard 18-pin plastic DIP; suffix 'LW' indicates an 18-lead wide-body SOIC.

### **FEATURES**

- 3.3 MHz Minimum Data-Input Rate
- CMOS, NMOS, TTL Compatible Inputs
- Internal Pull-Up/Pull-Down Resistors
- Low-Power CMOS Logic and Latches,
- High-Voltage Current-Sink Outputs
- Output Transient-Protection Diodes
- Single or Split Supply Operation
- DIP, PLCC, or SOIC Packaging

### UCN5841A - UCN5843A



Dwg. No. A-12,659

### ABSOLUTE MAXIMUM RATINGS at 25°C Free-Air Temperature


Output Voltage, V <sub>CE</sub>	
(UCN5841A/LW) <b>50 V</b>	
(UCN5842A/LW) 80 V	
(UCN5843A/LW) 100 V	
Output Voltage, V <sub>CE(sus)</sub>	
(UCN5841A/LW)	
(UCN5842A/LW) 50 V†	
(UCN5843A/LW) 50 V†	
Logic Supply Voltage Range,	
V <sub>DD</sub> 4.5 V to 15 V	•
V <sub>DD</sub> with Reference to V <sub>EE</sub> 25 V	•
Emitter Supply Voltage, V <sub>EE</sub> 20 V	!
Input Voltage Range,	
V <sub>IN</sub> 0.3 V to V <sub>DD</sub> + 0.3 V	,
Continuous Output Current,	
I <sub>ОUТ</sub>	
Package Power Dissipation,	
P <sub>D</sub> See Graph	ì
Operating Temperature Range,	
T <sub>A</sub> 20°C to +85°C	÷
Storage Temperature Range,	
T <sub>s</sub> 55°C to +150°C	,
†For inductive load applications.	

Note that the Series UCN5840A (dual in-line package) and Series UCN5840LW (small-outline IC package) are electrically identical and share a


common pin number assignment.

Always order by complete part number, e.g., UCN5842LW |.

### 5841 thru 5843 Bimos II 8-Bit serial-input, latched drivers




Dwg. No. GP-018A

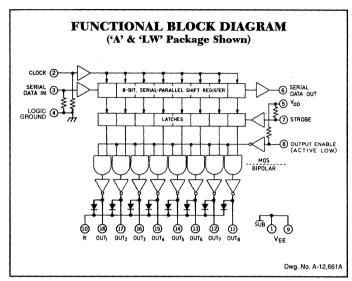

Caution: CMOS devices have input static protection but are susceptible to damage when exposed to extremely high static electrical charges.

### **UCN5841LW - UCN5843LW**



Dwg. No. A-14,438

Note that the Series UCN5840A (dual in-line package) and Series UCN5840LW (small-outline IC package) are electrically identical and share a common pin number assignment.

### 5841 thru 5843 Bimos II 8-BIT SERIAL-INPUT, LATCHED DRIVERS


ELECTRICAL CHARACTERISTICS at  $T_A$  = +25°C,  $V_{DD}$  = 5 V,  $V_{EE}$  = 0 V (unless otherwise specified).

	1	Applicable			Limits			
Characteristic	Symbol	Devices*	Test Conditions	Min.	Max.	Unit		
Output Leakage Current	I <sub>CEX</sub>	UCN5841	V <sub>OUT</sub> = 50 V	-	50	μΑ		
			V <sub>OUT</sub> = 50 V, T <sub>A</sub> = +70°C	-	100	μА		
		UCN5842	V <sub>OUT</sub> = 80 V	_	50	μА		
			V <sub>OUT</sub> = 80 V, T <sub>A</sub> = +70°C	_	100	μΑ		
		UCN5843	V <sub>OUT</sub> = 100 V	_	50	μА		
			V <sub>OUT</sub> = 100 V, T <sub>A</sub> = +70°C		100	μΑ		
Collector-Emitter	V <sub>CE(SAT)</sub>	ALL	I <sub>OUT</sub> = 100 mA	<del>-</del>	1.1	٧		
Saturation Voltage			I <sub>OUT</sub> = 200 mA	_	1.3	٧		
			$I_{OUT} = 350 \text{ mA}, V_{DD} = 7.0 \text{ V}$	_	1.6	٧		
Collector-Emitter	V <sub>CE(sus)</sub>	UCN5841	I <sub>OUT</sub> = 350 mA, L = 2 mH	35	_	٧		
Sustaining Voltage		UCN5842	I <sub>OUT</sub> = 350 mA, L = 2 mH	50	_	٧		
		UCN5843	I <sub>OUT</sub> = 350 mA, L = 2 mH	50	_	٧		
Input Voltage	V <sub>IN(0)</sub>	ALL		_	0.8	٧		
	V <sub>IN(1)</sub>	ALL	V <sub>DD</sub> = 12 V	10.5	_	٧		
			V <sub>DD</sub> = 10 V	8.5	_	٧		
	i i		V <sub>DD</sub> = 5.0 V	3.5	_	٧		
Input Resistance	R <sub>IN</sub>	ALL	V <sub>DD</sub> = 12 V	50	_	kΩ		
			V <sub>DD</sub> = 10 V	50	_	kΩ		
			V <sub>DD</sub> = 5.0 V	50	_	kΩ		
Supply Current	l <sub>DD(ON)</sub>	ALL	All Drivers ON, V <sub>DD</sub> = 12 V	_	16	mA		
			All Drivers ON, V <sub>DD</sub> = 10 V	_	14	mA		
			All Drivers ON, V <sub>DD</sub> = 5.0 V		8.0	mA		
	I <sub>DD(OFF)</sub>	ALL	All Drivers OFF, V <sub>DD</sub> = 12 V		2.9	mA		
	}		All Drivers OFF, V <sub>DD</sub> = 10 V		2.5	mA		
			All Drivers OFF, V <sub>DD</sub> = 5.0 V	_	1.6	mA		
Clamp Diode	I <sub>R</sub>	UCN5841	V <sub>R</sub> = 50 V		<b>50</b> ,	μА		
Leakage Current		UCN5842	V <sub>R</sub> = 80 V		50	μА		
		UCN5843	V <sub>R</sub> = 100 V	_	50	μА		
Clamp Diode Forward Voltage	V <sub>F</sub>	ALL	I <sub>F</sub> = 350 mA		2.0	٧		


<sup>\*</sup> Complete part number includes a suffix to identify package style: A = DIP, LW = SOIC.


### 5841 thru 5843 Bimos II 8-BIT SERIAL-INPUT, LATCHED DRIVERS

# STROBE OUTPUT ENABLE Dwg, No. EP-010-3



### TYPICAL OUTPUT DRIVER



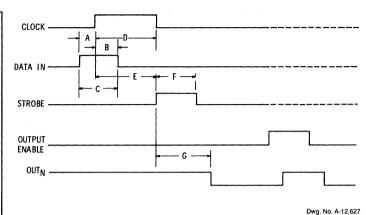

# TIMING CONDITIONS (T<sub>A</sub> = +25°C, Logic Levels are $V_{\rm DD}$ and Ground)


	$V_{DD} = 5.0 \text{ V}$
Minimum Data Active Time Before Clock Pulse     (Data Set-Up Time)	75 ns
B. Minimum Data Active Time After Clock Pulse (Data Hold Time)	75 ns
C. Minimum Data Pulse Width	150 ns
D. Minimum Clock Pulse Width	150 ns
E. Minimum Time Between Clock Activation and Strobe	300 ns
F. Minimum Strobe Pulse Width	100 ns
G. Typical Time Between Strobe Activation and Output Transition	500 ns

Serial Data present at the input is transferred to the shift register on the logic "0" to logic "1" transition of the CLOCK input pulse. On succeeding CLOCK pulses, the registers shift data information towards the SERIAL DATA OUTPUT. The SERIAL DATA must appear at the input prior to the rising edge of the CLOCK input waveform.

Information present at any register is transferred to its respective latch when the STROBE is high (serial-to-parallel conversion). The latches will continue to accept new data as long as the STROBE is held high. Applications where the latches are bypassed (STROBE tied high) will require that the ENABLE input be high during serial data entry.

When the ENABLE input is high, all of the output buffers are disabled (OFF) without affecting the information stored in the latches or shift register. With the ENABLE input low, the outputs are controlled by the state of the latches.

### 5841 thru 5843 <u>Bimos II 8-Bit serial-input, latched drivers</u>

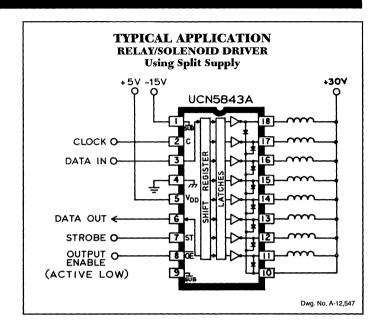

### TRUTH TABLE

Serial		s	hift l	Regi	ster Conte	ents	Serial			Lat	ch C	Contents		_		Output Contents			
Data Input	Clock	l,	l <sub>2</sub>	l <sub>3</sub>		I <sub>8</sub>	Data Output	Strobe Input	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>		I <sub>8</sub>	Output Enable	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>		l <sub>8</sub>
Н	7	Н	R <sub>1</sub>	R <sub>2</sub>		R <sub>7</sub>	R <sub>7</sub>												
L	7	L	R,	R <sub>2</sub>		R <sub>7</sub>	R <sub>7</sub>												
Х	L	R,	R <sub>2</sub>	R <sub>3</sub>		R <sub>8</sub>	R <sub>8</sub>												
		X	X	Х		Х	Х	L	R <sub>1</sub>	R <sub>2</sub>	R <sub>3</sub>	· [	R <sub>8</sub>						
		P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>		P <sub>8</sub>	P <sub>8</sub>	Н	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>	1	P <sub>8</sub>	L	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>		P <sub>8</sub>
i									Х	Х	Х		X	Н	Ħ	Н	Н		Н

 $L = Low\ Logic\ Level \quad H = High\ Logic\ Level \quad X = Irrelevant \quad P = Present\ State \quad R = Previous\ State$ 

# 5881

### **BiMOS II DUAL 8-BIT LATCHED** DRIVER WITH READ BACK

With 16 CMOS data latches (two sets of eight), CMOS control circuitry for each set of latches, and a bipolar saturated driver for each latch, the UCN5881EP provides low-power interface with maximum flexibility. The driver includes thermal shutdown circuitry to protect against damage from high junction temperatures and clamp diodes for inductive load transient suppression.

The CMOS inputs cause minimal circuit loading and are compatible with standard CMOS, PMOS, and NMOS circuits. TTL or DTL circuits may require the use of appropriate pull up resistors. When reading back, each data input will sink 8 mA (if its corresponding latch is low) or source 400 µA (if its corresponding latch is high). The read back feature is for error checking. It allows the system to verify that data has been received and latched.


The bipolar outputs are suitable for use with low-power relays, solenoids, and stepping motors. The very-low output saturation voltage makes this device well-suited for driving LED arrays. The output transistors are capable of sinking 50 mA and will maintain at least 20 V in the OFF state. Outputs may be paralleled for higher current capability.

The UCN5881EP dual 8-bit latched sink driver is rated for operation. over the temperature range of -20°C to +85°C and is supplied in a plastic 44-lead chip carrier conforming to the JEDEC MS-007AB outline.

### **FEATURES**

- 4.4 MHz Minimum Data-Input Rate
- Low-Power CMOS Logic
- 20 V. 50 mA (Max.) Outputs
- Transient-Protected Outputs

■ Thermal Shutdown Protection ■ Low-Profile Leaded Chip Carrier

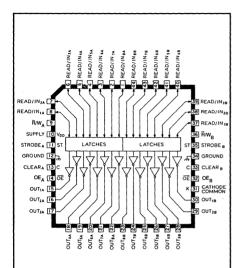

Dwg. No. A-14,225

### ABSOLUTE MAXIMUM RATINGS

Output Voltage, V <sub>OUT</sub> 20 V
Output Sustaining Voltage, V <sub>CE(sus)</sub> 15 V
Output Current, I <sub>OUT</sub> 50 mA
Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>DD</sub> + 0.3 V
Logic Supply Voltage, V <sub>DD</sub> 15 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,

T<sub>S</sub> .....-55°C to +150°C Caution: CMOS devices have input static protection, but are susceptible to damage when exposed to extremely high static electrical


Storage Temperature Range,


.....-20°C to +85°C

charges.

Always order by complete part number: **UCN5881EP**.

### 5881 Bimos II dual 8-bit latched driver

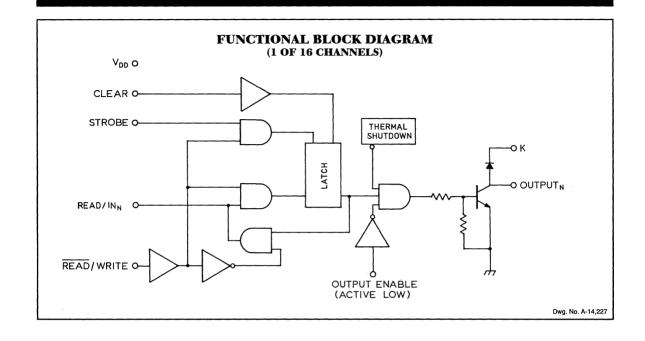

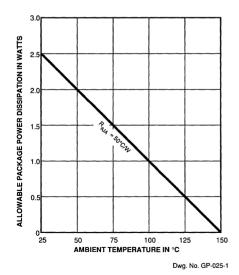


### TRUTH TABLE

Rea	d/ln	Strobe	Clear	Output Enable	Read/Write	Latch Contents	Output
>	(	Х	Х	1	Х	Х	OFF
1 0	)	1	0	0	1	0	OFF
1		1	0	0	1	1	ON
<b>\</b>	(	0	0	0	1	n-1	n-1
>	(	Χ	1	Х	Х	0	OFF
r	1	X	0	Х	0	n	n

- n = Present Latch Contents
- n-1 = Previous Latch Contents
- X = Irrelevant

### ELECTRICAL CHARACTERISTICS at $T_A = 25$ °C, $V_{DD} = 5$ V (unless otherwise noted).

				Limits	
Characteristic	Symbol	Test Conditions	Min.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	V <sub>OUT</sub> = 20 V		50	μΑ
Output Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>OUT</sub> = 10 mA	_	0.1	٧
		I <sub>OUT</sub> = 25 mA		0.5	٧
Output Sustaining Voltage	V <sub>CE(sus)</sub>	I <sub>OUT</sub> = 25 mA, L = 2 mH	15	_	٧
Input Voltage	V <sub>IN(0)</sub>		-0.3	0.8	٧
	V <sub>IN(1)</sub>		3.5	5.3	٧
Input Current	I <sub>IN(0)</sub>	V <sub>IN</sub> = 0.8 V	_	-10	μА
	I <sub>IN(1)</sub>	V <sub>IN</sub> = 5 V	_	10	μА
Readback Output Voltage	V <sub>OUT(1)</sub>	I <sub>OUT</sub> = -400 μA	3.5	_	٧
	V <sub>OUT(0)</sub>	I <sub>OUT</sub> = 5.0 mA	_	0.8	٧
Logic Supply Current	I <sub>DD</sub>	All Drivers ON	_	14	mA
		All Drivers-OFF	_	3.0	mA
Clamp Diode Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 20 V	_	50	μА
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 50 mA	_	1.5	٧



Dwg. No. A-14,228

# TIMING CONDITIONS (V<sub>DD</sub> = 5.0 V, Logic Levels are V<sub>DD</sub> and Ground)

Minimum Data Active Time Before Strobe Enabled     (Data Set-Up Time)	50 ns
B. Minimum Data Active Time After Strobe Disabled (Data Hold Time)	50 ns
C. Minimum Strobe Pulse Width	125 ns
D. Typical Time Between Strobe Activation and Output ON to OFF Transition	5 μ <b>s</b>
E. Typical Time Between Strobe Activation and Output OFF to ON Transition	500 ns
F. Minimum Clear Pulse Width	225 ns
G. Minimum Data Pulse Width	225 ns

A high on the READ/WRITE input allows the circuit to accept data in. Information then present at an input is transferred to its latch when the STROBE is high. A high CLEAR input will set all latches to the output OFF condition regardless of the data or STROBE input levels. A high OUTPUT ENABLE will set all outputs to the OFF condition regardless of any other input conditions. When the OUTPUT ENABLE is low, the outputs depend on the state of their respective latches.

A low on the READ/WRITE input will allow the latched data to be read back on the data input lines. Allow a minimum of 750 ns delay (will increase with capacitive loading) before reading back the state of the latches. The read back feature is for error checking applications and allows the system to verify that data has been received and latched.

# 90 AND

### **Bimos II 8-BIT SERIAL-INPUT,** LATCHED SOURCE DRIVERS

Frequently applied in non-impact printer systems, the UCN5890A and UCN5891A are BiMOS II serial-input, latched source (high-side) drivers. The octal, high-current smart-power ICs merge an 8-bit CMOS shift register, associated CMOS latches, and CMOS control logic (strobe and output enable) with sourcing power Darlington outputs. Typical applications include multiplexed LED and incandescent displays, relays, solenoids, and similar peripheral loads to a maximum of -500 mA per output.

Except for output voltage ratings, these smart high-side driver ICs are equivalent. The UCN5890A is rated for operation with load supply voltages of 20 V to 80 V and a minimum output sustaining voltage of 50 V. The UCN5891A is optimized for operation with supply voltages of 5 V to 50 V (35 V sustaining).

BiMOS II devices have higher data-input rates than the original BiMOS circuits. With a 5 V logic supply, they will typically operate at better than 5 MHz. With a 12 V supply, significantly higher speeds are obtained. The CMOS inputs are compatible with standard CMOS and NMOS logic levels. TTL circuits may require the use of appropriate pull-up resistors to ensure a proper input-logic high. A CMOS serial data output, allows cascading these devices in multiple drive-line applications required by many dot matrix, alphanumeric, and bar graph displays.

All devices are supplied in a standard dual in-line plastic package with copper lead frame for enhanced package power dissipation characteristics. A similar driver, featuring reduced output saturation voltage, is the UCN5895A. Complementary, 8-bit serial-input, latched sink drivers are the Series UCN5820A.

### ABSOLUTE MAXIMUM RATINGS at $T_A = +25^{\circ}C$

Output Voltage V

LATCHES

SERIAL DATA OUT

VDD 15 LOGIC SUPPLY

Ven 3 LOAD SUPPLY

Dwg. No. 12,639

OE 4 OUTPUT ENABLE

12 OUT a

GROUND [

CLOCK [

SERIAL 3

STROBE 4

DATA IN

Output voitage, voit
(UCN5890A)
(UCN5891A)
Logic Supply Voltage Range,
V <sub>DD</sub>
Driver Supply Voltage Range, V <sub>BB</sub> (UCN5890A) 20 V to 80 V
(UCN5890A) 20 V to 80 V
(UCN5891A) 5.0 V to 50 V
Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>DD</sub> + 0.3 V
Continuous Output Current,
Ι <sub>ΟυΤ</sub>
Allowable Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C

Caution: CMOS devices have input static protection, but are susceptible to damage when exposed to extremely high static electrical charges.

T<sub>S</sub> .....-55°C to +150°C

Storage Temperature Range,


### FEATURES


- 50 V or 80 V Source Outputs
- Output Current to -500 mA
- Output Transient-Suppression Diodes
- 3.3 MHz Minimum Data-Input Rate
- Low-Power CMOS Logic and Latches

Always order by complete part number:


Part Number	Max. V <sub>OUT</sub>
UCN5890A	80 V
UCN5891A	50 V

### 5890 and 5891 Bimos II 8-BIT SERIAL-INPUT, LATCHED SOURCE DRIVERS





TYPICAL INPUT CIRCUIT




Dwg. No. A-12,520

Dwg. No. GP-016

Number of Outputs ON at	Ma	x. Allowable Duty C at T <sub>A</sub> of	ycle
l <sub>out</sub> = -200 mA	50°C	60°C	70°C
8	53%	47%	41%
7	60%	54%	48%
6	70%	64%	56%
5	83%	75%	67%
4	100%	94%	84%
3	100%	100%	100%
2	100%	100%	100%
1	100%	100%	100%

### TYPICAL OUTPUT DRIVER



Dwg. No. A-12,648

### 5890 AND 5891 Bimos II 8-BIT SERIAL-INPUT, LATCHED SOURCE DRIVERS


# ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $V_{BB}$ = 80 V (UCN5890A) or 50 V (UCN5891A), $V_{DD}$ = 5 V and 12 V (unless otherwise noted).

					Limits	
Characteristic	Symbol	V <sub>BB</sub>	Test Conditions	Min.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	Max.	T <sub>A</sub> = +25°C	_	-50	μА
!			T <sub>A</sub> = +70°C	_	-100	μА
Output Saturation Voltage	V <sub>CE(SAT)</sub>	50 V	I <sub>OUT</sub> = -100 mA	_	1.8	٧
			I <sub>OUT</sub> = -225 mA	<del>-</del>	1.9	٧
		i i	I <sub>OUT</sub> = -350 mA	_	2.0	٧
Output Sustaining Voltage	V <sub>CE(sus)</sub>	Max.	I <sub>OUT</sub> = -350 mA, L = 2 mH, UCN5891A	35	_	٧
			I <sub>OUT</sub> = -350 mA, L = 2 mH, UCN5890A	50		٧
Input Voltage	V <sub>IN(1)</sub>	50 V	V <sub>DD</sub> = 5.0 V	3.5	5.3	٧
			V <sub>DD</sub> = 12 V	10.5	12.3	٧
	V <sub>IN(0)</sub>	50 V	V <sub>DD</sub> = 5 V to 12 V	-0.3	+0.8	٧
Input Current	I <sub>IN(1)</sub>	50 V	$V_{DD} = V_{IN} = 5.0 \text{ V}$		50	μА
			V <sub>DD</sub> = V <sub>IN</sub> = 12 V	_	240	μΑ
Input Impedance	Z <sub>IN</sub>	50 V	V <sub>DD</sub> = 5.0 V	100	_	kΩ
	!		V <sub>DD</sub> = 12 V	50	-	kΩ
Clock Frequency	f <sub>c</sub>	50 V		3.3		MHz
Serial Data Output	R <sub>out</sub>	50 V	V <sub>DD</sub> = 5.0 V	_	20	kΩ
Resistance			V <sub>DD</sub> = 12 V	_	6.0	kΩ
Turn-ON Delay	t <sub>PLH</sub>	50 V	Output Enable to Output, I <sub>OUT</sub> = -350 mA		2.0	μs
Turn-OFF Delay	t <sub>PHL</sub>	50 V	Output Enable to Output, I <sub>OUT</sub> = -350 mA		10	μs
Supply Current	I <sub>BB</sub>	50 V	All outputs ON, All outputs open	_	10	mA
•			All outputs OFF	_	200	μА
	I <sub>DD</sub>	50 V	V <sub>DD</sub> = 5 V, All outputs OFF, Inputs = 0 V	_	100	μА
			V <sub>DD</sub> = 12 V, All outputs OFF, Inputs = 0 V		200	μА
			V <sub>DD</sub> = 5 V, One output ON, All Inputs = 0 V	_	1.0	mA
			V <sub>DD</sub> = 12 V, One output ON, All Inputs = 0 V	_	3.0	mA
Diode Leakage Current	I <sub>R</sub>	Max.	T <sub>A</sub> = +25°C	_	50	μА
			T <sub>A</sub> = +70°C	_	100	μА
Diode Forward Voltage	V <sub>F</sub>	Open	I <sub>F</sub> = 350 mA		2.0	V

NOTES: Turn-off delay is influenced by load conditions. Systems applications well below the specified output loading may require timing considerations for some designs, i.e., multiplexed displays or when used in combination with sink drivers in a totem pole configuration.

Positive (negative) current is defined as going into (coming out of) the specified device pin.

### 5890 AND 5891 <u>Bimos II 8-Bit Serial-Input, latched source drivers</u>



# TIMING CONDITIONS (V<sub>DD</sub> = 5.0 V, Logic Levels are V<sub>DD</sub> and Ground)

 Serial Data present at the input is transferred to the shift register on the logic "0" to logic "1" transition of the CLOCK input pulse. On succeeding CLOCK pulses, the registers shift data information towards the SERIAL DATA OUTPUT. The SERIAL DATA must appear at the input prior to the rising edge of the CLOCK input waveform.

Information present at any register is transferred to the respective latch when the STROBE is high (serial-to-parallel conversion). The latches will continue to accept new data as long as the STROBE is held high. Applications where the latches are bypassed (STROBE tied high) will require that the OUTPUT ENABLE input be high during serial data entry.


When the OUTPUT ENABLE input is high, all of the output buffers are disabled (OFF) without affecting the information stored in the latches or shift register. With the OUTPUT ENABLE input low, the outputs are controlled by the state of their respective latches.

### TRUTH TABLE

Serial		S	hift I	Regi	egister Contents Serial Latch Contents				Output Contents							
Data Input	Clock Input	l,	l <sub>2</sub>	l <sub>3</sub>		I <sub>N-1</sub>	I <sub>N</sub>	Data Output	Strobe Input	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	 I <sub>N-1</sub>	I <sub>N</sub>	Output Enable	I <sub>1</sub> I <sub>2</sub> I <sub>3</sub> I <sub>N-1</sub> I <sub>N</sub>
Н	7	Н	R <sub>1</sub>	R <sub>2</sub>		R <sub>N-2</sub>	R <sub>N-1</sub>	R <sub>N-1</sub>			-					
L	J	L	R,	R <sub>2</sub>		R <sub>N-2</sub>	R <sub>N-1</sub>	R <sub>N-1</sub>								
X	l	R <sub>1</sub>	R <sub>2</sub>	R <sub>3</sub>		R <sub>N-1</sub>	R <sub>N</sub>	R <sub>N</sub>								
		Х	Х	Х		Х	Х	Х	L	R <sub>1</sub>	$R_2$	$R_3$	 R <sub>N-1</sub>	$R_N$		
1		P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>		P <sub>N-1</sub>	P <sub>N</sub>	P <sub>N</sub>	Н	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>	 P <sub>N-1</sub>	$P_N$	L	P <sub>1</sub> P <sub>2</sub> P <sub>3</sub> P <sub>N-1</sub> P <sub>N</sub>
								I		Χ	Χ	Х	 Х	Х	Н	L L L L L

L = Low Logic Level H = High Logic Level X = Irrelevant P = Present State R = Previous State

# TYPICAL APPLICATION SOLENOID OR RELAY DRIVER

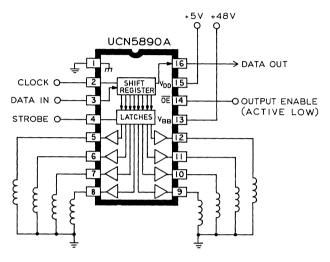

Dwg. No. A- 12,548

## $\overline{5895}$

## **Bimos II 8-BIT SERIAL INPUT,** LATCHED SOURCE DRIVERS

The UCN5895A and UCN5895EP BiMOS II serial-input. latched source drivers are designed for applications emphasizing low output saturation voltages and currents to -250 mA per output. These smart high-side octal, driver ICs merge an 8-bit CMOS shift register, associated CMOS latches, and CMOS control logic (strobe and output enable) with medium current emitter-follower (sourcing) outputs. Typical applications include incandescent or LED displays (both directly driven and multiplexed), non-impact (i.e., thermal) printers, relays, and solenoids.

The UCN5895A and UCN5895EP are suitable for high-side applications to -250 mA per channel. The maximum supply voltage is 50 V and a minimum output sustaining voltage rating of 35 V for inductive load applications. Under normal operating conditions, the UCN5895A is capable of providing -120 mA (8 outputs continuous and simultaneous) at +65°C with a logic supply of 5 V. Similar devices, with higher output current ratings, are the UCN5890A and UCN5891A.

BiMOS II devices can operate at greatly improved data-input rates. With a 5 V supply, they will typically operate at better than 5 MHz. At 12 V, significantly higher speeds are obtained.

The CMOS inputs provide for minimum loading and are compatible with standard CMOS, PMOS, and NMOS circuits. TTL or DTL circuits may require the use of appropriate pull-up resistors to ensure a proper input-logic high. A CMOS serial data output allows cascading these devices in multiple drive-line applications required by many dot matrix, alphanumeric, and bar graph displays.

These devices are rated for continuous operation over the temperature range of -20°C to +85°C. Because of limitations on package power dissipation, the simultaneous operation of all output drivers may require a reduction in duty cycle. The UCN5895A is supplied in a standard 16pin dual in-line plastic package with a copper lead frame for increased allowable package power dissipation. The UCN5895EP is supplied in a 20-lead plastic leaded chip carrier for minimum area, surface-mount applications.

## ABSOLUTE MAXIMUM RATINGS at $T_{\Lambda} = +25^{\circ}C$

**UCN5895A** 

LATCHES

GROUND [T

CLOCK 2

SERIAL 3

STROBE 4

DATA IN

SERIAL DATA OUT

OD 15 LOGIC SUPPLY

VBB 13 LOAD SUPPLY

Dwg. No. 12.639

OUTPUT ENABLE

12 OUT 8

Output Voltage, V <sub>OUT</sub> 50 V
Logic Supply Voltage Range,
V <sub>DD</sub> 4.5 V to 12 V
Driver Supply Voltage Range,
V <sub>BB</sub> 5.0 V to 50 V
Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>DD</sub> + 0.3 V
Continuous Output Current,
l <sub>OUT</sub> 250 mA
Allowable Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C

Caution: CMOS devices have input-static protection, but are susceptible to damage when exposed to extremely high static electrical charges.

T<sub>S</sub> .......55°C to +150°C


Storage Temperature Range,


#### **FEATURES**

- Low Output-Saturation Voltage
- Source Outputs to 50 V
- Output Current to -250 mA
- 3.3 MHz Minimum Data-Input Rate
- Low-Power CMOS Logic & Latches


Always order by complete part number, e.g., UCN5895A

## 5895 Bimos II 8-BIT SERIAL-INPUT, LATCHED DRIVERS






#### TYPICAL INPUT CIRCUIT




Dwg. No. A-12,520

#### TYPICAL OUTPUT DRIVER



Dwg. No. A-12,655

#### UCN5895EP



Dwg. No. A-14,368


## 5895 Bimos II 8-BIT SERIAL-INPUT, LATCHED DRIVERS

## ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $V_{BB}$ = 50 V, $V_{DD}$ = 5 V and 12 V (unless otherwise noted).

				Limits	
Characteristic	Symbol	Test Conditions	Min.	Max.	Units
Output Leakage Current	I <sub>OUT</sub>	$T_A = +25$ °C	-	- 50	μΑ
		T <sub>A</sub> = +70°C		-100	μА
Output Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>OUT</sub> = -60 mA	T -	1.1	V
		I <sub>OUT</sub> = -120 mA	T -	1.2	٧
Output Sustaining Voltage	V <sub>CE(sus)</sub>	I <sub>OUT</sub> = -120 mA, L = 2 mH	35	_	V
Input Voltage	V <sub>IN(1)</sub>	V <sub>DD</sub> = 5.0 V	3.5	5.3	V
		V <sub>DD</sub> = 12 V	10.5	12.3	V
	V <sub>IN(0)</sub>	V <sub>DD</sub> = 5 V to 12 V	-0.3	+0.8	V
Input Current	I <sub>IN(1)</sub>	$V_{DD} = V_{IN} = 5.0 \text{ V}$	T -	50	μА
		V <sub>DD</sub> = V <sub>IN</sub> = 12 V	T -	240	μА
Input Impedance	Z <sub>IN</sub>	V <sub>DD</sub> = 5.0 V	100		kΩ
		V <sub>DD</sub> = 12 V	50	-	kΩ
Clock Frequency	f <sub>CLK</sub>	1	3.3		MHz
Serial Data-Output	R <sub>OUT</sub>	V <sub>DD</sub> = 5.0 V	T -	20	kΩ
Resistance		V <sub>DD</sub> = 12V	T -	6.0	kΩ
Turn-ON Delay	t <sub>PLH</sub>	Output Enable to Output, I <sub>OUT</sub> = -120 mA	_	2.0	μs
Turn-OFF Delay	t <sub>PHL</sub>	Output Enable to Output, I <sub>OUT</sub> = -120 mA	_	10	μs
Supply Current	I <sub>BB</sub>	All outputs ON, All outputs open	_	10	mA
		All outputs OFF	T -	200	μА
	I <sub>DD</sub>	V <sub>DD</sub> = 5 V, All outputs OFF, Inputs = 0 V	T -	100	μА
		V <sub>DD</sub> = 12 V, All outputs OFF, Inputs = 0 V	_	200	μА
		V <sub>DD</sub> = 5 V, One output ON, All inputs = 0 V	-	1.0	mA
		V <sub>DD</sub> = 12 V, One output ON, All inputs = 0 V	T -	3.0	mA
Diode Leakage Current	I <sub>R</sub>	$V_{R} = 25 \text{ V}, T_{A} = +25^{\circ}\text{C}$	1 -	50	μА
		V <sub>R</sub> = 25 V, T <sub>A</sub> = +70°C	T -	100	μА
Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 120 mA	T -	2.0	V

NOTES: Turn-off delay is influenced by load conditions. Systems applications well below the specified output loading may require timing considerations for some designs, i.e., multiplexed displays or when used in combination with sink drivers in a totem pole configuration.

Positive (negative) current is defined as going into (coming out of) the specified device pin.

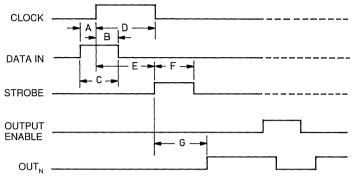

Dwg. No. A-12,649A

### TIMING CONDITIONS

 $(V_{DD}$  = 5.0 V, Logic Levels are  $V_{DD}$  and Ground)

A.	Minimum Data Active Time Before Clock Pulse	
	(Data Set-Up Time)	. 75 ns
В.	Minimum Data Active Time After Clock Pulse	
	(Data Hold Time)	. 75 ns
C.	Minimum Data Pulse Width	150 ns
D.	Minimum Clock Pulse Width	150 ns
E.	Minimum Time Between Clock Activation and Strobe	300 ns
F.	Minimum Strobe Pulse Width	100 ns
G.	Typical Time Between Strobe Activation and	
	Output Transistion	1.0 μs


Serial Data present at the input is transferred to the shift register on the logic "0" to logic "1" transition of the CLOCK input pulse. On succeeding CLOCK pulses, the registers shift data information towards the SERIAL DATA OUTPUT. The SERIAL DATA must appear at the input prior to the rising edge of the CLOCK input waveform.

Information present at any register is transferred to its respective latch when the STROBE is high (serial-to-parallel conversion). The latches will continue to accept new data as long as the STROBE is held high. Applications where the latches are bypassed (STROBE tied high) will require that the OUTPUT ENABLE input be high during serial data entry.

When the OUTPUT ENABLE input is high, all of the output buffers are disabled (OFF) without affecting the information stored in the latches or shift register. With the OUTPUT ENABLE input low, the outputs are controlled by the state of their respective latches.

## Bimos II 8-BIT SERIAL-INPUT, LATCHED DRIVERS

#### TYPICAL APPLICATION

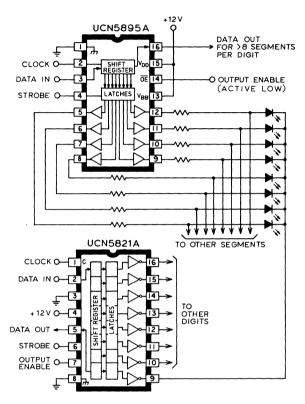

Dwg. B-1541

#### TRUTH TABLE


Serial		s	hift	Regi	ster	Conte	ents	Serial			Lat	ch C	onte	ents		_	Outpu	t Conten	its
Data Input	Clock Input	i,	l <sub>2</sub>	l <sub>3</sub>		I <sub>N-1</sub>	I <sub>N</sub>	Data Output	Strobe Input	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>		I <sub>N-1</sub>	N_	Output Enable	l <sub>1</sub> l <sub>2</sub> l <sub>3</sub>	I <sub>N-1</sub>	I <sub>N</sub>
Н	7	Н	R <sub>1</sub>	R <sub>2</sub>		R <sub>N-2</sub>	R <sub>N-1</sub>	R <sub>N-1</sub>											
L	7	L	R <sub>1</sub>	R <sub>2</sub>		R <sub>N-2</sub>	R <sub>N-1</sub>	R <sub>N-1</sub>											
Х	ı	R,	$R_2$	R <sub>3</sub>		R <sub>N-1</sub>	R <sub>N</sub>	R <sub>N</sub>								]			
		Х	Х	X		Х	Х	Х	L	R,	R <sub>2</sub>	R <sub>3</sub>		R <sub>N-1</sub>	$R_N$				
		$P_1$	P <sub>2</sub>	P <sub>3</sub>		P <sub>N-1</sub>	P <sub>N</sub>	P <sub>N</sub>	Н	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>		P <sub>N-1</sub>	$P_N$	L	P <sub>1</sub> P <sub>2</sub> P <sub>3</sub>	P <sub>N-1</sub>	P <sub>N</sub>
										Х	Х	Х		Х	Х	Н	LLL	L	L

L = Low Logic Level H = High Logic Level X = Irrelevant P = Present State R = Previous State

# 6116 AND 6118

### FLUORESCENT DISPLAY DRIVERS

#### **UDN6116A**



Dwg. No. A-9643A

## ABSOLUTE MAXIMUM RATINGS at T<sub>4</sub> = +25°C

Supply Voltage, V <sub>BB</sub>
(suffix A or LW)
(suffix A-1)
(suffix A-2) 65 V
Input Voltage, V <sub>IN</sub> 20 V
Output Current, IOUT40 mA
Allowable Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C

Caution: The high input impedance of these devices makes them susceptible to static discharge damage associated with handling and testing. Techniques similar to those used for handling MOS devices should be employed.

Consisting of six or eight NPN Darlington output stages and the associated common-emitter input stages, these drivers are designed to interface between low-level digital logic and vacuum fluorescent displays. All devices are capable of driving the digits and/or segments of these displays and are designed to permit all outputs to be activated simultaneously. Pull-down resistors are incorporated into each output and no external components are required for most fluorescent display applications. The highest voltage parts (suffix A-1) are also used in gas-discharge display applications as anode (digit) drivers.


Five standard devices are listed, so that a circuit designer may select the optimum device for his application. Input characteristics, number of drivers, package style, and output voltage are tabulated for each device in the Device Type Number Designation chart. With any device, the output load is activated when the input is pulled towards the positive supply (active 'high'). All units operate over the temperature range of -20°C to +85°C.

#### **FEATURES**


- Digit or Segment Drivers
- Low Input Current
- Integral Output Pull-Down Resistors
- High Output Breakdown Voltage
- Single or Split Supply Operation

Always order by complete part number, e.g., **UDN6118A-2** . See matrix on third page. Note that all devices are not available in both package types.


#### **UDN6116A**



#### UDN6118A\* UDN6118A-1\* UDN6118A-2\*




#### **UDN6118LW\***




Dwg. No. A-9643A

Dwg. No. A-9641A

Dwg. No. A-14,370

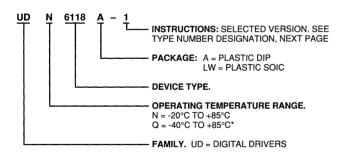

\* UDN6118 - devices are also available for operation between -40°C and +85°C. To order, change the prefix from 'UDN' to 'UDQ'.

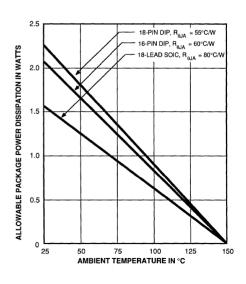


Dwg. No. GP-022A

#### **DEVICE TYPE NUMBER DESIGNATION**

	No. of		No. of	Type Number		
Input Compatibility	Drivers	V <sub>out</sub>	Pins	Plastic DIP	Plastic SOIC	
	6	80 V	16	UDN6116A		
5 V TTL, CMOS		60 V	18	UDN6118A-2*	_	
	8	80 V	18	UDN6118A*	UDN6118LW*	
		110 V	18	UDN6118A-1*		

<sup>\*</sup> See note on prior page.

## PARTIAL SCHEMATIC ONE DRIVER (ALL TYPES)

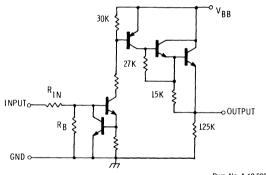

Dwg. No. A-10,592C

R <sub>IN</sub>	R <sub>B</sub>
10 kΩ	30 kΩ

### **ELECTRICAL CHARACTERISTICS** (over operating temperature range).

Note: All Values Specified At —


	Suffixes	Α	LW	A-1	A-2	,
ſ	V <sub>BB</sub> =	80	80	110	60	Volts

			Devices		Limits					
Characteristic	Symbol	Basic Part. No.	Suffix	Test Conditions	Min.	Тур.	Max.	Units		
Output Leakage Current	I <sub>out</sub>	All	All	V <sub>IN</sub> = 0.4 V	_	_	15	μА		
Output OFF Voltage	V <sub>out</sub>	All	All	V <sub>IN</sub> = 0.4 V			1.0	V		
Output Pull-Down Current	l <sub>out</sub>	All	A or LW		450	650	1100	μА		
			A-1	Input Open, V <sub>OUT</sub> = V <sub>BB</sub>	600	900	1500	μΑ		
			A-2		350	500	775	μΑ		
Output ON Voltage	V <sub>out</sub>	All	A or LW		77	78	_	V		
	!		A-1	V <sub>IN</sub> = 2.4 V, I <sub>OUT</sub> = -25 mA	107	108		٧		
			A-2		57	58	_	V		
Input ON Current	I <sub>IN</sub>	All	All	V <sub>IN</sub> = 2.4 V	_	120	225	μА		
				V <sub>IN</sub> = 5.0 V		375	650	μА		
Supply Current	I <sub>BB</sub>	All	All	All Inputs Open		10	100	μА		
		UDN6116	Α	All Inputs = 2.4 V	-	5.0	7.5	mA		
		UDN6118	A or LW	All Inputs = 2.4 V		6.0	9.0	mA		
			A-1	Two Inputs = 2.4 V	_	2.5	4.5	mA		
			A-2	All inputs = 2.4 V	T -	5.5	8.0	mA		

#### RECOMMENDED OPERATING CONDITIONS


		Applicable Devices			Limits					
Characteristic	Symbol	Basic Part. No.	Suffix	Test Conditions	Min.	Тур.	Max.	Units		
Supply Voltage	V <sub>BB</sub>	UDN6116/18	A or LW		5.0	-	70	٧		
			A-1		5.0		100	V		
			A-2		5.0		50	V		
Input ON Voltage	V <sub>IN</sub>	UDN6116/18	All		2.4	_	15	٧		
Output ON Current	I <sub>OUT</sub>	All	All		-	_	-25	mA		

NOTE: Positive (negative) current is defined as going into (coming out of) the specified device pin.

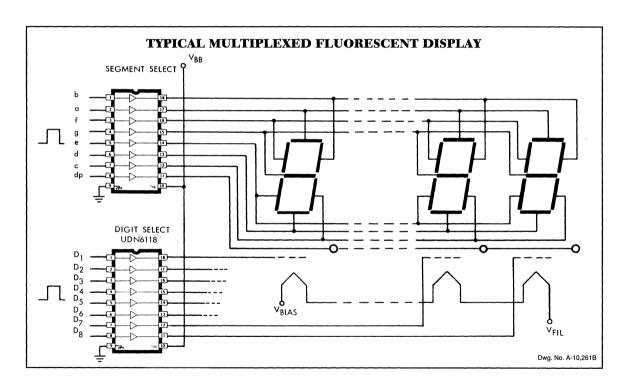

## 7003

## HIGH-VOLTAGE, HIGH-CURRENT DARLINGTON ARRAY



Dwg. No. A-9594

## ABSOLUTE MAXIMUM RATINGS at $T_{\star}$ = +25°C

Output Voltage, V <sub>CEX</sub>
Output Sustaining Voltage,
V <sub>CE(sus)</sub> 90 V
Output Current, I <sub>C</sub> <b>300 mA</b>
Input Current, I <sub>IN</sub>
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C

Output current may be limited by duty cycle, number of drivers operating, ambient temperature, and heat sinking. Under any set of conditions, do not exceed the specified maximum current rating or a junction temperature of 150°C.

Integrating seven high-voltage, high-current npn Darlingtons into a monolithic power array, the ULN7003A is designed for interfacing between TTL or CMOS logic and a variety of peripheral loads. The seven open-collector Darlington outputs are specified for 150 V minimum breakdown and 90 V minimum sustaining. Included are integral power diodes for switching inductive loads. Typical applications include relays, lamps, print heads and hammers, solenoids, and level shifting to power discretes.

The ULN7003A includes input current-limiting resistors compatible with the drive capabilities of TTL and (most) CMOS operating at a nominal logic supply of 5 V. Operation with 12 V CMOS may require additional input current limiting.

The high sustaining voltage rating of this power array makes it ideal for inductive load applications where Zener diode flyback techniques are used. The increased flyback voltage provides a much faster inductive load turn-OFF current decay that is especially useful with dc stepper motors, solenoids, and print heads.


The ULN7003A is pinned with outputs opposite inputs to facilitate ease of circuit board layout. It is supplied in a 16-pin plastic dual in-line package with a copper lead frame to maximize device power dissipation capabilities.

#### **FEATURES**

- 150 V Minimum Output Breakdown
- 90 V Minimum Sustaining Voltage
- 300 mA Output Current
- Internal High-Current Clamp Diodes
- Logic-Compatible Inputs


Always order by complete part number: ULN7003A .

## 7003 HIGH-VOLTAGE, HIGH-CURRENT DARLINGTON ARRAY




Dwg. No. GP-016

A Zener diode can be used to increase the flyback voltage. This gives a much faster inductive load turn-OFF current decay. The maximum Zener voltage plus the load supply voltage plus the internal diode forward voltage must not exceed the device's rated sustaining voltage.




## PARTIAL SCHEMATIC (ONE OF SEVEN DRIVERS)




Dwg. No. A-9651

#### SWITCHING DELAY TEST CIRCUIT



V<sub>in</sub> = 3.5 V for ULN7003A

Dwg. No. WP-010



## 7003 HIGH-VOLTAGE, HIGH-CURRENT DARLINGTON ARRAY

## ELECTRICAL CHARACTERISTICS at $T_A = +25^{\circ}C$ (unless otherwise noted).

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	V <sub>CE</sub> = 150 V	T -		50	μА
		V <sub>CE</sub> = 150 V, T <sub>A</sub> = +70°C	T -	_	100	μΑ
Output Sustaining Voltage	V <sub>CE(sus)</sub>	I <sub>C</sub> = 200 mA, L = 2 mH	90		_	V
Output Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>C</sub> = 100 mA, I <sub>IN</sub> = 250 μA	T -	1.1	1.3	٧
		$I_C = 250 \text{ mA}, I_{IN} = 350 \mu\text{A}$	T -	1.3	1.6	٧
Input Current	I <sub>IN(ON)</sub>	V <sub>IN</sub> = 3.85 V	_	0.93	1.35	mA
	I <sub>IN(OFF)</sub>	$I_C = 500 \mu A, T_A = +70^{\circ} C$	50	65	_	μА
Input Voltage	V <sub>IN(ON)</sub>	V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 200 mA	_		2.4	V
		V <sub>CE</sub> = 2.0 V, I <sub>C</sub> = 250 mA	T -	_	2.7	٧
Input Capacitance	C <sub>IN</sub>			15	25	pF
Switching Delay	t <sub>pd</sub>	Turn On, I <sub>C</sub> = 250 mA	-	0.5	1.0	μs
		Turn Off, I <sub>C</sub> = 250 mA	T -	0.5	1.0	μs
Clamp Diode Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 150 V	_	_	50	μΑ
		V <sub>R</sub> = 150 V, T <sub>A</sub> = +70°C	_		100	μА
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 250 mA	T	1.7	2.0	V


Typical Data is for design information only.

## 7003 HIGH-VOLTAGE, HIGH-CURRENT DARLINGTON ARRAY


## ALLOWABLE PEAK COLLECTOR CURRENT AS A FUNCTION OF DUTY CYCLE

#### INPUT CURRENT AS A FUNCTION OF INPUT VOLTAGE

at  $T_{\Lambda} = +50^{\circ}C$ 

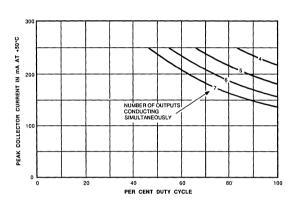


at  $T_A = +25^{\circ}C$ 



Dwg. No. A-9756B

Dwg. GP-015

at 
$$T_A = +70^{\circ}C$$



Dwg. GP-015-1

## APPLICATIONS INFORMATION

## POWER INTEGRATED CIRCUITS FOR MOTOR-DRIVE APPLICATIONS

Improved systems performance and reliability, lower component counts, and reduced cost are among benefits offered by space-saving power interface ICs. Many of the following devices are specifically designed for motor-drive applications. The development of these devices is especially significant in view of the increasing use of microprocessor-controlled servo and stepper motors.

#### UNIPOLAR STEPPER-MOTOR TRANSLATOR/DRIVER


The UCN5804B integrated circuit drives permanent magnet stepper motors rated to 1.25 A and 35 V with a minimum of external components.

Internal step logic activates one or two of the four output sink drivers to step the load from one position to the next. The logic is activated when STEP INPUT (pin 11) is allowed to go HIGH. Single-phase (A-B-C-D), two-phase (DA-AB-BC-CD), or half-step (A-AB-B-BC-C-CD-D-DA) operation, and step-inhibit are selected by connections at pins 9 and 10. The sequence of states is determined by the DIRECTION CONTROL (pin 14).

Pin 9	Pin 10
L	L
н	L
L	Н
Н	Н
	Pin 9 L H L H

RECOMMENDED MAXIMUM OPE	ERATING CONDITIONS
Output Voltage, VOUT	35 V
Output Current, I <sub>OUT</sub>	1.25 A
Logic Supply Voltage, V <sub>CC</sub>	
Input Voltage, V <sub>IN</sub>	

#### L/R STEPPER-MOTOR DRIVE

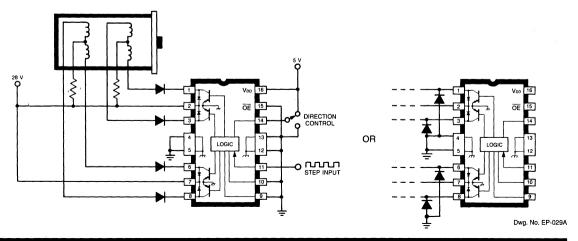

#### FULL-BRIDGE MOTOR DRIVERS

The UDN2953B and UDN2954W are designed for bidirectional, chopped-mode current control of dc motors with peak start-up currents as high as 3.5 A. The output-current limit is determined by the user's selection of a sensing resistor. The pulse duration is set by an external RC timing network. The chopped mode of operation is characterized by low power-dissipation levels and maximum efficiency.


Internal circuit protection includes thermal shutdown with hysteresis, output transient-suppression diodes, and crossover current protection.

The UDN2953B is supplied in a 16-pin DIP with heat-sink contact tabs. The UDN2954W, with increased allowable package power dissipation, is supplied in a 12-lead single in-line power tab package. In both case styles, the heat sink is at ground potential and needs no insulation.

#### RECOMMENDED MAXIMUM OPERATING CONDITIONS

Motor Supply Voltage, V <sub>BB</sub>	7.5 V to 50 V
Continuous Output Current, IOUT	±2.0 A
Peak Output Current, I OP	±3.5 A
Logic Supply Voltage, V <sub>CC</sub>	4.5 V to 5.5 V
Input Voltage, V <sub>IN</sub>	

#### **UDN2953B**



Dwg. No. A-12,649B

#### **QUAD DARLINGTON SWITCHES**


The UDN2878W and UDN2879W drive motor windings at up to 200 watts per channel. The integrated circuits include transient-suppression diodes and input logic that is compatible with most TTL, LS TTL, and 5 V CMOS. The 12-pin single in-line power-tab package allows maximum power-handling capability.

#### RECOMMENDED MAXIMUM OPERATING CONDITIONS

Load Voltage, V <sub>CC</sub> (UDN2878W)	٧
(UDN2879W)	V A
Peak Output Current, I <sub>CP</sub>	
Logic Supply Voltage Range, V <sub>s</sub> 4.5 V to 7.0	
Input Voltage, V <sub>IN</sub>	


#### STEPPER-MOTOR DRIVE

#### 2-PHASE, UNIPOLAR INPUT WAVEFORMS



Dwg. No. A-11,795

#### **UDN2878W**




#### **DUAL FULL-BRIDGE MOTOR DRIVER**


The UDN2993B motor driver contains two independent full-bridges capable of operating with load currents of up to 600 mA. An internally generated deadtime prevents potentially destructive crossover currents when changing load phase. Internal transient-suppression diodes are included for use with inductive loads. Emitter outputs allow for current sensing in pulse-width modulated applications.

#### RECOMMENDED MAXIMUM OPERATING CONDITIONS

#### 2-PHASE BIPOLAR STEPPER-MOTOR DRIVE (Pulse-Width Modulated)

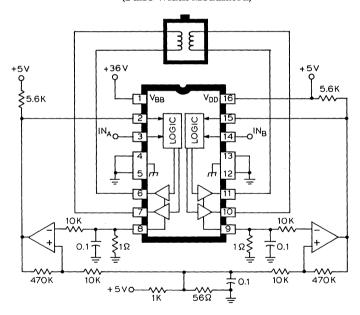

Dwg. No. A-12,453




Dwg. No. A-12,454

#### LINEAR MOTOR DRIVERS


Power operational amplifiers are useful in driving voice-coil motors, linear servo motors, and ac and dc motors in a linear mode where motor speed or position is a direct function of a linear input signal. The operational amplifiers listed here are standard "building block" circuits providing almost unlimited application. The high-gain, high-impedance operational amplifier configuration allows many specialized input, output, and feedback arrangements.

All devices feature high output voltage swings, high input common mode range, high PSRR and CMRR. The unity-gain stable versions need no external compensation. Internal thermal shutdown circuitry protects these devices against output overloads. The dual amplifiers include programmable output current-sensing capability.

		MAX.	CONT.	PEAK		
PART NUMBER	TYPE	Δ <b>V</b> s	l <sub>out</sub>	I <sub>OP</sub>	FEATURES	PACKAGE
ULN3751Z	Single	28 V	±2.5 A	3.5 A	Unity-Gain Stable Internal Compensation	5-Lead SIP

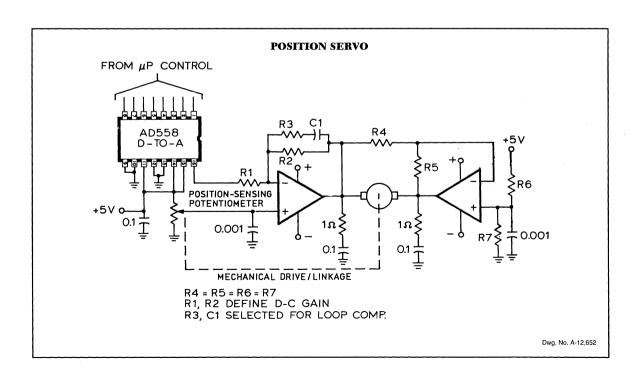


#### TWO-PHASE, 60 Hz OSCILLATOR/MOTOR DRIVER




Dwg. No. A-12,651

#### THREE-PHASE, 400 Hz OSCILLATOR/MOTOR DRIVER




Dwg. No. A-12,650

#### UNIPOLAR WAVE DRIVE



Dwg. No. A-11,446

#### **UNIPOLAR 2-PHASE DRIVE**



Dwg. No. A-11,447

#### **BIMOS UNIPOLAR MOTOR DRIVERS**

Driving unipolar motors is one of many successful applications for the UCN5800A and UCN5801A BiMOS II latched sink drivers.


All devices contain CMOS data latches, CMOS control circuitry, high-voltage, high-current bipolar Darlington outputs, and output transient protection diodes for use with inductive loads.

The UCN5800A is a direct replacement for the original UCN4401A. The UCN5801A replaces the UCN4801A. With a 5 V supply, BiMOS II devices typically operate at data input rates above 5 MHz; at 12 V, significantly higher speeds are obtainable.

Device	Package	Drivers	Features
UCN5800A	14-pin DIP	4	Clear, Strobe, Output Enable
UCN5801A	22-pin DIP	8	Clear, Strobe, Output Enable

#### RECOMMENDED MAXIMUM OPERATING CONDITIONS

Output Voltage, V <sub>OUT</sub>	/
Continuous Output Current, I <sub>OUT</sub>	١
Logic Supply Voltage, V <sub>DD</sub>	/




Dwg. No. B-1537

## APPLICATIONS INFORMATION

## INTEGRATED CIRCUITS FOR CURRENT-SOURCING APPLICATIONS

#### FLOATING LOGIC-GROUND LEVEL (Sink Driver)



Dwg. No. A-11,532


During recent years, the appearance of many new low-power monolithic devices (LSI and microprocessors) has created an increased need of peripheral power driver integrated circuits. Interface drivers are typically categorized in terms of their output-drive functions. When current flows out of the driver output terminal and into the load, the device is said to "source" current. Conversely, current flows from a load into a "sink" driver.

Integrated source drivers usually consist of high-voltage PNP devices and high-power NPN Darlington outputs (which provide PNP-type action), with input-level shifting. These power ICs are useful for interfacing low-level logic (TTL, CMOS, NMOS, PMOS) and high-current or high-voltage relays, solenoids, lamps (incandescent, LED, neon), motors, and displays (gas-discharge, LED, vacuum-fluorescent). They can also be used to provide multi-channel buffers for discrete power semiconductors.

The advantages of source drivers for display interface are quite evident. The X-Y addressing of most readouts requires both source and sink functions to minimize pin count, interconnections, and package count.

A more subtle advantage of source drivers is related to their use with inductive loads or incandescent lamps . Both types of load generate troublesome transients and noise currents on common logic/load ground lines. In addition, high ground currents can shift the ground rail, affecting logic input levels, thresholds, and noise immunity. The use of source drivers can minimize many of these concerns by separating the logic and power returns.

#### **SEPARATE GROUND RETURNS**




Dwg. No. A-11,531

### **RELAY-DRIVER APPLICATIONS**

#### TELECOMMUNICATIONS RELAY DRIVER

(Positive logic)



Dwg. No. A-11,524

Series UDN2580A, eight-channel source drivers provide current/voltage translation from TTL, positive CMOS, or negative CMOS logic to -48 V telecommunication relays requiring less than 350 mA. All devices have internal inductive-load transient-suppression diodes.


Type UDN2580A is best driven from negative-reference CMOS or NMOS logic (-5 V or -12 V swing) in order to provide a -48 V swing at the output. The active-low input Type UDN2588A-1 can be driven from positive logic TTL (+5 V swing) or CMOS (+12 V swing) levels.

#### RECOMMENDED MAX. OPERATING CONDITIONS

Supply Voltage, V <sub>EE</sub>	
Continuous Output Current, I <sub>OUT</sub> (per output)	350 mA

#### TELECOMMUNICATIONS RELAY DRIVER

(Negative logic)



Dwg. No. A-11,538

### PRINTER APPLICATIONS

Source drivers have been used extensively in electrosensitive, thermal, and impact printer applications. Multi-channel devices in the Series UDN2580A and UDN2980A reduce parts count and provide up to 350 mA per output at voltages up to 75 V (resistive load). Copper lead frames make these devices capable of simultaneously delivering up to 125 mA continuously from all eight channels at an ambient temperature of +50°C.

#### RECOMMENDED MAX. OPERATING CONDITIONS


Supply Voltage Range, V <sub>S</sub>	
UDN2588A-1	to 75 V
UDN2981A and UDN2982A	5 V to 45 V
UDN2983A and UDN2984A	35 V to 75 V
Logic Voltage, V <sub>IN</sub>	12 V
Continuous Output Current, I (per output)	350 mA
Peak Output Current, Ican	500 mA

#### THERMAL PRINTER APPLICATION

## 

Dwg. No. A-11,530

## ELECTROSENSITIVE PRINTER APPLICATION



Dwg. No. A-11,529

## VACUUM-FLUORESCENT/GAS-DISCHARGE DISPLAY APPLICATIONS

Series UDN6100A and UDN2580A source drivers provide solutions to problems encountered in driving higher-voltage vacuum-fluorescent and planar gas-discharge displays. Both series of parts provide TTL, CMOS, and NMOS input-logic compatibility. Series UDN6100A devices are active high (non-inverting) drivers. Series UDN2580A drivers are active low (inverting) devices.


At minimum cost, UDN6118A-2 devices offer 60 V output breakdowns for vacuum-fluorescent displays typically utilizing less than 32 characters. Featuring a minimum 80 V output breakdown voltage, standard UDN6118A drivers (no additional suffix) guarantee 25 mA per output. Suffix -1 devices provide for a 110 V breakdown, recommending them for 40 to 80-digit or dot-matrix V-F applications or gas-discharge anode-drive applications requiring the higher output voltage. All of these drivers include internal pull-down resistors and provide operation from single-ended positive supplies.

For vacuum-fluorescent display applications requiring a higher current capability (operating several displays with common drive circuitry), Type UDN2588A can be used with appropriate external output pull-down resistors to provide up to 350 mA per output.


#### **MAXIMUM OPERATING VOLTAGES**

V <sub>S</sub> V <sub>BB</sub>	V <sub>IN(ON)</sub> V <sub>IN(OFF)</sub>	v <sub>cc</sub>	V <sub>EE(MAX)</sub>	Device Type
+5	<14 >4.5	0	-45	UDN2588A
			-75	UDN2588A-1
+12	<8.4 >11.5	0	-45	UDN2588A
			-75	UDN2588A-1
+60	TTL or CMOS	NA	- 0	UDN6118A-2
+80	TTL or CMOS	NA	0	UDN6118A
+110	TTL or CMOS	NA	0	UDN6118A-1

#### MULTIPLEXED VACUUM- FLUORESCENT DISPLAY DRIVERS

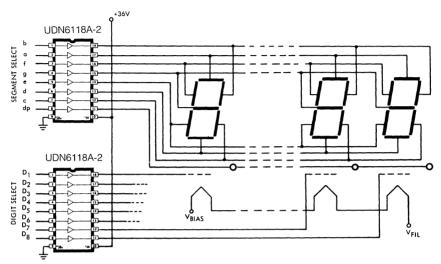

Dwg. No. A-11,522




## ELECTRO-MECHANICAL DISPLAY APPLICATIONS

Source drivers in the Series UDN2580A and UDN2980A, when combined with the Type ULN2804A sink driver, provide a simple interface between 12 V CMOS logic and a multiplexed electro-mechanical display. As shown, the need for additional inverter packages is eliminated since Type UDN2580A is activated by a low input level and Type UDN2982A is turned ON by a high input level. All drivers have internal inductive-load transient-suppression diodes and copper lead frames for improved package power dissipation capability.

#### RECOMMENDED MAX. OPERATING CONDITIONS

Supply Voltage, V <sub>S</sub>	٧
Continuous Output Current, I (per output)	Α

#### MULTIPLEXED ELECTRO-MECHANICAL DISPLAY DRIVERS

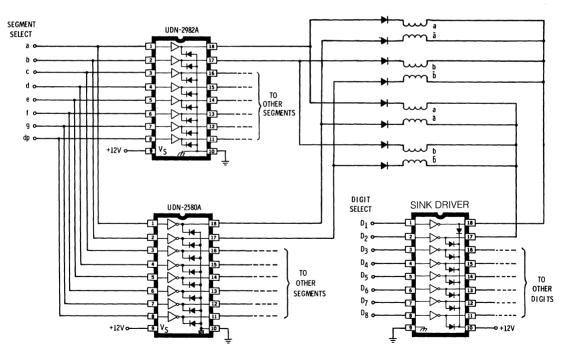

Dwg. No. B-1476

## LIGHT-EMITTING DIODE APPLICATIONS

Series UDN2580A and Series UDN2980A 8-channel source drivers provide monolithic solutions to problems associated with driving multiplexed LED displays in common-cathode or common-anode configurations.

Type UDN2585A is a non-Darlington inverting (input low = output high) source driver that is frequently used as a segment or dot driver in a common-cathode LED display where multiplexed segment or dot currents do not exceed 120 mA. This device features input logic-level compatibility with open-collector TTL, standard TTL, CMOS, and NMOS, as well as low output saturation voltages.


For common-cathode applications requiring higher segment currents, or for common-anode digit drive applications, Series UDN2980A is recommended. This non-inverting (input high = output high) series features 350 mA per output continuous current ratings with peak currents reaching 500 mA per output. Outputs may be paralleled for higher current capability. Type UDN2982A is logic-compatible with 2.4 V output levels of TTL and CMOS. Similar high output current ratings, for use in inverting applications, are offered by the Type UDN2580A driver.

Combining source drivers with multi-channel, high-current sink drivers (such as Type ULN2068B or UDN2595A provides simple, compact, and economical solutions to driving high-current multiplexed LED displays.

#### RECOMMENDED MAX. OPERATING CONDITIONS

Supply Voltage, V <sub>S</sub>
UDN2585A
UDN2982A
Continuous Output Current, I <sub>OUT</sub> (per output)
UDN2585A120 mA
UDN2982A
Input Voltage, V <sub>IN</sub>


#### COMMON-CATHODE LED DISPLAY




Dwg. No. 1473A

#### **COMMON-CATHODE LED DISPLAY**

#### **COMMON-ANODE LED DISPLAY**



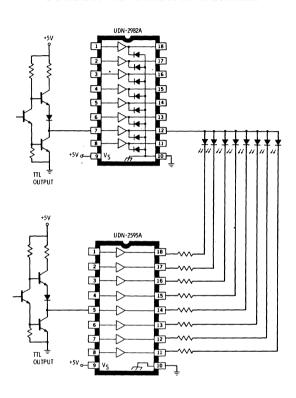

Dwg. No. B-1481

Dwg. No. B-1480


NOTE: Source driver turn-off delay is influenced by load conditions. System applications well below the specified output loading may require timing considerations for some designs, i.e., to prevent "ghosting" in multiplexed displays.


## MULTI-CHANNEL INTERFACE TO HIGH-POWER LOADS

Source drivers can be employed as multi-channel pre-drivers for discrete high-current or high-voltage semiconductors, thus reducing the need for many discrete components. For instance, a UDN2580A 8-channel source driver can provide up to 350 mA of pre-drive current into the base of power NPN devices, making 5 A load currents readily available. Higher load currents can be obtained by using power NPN Darlington devices.

For a-c loads, it is possible to use a source driver to provide gate current (with appropriate current-limiting) to a power SCR or triac. This scheme can provide an economical solution to many applications such as driving incandescent lamps or a-c motors at up to 20 A.

#### **DRIVER FOR HIGH-POWER DISCRETE DEVICES**

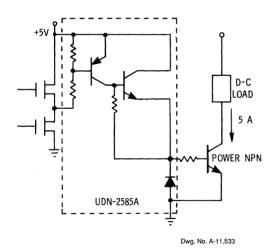

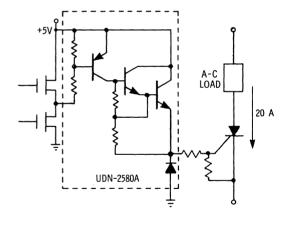

Dwg. No. A-11,534


## INCANDESCENT LAMP DRIVER APPLICATIONS

Driving multiplexed incandescent lamps at voltages up to 75 V with peak currents approaching 500 mA per segment, Series UDN2980A eight-channel source drivers, when combined with Type ULN2069B sink drivers, provide for a very cost-effective approach. Multiplexed lamps must typically be operated at a voltage  $\sqrt{N}$  (N = the number of digits) times the nominal d-c voltage, to obtain sufficient brightness. For example, a four-digit, 28 V display requires 56 V to operate satisfactorily. In addition, care must be taken to select a proper driver to withstand the substantial inrush currents created by cold filaments. Peak currents of up to ten times the nominal operating currents have been observed. Multiplexed lamps must also incorporate diodes to prevent series/parallel paths to unaddressed elements.

#### RECOMMENDED MAX. OPERATING CONDITIONS


Supply Voltage Range, V <sub>S</sub>	
UDN2981A and UDN2982A	5 V to 45 V
UDN2983A and UDN2984A	5 V to 75 V
Continuous Output Current, I <sub>OUT</sub> (per output)	350 mA
Peak Output Current, I	

#### MULTIPLEXED LAMP DRIVER, TTL- OR MOS-COMPATIBLE

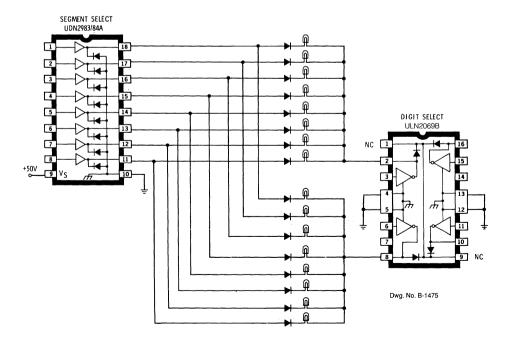


# **APPLICATIONS INFORMATION**

## EXPANDING THE FRONTIERS OF IC INTERFACE FOR ELECTRONIC DISPLAYS



Dwg. A-9869



Dwg. A-9866

#### FIGURE 1

#### INTRODUCTION

The original monolithic high-voltage/high-current power drivers (Series UHP500) were capable of sustaining 100 V and sinking load currents of 250 mA on each of four outputs. That 1970 peripheral driver capability has since been expanded and improved on to solve many of the most difficult display interfaces. Newer devices are rated for operation to 130 V, sourcing or sinking to 1.5 A, and as many as eight drivers per package (not all together) with inputs for TTL, Schottky TTL, DTL, CMOS, and PMOS.

#### LAMP (INCANDESCENT) INTERFACE

Utilizing marketing inputs that related to existing hybrid interface circuits, a group designed and manufactured monolithic ICs which initially were largely used for aircraft indicator lamp interface. Although not widely known, these quad driver units were developed quite independently (and simultaneously) to the ubiquitous TI 75451 series of high-speed, low-voltage peripheral drivers. A concentration upon circuit design factors, improvements in DIP packaging (copper alloy lead frames), and tighter, tougher control of diffusion-related parameters has allowed the manufacture of quad power drivers rather than the dual mini-DIPs offered by TI.

An increased awareness for improvements in reliability and space and power reductions provided a rather successful military market for lamp and relay interface; early success was evident in military aircraft indicator lamp interface, a tough application for TTL type ICs due to severe inrush currents resulting in secondary breakdown during "turn on". The increased current sinking capability of the peripheral power driver ICs offers a solution to lamp interface that usually obviates the need for "warming" resistors (across the output) which slightly warm the lamp filament and thus minimize problems associated with cold lamp filaments.


The high current-sinking capability of these ICs allow such loads as the #327 or #387 lamps to be driven without difficulty of secondary breakdown. The device beta will usually not allow sinking of the 10 to 13 times (nominal value) inrush current of cold lamps; but the lamp rapidly reaches a current level within the device output limitations (Figure 2 shows current as a function of time for a single #327 lamp). Sustaining this instantaneous inrush current and its peak power has been a key element in the success of many lamp interface circuits.

#### GAS DISCHARGE DISPLAY ICs

Early in 1972, the first high-voltage IC designed for gas discharge displays—a five channel, 130 V unit for cathode (segment) interface was produced. Subsequently, other circuits, both cathode and anode drivers, were produced; most of which were used in calculator applications with the Burroughs Panaplex® II.

Through a collaborative effort begun late in 1973 with Burroughs Corp. a newer, more efficient interface scheme evolved. Featured in "Electronic Displays '75," this series of monolithic IC interface devices for the high-voltage gas discharge panels has been one of the trailblaz-

ers in the world of display interface ICs. Intended for use in multiplexed display systems, these ICs present one of the easiest and least expensive solutions to a difficult interface problem. A combination of high-voltage bipolar techniques with thin-film resistor technology (circuit resistors sputtered over the IC dielectric) has provided both digit (anode) and segment (cathode) interface.



Dwg. A-10.289

#### **FIGURE 2**

To facilitate a minimum component interface, a split supply (±100 V) is employed to allow dc level-shifting (rather than capacitors or >200 V transistors) and both digit and segment drivers incorporate all pull-up, pull-down, current limiting, off-bias reference, etc. which were formerly required in discrete and/or hybrid systems. With the combination of the digit and segment drivers (each capable of withstanding 120 V), the split power supply approach affords PN diode IC technology suitable for driving a display usually requiring a 180 V minimum ionization voltage (equivalent to ±90 V in the split system).


#### LED INTERFACE


With the obvious abundance and variety of LED interface integrated circuits it would seem unlikely that there are still systems in search of an IC hardware solution to further minimize cost, component count, space, etc.; but this is definitely the case. The deficiencies are chiefly related to the limited number of current-sourcing circuits and/or high-current drivers.

The efficiency of LED displays has improved, but with the larger digits (up to 1" presently) most of the IC drivers are unable to switch the higher currents required in multiplexed systems. The rule-of-thumb generally applied uses the suggested dc current— multiplied by the number of digits in the display. For example, a multiplexed display of 160 mA peak current will give approximately the same light intensity output as a steady 20 mA in each of eight digits. Of particular difficulty is the switching of currents associated with the lower efficiency yellow and green LEDs. Completely monolithic integrated circuit solutions are available for applications requiring segment currents (source drivers) of 350 mA and digit currents (sink drivers) of up to 4 amperes!

Many of the ICs used in high-current LED applications were originally designed for use with electro-mechanical loads (relays, solenoids, motors, etc.) although the high-voltage ratings of the drivers are obviously not a concern. A combination of high-current, high-voltage Darlington drivers is shown in Figure 3.

The ULN2061M source driver is utilized as a modified emitterfollower. Through the use of discrete diodes in the common collector line, allowing the base to be switched to a potential higher than the collector, it is then possible to obtain a saturated output. This prevents the usual emitter-follower problems associated with gain, the MOS

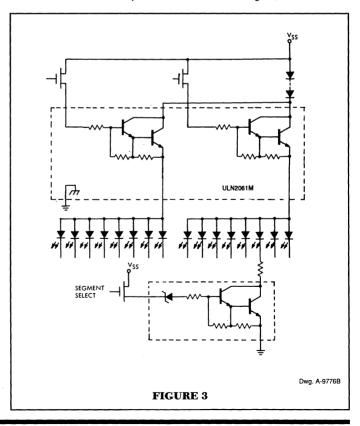

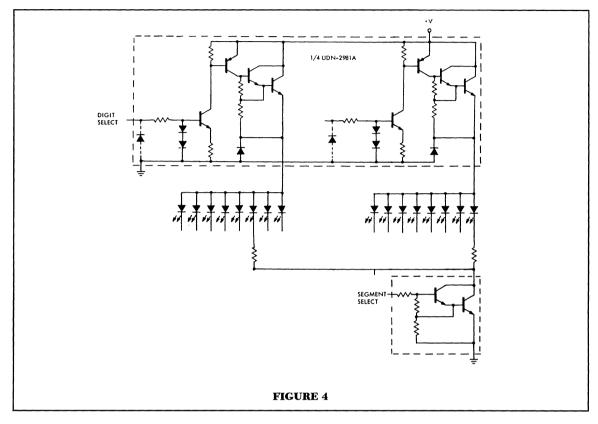

output impedance, and power. It is also possible to now better define the voltage at the emitter output and to then provide suitable segment current-limiting resistors for the LEDs.

An eight-channel source driver is shown as a digit switch for common anode LEDs in Figure 4. The Series UDN2980A drivers will handle output currents to a maximum of 500 mA. Two basic versions of the driver will allow interface from TTL, Schottky TTL, DTL, PMOS, and CMOS levels.


A common-cathode LED configuration is shown in Figure 5 for currents of up to 1.5 A per digit. A Series UDN2980A source driver is used to switch the segment side, the ULN2064B to switch the digit side. As has been shown with Figure 3, the IC package power dissipation must be considered with high-current applications.

The three examples that have been shown for LED interface represent only a very-small portion of the total applications area. The high-current capabilities and high gain of the drivers represent potential solutions to many difficult LED display systems—alphanumeric, seven-segment, or matrix; common-cathode or common-anode; continuous or multiplexed.

#### **AC PLASMA DISPLAY INTERFACE**

Plasma displays, such as those manufactured by National Electronics/NCR (USA) and NEC or Fujitsu (Japan), all have one common element with their gas discharge cousin—both types use a neon gas mixture. The plasma panels emit an orange glow when switched at rather high frequencies, and light output intensity is a function of frequency. The ac term for the plasma display is something of a misnomer since these panels actually operate from a toggled dc supply (usually in the area of 20 kHz).

The panel is basically a neon-filled capacitor, and has plates (electrodes) which are covered with the dielectric—between which is the neon mixture. Switching this capacitive load presents a problem with high peak currents in addition to the older problem of the high

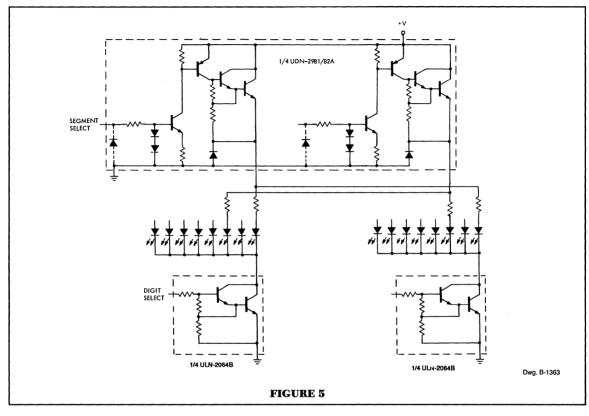

voltages which are associated with gas displays. Drive circuits use supply voltages of 150 to 260 V (depending on unipolar or bipolar drive), and the semiconductors used must switch instantaneous currents in the order of several hundred milliamperes for the larger displays.

Several high-voltage, high-current arrays can provide an answer to one side of the ac plasma display interface. The ULN7003A Darlington power driver is rated at 150 V. It is able to handle the application shown in Figure 6 (a basic dc, non-multiplexed clock interface rather than a more complex multiplexed system).


The high-current diodes that are internal to the arrays are utilized in the unipolar drive scheme connected to a suitable OFF reference. In one POS application, a set of 14 ULN7003A Darlington drivers replace more than 400 discrete components. The cost and space savings in such a machine are considerable, and a very complex printed wiring board was greatly simplified.

Further improvements in interface and plasma displays will no doubt evolve, and thus benefit all concerned—display and interface vendor along with the end user. Plasma displays are well-suited to custom panels (particularly those with various sizes of characters) and

with improvements in IC breakdown voltages some further simplification of interface should evolve.

#### FLUORESCENT DISPLAY INTERFACE

Although the vast majority of fluorescent displays are directly driven from MOS logic (handheld and low-cost desk calculators), there is an emerging need for interface integrated circuits for use with the larger characters (higher currents) and the higher voltages coming into use. These blue-green display panels originated in Japan, and the manufacturers are quite aggressively pursuing markets such as POS systems, clocks, cash registers, appliances, automotive displays, etc. Larger and/or more complex styles are being made, including displays with alphanumeric capability (a starburst 14 or 16-segment pattern).

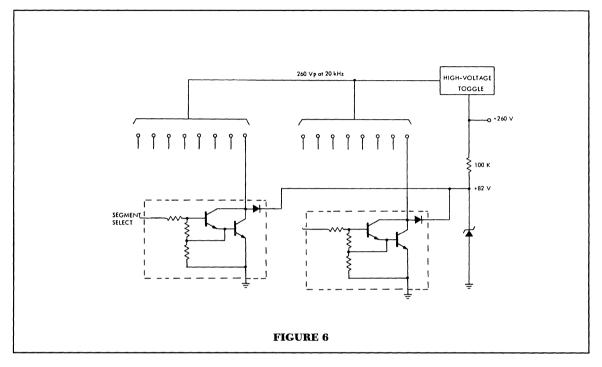

Modest voltage capability (60 or 70 volts) is all that is required of a semiconductor device to drive these panels, and the currents are in 20 to 30 mA region. These electrical requirements are well within the capability of many gas discharge digit drivers.

The UDN6118A device is designed specifically for use with fluorescent displays and includes internal pull-down resistors so that up to eight segments and eight digits will require only two packages and a greatly simplified power supply (Figure 7). The UDN6118A driver is compatible with TTL, Schottky TTL, DTL, and 5 volt CMOS.

The future of fluorescent displays look rather strong, particularly if competition further reduces prices. For the moment at least, these displays will not seriously tax the capability of IC interface.

#### **HOT WIRE READOUTS**


Although hot wire readouts could easily be placed in the incandescent category, their application in multidigit, multiplexed display systems more closely resembles LED circuit operation. Since hot wire displays will conduct current in either direction, isolation diodes are required to prevent sneak paths from partially turning ON unaddressed segments. Compare the typical hot wire display of Figure 8 with the LED display of Figure 4. The availability of a suitable, inexpensive diode array would be of considerable asset in multiplexed hot wire systems.

The hot wire readouts are available in both seven-segment and alphanumeric (16-segment) versions and are quite well-suited to high ambient light applications. They do not wash out in sunlight, although their reliability diminishes with the higher currents required in brightly lighted applications. As described, multiplexed schemes can be cumbersome because of the great number of discrete diodes required. One avionics system using a 16-character, 16-segment alphanumeric panel required 256 discrete diodes.

#### SUMMARY


The phenomenal growth in display technology has largely come as a result of the electronic calculator, and electronic displays will pervade all our lives in an ever-increasing number of products. The use of digital displays in appliances, gasoline pumps, electronic games (even pinball machines), etc., etc., will also require that a continuing evolution on interface integrated circuits meet the challenges of higher brightness, increased currents, improved reliability, and lower system costs.

#### IC INTERFACE FOR ELECTRONIC DISPLAYS

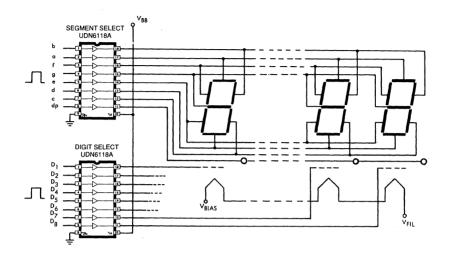

Dwg. A-10,261B

FIGURE 7

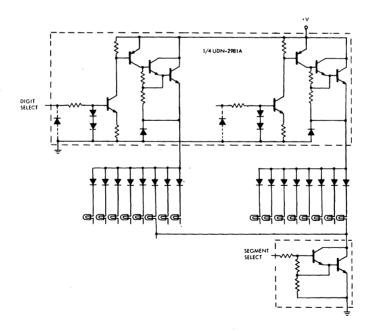

Dwg. B-1362

FIGURE 8

## APPLICATIONS INFORMATION

#### TRENDS IN IC INTERFACE FOR ELECTRONIC DISPLAYS

Display technology was truly set into high gear by the explosion of the electronic calculator business. Expansion at a phenomenal pace continues, encompassing a multitude of products, particularly high-volume consumer products (calculators, clocks, games, and watches). Recently, further stimulated by the "microprocessor revolution," with its far-reaching effects, and the resulting changeover to solid state design from electromechanical, mechanical, fluidic, or electrical systems, the vistas for displays have expanded well beyond the horizon. Products have been and are being developed, using microprocessors and displays, that never previously existed.

To augment this microprocessor revolution, semiconductor manufacturers are developing many new interface circuits useful with displays, although some of these will not be exclusively for display systems. To accomplish this, the present boundaries of device design, process, packaging, and electrical parameters will require continual extension and expansion.

#### **DISPLAY BUFFERS**

A continuing evolution of standard interface ICs is needed to buffer low-level logic from high-voltage and/or high-current loads. Some of this buffer development will serve display systems. Since there already is a broad assortment of buffers (particularly for low-to medium-current LED applications), the ongoing development in simple or low-order interface will mainly concentrate upon further reduction in discrete component count, package improvement (particularly for high-current/high-power devices), improvements in device current, voltage, switching speed, and greater reliability.

Figures 1, 2, and 3 show some interface ICs that represent buffer circuits; other vendors supply similar, or identical, high-current or high-voltage buffers to allow operation of displays from low-level logic. Two basic changes have occurred relatively recently:


- 1. Greater use of 18-pin DIPs for eight driver channels (Source Driver, Figure 2).
- 2. Creation of sourcing functions (Figures 2 and 3; useful for LED, gas-discharge, vacuum fluorescent, incandescent, and electromagnetic displays, depending upon device ratings). While further buffer designs are needed (particularly in high-current (>2 A) and high-voltage (>100 V) circuits), the main emphasis will be toward the incorporation of logic and control circuitry with output buffers.

#### COMPLEX INTERFACE

Paralleling (though lagging) the microprocessor LSI revolution is the area of greatest future for IC display circuits: The need for complex, smart or high-order interface. This will be MSI to LSI logic (with perhaps some linear functions) combined with suitable output buffers.

# TRENDS IN IC INTERFACE FOR ELECTRONIC DISPLAY

#### UDN6116A GAS-DISCHARGE DRIVER



30K VBB
27K OUTPUT

RB
125K


Dwg. A-9643A


Dwg. A-10,592C

FIGURE 1A

FIGURE 1B

#### SERIES UDN2980A SOURCE DRIVER





Dwg. A-10,243

Dwg. A-10,242A

FIGURE 2A

FIGURE 2B

# TRENDS IN IC INTERFACE FOR ELECTRONIC DISPLAY

#### 8-DIGIT/8-SEGMENT HIGH-CURRENT LED INTERFACE


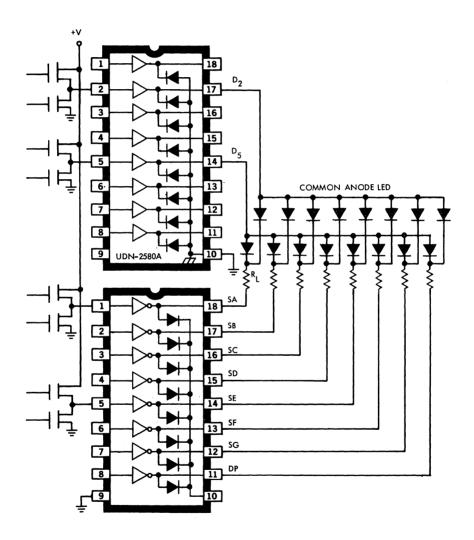


FIGURE 3

#### TRENDS IN IC INTERFACE FOR ELECTRONIC DISPLAY

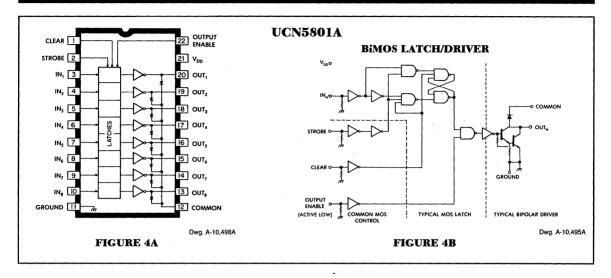

Display interface ICs (similar to the MOS I/O control chips), both custom and standard product, are becoming available in this category. High-volume applications may justify custom ICs, but the more general trend will be toward standard, off-the-shelf designs— chiefly due to the high costs of developing custom ICs.

The higher voltage displays (gas-discharge, vacuum fluorescent, ac plasma, and dc electroluminescent) may share some circuits (if appropriately planned and designed), particularly in the area of matrix displays. It is difficult to imagine, however, much commonality between high-current LEDs, high-voltage gas-discharge or ac plasma, and low-power LCDs, although they should share considerably the development of cellullar CAD circuit designs. Basic shift registers, latches and decoders do have considerable commonality.

In Figure 4 is a pinout and logic diagram of a BiMOS device combining logic and output drive. Although not expressly intended for display applications, this BiMOS (CMOS logic and bipolar outputs) IC has a great deal of utility to engineers working with lower voltages and high currents (LEDs, incandescent and electromagnetic displays). Type UCN5801A is a parallel-in/parallel-out unit composed of eight 'D' latches and eight 350 mA/50 V bipolar Darlington outputs.


More recently, serial-in/parallel-out BiMOS interface ICs have been designed expressly for use with vacuum fluorescent displays. Figure 5 shows the UCN5810AF 10-bit serial-in/parallel-out interface for use with VF displays; the use of serial data allows 10 output lines, data in and data out in a standard 18-lead DIP. It makes possible both fewer IC packages and simpler PC board wiring, although it is slower than a parallel data approach. It uses only a single pin of the I/O ports.

A slightly more recent design for vacuum fluorescent displays is the UCN5815A. This is a 22-lead, 8-bit parallel-in/parallel-out BiMOS unit. The unit may have data inputs and a strobe bus (see Figure 6). The chip enable/blanking pin provides control of VF buffers. A power-on-clear is internally incorporated.

# TRENDS IN IC INTERFACE FOR ELECTRONIC DISPLAY

#### UCN5810AF

#### VF DRIVER BLOCK DIAGRAM



Dwg. PP-029

FIGURE 5A

#### UCN5815A PARALLEL 8-BIT VF INTERFACE

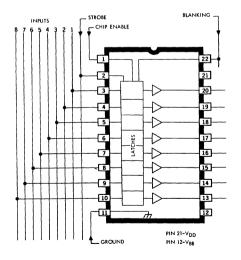


FIGURE 6

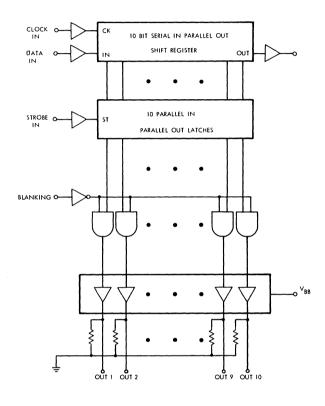


FIGURE 5B

## TRENDS IN IC INTERFACE FOR ELECTRONIC DISPLAY

#### **DEVICE TECHNOLOGIES**

With the exception of LCD displays (which at least until recently have been largely, if not entirely, driven by MOS) the display and interface technologies in high-volume use are mainly associated with bipolar semiconductors. Early display interface ICs (particularly devices such as the 7447 and 7448) were aimed at LED technology and represent MSI with modest output capability. The increasing use of higher voltage displays, multiplexed high-current applications, and the need for greater circuit complexity and low pin count will dictate other technologies, such as I<sup>2</sup>L, BiMOS, CMOS/DMOS, and possibly DMOS.

#### STANDARD BIPOLAR

Standard bipolar technology, long associated with TTL or linears (early op amps). appears very limited in scope for the future. Circuit density and supply power requirements will dictate other processes for functions beyond the simple MSI level. The advantages of standard bipolar ICs appear to be in the areas of simple high-current. high-power, or high-voltage interface. In particular, applications requiring the combination of high voltages (≥100 V) or multiple highcurrent outputs (≥2 A) will restrict the logic/ control circuitry to a low level. Cost, chip size, and package power dissipation will restrict this circuitry largely to versatile, simple buffers.

#### T<sup>2</sup>T.

Anticipated to increase significantly is the use of I²L for systems of low-to-modest voltages (LEDs through VF). The present limits of I²L appear to be limited to applications below the 50- to 60-volt level. I²L, with its combination of circuit density, low power and reasonable switching speeds should make a fine match for LEDs or other low-voltage display applications. For higher voltages (>25 or 30 V), prospects the penalty of reduced circuit density may diminish its cost effectiveness. Some increase in standoff voltage may be afforded by the uses of cascaded output transistors or process improvements, thus reducing the need to sacrifice

logic density. Without a standard I<sup>2</sup>L logic family, the main market penetration would appear to be custom designs although there is a definite opportunity for standard interface for lower voltage applications, particularly LEDs and vacuum fluorescent.

#### **BiMOS**

BiMOS, a combination of CMOS and bipolar for interface ICs, seems to fit a technology niche of higher breakdown voltages than I<sup>2</sup>L, especially where logic power and supply voltage range (5 to 15 V) is important. Other BiMOS or BiFET ICs which are presently on the market, are largely related to operational amplifiers, although other uses, such as the Series UCN5800 application of BiMOS to interface, are emerging.

Currently, it is feasible to design and manufacture BiMOS interface with breakdown voltages in the 80 to 100 V range. With additional time and greater concentration on increasing breakdown voltage, it appears that higher voltages (≥150 V) for output buffers could be obtained. By obtaining breakdowns in the 120 V to 160 V range, BiMOS then becomes a viable IC technology for interface for the higher voltage displays: dc gas-discharge with ±100 to ±130 V and glow transfer or dc electroluminescent (DCEL) opportunities with a range of 120-150 volts.

Switching speeds and output configurations (active pull-down or resistive) are critical to matrix displays with large numbers of drive lines. Adding active pull-down or pull-up will tend to increase chip size (and cost), thus adding to the potential overall difficulty of BiMOS with its greater process complexity and slightly longer manufacturing cycle. This does appear to be a very key technology for the near future. Its product niche will include applications requiring 60 to 100 V (or more) breakdowns, low-power logic, wide supply range, modest speeds, and MSI to small LSI.

#### CMOS/DMOS

CMOS/DMOS display interface appears to be intended for much of the same display market as BiMOS. Product information now available indicates 60 to 100 V breakdown (DMOS outputs), CMOS logic, low-to-modest output currents (≤25 mA), and logic speeds to 4 MHz. Designs now being promoted are targeted toward ac plasma and vacuum fluorescent panels.


Two apparent disadvantages now appear to exist:

- 1. Logic operates from 12 V  $\pm 10\%$  (may be done to provide maximum speed).
- Output drive current is insufficient for high-current displays (without 100 mA, or more, the larger matrix panels will use discretes or another technology).

These shortcomings may be modified with time, although it is doubtful if 500 mA to 1A DMOS ouputs are practical.


# APPLICATIONS INFORMATION

#### 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVER



Dwg. No. A-14,146

FIGURE 1



Three-phase brushless dc motors are especially useful because they have no brushes to make noise, dust, or wear out. The brushes of a conventional motor have been replaced by position sensors, usually Hall effect or optical devices. These sensors detect the rotor position with respect to the stator windings. This information is used to drive the windings in a sequence synchronized with the rotor position, called commutation. To use a three-phase brushless motor usually requires custom ICs to perform the commutation, and discretes for drivers. Then, to control the motor current, and with it speed and torque, requires pulse width modulation circuitry. All this adds up to many components and an expensive solution.

Now, due to progress in integrated power technology, all of the functions needed to drive three phase brushless motors can be performed by one chip. The UDN2936W incorporates Hall effect sensor decoding logic, power outputs capable of driving 2 A continuous at 45 V, PWM current limiting, direction control, dynamic braking, and integrated protection features. This device can be used to provide a simple, inexpensive, and reliable solution to the problem of driving brushless dc motors.

#### OVERALL CHIP STRUCTURE

The UDN2936W is made up of five sections, namely the commutation logic, output drivers, current limiting, direction and braking, and thermal shutdown. All logic and power functions utilize only bipolar processing, which allows for high power with an efficient use of die area.

#### **MOTOR COMMUTATION**

In a three-phase motor, winding current must be synchronized to rotor position to run the motor efficiently, i.e., with unidirectional torque. Hall effect sensors detect rotor position, which must be decoded to drive the coils in the proper sequence. Hall effect sensors produce low level differential analog outputs. Today's Hall effect ICs amplify this signal to make it easier to use. These Hall effect ICs produce either large signal ac linear waveforms, or open collector digital signals. The UDN2936W is compatible with both types of Hall effect ICs.

Position of the Hall effect sensors determines the decoding sequence to produce the correct driving waveforms for each motor. The decoding sequence programmed into this device is based on Hall effect cells 60 electrical degrees apart. This 60 degree sequence is one of the most common used in the industry. The truth table and timing waveforms found in Figure 1 illustrate how the Hall cell inputs, driving output waveforms, and motor currents states are interrelated. Motors with other commutation sequences can typically be accommodated by inverting one of the position inputs.

#### CHOPPING CURRENT CONTROL

The current limit technique chops the source drivers to control the load current level. The maximum current and percentage ripple, or hysteresis, can be programmed by the user or left to internal default values. Source chopping produces a continuous sense voltage (see Figure 2), so this voltage is an accurate representation of load current, even during recirculation. Also, chopping only the sources produces a fast current charge-up and a slower current decay. This occurs because of the different voltages across the




FIGURE 4

coil in both states, and results in a controllable current waveform. The chopping method functions as follows: When the current reaches I<sub>TRIP</sub>, the source is disabled and the current recirculates through a sink driver and a clamp diode. The motor current decays a fixed percentage, the source is enabled again, and the cycle repeats. The internal sense voltage comparator has a limited bandwidth that essentially filters out noise on the sense pin to prevent erroneous chopping.

The limiting current level and hysteresis are determined by the user or left to internal defaults. Figure 3 illustrates these values in a typical output current waveform. A voltage divider on the  $V_{\rm REF}$  pin sets the external  $V_{\rm REF}$ . If set above 3 V, the internal  $V_{\rm REF}$  is used. Whether  $V_{\rm REF}$  is set internally or externally,  $V_{\rm REF}/10$  is the trip threshold on  $V_{\rm SENSE}$ . The default trip can be programmed by:

$$I_{TRIP} = \frac{0.3 \text{ V}}{R_s}$$

Default hysteresis is set at 7.5%. For a  $V_{\text{REF}} < 3 \text{ V}$ , the trip threshold is the following:

$$I_{TRIP} = \frac{V_{REF}}{10 R_{S}}$$

In this case, hysteresis is created by drawing 200  $\mu$ A from the resistor divider when the sources are chopped, lowering the trip theshold a certain percentage. The sources turn back when the sense voltage decays to the new lower threshold. Hystersis is given by this expression:

%hys = 
$$\frac{100 (200 \, \mu \text{A} \cdot \text{R}_{\text{H}})}{\text{V}_{\text{P}}}$$

The graphs in Figure 5 aid in selecting values for R<sub>H</sub> and R<sub>T</sub>.

The internal and external current limit settings can be used together to start a motor with a high regulated current, and run it at a lower regulated current. To do this,  $V_{\text{REF}}$  must be tied above 3 V when the motor starts, and the  $V_{\text{REF}}$  divider switched in after start-up (see Figure 6).

#### **OUTPUTS**

The output section consists of three half-bridges capable of sourcing or sinking 2 A continuously at a saturation voltage of less than 2 V per driver. They are built to sustain at least 45 V. Source and sink clamp diodes are included to provide a current path during commutation and chopping. These are high-performance substrate isolated diodes that virtually eliminate the wasteful parasitic substrate currents of conventional diodes. The drivers, both source and sink, are bipolar double level metal Darlingtons.

#### **DIRECTION AND BRAKING**

The direction control allows the motor to be reversed even while running. When direction changes polarity, the state of the outputs is reversed, i.e., if the source was ON, the sink will turn ON, and vice versa. Because the turn off times are longer than the turn on times, the drivers turning ON must be delayed by a precise amount to prevent

#### 2936 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVER

potentially destructive crossover currents. This delay is generated internally.

The brake function uses the back EMF of the motor to brake it dynamically. The windings are effectively 'shorted' together through sink drivers and clamp diodes.


### THERMAL SHUTDOWN AND POWER DISSIPATION

The thermal shutdown feature protects the IC from overheating. This circuit turns OFF all drivers at about 165°C, and allows the device to cool down approximately 25° before turning ON again.


The device is packaged in a 12-pin power SIP that has a large copper tab for excellent heat dissipation. The design of the tab, and the fact that it is at ground, make the package easy to use with a heat sink. The maximum allowable power dissipation in 25°C ambient air without a heat sink is 5.2 W. With minimal heat sinking, dissipation greater than 10 W can be accomplished.

#### APPLICATION

The application shown in Figure 7 is a simple one illustrating the use of the UDN2936W in an open-loop situation with bilevel current limiting. The motor uses digital open-collector Hall cells such as the UGN3113U or linear Hall effect ICs such as the UGN3503U. These Hall effect sensors have a guiescent output voltage of 2.5 V, and emitter follower outputs. The UDN2936W has a regulated internal 2.5 V reference designed to make the inputs compatible with those linear Hall effect sensors. The 5 V supply is also used as a reference in the current limiting for the  $V_{\rm REF}$  resistor divider. Choosing  $R_{\rm s}=0.15$  ohms results in internal default trip current of 2 A, and 7.5% ripple. This internal limiting is active when Q1 is OFF, R1 and R2 form a resistor divider, when Q1 is ON, to apply 1 V to the  $\rm V_{REF}$  input, producing 0.67 A of regulated running current and 5% ripple. Typically, Q1 would be OFF during start-up, giving 2 A of regulated start-up current, and then turned ON to provide 0.67 A of running current. The values of R<sub>1</sub>, R<sub>2</sub>, and V<sub>SENSE</sub> can be calculated using the circuit and equations of Figure 5, or the tables of Figure 6.




Dwg. No. A-14,15



Dwg. No. A-14.152

FIGURE 5




Dwg. No. A-14,153

FIGURE 6

The motor speed is controlled by the current limiting. For a given load, speed is proportional to torque, and torque is proportional to motor current. Subsequently, the motor speed can be controlled through  $V_{\rm psf}$ .

#### CONCLUSION

Smart power integrated circuits have come a long way in the past few years in solving numerous motor driving problems. The UDN2936W is one example of how integrated monolithic devices can replace a drive circuit of many components with one reliable component. Also evident is the fact that bipolar transistors continue to provide economic solutions in the high current application.

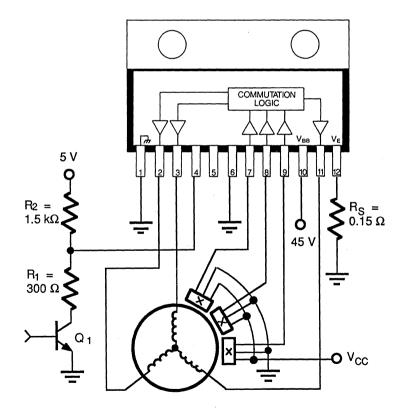

Dwg. EP-033

# APPLICATIONS INFORMATION

#### SERIES 5800 Bimos II Power Drivers

#### INTRODUCTION

The second generation of merged CMOS/ bipolar integrated circuits extends the lead in innovative interface forged by the original BiMOS power drivers.

Higher-density CMOS logic gives BiMOS II integrated circuits improved switching speeds at reduced costs. With a 5 V supply, second generation BiMOS typically operates at data input rates above 5 MHz; at 12 V, significantly higher speeds are obtainable. The BiMOS II series also offers new and improved functions.


Reliable, single-chip BiMOS II solutions are available for a wide variety of peripheral and power interface problems. Two or more devices are no longer required to interface low-level (TTL, CMOS, NMOS, PMOS) LSI or microprocessor functions with power loads such as LEDs, gas-discharge or vacuum-fluorescent displays, relays, solenoids, thermal printers, motors, impact printer hammers, and incandescent lamps. Since all BiMOS devices include logic and control in addition to power functions, they also free the microprocessor from many housekeeping tasks.

#### INCANDESCENT LAMP DRIVERS

Each of the UCN5800A or UCN5801A open-collector Darlington outputs will sink up to 500 mA and will sustain at least 50 V in the OFF state. The high peak current rating of these devices allows their use with the high inrush (10 x) currents normally associated with incandescent lamps. Package power limitations normally disallow simultaneous and continuous operation of all outputs at the rated maximun current: Either a reduction in output current or a suitable combination of duty cycle and number of active outputs is usually required.

The UCN5800A is supplied in a standard 14-lead DIP. The UCN5801A is furnished in a 22-lead DIP with 0.400" row spacing.


#### 

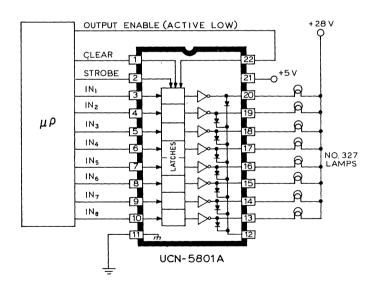

#### PLANAR GAS-DISCHARGE DISPLAY DRIVERS

Combining the high-voltage UCN5810AF-1, UCN5812AF-1 or UCN5818AF-1 serial-input, latched source driver with the UCN5823A serial-input, latched sink driver provides a simple way to drive multiplexed high-voltage planar gas-discharge displays.

# RECOMMENDED MAX. OPERATING CONDITIONS Output Voltage UCN5810AF-1, UCN5812AF-1, UCN5818AF-1 .75 V UCN5823A .95 V Logic Supply Voltage Range 5.0 V to 12 V Continuous Output Current UCN5810AF-1, UCN5812AF-1, UCN5818AF-1 -25 mA UCN5823A .350 mA

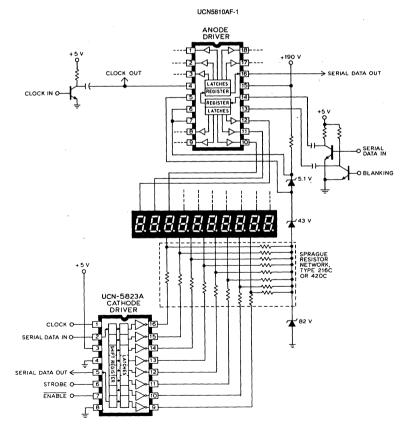


Dwg. C-1275

#### VACUUM-FLUORESCENT DISPLAY DRIVERS

The UCN5815A 8-bit, latched, source driver provides a practical means of driving the segments, dots (matrix panel), or bars of multiplexed high-voltage vacuum-fluorescent displays. The UCN5810AF (10-bit), UCN5812AF (20-bit), or UCN5818AF (32-bit) serial-input latched source drivers are well-suited for use as character or digit drivers. The high-voltage versions (suffix-1) can also be used to drive the anodes of planar gas-discharge displays.

# RECOMMENDED MAX. OPERATING CONDITIONS Output Voltage UCN5812AF, UCN5818AF 55 V UCN5810AF-1, UCN5812AF-1, UCN5818AF-1 75 V Logic Supply Voltage Range 5.0 V to 12 V Continuous Output Current -25 mA

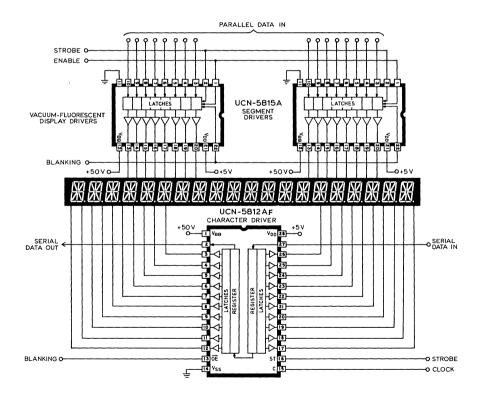

#### MULTIPLEXED INCANDESCENT LAMP DRIVERS

In order to obtain brightness equivalent to normal dc operation, multiplexed incandescent displays must be operated at a voltage:

 $E_{MPX} = E_{DC} \sqrt{N}$ 

where

 $E_{MPX}$  = the recommended operating supply voltage,


E<sub>nc</sub> = the rated dc lamp voltage, and

N = the number of digits being multiplexed.

Multiplexed lamps also require isolation diodes to prevent sneak series/parallel paths to unaddressed elements.

Serial-input, latched source drivers provide simple, compact, and economical segment drivers for mutiplexed incandescent lamp applications. The UCN5890A and UCN5891A feature high-voltage, high-current (500 mA, peak) Darlington outputs. The UCN5895A has saturated outputs for minimum voltage drop and will source up to 250 mA per driver. The drivers are supplied in an economical 16-pin "A" package. The UCN5890, UCN5891, and UCN5895 are pin-compatible except for output ratings.

# RECOMMENDED MAX. OPERATING CONDITIONS Output Voltage UCN5890A 75 V UCN5891A 45 V UCN5895A 45 V Logic Supply Voltage Range 5.0 V to 12 V Continuous Output Current UCN5890A -350 mA UCN5891A -350 mA UCN5895A -120 mA

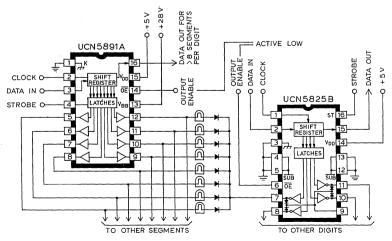

Dwg. B-1541


#### MULTIPLEXED LED DRIVERS

Latched source drivers are simple, compact, and economical segment drivers for multiplexed LED and incandescent and lamp applications. The UCN5895A features saturated outputs for minimum voltage drop. It sources a minimum of 120 mA per driver. The source driver is supplied in an economical 16-pin 'A' package.

A typical common-cathode LED display driver application is shown below. The high-current UCN5821A, a latched sink driver, is used to drive the digits. Common-anode LED displays would require the use of the UCN5891A source driver and UCN5821A sink driver.

In order to obtain sufficient brightness, multplexed LED displays must typically be operated at greatly increased current. Appropriate current limiting is required.

RECOMMENDED MAX. OPERATING CONDITIONS
Output Voltage
UCN5821A
UCN5890A
UCN5891A 45 V
UCN5895A
Logic Supply Voltage Range
UCN5821A
UCN5890A
UCN5891A350 mA
UCN5895A120 mA

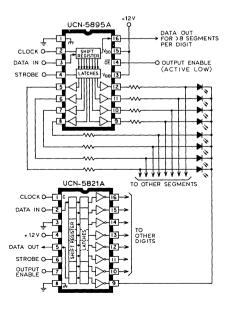

Dwg. No. B-1541


#### THERMAL PRINTHEAD DRIVER

Designed primarily for use with thermal printheads, the UCN5832A is optimized for low output-saturation voltage and high-speed operation. Each device has 32 bipolar, open-collector saturated outputs, a CMOS data latch for each driver, a 32-bit CMOS shift register, and CMOS control circuitry. A CMOS serial data output allows these devices to be cascaded in applications requiring more than 32 bits.

The UCN5832A is supplied in a 40-pin DIP with 0.600" row spacing. Under normal conditions, all outputs will sustain 100 mA continuously without derating. They can also be supplied in unpackaged chip form or in a leaded chip carrier.

#### RECOMMENDED MAX. OPERATING CONDITIONS

Output Voltage	٧
Logic Supply Voltage Range	٧
Continuous Output Current	A

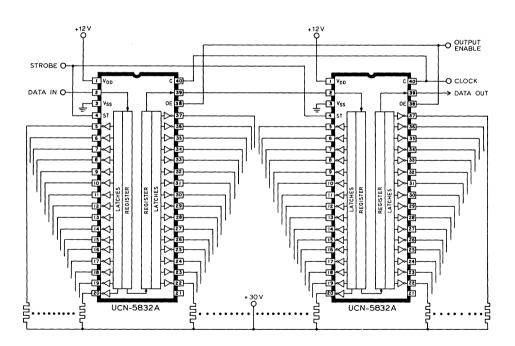


#### **RELAY AND SOLENOID DRIVERS**


BiMOS II drivers provide an interface flexibility beyond the reach of standard logic buffers and power-driver arrays. Drivers with internal, transient-suppression diodes are ideal for use with relay and solenoid loads.

Series UCN5840A sink drivers feature isolated logic and power grounds that allow split-supply operation or isolated grounds for reduction of transients and noise currents on common logic/load ground lines. The UCN5890A source driver requires load supply voltages of at least 20 V. For lower-voltage operation, the UCN5891A is recommended.

The serial DATA OUTPUT allows cascading for interface applications requiring additional drive lines. The OUTPUT ENABLE can also provide a CHIP ENABLE function that uses a minimum number of drive lines to control output from several packages in a simple multiplex scheme.

# RECOMMENDED MAX. OPERATING CONDITIONS Output Voltages (Inductive Load) UCN5841A 35 V UCN5842A 50 V UCN5843A 60 V UCN5890A 50 V UCN5891A 35 V Logic Supply Voltage Range 5.0 V to 12 V Continuous Output Current 350 mA

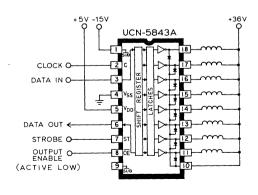

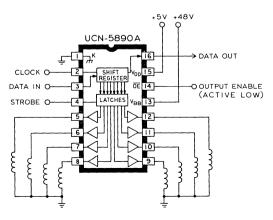


Dwg. No. A-12,547 Dwg. No. A-12,548

3-261


#### MULTI-CHANNEL INTERFACE TO HIGH-POWER LOADS

BiMOS II power drivers can also be used as multi-channel predrivers for discrete high-current semiconductors, reducing the need for many discrete components. BiMOS II sink drivers provide enough switching current to the bases of discrete PNP power transistors for load currents of up to 20 A. Higher load currents can be obtained by using power Darlington devices. BiMOS II source drivers may require discrete Darlington power drivers for significant load currents, but have the advantage of allowing rather wide load-voltage swings.

For ac loads, source drivers can be used to provide gate current (with appropriate current limiting) to a power SCR or triac. This scheme can provide an economical approach to many applications such as driving incandescent lamps or ac motors with current levels of up to 20 A.



Dwg. No. A-11,744A



Dwg. No. A-11,745A

GENERAL INCORMATION & PRODUCTINDEN

PATROLING PROPERTY SERVICE PROPERTY SERV

729) 724

PERIPHERAL POWER & DISPLAY DRIVER ICS

**3** 

HALL-EFFECT SENSOR ICs

MASS STORAGE APPLICATION ICS

55

AUTOMOTIVE, SIGNAL-PROCESSING, & CONSUMER IG

(6)

DISCRETE TRANSISTORS, DIODES, & ARRAYS

QUALTRY & RELIABILITY INFORMATION

PACKACE INFORMATION

## SECTION 4. TECHNICAL DATA & APPLICATION NOTES for Hall-Effect Sensor ICs

in Numerical Order	Beginning at 4-1
Applications Information:	
Hall Effect Applications Guide	4-74
The Hall Effect Sensor	4-108

# 3046, 3056, AND 3058

#### HALL-EFFECT GEAR-TOOTH SENSORS-ZERO SPEED

The A3046EU/LU, A3056EU/LU, and A3058EU/LU Hall-effect gear-tooth sensors are monolithic integrated circuits that switch in response to differential magnetic fields created by ferrous targets. These devices are ideal for use in gear-tooth-based speed, position, and timing applications and operate down to zero rpm over a wide range of air gaps and temperatures. When combined with a backbiasing magnet and proper assembly techniques, devices can be configured to give 50% duty cycle or to switch on either leading, trailing, or both edges of a passing gear tooth or slot.

The six devices differ only in their magnetic switching values and operating temperature ranges. The low hysteresis of the A3046/56EU and A3046/56EU makes them perfectly suited for ABS (anti-lock brake system) or speed sensing applications where maintaining large air gaps is important. The A3046EU/LU features improved switch point stability with temperature over the A3056EU/LU. The high hysteresis of the A3058EU and A3058LU, with their excellent temperature stability, makes them especially suited to ignition timing applications where switch-point accuracy (and latching requirements) is extremely important.

All devices, when used with a back-biasing magnet, can be configured to turn ON or OFF with the leading or trailing edge of a gear tooth or slot. Changes in fields on the magnet face caused by a moving

Continued next page...

# 

Dwg. No. PH-012

Pinning is shown viewed from branded side.

#### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V <sub>CC</sub> 28 V
Reverse Battery Voltage,
V <sub>RCC</sub> 30 V
Magnetic Flux Density, B Unlimited
Output OFF Voltage, V <sub>OUT</sub> 28 V
Reverse Output Voltage, V <sub>OUT</sub> <b>-0.5 V</b>
Output Current, I <sub>OUT</sub> 25 mA
Package Power Dissipation, P <sub>D</sub> 500 mW
Operating Temperature Range, TA
Suffix "EU"40°C to +85°C
Suffix "LU"40°C to +150°C
Storage Temperature Range,

T<sub>S</sub>..... -65°C to +170°C

#### **BENEFITS**

- Senses Ferrous Targets Down to Zero RPM
- Defined Power-Up State (3058 only) Available Mid-1993
- Large Effective Air Gap
- Wide Operating Temperature Range
- Operation from Unregulated Supply
- High-Speed Operation
- Output Compatible With All Logic Families
- Reverse Battery Protection
- Solid-State Reliability ... No Moving Parts
- Resistant to Physical Stress

#### **SELECTION GUIDE**


	Switching Hysteresis, B <sub>OP</sub> -B <sub>RP</sub>				
	15-90 G	150-250 G			
Operating Temp. Range	Device Type Number				
-40°C to +85°C	A3046EU A3058EU				
	A3056EU				
-40°C to +150°C	A3046LU	A3058LU			
	A3056LU				

#### 3046, 3056, and 3058 HALL-EFFECT GEAR-TOOTH SENSORS-ZERO SPEED

ferrous mass are sensed by two integrated Hall transducers and are differentially amplified by on-chip electronics. The on-chip temperature compensation and Schmitt trigger circuitry minimizes shifts in effective working air gaps and switch points over temperature making these devices ideal for use in ignition timing, anti-lock braking systems, and speed measurement systems in hostile automotive and industrial environments.

Each Hall-effect digital Integrated circuit includes two quadratic Hall effect sensing elements, a voltage regulator, temperature compensating circuitry, low-level amplifier, Schmitt trigger, and an open-collector output driver. The on-board regulator permits operation with supply voltages of 4.5 to 24 volts. The output stage can switch up to 20 mA at conservatively specified repetition rates to 20 kHz and is compatible with bipolar and MOS logic circuits.

Both magnetic characteristics are available in a choice of two operating temperature ranges. Suffix EU devices have an operating

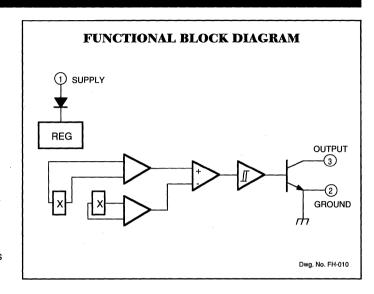

range of -40°C to +85°C while suffix LU devices feature an operating range of -40°C to +150°C. All devices are packaged in a 3-pin plastic SIP.

#### ELECTRICAL CHARACTERISTICS at $V_{CC} = 8 \text{ V}$ , over operating temperature range.

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Supply Voltage	V <sub>cc</sub>	Operating	4.5	_	24	٧
Output Saturation Voltage	V <sub>OUT(SAT)</sub>	I <sub>OUT</sub> = 20 mA, B > B <sub>OP</sub>	Ι –	135	400	mV
Output Leakage Current	I <sub>OFF</sub>	V <sub>CC</sub> = V <sub>OUT</sub> = 24 V, B < B <sub>RP</sub>	T		5.0	μА
Supply Current	l <sub>cc</sub>	V <sub>CC</sub> = 24 V, B < B <sub>RP</sub>		7.2	14	mA
Output Rise time	t <sub>r</sub>	$R_L = 820 \Omega, C_L = 20 pF$	T -	100		ns
Output Fall time	t,	$R_L = 820 \Omega, C_L = 20 pF$	_	100	_	ns

# 3046, 3056, and 3058 HALL-EFFECT GEAR-TOOTH SENSORS-ZERO SPEED

#### MAGNETIC CHARACTERISTICS in gauss at $V_{CC} = 8 \text{ V}$ .


					Part	Numbe	ers*			
		3046 3056 3058		3046 3056		3058				
Characteristic	Test Conditions	Min.	Тур.	Max.	Min.	Тур.	Max.	Min.	Тур.	Max.
Operate Point, B <sub>OP</sub>	Output Switches OFF to ON, $T_A = +25$ °C	_	_	150		_	150	_	_	250
Release Point, B <sub>RP</sub>	Output Switches ON to OFF, $T_A = +25^{\circ}C$	-150		_	-150		_	-250	_	
Hysteresis, B <sub>hys</sub>	$B_{OP}$ - $B_{RP}$ , $T_A = +25$ °C	15	50	90	15	50	90	150	200	250
Change in Trip Point, $\Delta B_{OP}$ or $\Delta B_{RP}$	Over operating temperature range, Ref. $B_{OP}$ or $B_{RP}$ at $T_A = +25$ °C	_	_	±50	_	_	±75	_	_	±50


NOTES: Magnetic switch points are specified as the difference in magnetic fields at the two Hall elements. As used here, negative flux densities are defined as less than zero (algebraic convention).


Typical values are at  $T_A = +25^{\circ}$ C.

\* Complete part number includes the prefix 'A' and a suffix to identify operating temperature range and package style. (see selection guide).


#### TYPICAL OPERATING CHARACTERISTICS








#### 3046, 3056, AND 3058 HALL-EFFECT GEAR-TOOTH SENSORS-ZERO SPEED





Dwg. No. AH-003

Figure 1 TYPICAL GEAR-TOOTH SENSING APPLICATION

#### APPLICATIONS INFORMATION

A gear-tooth sensing system consists of the sensor IC, a backbiasing magnet, an optional pole piece, and a target (Figure 1). The system requirements are usually specified in terms of the effective working air gap between the package and the target (gear teeth), the number of switching events per rotation of the target, temperature and speed ranges, minimum pulse duration or duty cycle, and switch point accuracy. Careful choice of the sensor IC, magnet material and shape, target material and shape, and assembly techniques enables large working air gaps and high switch-point accuracy over the system operating temperature range.

Naming Conventions. With a south pole in front of the branded surface of the sensor, a north pole behind the sensor, the field at the sensor is defined as positive. As used here, negative flux densities are defined as less than zero (algebraic convention), e.g., -100 G is less than -50 G.

Magnet Biasing. In order to sense moving non-magnetized ferrous targets, these devices must be back-biased by mounting the unbranded side on a small permanent magnet. Either magnetic pole (north or south) can be used.

The devices can also be used without a back-biasing magnet. In this configuration, the sensor can be used to detect a rotating ring magnet such as those found in brushless dc motors or in speed sensing applications. Here, the sensor detects the magnetic field gradient created by the magnetic poles.




Figure 2 TYPICAL TRANSFER CHARACTERISTIC

#### 3046, 3056, and 3058 HALL-EFFECT GEAR-TOOTH SENSORS-ZERO SPEED


Sensor Operation. The A3046EU/LU, A3056EU/LU, and A3058EU/LU sensor ICs each contain two integrated Hall transducers (E1 and E2) that are used to sense a magnetic field differential across the face of the IC (see Sensor Location drawing). Referring to Figure 2, the trigger switches the output ON (output LOW) when  $B_{\rm E1}-B_{\rm E2}>B_{\rm OP}$  and switches the output OFF (output HIGH) when  $B_{\rm E1}-B_{\rm E2}<B_{\rm RP}$ . The difference between  $B_{\rm OP}$  and  $B_{\rm RP}$  is the hysteresis of the device.

Figure 3 relates the output state of a back-biased sensor IC, with switching characteristics shown in Figure 2, to the target gear profile and position. Assume a north pole back-bias configuration (equivalent to south pole at the face of the device). The motion of the gear produces a phase-shifted field at E1 and E2 (Figure 3 (a)); internal conditioning circuitry subtracts the field at the two elements (Figure 3 (b)); and the Schmitt trigger at the output of the conditioning circuitry switches at the pre-determined thresholds  $(B_{OP} \text{ and } B_{BP})$ . As shown (Figure 3 (c)), the IC output is LOW whenever sensor E1 sees a (ferrous) gear tooth and sensor E2 faces air. The output is HIGH when sensor E1 sees air and sensor E2 sees the ferrous target.

A gear-tooth sensor can be configured (see Assembly Techniques) to operate as a latch, a (positive) switch, or a negative switch. Note the change in duty cycle in each of the cases (Figure 4).

A latch is a device where the operate point is greater than zero gauss and the release point is less than zero gauss. With the configuration shown in Figure 3, such a device will switch ON on the leading edge and OFF on the trailing edge of the target tooth.

A **(positive) switch** is a device where both the operate and release points are greater than zero gauss (positive values). In the configuration shown in Figure 3, such a device will switch ON and then switch OFF on the leading or rising edge of the target tooth (Figure 4 (a)).

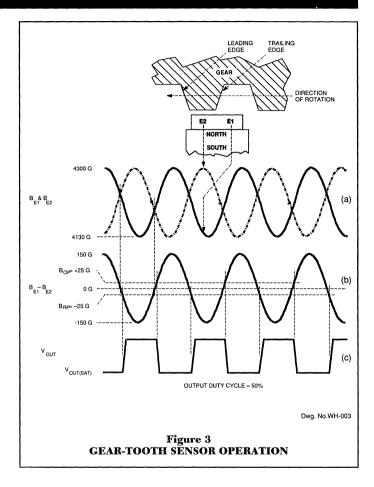

A **negative switch** is a device where both the operate and release points are less than zero gauss (negative values). In the configuration shown in Figure 3, such a device will switch OFF and then switch ON on the trailing or falling edge of the target tooth (Figure 4 (b)).

Speed sensors can use any of the three sensor configurations described. Timing sensors, however, must use a latch to guarantee dual-edge detection. Latches are most easily made using the A3058EU or A3058LU device types.

#### 3046, 3056, and 3058 HALL-EFFECT GEAR-TOOTH SENSORS-ZERO SPEED

#### SYSTEM ISSUES


Optimal performance of a gear-tooth sensing system strongly depends on four factors: the IC magnetic parameters, the magnet, the pole piece configuration, and the target.

Sensor Specifications. Shown in Figure 5 are graphs of the differential field as a function of air gap. A 48-tooth, 2.5" (63.5 mm) diameter, uniform wheel similar to that used in ABS applications is used. The samarium cobalt magnet is 0.32" diameter by 0.20" long (8.13  $\times$  5.08 mm). The maximum functioning air gap with this typical gear/magnet combination can be determined using the graphs and the specifications for the sensor IC.

In this case, if an A3056EU/LU sensor with a  $B_{op}$  of +25 G and a  $B_{RP}$  of -25 G is used, the maximum allowable air gap would be 0.110" (2.79 mm). If the switch points change +75 G with temperature ( $B_{op}$  = +100 G,  $B_{RP}$  = +50 G), the maximum air gap will be approximately 0.077" (1.96 mm).

All system issues should be translated back to such a profile to aid the prediction of system performance.

Magnet Selection. These devices can be used with a wide variety of commercially available permanent magnets. The selection of the magnet depends on the operational and environmental requirements of the sensing system. For systems that require high accuracy and large working airgaps or an extended temperature range, the usual magnet material of choice is rare earth samarium cobalt (SmCo). This magnet material has a high energy product and can operate over an extended temperature range. For systems that require low-cost solutions for an extended temperature range, Alnico-8 can be used. Due to its relatively low energy product, smaller operational airgaps can be expected. At this time, neodymium iron boron (NeFeB) is not a proven high-temperature performer; at temperatures above +150°C it may irreversibly lose magnetic strength.

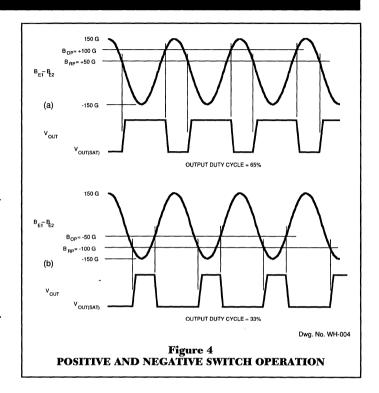


Of these three magnet materials, Alnico-8 is the least expensive by volume and SmCo is the most expensive.


Either cylindrical- or cube-shaped magnets can be used, as long as the magnet pole face at least equals the facing surface(s) of the IC package and the pole piece. Choose the length of the magnet to obtain a high length-to-width ratio, up to 0.75:1 for rare earths, or 1.5:1 for Alnico-8. Any added magnet length may incrementally improve the allowable maximum air gap.

Magnets, in general, have a non-uniform magnetic surface profile. The flux across the face of a magnet can vary by as much as 5% of the average field over a 0.10" (2.5 mm) region. If a Hall sensor is placed directly on a magnet face, the non-uniformity can appear to shift the operating parameters of the sensor. For example, if a device is placed on a 3000 G magnet with  $\pm 2\%$  face offsets, each of the operating points might be shifted by  $\pm 60$  G. When offsets are present, the operating characteristics may be greatly altered.

## 3046, 3056, AND 3058 HALL-EFFECT GEAR-TOOTH SENSORS-ZERO SPEED



Dwg. No. GH-035



Dwg. No. GH-036

#### Figure 5 DIFFERENTIAL FLUX DENSITY

**Pole Piece Design.** A pole piece may be used at the face of the magnet to smooth out the magnet-face offsets. A 0.020" (0.51 mm) thick, soft-iron pole piece will bring the field non-uniformity down to the  $\pm 1\%$ -to- $\pm 3\%$  range. Note that pole pieces will minimize but not eliminate the non-uniformity in the magnet face field. Front pole pieces will almost always result in a reduced maximum air gap.

**Ferrous Targets.** The best ferrous targets are made of cold-rolled low-carbon steel. Sintered-metal targets are also usable, but care must be taken to ensure uniform material composition and density.

The teeth or slots of the target should be cut with a slight angle so as to minimize the abruptness of transition from metal to air as the target passes by the sensor. Sharp transitions will result in magnetic overshoots that can result in false triggering.


Gear teeth larger than 0.10" (2.54 mm) wide and at least 0.10" (2.54 mm) deep provide reasonable working air gaps and adequate change in magnetic field for reliable switching. Generally, larger teeth and slots allow a larger air gap. A gear tooth width approximating the spacing between sensors (0.088" or 2.24 mm) requires special care in the system design and assembly techniques.

#### **ASSEMBLY TECHNIQUES**

Due to magnet face non-uniformities and device variations, it is recommended that applications requiring precision switching utilize a mechanical optimization procedure during assembly. Without a pole piece, the inherent magnet face offsets can be used to pre-bias the magnetic circuit to obtain any desired operating mode. This is achieved by physically changing the relative position of the magnet behind the sensor to achieve the desired system performance objective. For example, with a rotating ABS gear, the objective might be a 50% duty cycle at maximum air gap. Similar objectives can be set for ignition (crank and cam position) sensing systems.

Non-precision speed sensing applications do not require optimization. For applications where mechanical optimization is not feasible, non-zero speed devices such as the UGN/UGS3059KA ac-coupled gear-tooth sensor are available.

#### SENSOR LOCATION



Dwg. No. MH-002-8A

# 3055

#### **MULTIPLEXED TWO-WIRE** HALL-EFFECT SENSOR ICS

The UGN3055U Hall-effect sensor is a digital magnetic sensing IC capable of communicating over a two-wire power/signal bus. Using a sequential addressing scheme, the device responds to a signal on the bus and returns the diagnostic status of the IC, as well as the status of each monitored external magnetic field. As many as 30 sensors can function on the same two-wire bus. This IC is ideal for multiple sensor applications where minimizing the wiring harness size is desirable or essential.

The device consists of high-resolution bipolar Hall-effect switching circuitry, the output of which drives high-density CMOS logic stages. These logic stages decode the address pulse and enable a response at the appropriate address. The combination of magnetic-field or switch-status sensing, low-noise amplification of the Hall-transducer output, and high-density decoding and control logic is made possible by the development of a new sensor BiMOS fabrication technology.

This unique magnetic sensing IC operates within specifications between -20°C and +85°C. Alternate magnetic and temperature specifications are available upon request. It is supplied in a 60 mil (1.54 mm) thick, three-pin plastic SIP. Each package is clearly marked with a two-digit decimal device address (xx).

#### **FEATURES**

- Complete Multiplexed Hall-Effect IC with Simple Sequential Addressing Protocol
- Allows Power and Communication Over a Two-Wire Bus (Supply/Signal and Ground)
- Up to 30 Hall-Effect Sensors Can Share a Bus
- Sensor Diagnostic Capabilities
- Magnetic-Field or Switch-Status Sensing
- Low Power of BiMOS Technology Favors Battery-Powered and Mobile Applications
- Ideal for Automotive. Consumer, and Industrial Applications

LOGIC 3 1 2 **3ROUND** SWITCH IN

Dwg. No. PH-005

Pinning is shown viewed from branded side.

#### ABSOLUTE MAXIMUM RATINGS at $T_A = +25^{\circ}C$

Supply Voltage, V<sub>BUS</sub> . . . . . . . . . . . . 24 V Magnetic Flux Density, B . . . . . . Unlimited Operating Temperature Range, T<sub>A</sub> . . . . . . . . . . . -20°C to +85°C Storage Temperature Range, T<sub>S</sub> .....-55°C to +150°C Package Power Dissipation, 

Always order by complete part number: UGN3055U .

#### OPERATIONAL CHARACTERISTIC over operating temperature range.

Electrical				Limits					
Characteristics		Symbol	Min.	Тур.	Max.	Units			
Power Supply Voltage		V <sub>BUS</sub>		_	15	V			
Signal Current		Is	12	15	20	mA			
Quiescent Current	V <sub>BUS</sub> = 6 V	I <sub>QH</sub>			2.5	mA			
	V <sub>BUS</sub> = 9 V	I <sub>QL</sub>	T -	_	2.5	mA			
	I <sub>aH</sub> -I <sub>aL</sub>	Ι <sub>α</sub>	_	_	300	μА			
Address Range		Addr	1	_	30	T-			
Clock Thresholds	LOW to HIGH	V <sub>CLH</sub>		_	8.5	V			
	HIGH to LOW	V <sub>CHL</sub>	6.5	_		V			
	Hysteresis	V <sub>CHYS</sub>		0.8		V			
Clock Period		t <sub>CLK</sub>	0.1	1.0		ms			
Address LOW Voltage		V <sub>L</sub>	V <sub>RST</sub>	6	V <sub>CHL</sub>	V			
Address HIGH Voltage		V <sub>H</sub>	V <sub>CLH</sub>	9	V <sub>BUS</sub>	V			
Power-On Reset Voltage		V <sub>RST</sub>	2.5	3.5	5.5	V			
Settling Time	V <sub>BUS</sub> = 9 V	t <sub>h</sub>	100			μѕ			
	V <sub>BUS</sub> = 6 V	t,	100			μs			
Propagation Delay	LOW to HIGH	t <sub>plh</sub>	10		_	μs			
	HIGH to LOW	t <sub>phl</sub>	<u> </u>		10	μs			
Pin 3 Input Resistance	No Magnetic Field (V <sub>OUT</sub> = HIGH)	R <sub>outh</sub>	40		75	kΩ			
	Mag. Field Present (V <sub>OUT</sub> = LOW)	R <sub>OUTL</sub>		_	50	Ω			

#### **Magnetic Characteristics**

Magnetic Thresholds	*Turn-On	B <sub>OP</sub>	50	150	300	G
	Turn-Off	B <sub>RP</sub>	-25	100	300	G
Hysteresis (B <sub>OP</sub> -B <sub>RP</sub> )		B <sub>HYS</sub>	0	50	75	G


<sup>\*</sup>Alternate magnetic switch point specifications are available on request. Please contact the factory.

#### 3055

#### MULTIPLEXED TWO-WIRE HALL-EFFECT SENSOR IC


#### SENSOR LOCATION

(±0.005" [0.13 mm] die placement)



Dwg. No. MH-002

#### **FUNCTIONAL BLOCK DIAGRAM**



Dwg. No. FH-009

#### **DEFINITION OF TERMS**

#### Sensor Address

Each bus sensor has a factory-specified predefined address. At present, allowable sensor addresses are integers from 1 to 30.

#### LOW-to-HIGH Clock Threshold (V<sub>CLH</sub>)

Minimum voltage required during the positive-going transition to increment the bus address and trigger a diagnostic response from the bus sensors. This is also the maximum threshold of the on-chip comparator which monitors the supply voltage,  $V_{\text{Bus}}$ .

#### HIGH-to-LOW Threshold (V,,,)

Maximum voltage required during the negative-going transition to trigger a signal current response from the bus sensors. This is also the maximum threshold of the on-chip comparator which monitors the supply voltage,  $\rm V_{\rm BUS}$ 

#### Bus HIGH Voltage (V,)

Bus HIGH voltage required for addressing. Voltage should be greater than  $\mathbf{V}_{\text{CLH}}.$ 

#### Address LOW Voltage (V,)

Bus LOW Voltage required for addressing. Voltage should be greater than  $\rm V_{BST}$  and less than  $\rm V_{CHL}$ 

#### Bus Reset Voltage (V<sub>RST</sub>)

Voltage level required to reset individual sensors.

#### Sensor Quiescent Current Drain (I<sub>c</sub>)

The current drain of bus sensors when active but not addressed.  $I_{\text{OH}}$  is the maximum quiescent current drain when the sensor is not addressed and is at  $V_{\text{H}}.\ I_{\text{OL}}$  is the maximum quiescent current drain when the sensor is not addressed and is at  $V_{\text{L}}.$ 

#### Diagnostic Phase

Period on the bus when the address voltage is at V<sub>H</sub>. During this period, a correctly addressed sensor responds by increasing its current drain on the bus. This response from the sensor is called the **diagnostic response** and the bus current *increase* is called the **diagnostic current**.

#### Signal Phase

Period on the bus when the address voltage is at  $V_L$ . During this period, a correctly addressed sensor that detects a magnetic field greater than magnetic Operate Point  $B_{op}$  responds by maintaining a current drain of  $I_s$  on the bus. This response from the sensor is called the **signal response** and the bus current *increase* is called the **signal current**.

#### Sensor Address Response Current (I<sub>s</sub>)

Current returned by the bus sensors during the *diagnostic* and the *signal* responses of the bus sensors. This is accomplished by enabling the constant current source (CCS).

#### Magnetic Operate Point (Bop)

Minimum magnetic field required to switch ON the Hall amplifier and switching circuitry of the addressed sensor. This circuitry is only active when the sensor is addressed.

#### Magnetic Release Point (Bpg)

Magnetic field required to switch OFF the Hall amplifier and switching circuitry after the output has switched ON. This is due to magnetic memory in the switching circuitry. However, when a device is deactivated by changing the current bus address, all magnetic memory is lost.

#### Magnetic Hysteresis (B<sub>HYS</sub>)

Difference between the  $\rm B_{\rm OP}$  and  $\rm B_{\rm RP}$  magnetic field thresholds.

#### ADDRESSING PROTOCOL

The device may be addressed by modulating the supply voltage as shown in Figure 1. A preferred addressing protocol is as follows: the bus supply voltage is brought down to 0 V so that all devices on the bus may be reset. The voltage is then raised to the address LOW voltage ( $V_1$ ) and the bus quiescent current is measured. The bus is then toggled between  $V_L$  and  $V_H$  (address HIGH voltage), with each positive transition representing an increment in the bus address. After each voltage transition, the bus current is monitored to check for diagnostic and signal responses from sensor IC's.


#### Sensor Addressing

When a sensor detects a bus address equal to its factory programmed address, it responds with an increase in its supply current drain (called I<sub>c</sub> during the HIGH portion of the

address cycle). This response may be used as an indication that the sensor is alive and well on the bus and is also called the *diagnostic* response. If the sensor detects an ambient magnetic field, it also responds with  $I_s$  during the low portion of the address cycle. This response from the sensor is called the *signal* response. When the next positive transition is detected, the sensor becomes disabled, and its contribution to the bus signal current returns to  $I_s$ .

#### **Bus Current**

Figure 1 displays the above described addressing protocol. The top trace represents the bus voltage transitions as controlled by the bus driver (see applications note for an optimal bus driver schematic). The second trace represents the bus current contribution of sensor (address 2). The *diagnostic* response from the sensor indicates that it detected its address on the bus; however, no *signal* response current is returned which indicates that sufficient magnetic field is not detected at the chip surface. The third trace represents the current drain of sensor 2 when a magnetic field is detected. Note both the *diagnostic* and *signal* response from the sensor. The last trace represents the overall bus current drain when sensors 2 and 3 are present; note that

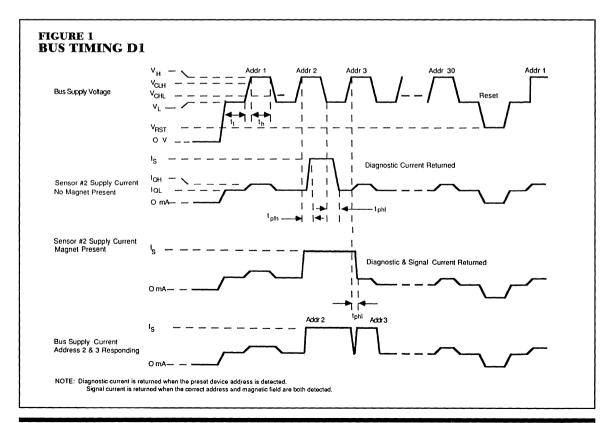

while sensor 2 returns a diagnostic and signal current, sensor 3 only returns a diagnostic current. When no sensors are addressed, the net bus current drain is the sum of quiescent currents of all sensors on the bus (for 'n' sensors, the bus quiescent current drain is n\*l\_).

#### **Bus Issues**

At present, a maximum of 30 active sensors can coexist on the same bus, each with a different address. Address 0 is reserved for bus current calibration in software. This feature allows for fail-safe detection of signal current and eliminates detection problems caused by low signal current (Is), the operation of sensors at various ambient temperatures, lot-to-lot variation of quiescent current. and the addition and replacement of sensors to the bus while in the field. Address 31 is designed to be inactive to allow for further address expansion of the bus (to 62 maximum addresses). In order to repeat the address cycle, the bus must be reset as shown in Figure 1 by bringing the supply voltage to below V<sub>BST</sub>. Sensors have been designed not to 'wrap-around'.

#### Magnetic Sensing

The sensor IC has been designed to respond to an external magnetic field whose magnetic strength is greater than  ${\rm B}_{\rm OP}$ . It accomplishes this by amplifying the output of an on-chip Hall transducer and feeding it into a threshold detector. In order that bus current is kept to a minimum, the transducer and amplification circuitry is kept powered down until the sensor is addressed. Hence, the magnetic status is evaluated only when the sensor is addressed.

#### **External Switch Sensing**

The third pin of the IC (pin 3) may be used to detect the status of an external switch when magnetic field sensing is not desired (and in the absence of a magnetic field). The allowable states for the switch are 'open' and 'closed' (shorted to sensor ground).

#### **APPLICATIONS NOTES**


#### **Magnetic Actuation**

Figure 2 shows the wiring of the UGN3055U when used as a magnetic threshold detector. Pin 1 of the sensor is wired to the positive terminal of the bus, pin 2 is connected to the bus negative terminal, and pin 3 has no connection.


#### Mechanical Actuation


Figure 3 shows the wiring of the UGN3055U when used to detect the status of a mechanical switch. In this case, pin 3 is connected to the positive terminal of the switch. The negative side of the switch is connected to the negative terminal of the bus. When the mechanical switch is closed (shorted to ground) and the correct bus address is detected by the IC, the sensor responds with a signal current. If the switch is open, only a diagnostic current is returned.

### FIGURE 2 MAGNETICALLY ACTUATED SENSOR



## FIGURE 3 MECHANICALLY ACTUATED SENSOR



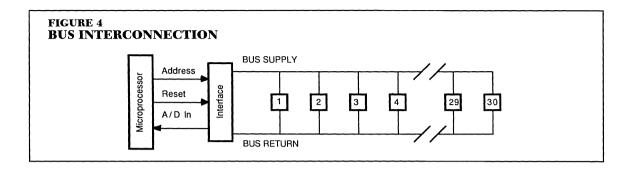

#### **Bus Configuration**

A maximum of 30 sensors may be connected across the same two wire bus as shown in Figure 4. It is recommended that the sensors use a dedicated digital ground wire to minimize the effects of changing ground potential (as in the case of chassis ground in the automotive industry).

The bus was not designed to require two wire twisted pair wiring to the sensors; however, in areas of extreme EMI (electromagnetic interference), it may be advisable to install a small bypass capacitor (.01  $\mu\text{F}$  for example) between the supply and ground terminals of each sensor instead of using the more expensive wiring.

#### **Bus Driver**

It is recommended that the bus be controlled by microprocessor-based hardware for the following reasons:

- Sensor address information may be stored in ROM in the form of a look up table.
- Bus faults can be pinpointed by the microprocessor by comparing the diagnostic response to the expected response in the ROM look up table.
- The microprocessor, along with an A/D converter, can also be used to self calibrate the quiescent currents in the bus and hence be able to easily detect a signal response.
- The microprocessor can also be used to filter out random line noise by digitally filtering the bus responses.

• The microprocessor can easily keep track of the signal responses, initiate the appropriate action; e.g., light a lamp, sound an alarm, and also pinpoint the location of the signal.

Optimally, the microprocessor is used to control bus-driving circuitry that will accept TTL level inputs to drive the bus and will return an analog voltage representation of the bus current.

#### Interface Schematic

The bus driver is easily designed using a few operational amplifiers, resistors, and transistors. Figure 5 shows a schematic of a recommended bus driver circuit that is capable of providing 6 to 9 V transitions, resetting the bus, and providing an analog measurement of the current for use by the A/D input of the microprocessor.

In Figure 5, the Address pin provides aTTL-compatible input that is used to control the Bus supply. A HIGH (5 V) input switches Q1 ON and sets the bus voltage to 6 V through the resistor divider R4, R5, and the Zener Z1. A LOW input switches OFF Q2 and sets the bus voltage to 9 V. This voltage is fed into the positive input of the operational amplifier OP1 and is buffered and made available at Bus Supply (or sensor supply). Bus reset control is also available in the form of a TTL-compatible input. When this input, which is marked Reset, is HIGH, Q2 is switched ON and the positive input of the op amp is set to the saturation voltage of the transistor (approximately 0 V). This resets the bus.

A linear reading of the bus current is made possible by amplifying the voltage generated across R6 (which is  $I_{\text{BUS}}$  \*R6). The amplifier, OP2, is a standard differential amplifier of gain R9/R7 (provided that R7 = R8, R9 = R10). The gain of the total transimpedance amplifier is given by:

$$V_{OUT} = I_{BUS} *R6*R9/R7$$

This voltage is available at the terminal marked Analog Out.


#### **Bus Control Software**

The processing of the bus current (available at Analog Out) is best done by feeding it into the A/D input of a microprocessor. If the flexibility provided by a microprocessor is not desired, this signal could be fed into threshold detection circuitry; e.g., comparator, and the output used to drive a display.

#### **Related References**

- 1. G. AVERY, "Two Terminal Hall. Sensor," ASSIGNEE: Sprague Electric Company, North Adams, MA, United States. Patent number 4,374,333; Feb. 1983.
- 2. T. WROBLEWSKI and F. MEISTERFIELD, "Switch Status Monitoring System, Single Wire Bus, Smart Sensor Arrangement There Of," ASSIGNEE: Chrysler Motor Corporation, Highland Park, MI, United States. Patent number 4,677,308; June 1987.

### FIGURE 5 BUS INTERFACE SCHEMATIC

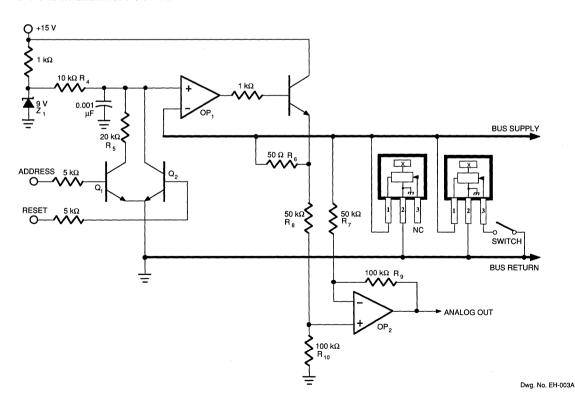

# 3056 AND 3058

#### HALL-EFFECT GEAR-TOOTH SENSORS-ZERO SPEED


The A3056EU/LU and A3058EU/LU Hall effect gear-tooth sensors are monolithic integrated circuits that switch in response to differential magnetic fields created by ferrous targets. These devices are ideal for use in gear-tooth-based speed, position, and timing applications and operate down to zero rpm over a wide range of air gaps and temperatures. When combined with a back-biasing magnet and proper assembly techniques, devices can be configured to give 50% duty cycle or to switch on either leading, trailing, or both edges of a passing gear tooth or slot.

The six devices differ only in their magnetic switching values and operating temperature ranges. The low hysteresis of the A3056EU and A3056LU makes them perfectly suited for ABS (anti-lock brake system) or speed sensing applications where maintaining large air gaps is important. The high hysteresis of the A3058EU and A3058LU, with their excellent temperature stability, makes them especially suited to ignition timing applications where switch-point accuracy (and latching requirements) is extremely important.

Complete technical information on these devices is included with the A3046EU/LU.

#### BENEFITS

- Senses Ferrous Targets Down to Zero RPM
- Defined Power-Up State (3058 only) Available Mid-1993
- Large Effective Air Gap
- Wide Operating Temperature Range
- Operation from Unregulated Supply
- High-Speed Operation
- Output Compatible With All Logic Families
- Reverse Battery Protection
- Solid-State Reliability ... No Moving Parts
- Resistant to Physical Stress




Dwg. No. PH-Pinning is shown viewed from branded side.

#### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V <sub>CC</sub> 28 V
Reverse Battery Voltage,
V <sub>RCC</sub> 30 V
Magnetic Flux Density, B Unlimited
Output OFF Voltage, V <sub>OUT</sub> 28 V
Reverse Output Voltage, V <sub>OUT</sub> 0.5 V
Output Current, I <sub>OUT</sub> 25 mA
Package Power Dissipation, Pp 500 mW
Operating Temperature Range, T <sub>A</sub>
Suffix "EU"40°C to +85°C
Suffix "LU"40°C to +150°C
Storage Temperature Range,
T <sub>S</sub> 65°C to +170°C

#### 3059

#### HALL-EFFECT GEAR-TOOTH SENSORS —AC COUPLED



Dwg. No. PH-011

Pinning is shown viewed from branded side.

#### ABSOLUTE MAXIMUM RATINGS at $T_{A} = +25^{\circ}C$

Supply Voltage, V <sub>CC</sub> 24 V
Reverse Battery Voltage, V <sub>RCC</sub> 30 V
Magnetic Flux Density, B Unlimited
Output OFF Voltage, V <sub>OUT</sub> 24 V
Output Current, I <sub>OUT</sub> 25 mA
Package Power Dissipation,
P <sub>D</sub>
Operating Temperature Range, T <sub>A</sub>
UGN3059KA20°C to +85°C
UGS3059KA40°C to +125°C
Storage Temperature Range,
T <sub>S</sub> 65°C to +150°C

The UGN3059KA and UGS3059KA ac-coupled Hall-effect geartooth sensors are monolithic integrated circuits that switch in response to changing differential magnetic fields created by moving ferrous targets. These devices are ideal for use in non-zero-speed, gear-tooth-based speed, position, and timing applications.

Both devices, when coupled with a back-biasing magnet, can be configured to turn ON or OFF with the leading or trailing edge of a gear-tooth or slot. Changes in fields on the magnet face caused by a moving ferrous mass are sensed by two integrated Hall transducers and are differentially amplified by on-chip electronics. Steady-state magnet and system offsets are eliminated using an on-chip differential band-pass filter. This filter also provides relative immunity to interference from RF and electromagnetic sources. The on-chip temperature compensation and Schmitt trigger circuitry minimizes shifts in effective working air gaps and switch points over temperature, allowing operation to low frequencies over a wide range of air gaps and temperatures.

Each Hall-effect digital Integrated circuit includes a voltage regulator, two quadratic Hall effect sensing elements, temperature compensating circuitry, a low-level amplifier, band-pass filter, Schmitt trigger, and an open-collector output driver. The on-board regulator permits operation with supply voltages of 4.5 to 18 volts. The output stage can easily switch 20 mA over the full frequency response range of the sensor and is compatible with bipolar and MOS logic circuits.

The two devices provide a choice of operating temperature ranges. The UGN3059KA has an operating range of -20°C to +85°C. The UGS3059KA has an operating range of -40°C to +125°C. Both devices are packaged in a 5-pin plastic SIP.


#### **FEATURES**

- Senses Motion of Ferrous Targets Such as Gears
- Large Effective Air Gap
- Wide Operating Temperature Range
- 4.5 V to 18 V Operation
- Operation to 30 kHz
- Output Compatible With All Logic Families
- Reverse Battery Protection
- Activate With Small, Inexpensive Magnets
- Resistant to RFI. EMI

Always order by complete part number:

Part Number	Operating Temperature Range
UGN3059KA	-20°C to +85°C
UGS3059KA	-40°C to +125°C

#### 3059 HALL-EFFECT GEAR—TOOTH SENSORS- AC COUPLED

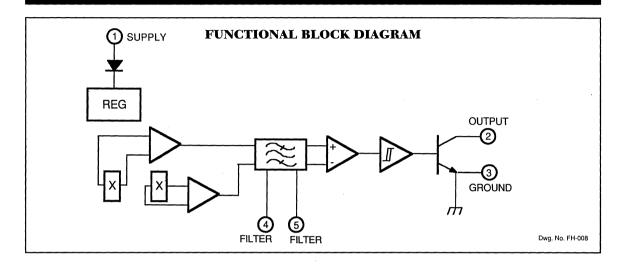

#### **ELECTRICAL CHARACTERISTICS** over operating temperature range.

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Supply Voltage	V <sub>cc</sub>	Operating	4.5	_	18	٧
Output Saturation Voltage	V <sub>OUT(SAT)</sub>	I <sub>OUT</sub> = 20 mA, B > B <sub>OP</sub>	_	_	400	mV
Output Leakage Current	I <sub>OFF</sub>	V <sub>OUT</sub> = 24 V, B < B <sub>RP</sub>	T -		10	μΑ
Supply Current	l <sub>cc</sub>	V <sub>CC</sub> = 18 V, B < B <sub>RP</sub>			20	mA
High-Frequency Cutoff	f <sub>coh</sub>	-3 dB	30			kHz
Output Rise time	t <sub>r</sub>	$V_{OUT} = 12 \text{ V}, R_{L} = 820 \Omega$	_	0.04	0.2	μs
Output Fall time	t,	$V_{OUT} = 12 \text{ V, R}_{L} = 820 \Omega$		0.18	0.3	μs

#### MAGNETIC CHARACTERISTICS over operating temperature range, $V_{CC} = 12 \text{ V}$ .

				Limits		
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Operate Point	B <sub>OP</sub>	Output Switches OFF to ON	10	_	100	G
Release Point	B <sub>RP</sub>	Output Switches ON to OFF	-100		-10	G
Hysteresis	B <sub>hys</sub>	B <sub>OP</sub> -B <sub>RP</sub>	20		150	G

NOTES: Magnetic switch points are specified as the difference in magnetic fields at the two Hall elements.

As used here, negative flux densities are defined as less than zero (algebraic convention).

Typical values are at  $T_A = +25^{\circ}C$  and  $V_{CC} = 12 \text{ V}$ .

#### 3059 HALL-EFFECT GEAR—TOOTH SENSORS- AC COUPLED

# 1 k H 100 H

Dwg. No. GH-025

#### APPLICATIONS INFORMATION

Magnetic Operation. The UGN3059KA and UGS3059KA sensor ICs have two integrated Hall transducers that are used to sense a magnetic field gradient across the face of the IC.

The magnetic field is measured and converted into an analog voltage by each of the two Hall transducers, E1 and E2 where E1 is the left element and E2 is the right element. The difference voltage is amplified, band-pass filtered to remove dc offset components, and then fed into a Schmitt trigger. This trigger switches the output ON when  $B_{\rm E_1}$ - $B_{\rm E_2}$  >  $B_{\rm OP}$  and switches the output OFF when  $B_{\rm E_1}$ - $B_{\rm E_2}$  <  $B_{\rm RP}$ .

**AC-Coupled Operation.** Steady-state magnet and system offsets are eliminated using an on-chip differential band-pass filter. The lower frequency cut-off of this patented filter is set using an external capacitor the value of which can range from 0.01  $\mu F$  to 10  $\mu F$ . The high-frequency cut-off of this filter is set at 30 kHz by an internal integrated capacitor.

The differential structure of this filter enables the IC to reject singleended noise on the ground or supply line and, hence, makes it resistant to radio-frequency and electromagnetic interference typically seen in hostile remote sensing environments. This filter configuration also increases system tolerance to capacitor degradation at high temperatures, allowing the use of an inexpensive external ceramic capacitor.


Low-Frequency Operation. Low-frequency operation of the sensor is set by the value of an external capacitor. The graph provides the low-frequency cut-off (-3 dB point) of the filter as a function of capacitance value. This information should be used with care. The graph assumes a perfect sinusoidal magnetic signal input. In reality, when used with gear teeth, the teeth create transitions in the magnetic field that have a much higher frequency content than the basic rotational speed of the target. This allows the device to sense speeds much lower than those indicated by the graph for a given capacitor value.

Capacitor Characteristics. The major requirement for the external capacitor is its ability to operate in a bipolar (non-polarized) mode. Another important requirement is the low leakage current of the capacitor (equivalent parallel resistance should be greater than 500 k $\Omega$ ). To maintain proper operation with frequency, capacitor values should be held to within  $\pm 30\%$  over the operating temperature range. Available non-polarized capacitors include ceramic, polyester, and some tantalum types. For low-cost operation, ceramic capacitors with temperature codes Z5S, Y5S, X5S, or X7S (depending on operating temperature range) or better are recommended. The commonly available Z5U temperature code should not be used in this application.

#### 3059 HALL-EFFECT GEAR—TOOTH SENSORS- AC COUPLED

#### SENSOR LOCATIONS

(±0.005" [0.13 mm] die placement)



Dwg. No. MH-007A

Magnet Biasing. In order to sense moving non-magnetized ferrous targets, the UGN3059KA or UGS3059KA must be back-biased by mounting it on a small permanent magnet. This can be accomplished by attaching the pole end of a magnet (AlNiCo 8, SmCo, or NeFe B) to the back of the package, opposite to the branded side. Either magnetic pole (north or south) can be used. The magnetic system, thus configured, can sense ferrous gear teeth out to 0.070" (1.75 mm) for typical wheel speed sensing targets or 0.100" (2.5 mm) for deep slotted ignition targets.

The UGN/UGS3059KA can also be used without a back-biasing magnet. In this configuration, the sensor can be used to detect a rotating ring magnet such as those found in brushless dc motors or in speed sensing applications. Here, the sensor detects the magnetic field gradient created by the moving magnetic poles.

Magnet Selection. The UGN/UGS3059KA can be used with a wide variety of commercially available permanent magnets. The selection of the magnet depends on the operational and environmental requirements of the sensing system. For systems that require high accuracy and large working airgaps or an extended temperature range, the usual magnet material of choice is rare earth samarium cobalt (SmCo). This magnet material has a high energy product and can operate over an extended temperature range. For systems that require low-cost solutions for an extended temperature range, AlNiCo 8 can be used. Due to its relatively low energy product, smaller operational airgaps can be expected. Neodymium iron boron (NeFeB) can be used over moderate temperature ranges when large working airgaps are required. Of these three magnet materials, AlNiCo 8 is the least expensive by volume and SmCo is the most expensive.

#### 3113, 3120, 3130, AND 3140

#### HALL-EFFECT SWITCHES

These Hall-effect switches are highly temperature stable and stressresistant sensors best utilized in applications that provide steep magnetic slopes and low residual levels of magnetic flux density.

Each device includes a voltage regulator, quadratic Hall voltage generator, temperature stability circuit, signal amplifier, Schmitt trigger and open-collector output on a single silicon chip. The on-board regulator permits operation with supply voltages of 4.5 to 24 volts. The switch output can sink up to 20 mA. With suitable output pull up, they can be used directly with bipolar or MOS logic circuits.

The four package styles available provide a magnetically optimized package for most applications. Suffix LT is a surface-mount SOT-89 (TO-243AA) package; suffixes LL, U, and UA feature wire leads for through-hole mounting.

#### **FEATURES**

- 4.5 V to 24 V Operation
- Activate With Small, Commercially Available Permanent Magnets
- Solid-State Reliability... No Moving Parts
- Small Size
- Constant Output Amplitude
- Superior Temperature Stability
- Resistant to Physical Stress
- Directly Replace Series UGN and UGS3000T/U Switches

3 ALPOUTOUS SUPPLY

Dwg No PH-003A

Pinning is shown viewed from branded side.

#### ABSOLUTE MAXIMUM RATINGS

\* Devices can be stored at +200°C for short periods of time. Always order by complete part number, e.g., **UGN3113UA**. See Magnetic Characteristics table for differences between devices.

#### 3113, 3120, 3130, and 3140 *HALL-EFFECT SWITCHES*

#### ELECTRICAL CHARACTERISTICS at $T_A$ + +25°C, $V_{CC}$ = 4.5 V to 24 V (unless otherwise noted).

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Supply Voltage	V <sub>cc</sub>	Operating	4.5	_	24	V
Output Saturation Voltage	V <sub>OUT(SAT)</sub>	I <sub>OUT</sub> = 20 mA, B > B <sub>OP</sub>	_	150	400	mV
Output Leakage Current	I <sub>OFF</sub>	V <sub>OUT</sub> = 24 V, B < B <sub>RP</sub>	_	<1.0	10	μА
Supply Current	I <sub>cc</sub>	V <sub>CC</sub> = 4.5 V, Output Open	_	4.7	8.0	mA
Output Rise Time	t,	$V_{CC} = 12 \text{ V}, R_L = 820 \Omega, C_L = 20 \text{ pF}$	_	0.04	2.0	μs
Output Fall Time	t,	$V_{CC} = 12 \text{ V}, R_L = 820 \Omega, C_L = 20 \text{ pF}$	_	0.18	2.0	μs

#### **MAGNETIC CHARACTERISTICS in gauss**

Characteristic	Part Number*	T <sub>A</sub> = Min.	+25°C Max.	T <sub>A</sub> = -20°0 Min.	C to +85°C Max.	T <sub>A</sub> = -40°C Min.	to +125°C <sup>†</sup> Max.
Operate Point, B <sub>OP</sub>	3113	_	450	_	510	_	_
	3120	70	350	70	425	35	450
	3130	_	150	_	175	-	200
	3140	70	200	45	260	45	270
Release Point, B <sub>RP</sub>	3113	30	_	20	_	_	_
	3120	50	330	50	405	25	430
	3130	-150		-175		-200	_
	3140	50	180	25	240	25	250
Hysteresis, B <sub>hys</sub>	3113	20	<del>-</del>	10	_	_	_
·	3120	20	_	20	-	20	
	3130	20	_	20	-	20	_
	3140	20		20		20	


NOTE: As used here, negative flux densities are defined as less than zero (algebraic convention).


<sup>\*</sup> Complete part number includes a prefix denoting operating temperature range (UGN or UGS) and a suffix denoting package type (LL, LT, U, or UA).

<sup>†</sup> Applicable to prefix UGS devices only (available with all devices except 3113).

#### 3113, 3120, 3130, and 3140 HALL-EFFECT SWITCHES

#### TYPICAL CHARACTERISTICS AS FUNCTIONS OF TEMPERATURE






Dwg. No. GH-018


#### TYPICAL CHARACTERISTICS AS FUNCTIONS OF TEMPERATURE

#### **OUTPUT SATURATION VOLTAGE**



Dwg. No. GH-013

#### SUPPLY CURRENT




Dwg. No. GH-014

#### 3113, 3120, 3130, AND 3140 HALL-EFFECT SWITCHES

#### SENSOR LOCATIONS

(±0.005" [0.13mm] die placement)

#### SUFFIX "LL" AND "LT"




Dwg. No. MH-008A

#### SUFFIX "U"

## ACTIVE AREA DEPTH 0.017" 0.43 mm NOM 2.34 mm 0.080" 2.03 mm

#### SUFFIX "UA"




Dwg. No. MH-002-1A

Dwg. No. MH-011-1A

## 3121, 3122, AND 3123

#### HALL-EFFECT SWITCHES FOR HIGH-TEMPERATURE OPERATION



Dwg. No. PH-003A

Pinning is shown viewed from branded side.

#### ABSOLUTE MAXIMUM RATINGS at $T_{\star}$ =+25°C

Supply Voltage, V <sub>CC</sub> <b>30 V</b>
Reverse Battery Voltage, V <sub>RCC</sub> 30 V
Magnetic Flux Density, B Unlimited
Output OFF Voltage, V <sub>OUT</sub> 28 V
Reverse Output Voltage, V <sub>OUT</sub> 0.5 V
Continuous Output Current, IOUT 25 mA
Operating Temperature Range, T <sub>A</sub>
Suffix 'E-'40°C to +85°C
Suffix 'L-'40°C to +150°C
Storage Temperature Range,
T <sub>S</sub> 65°C to +170°C

These Hall-effect switches are monolithic integrated circuits with hter magnetic specifications and switch points, designed to operate continuously over extended temperatures to +150°C, and are more stable with both temperature and supply voltage changes. The unipolar switching characteristic makes these devices ideal for use with a simple bar or rod magnet. The three basic devices (3121, 3122, and 3123) are identical except for magnetic switch points.

Each device includes a voltage regulator for operation with supply voltages of 4.5 volts to 24 volts, reverse battery protection diode, quadratic Hall-voltage generator, temperature compensation circuitry, small-signal amplifier, Schmitt trigger, and an open-collector output to sink up to 25 mA. With suitable output pull up, they can be used with bipolar or CMOS logic circuits. The 3121 is an improved replacement for the 3113 and 3119.

The first character of the part number suffix determines the device operating temperature range; suffix 'E-' is for the automotive and industrial temperature range of -40°C to +85°C, suffix 'L-' is for the automotive and military temperature range of -40°C to +150°C. Four package styles provide a magnetically optimized package for most applications. Suffix '-LL' is a long-leaded version of suffix '-LT', a miniature SOT-89/TO-243AA transistor package for surface-mount applications; suffix '-U' is a three-lead plastic mini-SIP while suffix '-UA' is a three-lead ultra-mini-SIP.

#### FEATURES and BENEFITS

- Superior Temp. Stability for Automotive or Industrial Applications
- 4.5 V to 24 V Operation ... Needs Only An Unregulated Supply
- Open-Collector 25 mA Output ... Compatible with Digital Logic
- Reverse Battery Protection
- Activate with Small, Commercially Available Permanent Magnets
- Solid-State Reliability ... No Moving Parts
- Small Size
- Resistant to Physical Stress

Always order by complete part number, e.g., A3121ELL.

#### 3121, 3122, and 3123 HALL-EFFECT SWITCHES FOR HIGH-TEMPERATURE OPERATION

#### ELECTRICAL CHARACTERISTICS over operating temperature range, at $V_{CC} = 12 \text{ V}$ .

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Supply Voltage	V <sub>cc</sub>	Operating	4.5		24	V
Output Saturation Voltage	V <sub>OUT(SAT)</sub>	I <sub>OUT</sub> = 20 mA, B > B <sub>OP</sub>	T	140	400	mV
Output Leakage Current	I <sub>OFF</sub>	V <sub>OUT</sub> = 24 V, B < B <sub>RP</sub>		<1.0	10	μА
Supply Current	l <sub>cc</sub>	B < B <sub>RP</sub> (Output OFF)	T-	4.6	9.0	mA
Output Rise Time	t <sub>r</sub>	$R_L = 820 \Omega, C_L = 20 pF$	T	0.04	2.0	ns
Output Fall Time	t <sub>r</sub>	$R_{L} = 820 \Omega, C_{L} = 20 pF$	T	0.18	2.0	ns


#### MAGNETIC CHARACTERISTICS in gauss over operating supply voltage range.

			Part Numbers*								
			A3121			A3122			A3123		
Cha	racteristic	Min.	Тур.	Max.	Min.	Тур.	Max.	Min.	Тур.	Max	
Вор	at T <sub>A</sub> = 25°C	250	350	450	280	340	400	250	345	440	
	over operating temp. range	220	350	500	260	340	430	230	345	470	
B <sub>RP</sub>	at T <sub>A</sub> = 25°C	125	245	380	140	235	330	180	240	300	
	over operating temp. range	80	245	410	120	235	360	160	240	330	
B <sub>hys</sub>	at T <sub>A</sub> = 25°C	70	105	140	70	105	140	70	105	140	
	over operating temp. range	60	105	150	70	105	140	70	105	140	

NOTES: Typical values are at T<sub>A</sub> = +25°C and V<sub>CC</sub> = 12 V.

B<sub>OP</sub> = operate point (output turns ON); B<sub>RP</sub> = release point (output turns OFF); B<sub>hys</sub> = hysteresis (B<sub>OP</sub> - B<sub>RP</sub>).


\*Complete part number includes a suffix to identify operating temperature range (E- or L-) and package type (-LL, -LT, -U, or -UA).



#### 3121, 3122, and 3123 HALL-EFFECT SWITCHES FOR HIGH-TEMPERATURE OPERATION


#### TYPICAL OPERATING CHARACTERISTICS

#### SWITCH POINTS




Dwg. No. GH-038

#### **OUTPUT SATURATION VOLTAGE**




Dwg. No. GH-040

#### SUPPLY CURRENT




Dwg. No. GH-039

#### SUPPLY CURRENT



Dwg. No. GH-041


#### CHANGE IN OPERATE POINT



Dwg. No. GH-042

<sup>\*</sup> Complete part number includes a suffix denoting operating temperature range (E- or L-) and package type (-LL, -LT, -U, or -UA).


#### 3121, 3122, and 3123 HALL-EFFECT SWITCHES FOR HIGH-TEMPERATURE OPERATION

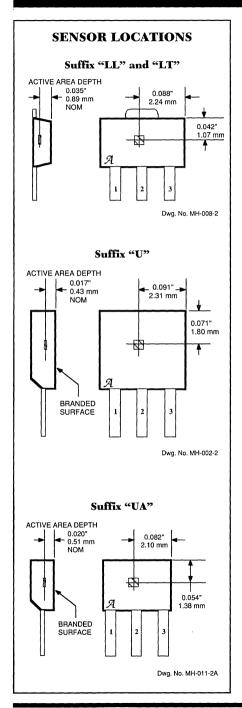

#### **OPERATION**

The output of these devices (pin 3) switches low when the magnetic field at the Hall sensor exceeds the operate point threshold ( $B_{\rm op}$ ). At this point, the output voltage is  $V_{\rm out,(SAT)}$ . When the magnetic field is reduced to below the release point threshold ( $B_{\rm RP}$ ), the device output goes high. The difference in the magnetic operate and release points is called the hysteresis ( $B_{\rm hys}$ ) of the device. This built-in hysteresis allows clean switching of the output even in the presence of external mechanical vibration and electrical noise.

#### 3130



Dwg No PH-003A

OUTPUT

Pinning is shown viewed from branded side.

**GROUND** 

#### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V <sub>CC</sub> 25 V
Magnetic Flux Density, B Unlimited
Output OFF Voltage, V <sub>OUT</sub> 25 V
Continuous Output Current, I <sub>OUT</sub> 25 mA
Operating Temperature Range, T <sub>A</sub>
Prefix UGN20°C to +85°C
Prefix UGS40°C to +125°C
Storage Temperature Range,
T <sub>S</sub> 65°C to +150°C*

\* Devices can be stored at +200°C for short periods of time.

#### HALL-EFFECT SWITCH

This Hall-effect switch is a highly temperature stable and stressresistant sensor best utilized in applications that provide steep magnetic slopes and low residual levels of magnetic flux density.

Each device includes a voltage regulator, quadratic Hall voltage generator, temperature stability circuit, signal amplifier, Schmitt trigger and open-collector output on a single silicon chip. The on-board regulator permits operation with supply voltages of 4.5 to 24 volts. The switch output can sink up to 20 mA. With suitable output pull up, they can be used directly with bipolar or MOS logic circuits.

The four package styles available provide a magnetically optimized package for most applications. Suffix LT is a surface-mount SOT-89 (TO-243AA) package; suffixes LL, U, and UA feature wire leads for through-hole mounting.

Complete technical information for the UGN3130- is included with the UGN3113-.

#### **FEATURES**

- 4.5 V to 24 V Operation
- Activate With Small, Commercially Available Permanent Magnets
- Solid-State Reliability... No Moving Parts
- Small Size
- Constant Output Amplitude
- Superior Temperature Stability
- Resistant to Physical Stress
- Directly Replace Series UGN and UGS3030T/U Switch

Always order by complete part number, e.g., UGN3130UA .

## 3132 AND 3133

#### ULTRA-SENSITIVE BIPOLAR HALL-EFFECT SWITCHES


These Hall-effect switches are designed for magnetic actuation using a bipolar magnetic field, i.e., a north-south alternating field. They combine extreme magnetic sensitivity with excellent stability over varying temperature and supply voltage. The high sensitivity permits their use with multi-pole ring magnets over relatively large distances.

Each device includes a voltage regulator, quadratic Hall voltage generator, temperature stability circuit, signal amplifier, Schmitt trigger, and open-collector output on a single silicon chip. The on-board regulator permits operation with supply voltages of 4.5 to 24 volts. The switch output can sink up to 25 mA. With suitable output pull up, they can be used directly with bipolar or MOS logic circuits.

The four package styles available provide a magnetically optimized package for most applications. Suffix LT is a surface-mount SOT 89 (TO-243AA) package; suffixes LL, U, and UA feature wire leads for through-hole mounting. Prefix 'UGN' devices are rated for continuous operation over the temperature range of -20°C to +85°C; prefix 'UGS' devices over an extended range of -40°C to +125°C.

#### FEATURES

- 4.5 V to 24 V Operation
- Reverse Battery Protection
- Superior Temperature Stability
- Superior Supply Voltage Stability
- Activate with Multi-Pole Ring Magnets■ Solid-State Reliability ... No Moving Parts
- Small Size
- Constant Output Amplitude
- Resistant to Physical Stress



Dwg. No. PH-003A

Pinning is shown viewed from branded side.


#### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V <sub>CC</sub> 25 V
Reverse Battery Voltage, V <sub>RCC</sub> 35 V
Magnetic Flux Density, B Unlimited
Output OFF Voltage, V <sub>OUT</sub> 25 V
Continuous Output Current, I <sub>OUT</sub> 25 mA
Operating Temperature Range, T <sub>A</sub>
Prefix UGN20°C to +85°C
Prefix UGS40°C to +125°C
Storage Temperature Range.

T<sub>S</sub> . . . . . . . . . -65°C to +150°C

Always order by complete part number including prefix and suffix, e.g., **UGN3132LL** .

#### 3132 AND 3133 BIPOLAR HALL-EFFECT SWITCHES

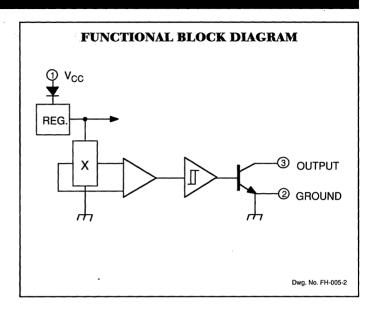

#### ELECTRICAL CHARACTERISTICS at $T_A = +25$ °C

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Supply Voltage	V <sub>cc</sub>	Operating	4.5	_	24	V
Output Saturation Voltage	V <sub>OUT(SAT)</sub>	$I_{OUT} = 20 \text{ mA}, B \ge B_{OP}$		145	400	mV
Output Leakage Current	l <sub>OFF</sub>	V <sub>OUT</sub> = 24 V, B ≤ B <sub>RP</sub>		<1.0	10	μΑ
Supply Current	l <sub>cc</sub>	V <sub>CC</sub> = 24 V, B ≤ B <sub>RP</sub>	_	4.3	9.0	mA
Output Rise Time	t <sub>r</sub>	$V_{CC} = 12 \text{ V}, R_L = 820 \Omega, C_L = 20 \text{ pF}$	_	0.04	2.0	μs
Output Fall Time	t <sub>f</sub>	$V_{CC} = 12 \text{ V}, R_L = 820 \Omega, C_L = 20 \text{ pF}$	_	0.18	2.0	μs

#### MAGNETIC CHARACTERISTICS over operating temperature and voltage range.


			Limits				
Characteristic	Symbol	Device Type*	Min.	Тур.	Max.	Units	
Operate Point	B <sub>OP</sub>	3132	_	32	95	G	
		3133		32	75	G	
Release Point	B <sub>RP</sub>	3132	-95	-20	_	G	
	·	3133	-75	-20	_	G	
Hysteresis	B <sub>hys</sub>	Both	30	52	_	G	


NOTE: As used here, negative flux densities are defined as less than zero (algebraic convention.) Typical values are at  $T_A = +25^{\circ}C$  and  $V_{CC} = 12 V$ .

<sup>\*</sup> Complete part number includes a prefix denoting operating temperature range (UGN or UGS) and a suffix denoting package type (LL, LT, U, or UA).

#### 3132 AND 3133 BIPOLAR HALL-EFFECT SWITCHES


#### TYPICAL CHARACTERISTICS






Dwg. No. GH-022

Dwg. No. GH-021






Dwg. No. GH-023

#### 3132 AND 3133 BIPOLAR HALL-EFFECT SWITCHES

#### SENSOR LOCATIONS

(±0.005" [0.13mm] die placement)

#### SUFFIX "LL" & SUFFIX "LT"




Dwg. No. MH-008-2A

#### SUFFIX "U"

# ACTIVE AREA DEPTH 0.017" 0.43 mm NOM 2.31 mm 0.071" 1.80 mm RANDED SURFACE 1 2 3


#### SUFFIX "UA"



Dwg. No. MH-011-2A

Dwg. No. MH-002-2

#### 3140



Dwg. No. PH-003A

Pinning is shown viewed from branded side.

#### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V <sub>CC</sub> 25 V
Magnetic Flux Density, B Unlimited
Output OFF Voltage, V <sub>OUT</sub> 25 V
Continuous Output Current, I <sub>OUT</sub> 25 mA
Operating Temperature Range, TA
Prefix UGN20°C to +85°C
Prefix UGS40°C to +125°C
Storage Temperature Range,
T <sub>S</sub> 65°C to +150°C*

Devices can be stored at +200°C for short periods of time.

#### HALL-EFFECT SWITCH

This Hall-effect switch is a highly temperature stable and stressresistant sensor best utilized in applications that provide steep magnetic slopes and low residual levels of magnetic flux density.

Each device includes a voltage regulator, quadratic Hall voltage generator, temperature stability circuit, signal amplifier, Schmitt trigger and open-collector output on a single silicon chip. The on-board regulator permits operation with supply voltages of 4.5 to 24 volts. The switch output can sink up to 20 mA. With suitable output pull up, they can be used directly with bipolar or MOS logic circuits.

The four package styles available provide a magnetically optimized package for most applications. Suffix LT is a surface-mount SOT-89 (TO-243AA) package; suffixes LL, U, and UA feature wire leads for through-hole mounting.

Complete technical information for the UGN3140- is included with the UGN3113 -.


#### **FEATURES**

- 4.5 V to 24 V Operation
- Activate With Small, Commercially Available Permanent Magnets
- Solid-State Reliability... No Moving Parts
- Small Size
- Constant Output Amplitude
- Superior Temperature Stability
- Resistant to Physical Stress
- Directly Replace Series UGN and UGS3040T/U Switch

Always order by complete part number, e.g., UGN3140UA

## 3141, 3142, AND

#### SENSITIVE HALL-EFFECT SWITCHES FOR HIGH-TEMPERATURE OPERATION



Dwg PH-003A

Pinning is shown viewed from branded side.



#### ABSOLUTE MAXIMUM RATINGS at $T_A = +25^{\circ}C$

Supply Voltage, V <sub>CC</sub> 30 V
Reverse Battery Voltage, V <sub>RCC</sub> 30 V
Magnetic Flux Density, B Unlimited
Output OFF Voltage, V <sub>OUT</sub> 28 V
Reverse Output Voltage, V <sub>OUT</sub> 0.5 V
Continuous Output Current, IOUT 25 mA
Operating Temperature Range, T <sub>A</sub>
Suffix 'E-'40°C to +85°C
Suffix 'L-'40°C to +150°C
Storage Temperature Range,
T <sub>S</sub> 65°C to +170°C

These Hall-effect switches are monolithic integrated circuits with tighter magnetic specifications and switch points, designed to operate continuously over extended temperatures to +150°C, and are more stable with both temperature and supply voltage changes. The high sensitivity and unipolar switching characteristic makes these devices ideal for use with a simple bar or rod magnet. The three basic devices (3141, 3142, and 3143) are identical except for magnetic switch points.

Each device includes a voltage regulator for operation with supply voltages of 4.5 volts to 24 volts, reverse battery protection diode, quadratic Hall-voltage generator, temperature compensation circuitry, small-signal amplifier. Schmitt trigger, and an open-collector output to sink up to 25 mA. With suitable output pull up, they can be used with bipolar or CMOS logic circuits. The 3141 is an improved replacement for the 3120 and 3140.

The first character of the part number suffix determines the device operating temperature range; suffix 'E-' is for the automotive and industrial temperature range of -40°C to +85°C, suffix 'L-' is for the automotive and military temperature range of -40°C to +150°C. Four package styles provide a magnetically optimized package for most applications. Suffix '-LL' is a long-leaded version of suffix '-LT', a miniature SOT-89/TO-243AA transistor package for surface-mount applications: suffix '-U' is a three-lead plastic mini-SIP while suffix '-UA' is a three-lead ultra-mini-SIP.


These devices are currently available for sampling. Production quantities are expected in 1993. Contact the local sales office for complete specifications and availability.

#### FEATURES and BENEFITS

- Superior Temp. Stability for Automotive or Industrial Applications
- 4.5 V to 24 V Operation ... Needs Only An Unregulated Supply
- Open-Collector 25 mA Output ... Compatible with Digital Logic
- Reverse Battery Protection
- Activate With Small, Commercially Available Permanent Magnets
- Solid-State Reliability ... No Moving Parts
- Small Size
- Resistant to Physical Stress

Always order by complete part number, e.g., A3141ELL |

## 3175 AND 3177



Dwa. No. PH-003A

Pinning is shown viewed from branded side.

#### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V <sub>CC</sub> 18 V
Reverse Battery Voltage, V <sub>RCC</sub> 18 V
Magnetic Flux Density, B Unlimited
Output OFF Voltage, V <sub>OUT</sub> 18 V
Continuous Output Current, I <sub>OUT</sub> 15 mA
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
O. 7 = . D

Storage Temperature Range, T<sub>s</sub>.....-65°C to +150°C

#### HALL-EFFECT LATCHES

These Hall-effect latches are temperature-stable and stress-resistant sensors especially suited for electronic commutation in brushless dc motors using multipole ring magnets. Each device includes a voltage regulator, quadratic Hall voltage generator, temperature compensation circuit, signal amplifier, Schmitt trigger, and an opencollector output on a single silicon chip. The on-board regulator permits operation with supply voltages of 4.5 to 18 volts. The switch output can sink 10 mA. With suitable output pull up, they can be used directly with bipolar or MOS logic circuits.

The four package styles available provide a magnetically optimized package for most applications. Suffix LT is a surface-mount SOT 89 (TO-243AA) package; suffixes LL, U, and UA feature wire leads for through-hole mounting.


#### **FEATURES**

- Symmetrical Response
- 4.5 V to 18 V Operation
- Open-Collector Output
- Reverse Battery Protection
- Activate With Small, Commercially Available Permanent Magnets
- Solid-State Reliability ... No Moving Parts
- Small Size
- Superior Temperature Stability
- Resistant to Physical Stress

Always order by complete part number, e.g., UGN3175LL.

See Magnetic Characteristics table for differences between devices.

#### 3175 AND 3177 HALL-EFFECT LATCHES

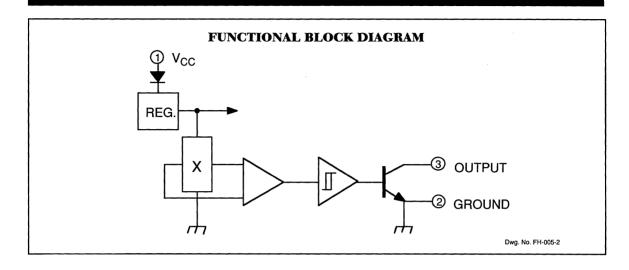

#### ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $V_{CC}$ = 4.5 V to 18 V (unless otherwise noted).

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Týp.	Max.	Units
Supply Voltage	v <sub>cc</sub>	Operating	4.5	_	18	٧
Output Saturation Voltage	V <sub>OUT(SAT)</sub>	V <sub>CC</sub> = 18 V, I <sub>OUT</sub> = 10 mA, B > B <sub>OP</sub>	_	200	300	mV
Output Leakage Current	I <sub>OFF</sub>	V <sub>OUT</sub> = 18 V, B < B <sub>RP</sub>	_	0.05	5.0	μА
Supply Current	I <sub>cc</sub>	V <sub>CC</sub> = 4.5 V, Output Open	_	5.0	10	mA
Output Rise Time	t <sub>r</sub>	$V_{CC} = 12 \text{ V}, R_L = 1.1 \text{ k}\Omega, C_L = 20 \text{ pF}$	_	0.04	2.0	μs
Output Fall Time	t <sub>f</sub>	$V_{CC} = 12 \text{ V}, R_L = 1.1 \text{ k}\Omega, C_L = 20 \text{ pF}$	_	0.18	2.0	μs

#### MAGNETIC CHARACTERISTICS in gauss; $V_{CC} = 4.5 \text{ V}$ to 18 V.


	Part	T <sub>A</sub> = +25°C			T <sub>A</sub> = -20°C to +85°C			
Characteristic	Number*	Min.	Тур.	Max.	Min.	Тур.	Max.	
Operate Point, B <sub>OP</sub>	UGN3175	25	_	170	15	_	180	
	UGN3177	50	_	150	25		150	
Release Point, B <sub>RP</sub>	UGN3175	-170	_	-25	-180	_	-15	
	UGN3177	-150	_	-50	-150	_	-25	
Hysteresis, B <sub>hys</sub>	UGN3175	100	200	_	80	180	_	
	UGN3177	100	200	_	50	180	_	

NOTE: As used here, negative flux densities are defined as less than zero (algebraic convention).

<sup>\*</sup> Complete part number includes a suffix denoting package type (LL, LT, U, or UA).

#### 3175 AND 3177 HALL-EFFECT LATCHES

#### TYPICAL OPERATING CHARACTERISTICS




Dwg. No. GH-020

#### SENSOR LOCATIONS


(±0.005" [0.13mm] die placement)

#### Suffix "LL" & Suffix "LT"



Dwg. No. MH-008-1A

# Suffix "U" ACTIVE AREA DEPTH 0.017" 0.43 mm NOM 2.36 mm 0.072" 1.83 mm Dwg. No. MH-002-3A




Suffix "UA"

Dwg. No. MH-011A

## 85 THRU

#### HALL-EFFECT LATCHES FOR HIGH-TEMPERATURE OPERATION

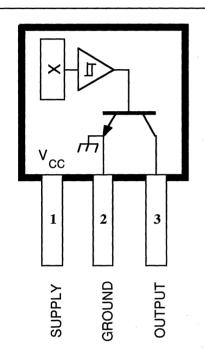

Dwg. No. PH-003A

Pinning is shown viewed from branded side.

#### ABSOLUTE MAXIMUM RATINGS at $T_A = +25^{\circ}C$

Supply Voltage, V <sub>CC</sub>
Reverse Battery Voltage, V <sub>RCC</sub> 30 V
Magnetic Flux Density, B Unlimited
Output OFF Voltage, V <sub>OUT</sub> 30 V
Reverse Output Voltage, V <sub>OUT</sub> <b>-0.5 V</b>
Continuous Output Current, I <sub>OUT</sub> 25 mA
Operating Temperature Range, TA
Suffix 'S-'20°C to +85°C
Suffix 'E-'
Suffix 'K-'40°C to +125°C
Suffix 'K-'40°C to +125°C

These Hall-effect latches are extremely temperature-stable and stress-resistant sensors especially suited for operation over extended temperature ranges to +150°C. Superior high-temperature performance is made possible through a novel Schmitt trigger circuit that maintains operate and release point symmetry by compensating for temperature changes in the Hall element. Additionally, internal compensation provides magnetic switch points that become more sensitive with temperature, hence offsetting the usual degradation of the magnetic field with temperature. The symmetry capability makes these devices ideal for use in pulse-counting applications where duty cycle is an important parameter. The five basic devices (3185 through 3189) are identical except for magnetic switch points.

Each device includes on a single silicon chip a voltage regulator, quadratic Hall-voltage generator, temperature compensation circuit. signal amplifier, Schmitt trigger, and a buffered open-collector output to sink up to 25 mA. The on-board regulator permits operation with supply voltages of 3.8 to 24 volts.

The first character of the part number suffix determines the device operating temperature range; suffix 'S-' is for -20°C to +85°C, 'E-' is for -40°C to +85°C, 'K-' is -40°C to +125°C, and 'L-' is -40°C to +150°C. Four package styles provide a magnetically optimized package for most applications. Suffix '-LL' is a long-leaded version of suffix '-LT', a miniature SOT-89/TO-243AA transistor package for surface-mount applications; suffix '-U' is a three-lead plastic mini-SIP while suffix '-UA' is a three-lead ultra-mini-SIP.

#### **FEATURES**

- Symmetrical Switch Points
- Superior Temperature Stability
- Operation From Unregulated Supply
- Open-Collector 25 mA Output
- Reverse Battery Protection
- Activate With Small, Commercially Available Permanent Magnets
- Solid-State Reliability ... No Moving Parts
- Small Size
- Resistant to Physical Stress

Always order by complete part number, e.g., |A3185SLL|.

#### 3185 thru 3189 HALL-EFFECT LATCHES FOR HIGH-TEMPERATURE OPERATION

#### ELECTRICAL CHARACTERISTICS over operating temperature range, at $V_{CC} = 12 \text{ V}$ .


			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Supply Voltage	V <sub>cc</sub>	Operating	3.8	_	24	V
Output Saturation Voltage	V <sub>OUT(SAT)</sub>	I <sub>OUT</sub> = 20 mA, B > B <sub>OP</sub>	-	175	400	mV
Output Leakage Current	I <sub>OFF</sub>	V <sub>OUT</sub> = 24 V, B < B <sub>RP</sub>		0.05	5.0	μА
Supply Current	I <sub>cc</sub>	B < B <sub>RP</sub> (Output OFF)	T -	4.75	8.0	mA
	1	B > B <sub>OP</sub> (Output ON)	T	5.7	_	mA
Output Rise Time	t <sub>r</sub>	$R_L = 820 \Omega, C_L = 20 pF$	_	100	_	ns
Output Fall Time	t <sub>f</sub>	$R_{L} = 820 \Omega, C_{L} = 20 pF$	T -	100	_	ns

#### MAGNETIC CHARACTERISTICS in gauss over operating supply voltage range.

		Part Numbers*								
į	A:	A3185		A3186		A3187		A3188		3189
Characteristic	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
$B_{OP}$ at $T_A = 25^{\circ}C$	170	270	70	330	50	150	100	180	50	230
over operating temp range	140	300	30	350	50	175	80	200	50	250
B <sub>RP</sub> at T <sub>A</sub> = 25°C	-270	-170	-330	-70	-150	-50	-180	-100	-230	-50
over operating temp range	-300	-140	-350	-30	-175	-50	-200	-80	-250	-50
B <sub>hys</sub> at T <sub>A</sub> = 25°C	340	540	140	660	100	300	200	360	100	460
over operating temp range	280	600	100	700	100	350	160	400	100	500

NOTES:  $B_{_{QP}}$  = operate point (output turns ON);  $B_{_{RP}}$  = release point (output turns OFF);  $B_{_{Pys}}$  = hysteresis ( $B_{_{QP}}$  -  $B_{_{RP}}$ ). As used here, negative flux densities are defined as less than zero (algebraic convention).


<sup>\*</sup>Complete part number includes a suffix to identify operating temperature range (E, K, L, or S) and package type (LL, LT, U, or UA).




### 3185 THRU 3189 HALL-EFFECT LATCHES FOR HIGH-TEMPERATURE OPERATION

#### TYPICAL OPERATING CHARACTERISTICS


#### A3185° SWITCH POINTS




#### A3187\* SWITCH POINTS




#### **OUTPUT SATURATION VOLTAGE**




#### SUPPLY CURRENT



#### SUPPLY CURRENT



#### OPERATE POINT



Dwg. No. GH-037


<sup>\*</sup> Complete part number includes a suffix denoting operating temperature range (E, K, L, or S) and package type (LL, LT, U, or UA).

### 3185 THRU 3189 HALL-EFFECT LATCHES FOR HIGH-TEMPERATURE OPERATION

#### SENSOR LOCATIONS

 $(\pm 0.005 [0.13 \text{ mm}] \text{ die placement})$ 

#### Suffix "LL" and "LT"




#### **OPERATION**

In operation, the output transistor is OFF until the strength of the magnetic field perpendicular to the surface of the chip exceeds the threshold or operate point ( $B_{\rm OP}$ ). When the field strength exceeds  $B_{\rm OP}$ , the output transistor switches ON and is capable of sinking 25 mA of current.

The output transistor switches OFF when magnetic field reversal results in a magnetic flux density below the OFF threshold ( $B_{\rm RP}$ ). This is illustrated in the transfer characteristics graph (A3187\* shown).


Note that the device latches; that is, a south pole of sufficient strength will turn the device ON. Removal of the south pole will leave the device ON. The presence of a north pole of sufficient strength is required to turn the device OFF.

#### TYPICAL TRANSFER CHARACTERISTICS




Dwg. No. A-11,739

#### Suffix "U"



Dwg. No. MH-002-7A


#### Suffix "UA"



Dwg. No. MH-011-4A

Although sensor location is accurate to three sigma for a particular design, product improvements may result in small changes to sensor location.

The simplest form of magnet that will operate these devices is a ring magnet, as shown in the figure. Other methods of operation are possible.



Dwg. No. A-11,899

#### 3235

#### DUAL-OUTPUT HALL-EFFECT SWITCH

Type UGN3235K Hall-effect sensors are bipolar integrated circuits designed for commutation of brushless dc motors, and other rotary encoding applications using multi-pole ring magnets. The device features two outputs which are independently activated by magnetic fields of opposite polarity.

Each sensor IC includes a Hall voltage generator, two Schmitt triggers, a voltage regulator, output transistors, and on-board reverse polarity protection. The regulator enables these devices to operate from voltages ranging between 4.5 V and 24 V. On-chip compensation circuitry stabilizes the switch points over temperature.

Each open-collector output is independently operated by the proper amount and polarity of incident magnetic flux. Output 1 responds only to the positive flux from the south pole of a magnet, Output 2 to the negative flux from the north pole of a magnet. When the sensor experiences the field of a south magnetic pole greater than the maximum operate point of Output 1, that output switches to the LOW state and Output 2 is unaffected. When the incident flux falls below the minimum release point for Output 1, that output returns to the HIGH state and Output 2 remains unchanged.

Output 2 independently responds in the same manner to the negative flux from the north magnetic pole of a magnet. Figure 1 shows a zone in the region of 0 G,  $t_{\rm H}$ , where both outputs are in the HIGH or OFF state. This constitutes a delay that is independent of rate of change of the incident magnetic field and ensures that both outputs are never ON simultaneously. This is an essential feature for driving brushless dc motors with a minimum of reactive transient currents.

The UGN3235K is supplied in a four-pin plastic single in-line package (SIP) measuring just 0.205" wide  $\times$  0.135" high  $\times$  0.060" thick (5.2  $\times$  3.4  $\times$  1.55 mm).

#### **FEATURES**

- Reliable and Rugged Magnetic Sensing Switch
- Two Outputs Independently Switched by North and South Poles
- Independent Actuation of Outputs Minimizes Inductive-Load Reactive Transient
- Built-in Hysteresis Minimizes Interference from Stray Fields
- Operates from 4.5 V to 24 V
- Outputs Compatible with All Logic Levels
- On-Board Reverse Polarity Protection
- Open-Collector, Active-Low Outputs

4 QNNOND 2 LINALINO 2 ATALANS

Dwg. PH-007


Pinning is shown viewed from branded side.

#### ABSOLUTE MAXIMUM RATINGS at $T_A = +25^{\circ}C$

	۶ V
oltage, V <sub>BCC</sub> <b>-30</b>	V
nsity, B <b>Unlimite</b> ge, V <sub>OUT</sub> 25	ed
nt, I <sub>OUT</sub> <b>50 m</b>	
rature Range,	
20°C to + 85°	°C
ture Range	
65°C to +150°	°C

Always order by complete part number: UGN3235K .

#### 3235 DUAL-OUTPUT HALL-EFFECT SWITCH



#### ELECTRICAL CHARACTERISTICS at $T_A = +25^{\circ}C$ (unless otherwise noted).


Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Supply Voltage	V <sub>cc</sub>		4.5	_	24	V
Output Saturation Voltage	V <sub>OUT(SAT)</sub>	$V_{CC} = 24 \text{ V}, I_{OUT} = 20 \text{ mA}$	-	160	400	mV
Output Leakage Current	I <sub>OFF</sub>	V <sub>OUT</sub> = 24 V, V <sub>CC</sub> = 24 V		_	1.0	μΑ
Supply Current	l <sub>cc</sub>	V <sub>CC</sub> = 24 V, Output Open	T -	6.0	8.0	mA
Output Rise Time	t <sub>r</sub>	$V_{CC} = 14 \text{ V}, R_L = 820 \Omega, C_L = 20 \text{ pF}$	_	0.04	0.4	μs
Output Fall Time	t <sub>f</sub>	$V_{CC} = 14 \text{ V}, R_{L} = 820 \Omega, C_{L} = 20 \text{ pF}$		0.18	0.4	μs


#### MAGNETIC CHARACTERISTICS at $V_{CC}$ = 4.5 V to 24 V

Characteristic	Test Conditions	Output	Min.	Max.	Units
Operate Point, B <sub>OP</sub>	T <sub>A</sub> = +25°C	Q1 Q2	50 -175	175 -50	G G
	T <sub>A</sub> = -20°C to +85°C	Q1 Q2	35 -200	200 -35	G G
Release Point, B <sub>RP</sub>	T <sub>A</sub> = +25°C	Q1 Q2	25 -160	160 -25	G G
	$T_A = -20^{\circ}\text{C to } +85^{\circ}\text{C}$	Q1 Q2	15 -190	190 -15	G G
Hysteresis, B <sub>hys</sub>	T <sub>A</sub> = +25°C	Q1 & Q2	15	100	G
_	$T_A = -20^{\circ}\text{C to } +85^{\circ}\text{C}$	Q1 & Q2	15	110	G


#### DUAL-OUTPUT HALL-EFFECT SWITCH

#### **OUTPUT SWITCHING CHARACTERISTICS**

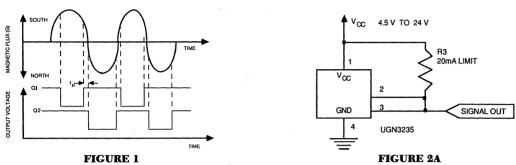

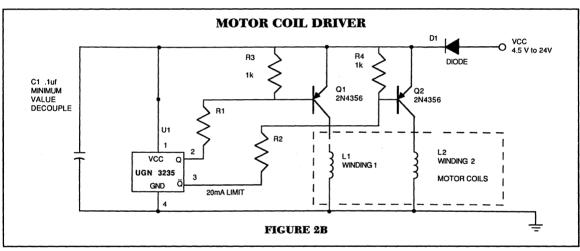

#### SWITCH POINTS VERSUS TEMPERATURE




#### **APPLICATIONS**

Figure 2A gives a method of sensing the presence of either a north or south magnetic pole. Since the UGN3235K is an open collector device, it is possible to directly connect (OR-wire) the two outputs. This causes the output to go LOW when a north or south pole of sufficient magnitude is sensed.


The device connected in this manner suits many applications, ranging from doubling the resolution of a ring-magnet encoder, to zero-crossing detection. Figure 1 shows that t<sub>H</sub> is centered around the zero-G portion of the magnetic field plot. Thus, by decoding the HIGH portion of the UGN3235K OR-wired output, the zero-crossing can be encoded.

Figure 2B shows that the UGN3235K makes it possible to implement a very efficient brushless dc motor using a minimum number of components. Referring again to Fig. 1, the dead time  $(t_{\text{H}})$  of the switching characteristics allow the motor coil fields to decay sufficiently. This avoids both excessive reactive voltages and the magnetic drag resulting from the motor coils working in opposition to each other.

#### 3235 DUAL-OUTPUT HALL-EFFECT SWITCH

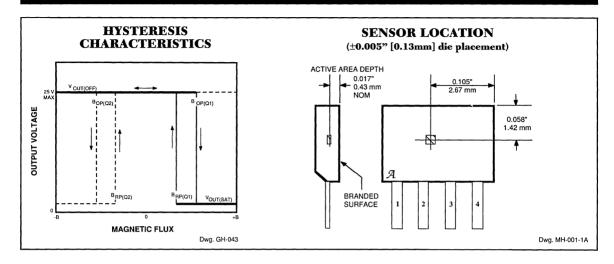

#### **GUIDE TO INSTALLATION**




Dwg. No. A-12.062

- All Hall effect integrated circuits are susceptible to mechanical stress effects.
   Caution should be exercised to minimize the application of stress to the leads
   or the epoxy package. Use of epoxy glue is recommended. Other types may
   deform the epoxy package.
- To prevent permanent damage to the Hall cell, heat-sink the leads during hand soldering. Recommended maximum conditions for wave soldering are shown in the graph above.

#### 3275

#### COMPLEMENTARY-OUTPUT HALL-EFFECT LATCH



amplifier. Schmitt trigger, voltage regulator, and dual bipolar output transistors. The regulator allows use of the integrated circuit with supply voltages of 4.5 V to 24 V.


If the Hall cell is exposed to a magnetic flux density greater than the operate threshold  $(B_{\rm op})$ , OUTPUT goes low (turns ON) and OUTPUT goes high (turns OFF). The outputs will hold (latch) this state until magnetic field reversal exposes the Hall cell to a magnetic flux density below the release threshold ( $B_{\rm pp}$ ) when OUTPUT will go high (OFF) and OUTPUT will go low (ON). This state is also latched. Under any condition one output is ON while the other is OFF. Because the operating state switches only with magnetic field reversal, and not merely with a change in the strength, these integrated circuits qualify as true Hall-effect latches.

Similar devices with a 500 mA continuous output current rating are available as the UGN5275K.

These complementary-output Hall-effect latches are supplied in a four-pin plastic SIP, 0.200" (5.08 mm) wide, 0.130" (3.3 mm) high, and 0.060" (1.54 mm) thick.

#### **FEATURES**

- Operable with Multipole Ring Magnets
- High Reliability
- Small Size
- Output Compatible with All Digital Logic Families
- 4.5 V to 24 V Operation
- High Hysteresis Level Minimizes Stray-Field Problems
- Complementary Outputs



Dwg. No. PH-002

Pinning is shown viewed from branded side.


#### ABSOLUTE MAXIMUM RATINGS

Power Supply, V<sub>CC</sub> . . . . . . . . . . . . . . . . 25 V Magnetic Flux Density, B . . . . . . Unlimited Output OFF Voltage, VOLT ..... 25 V Output ON Current, I<sub>OUT</sub> ..... 50 mA Operating Temperature Range, T<sub>A</sub> . . . . . . . . . . . -20°C to +85°C Storage Temperature Range, T<sub>S</sub>. . . . . . . . . . -65°C to +150°C

Always order by complete part number: UGN3275K .

#### 3275 COMPLEMENTARY OUTPUT HALL-EFFECT LATCH

## SENSOR LOCATION ACTIVE AREA DEPTH 0.017\* 0.43 mm NOM 2.40 mm 0.047\* 1.19 mm

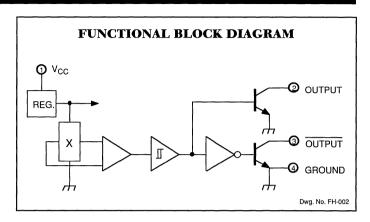

#### ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $V_{CC}$ = 4.5 V to 24 V (unless otherwise noted).

Dwg. No. MH-001-2

Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Supply Voltage	V <sub>cc</sub>	Operating	4.5	_	24	V
Output Saturation Voltage	V <sub>OUT(SAT)</sub>	$V_{CC} = 4.5 \text{ V}, I_{OUT} = 20 \text{ mA}, B > B_{OP}$			400	mV
Output Leakage Current	I <sub>OFF</sub>	$V_{OUT} = 24 \text{ V}, V_{CC} = 24 \text{ V}, B < B_{RP}$		_	10	μА
Supply Current	I <sub>cc</sub>	V <sub>CC</sub> = 24 V, B < B <sub>RP</sub>			7.0	mA
Output Rise Time	t <sub>r</sub>	$V_{CC} = 12 \text{ V}, R_L = 820 \Omega, C_L = 20 \text{ pF}$	_	0.04	0.4	μs
Output Fall Time	t,	$V_{CC} = 12 \text{ V}, R_L = 820 \Omega, C_L = 20 \text{ pF}$	_	0.18	0.4	μs

#### **MAGNETIC CHARACTERISTICS**

		T <sub>A</sub> = +25°C		T <sub>A</sub> = -20°C t		
Characteristic	Symbol	Min.	Max.	Min.	Max.	Units
Operate Point	B <sub>OP</sub>	25	250	15	250	G
Release Point	B <sub>RP</sub>	-250	-25	-250	-15	G
Hysteresis	B <sub>hys</sub>	100	_	100	_	G

NOTE: As used here, negative flux densities are defined as less than zero (algebraic convention).

#### 3501

#### LINEAR OUTPUT HALL EFFECT SENSORS

Utilizing the Hall effect for sensing a magnetic field, UGN3501U and UGN3501UA integrated circuits provide a linear single-ended output that is a function of magnetic field intensity.


These devices can sense relatively small changes in a magnetic field — changes that are too small to operate a Hall effect switch. They can be capacitively coupled to an amplifier, to boost the output to a higher level.

The UGN3501U/UA include a Hall cell, linear amplifier, emitter-follower output, and a voltage regulator. Integrating the Hall cell and the amplifier into one monolithic device minimizes problems related to the handling of millivolt analog signals.

Both devices are rated for continuous operation over the temperature range of 0°C to +70°C and over a supply voltage range of 8V to 12 V.

#### **FEATURES**

- Excellent Sensitivity
- Flat Response to 25 kHz (typ.)
- Internal Voltage Regulation
- Excellent Temperature Stability



Dwg. No. PH-006

Pinning is shown viewed from branded side.


#### ABSOLUTE MAXIMUM RATINGS

Supply voltage, v <sub>CC</sub>
Output Current, I <sub>OUT</sub> 4 mA
Magnetic Flux Density, B Unlimited
Operating Temperature Range,
T <sub>A</sub> 0°C to +70°C
Storage Temperature Range,
T <sub>c</sub> 65°C to +150°C

Always order by complete part number:

Part Number	Package		
UGN3501U	3-Pin Mini-SIP		
UGN3501UA	3-Pin Ultra-Mini-SIP		

#### 3501 LINEAR OUTPUT HALL EFFECT SENSORS

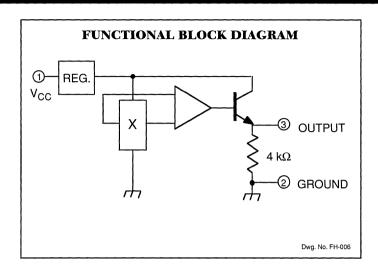

#### ELECTRICAL CHARACTERISTICS at $T_A = +25$ °C, $V_{CC} = 12$ V


			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Operating Voltage	V <sub>cc</sub>		8.0	_	12	V
Supply Current	I <sub>cc</sub>	V <sub>CC</sub> = 12 V		10	20	mA
Quiescent Output Voltage	V <sub>out</sub>	B = 0 G, Note 1	2.5	3.6	5.0	V
Sensitivity	ΔV <sub>OUT</sub>	B = 1000 G, Notes 1, 2	0.35	0.7		mV/G
Frequency Response	BW	f <sub>H</sub> - f <sub>L</sub> at - 3 dB		25	_	kHz
Broadband Output Noise	e <sub>n</sub>	f = 10 Hz to 10 kHz		0.1	_	mV
Output Resistance	R <sub>out</sub>		_	100		Ω

NOTE 1. All output voltage measurements are made with a voltmeter having an input impedance of 10 k $\Omega$  or greater.

NOTE 2. Magnetic flux density is measured at the most sensitive area of the device, which is 0.017" (0.43 mm) below the branded side of the "U" package; 0.020" (0.51 mm) below the branded side of the "UA" package.


#### 3501 LINEAR OUTPUT HALL EFFECT SENSORS

#### NORMALIZED SENSITIVITY AS A FUNCTION OF V<sub>CC</sub>




Dwg. No. A-10,522

#### NORMALIZED SENSITIVITY AS A FUNCTION OF TEMPERATURE




Dwg. No. A-10,521

#### OUTPUT VOLTAGE AS A FUNCTION OF MAGNETIC FLUX DENSITY




#### OUTPUT VOLTAGE AS A FUNCTION OF AIR GAP



Dwg. No. A-10,523

Dwg. No. A-10,519


#### NOISE SPECTRAL DENSITY AS A FUNCTION OF FREQUENCY



Dwg. No. A-10,520A

#### TYPICAL APPLICATIONS


#### SENSITIVE PROXIMITY DETECTOR




#### FERROUS METAL SENSOR



#### LOBE OR COG SENSOR



#### NOTCH OR HOLE SENSOR



For reference only - an Alnico VIII permanent magnet, 0.212" (5.38 mm) in diameter and 0.187" (4.75 mm) long is approximately 800 gauss at the surface. A samarium cobalt permanent magnet, 0.100" (2.54 mm) square and 0.040" (1.02 mm) thick is approximately 1200 gauss at its surface.

# 3503

# RATIOMETRIC, LINEAR HALL EFFECT SENSORS

Type UGN3503U and UGN3503UA Hall effect sensors accurately track extremely small changes in magnetic flux density—changes generally too small to operate Hall effect switches.

As motion detectors, gear tooth sensors, and proximity detectors, they are magnetically driven mirrors of mechanical events. As sensitive monitors of electromagnets, they can effectively measure a system's performance with negligible system loading while providing isolation from contaminated and electrically noisy environments.

Each Hall effect integrated circuit includes a Hall sensing element, linear amplifier, and emitter-follower output stage. Problems associated with handling tiny analog signals are minimized by having the Hall cell and amplifier on a single chip.

The UGN3503U and UGN3503UA are rated for continuous operation over the temperature range of -20°C to +85°C.

#### **FEATURES**

- Extremely Sensitive
- Flat Response to 23 kHz
- Low-Noise Output
- 4.5 V to 6 V Operation
- Magnetically Optimized Package


Dwg. No. PH-006

Pinning is shown viewed from branded side.

#### ABSOLUTE MAXIMUM RATINGS

Always order by complete part number:

Part Number	Package
UGN3503U	3-Pin Mini-SIP
UGN3503UA	3-Pin Ultra-Mini-SIP

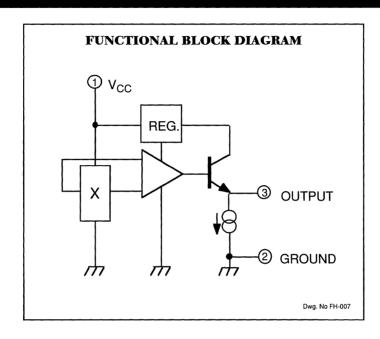

### ELECTRICAL CHARACTERISTICS at $T_A = +25$ °C, $V_{CC} = 5$ V


Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Operating Voltage	V <sub>cc</sub>		4.5	_	6.0	٧
Supply Current	I <sub>cc</sub>		_	9.0	14	mA
Quiescent Output Voltage	V <sub>out</sub>	B = 0 G	2.25	2.50	2.75	٧
Sensitivity	ΔV <sub>OUT</sub>	B = 0 G to ±900 G	0.75	1.30	1.72	mV/G
Bandwidth (-3 dB)	BW			23		kHz
Broadband Output Noise	V <sub>out</sub>	BW = 10 Hz to 10 kHz		90	_	μV
Output Resistance	R <sub>out</sub>		1 -	50		Ω

All output-voltage measurements are made with a voltmeter having an input impedance of at least 10 k $\Omega$ .

Magnetic flux density is measured at most sensitive area of device located 0.016" (0.41 mm) below the branded face of the "U" package; 0.020" (0.51 mm) below the branded face of the "UA" package.


### 3503 RATIOMETRIC, LINEAR HALL EFFECT SENSORS

# OUTPUT VOLTAGE AS A FUNCTION OF TEMPERATURE




Dwg. No. A-12,573

# OUTPUT NOISE AS A FUNCTION OF FREQUENCY




Dwg. No. A-12,505

# SUPPLY CURRENT AS A FUNCTION OF SUPPLY VOLTAGE




# OUTPUT NULL VOLTAGE AS A FUNCTION OF SUPPLY VOLTAGE




Dwg. No. A-12,508

# DEVICE SENSITIVITY AS A FUNCTION OF SUPPLY VOLTAGE




# LINEARITY AND SYMMETRY AS A FUNCTION OF SUPPLY VOLTAGE



Dwg. No.. A-12,509

### RATIOMETRIC, LINEAR HALL EFFECT SENSORS

#### **NOTCH SENSOR**




Dwg. No. A-12,574

#### **GEAR TOOTH SENSOR**



Dwg. No. A-12,512

#### **CURRENT MONITOR**



Dwg. No. A-12,513

#### **OPERATION**

The output null voltage (B = 0 G) is nominally one-half the supply voltage. A south magnetic pole, presented to the branded face of the Hall effect sensor will drive the output higher than the null voltage level. A north magnetic pole will drive the output below the null level.

In operation, instantaneous and proportional output-voltage levels are dependent on magnetic flux density at the most sensitive area of the device. Greatest sensitivity is obtained with a supply voltage of 6 V, but at the cost of increased supply current and a slight loss of output symmetry. The sensor's output is usually capacitively coupled to an amplifier that boosts the output above the millivolt level.


In two applications shown, a permanent bias magnet is attached with epoxy glue to the back of the epoxy package. The presence of ferrous material at the face of the package acts as a flux concentrator.

The south pole of a magnet is attached to the back of the package if the Hall effect IC is to sense the presence of ferrous material. The north pole of a magnet is attached to the back surface if the integrated circuit is to sense the absence of ferrous matrial.

Calibrated linear Hall devices, which can be used to determine the actual flux density presented to the sensor in a particular application, are available.


#### SENSOR LOCATIONS

#### SUFFIX "U"




Dwg. No. MH-002-5A

#### SUFFIX "UA"



Dwg. No. MH-011-3A

## RATIOMETRIC, LINEAR HALL-EFFECT SENSORS FOR HIGH-TEMPERATURE OPERATION



Pinning is shown viewed from branded side.

The A3506- and A3507- linear Hall-effect sensors provide an output voltage that is proportional to the incident magnetic field. On-chip processing circuitry provides the user with an amplified low-impedance output signal that minimizes the need for external circuitry. Internal temperature compensating circuitry lowers the intrinsic sensitivity drift of the Hall element allowing it to accurately operate continuously over extended temperature ranges to +150°C. These highly sensitive, temperature-stable magnetic transducers are ideal for use in linear and rotary position sensing systems in the harsh environments of automotive and industrial applications. The two devices are identical except for magnetic tolerances; where the A3506— is the more precise device.

Each monolithic integrated circuit includes a quadratic Hall element, improved temperature compensating circuitry, a small-signal amplifier, and a rail-to-rail output stage. The problems normally associated with low-level analog signals are minimized by having the Hall element and amplifier on a single chip. Output precision is obtained by internal gain and offset trim adjustments during the manufacturing process.

These devices are supplied in a 3-pin ultra-mini-SIP UA package for operation from -20°C to +85°C (suffix 'SUA') or -40°C to +150°C (suffix 'LUA'). Both are currently available for sampling. Production quantities are expected in 1993. Contact the local sales office for complete specifications and availability.

### **FEATURES**

- Output Voltage Proportional to Incident Magnetic Field
- Ratiometric Rail-to-Rail Output
- Increased Sensitivity
- Superior Temperature Stability
- 4.5 V to 5.5 V Operation
- Small Package Size
- Solid-State Reliability

#### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V <sub>CC</sub> 8.0 V
Output Voltage, Vo 8.0 V
Output Sink Current, Io 10 mA
Magnetic Flux Density, B Unlimited
Operating Temperature Range, T <sub>A</sub>
Suffix 'S-'20°C to +85°C
Suffix 'L-'40°C to +150°C
Storage Temperature Range,
T <sub>c</sub> -65°C to +170°C

Always order by complete part number, e.g., A3506LUA

# 3625 AND 3626

# **POWER HALL™SENSOR/DRIVER FOR BRUSHLESS DC MOTORS**

Requiring a minimum of external components, the UDN3625M and UDN3626M are monolithic ICs that provide single-chip control and direct drive solutions for many small, single-phase, unipolar brushless dc motor applications. Integrated into the ICs are a high-sensitivity Halleffect sensor, control and commutating logic, a stable voltage regulator, extensive self and system protective functions, and two high-current saturated NPN outputs. Both ICs include thermal shutdown, output over-current limiting, and output transient protection/flyback diodes. The UDN3625M is nominally for 12 V motor applications while the UDN3626M is better suited to 24 V motors.

Output over-current limiting (relating to startup surge or a locked rotor condition) and short-circuit protection are provided by an internal current-sense resistor. The maximum (default) output load current is typically 1.3 A for the UDN3625M or 600 mA for the UDN3626M, but may be decreased by user selection of an external low-wattage resistor.

A separate low-level output provides tachometer capability for motor speed control or sensing a locked rotor condition. With appropriate external logic, pulse-width modulated (PWM) speed control can be accomplished at the output current adjust pin.

These sensor/drivers are supplied in an 8-pin mini-DIP plastic package with a copper leadframe for increased package power handling capability.

#### ABSOLUTE MAXIMUM RATINGS

LOGIC

CONTROL

PWM/In ADJUST 1

INTERNAL 2 IC CONNECTION 3 IC

оит<sub>в</sub>[

8 TACH OUT

GROUND

OUTA

Dwg. No. PP-012


	UDN3625M	UDN3626M
V <sub>CC(MAX)</sub>	14 V	26 V
I <sub>O(CONT)</sub>	1.0 A	0.45 A
I <sub>O(PEAK)</sub>	1.6 A	0.75 A


Output current rating will be limited by ambient temperature, supply voltage, and duty cycle. Under any set of conditions, do not exceed a junction temperature of +150°C.

#### FEATURES

- 900 mA/12 V or 400 mA/24 V Operation
- ☐ Speed-Control (PWM) Capability
- Locked-Rotor Indication
- Minimum External Components
- Over-Current Protected
- Thermal Protection
- Enhanced Reliability
- Reduced Cost

Always order by complete part number, e.g., UDN3625M . See Maximum Ratings at left.

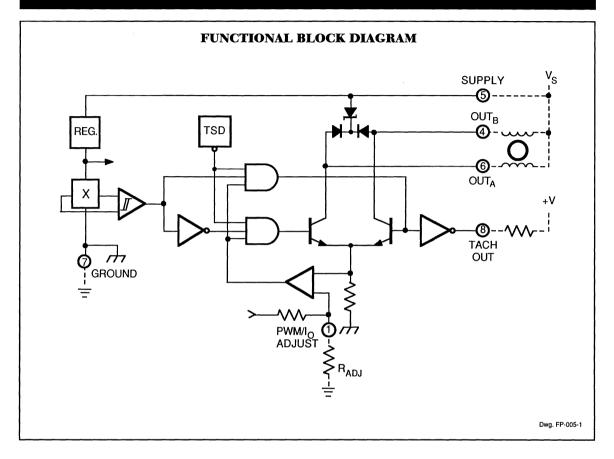



#### TRUTH TABLE

Mag. Field	PWM/I <sub>O</sub> ADJ	OUTA	OUTB
> +B <sub>OP</sub>	Open	Low	High
> -B <sub>OP</sub>	Open	High	Low
Any	<0.3 V	High	High

# ELECTRICAL CHARACTERISTICS at $T_A = +25^{\circ}\text{C}$ , $R_{ADJ} = \infty$ , Over Operating Voltage Range (unless otherwise noted).

				Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units	
UDN3625M							
Operating Voltage Range	V <sub>s</sub>		6.5	12	14	V	
Output Leakage Current	l <sub>o</sub>	V <sub>CC</sub> = V <sub>O</sub> = 24 V	_	_	100	μА	
Output Breakdown Voltage	V <sub>(BR)CEX</sub>	V <sub>CC</sub> = 24 V, I <sub>O</sub> = 10 mA*	34	_		٧	
Output Saturation Voltage	V <sub>O(SAT)</sub>	I <sub>O</sub> = 450 mA, V <sub>S</sub> = 6.5 V	_	0.25	0.4	V	
		I <sub>O</sub> = 900 mA, V <sub>S</sub> = 12 V	_	0.5	0.8	V	
Output Current Limit	I <sub>O</sub> MAX	$R_{ADJ} = \infty$ , $V_O = 2 V$	1.0	1.3	1.6	Α	
Output Clamp Voltage	V <sub>CL</sub>	I <sub>CL</sub> = 10 mA, V <sub>CC</sub> = 0	11	12	13	V	
(Test Fig. 1)		I <sub>CL</sub> = 450 mAt, V <sub>CC</sub> = 0	13	14	15	V	
Output Switching Time	t <sub>PLH</sub>	50% $V_{ADJ}$ to $V_{O} = 3.0 \text{ V}$ , $I_{O} = 450 \text{ mA}$	_		5.0	μs	
Supply Current	l <sub>cc</sub>	$R_{ADJ} = \infty$ , $V_S = 14$ V, One Output ON	_	30	38	mA	
(Test Fig. 2)		$R_{ADJ} = 0 \Omega$ , $V_S = 14 V$ , Outputs OFF	_	8.0	10	mA	
UDN3626M							
Operating Voltage Range	V <sub>s</sub>		‡	24	26	V	
Output Leakage Current	10	V <sub>CC</sub> = V <sub>O</sub> = 30 V	_	_	100	μА	
Output Breakdown Voltage	V <sub>(BR)CEX</sub>	V <sub>CC</sub> = 30 V, I <sub>O</sub> = 10 mA*	50			V	
Output Saturation Voltage	V <sub>O(SAT)</sub>	I <sub>O</sub> = 250 mA, V <sub>S</sub> = 6.5 V	_	0.15	0.3	٧	
		I <sub>O</sub> = 400 mA, V <sub>S</sub> = 24 V	_	0.3	0.5	V	
Output Current Limit	I <sub>O</sub> MAX	$R_{ADJ} = \infty$ , $V_O = 2 V$	450	600	750	mA	
Output Clamp Voltage	V <sub>CL</sub>	I <sub>CL</sub> = 10 mA, V <sub>CC</sub> = 0	17	18	20	V	
(Test Fig. 1)	-	I <sub>CL</sub> = 250 mAt, V <sub>CC</sub> = 0	19	20	22	V	
Output Switching Time	t <sub>PLH</sub>	$50\% \text{ V}_{ADJ} \text{ to V}_{O} = 3.0 \text{ V}, \text{ I}_{O} = 250 \text{ mA}$	_		5.0	μs	
Supply Current	Icc	$R_{ADJ} = \infty$ , $V_S = 26$ V, One Output ON	-	_	24	mA	
(Test Fig. 2)	ŀ	$R_{ADJ} = 0 \Omega$ , $V_S = 26 V$ , Outputs OFF	_	8.0	10	mA	

<sup>&#</sup>x27; Io is almost entirely Zener clamp current.

† Pulse test


Continued next page...

<sup>‡</sup> Dependent on value of external series Zener diode (see Applications), 6.5 V without a Zener diode.


#### **ELECTRICAL CHARACTERISTICS continued**

				Limits			
Characteristic	Symbol	<b>Test Conditions</b>	Min.	Тур.	Max.	Units	
Both							
Operate Point§	B <sub>OP</sub>		_	±100	±150	G	
Hysteresis	B <sub>H</sub>		_	200		G	
Output Current Limit Ratio	I <sub>O</sub> /I <sub>O</sub> MAX	$R_{ADJ} = 39 \text{ k}\Omega$		0.75	_	_	
		$R_{ADJ} = 17 k\Omega$		0.50	_	-	
,	į į	$R_{ADJ} = 10 \text{ k}\Omega$	_	0.25		_	
PWM Control Current	I <sub>ADJ</sub>	V <sub>ADJ</sub> = 0	_	-350	-500	μА	
Tach Output Leak. Current	I <sub>T</sub>	V <sub>T</sub> = 14 V			10	μА	
Tach Output Sat. Voltage	V <sub>T(SAT)</sub>	I <sub>T</sub> = 750 μA		0.2	0.4	٧	
Thermal Shutdown	· T <sub>J</sub>			165	_	°C	
Thermal Hysteresis	$\Delta T_{ m J}$		_	10	_	°C	

<sup>§</sup> Magnetic flux density is measured at most sensitive area of device, nominally located 0.055" (1.40 mm) below the top of the package.

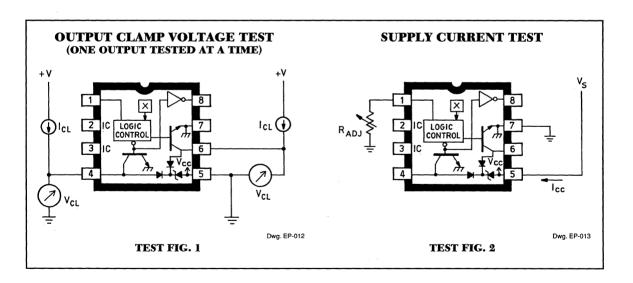

#### SENSOR LOCATION



#### APPLICATIONS INFORMATION

**Power Dissipation.** Care should be taken in evaluating the package power dissipation of these devices. Total power dissipated by the device will consist of power due to the internal regulator, logic and drive circuitry ( $I_{cc} \times V_{cc}$ ), power due to the output drivers ( $I_o \times V_{o(SAT)}$ ), and power due to the clamp circuitry ( $I_{cL} \times V_{cL} \times duty$  cycle).

#### For example:

$$I_{cc} \times V_{cc} = 38 \text{ mA (max)} \times 14 \text{ V} = 532 \text{ mW (max)}$$
  
 $I_{o} \times V_{o(SAT)} = 450 \text{ mA} \times 0.4 \text{ V (max)} = 180 \text{ mW (max)}$ 

$$I_{cL} \times V_{cL} \times duty \ cycle = 450 \ mA \times 15 \ V \ (max) \times 1\% = 67.5 \ mW \ (max)$$

Total package power dissipation = 779.5 mW (max)

Some of the power dissipated by the device ( $I_{cc} \times V_{cc}$ ) can be reduced by inserting a Zener diode in the supply line ( $Z_A$  in the figure). Note that the voltage at the  $V_{cc}$  pin under worst-case conditions must be greater than the minimum operating voltage (6.5 V).


**Transient Protection.** A note of caution concerns negative (below ground) excursions of the outputs. In application, the coupling of the two motor windings can provide for just such a case. Reducing the coupling between windings will help, but ground clamp diodes **or** diodes in series with the motor windings might be required ( $D_c$  **or**  $D_s$  in the figure). Most small brushless motors will not require these diodes.


System requirements usually utilize a diode type of reverse-polarity protection. If series diode protection is used with an inductive load (the usual fan application), a Zener clamp between  $V_{\rm s}$  and ground  $(Z_{\rm g}$  in the figure) is required. The Zener voltage must be greater than the supply voltage but less than the rated maximum allowable supply voltage.

With diode reverse-polarity protection, a high-impedance supply, or a switched supply line, high-voltage spikes will be generated (especially with high-current or high-inductance loads) during normal operation, coasting, or immediately after turn-off. In these situations, a Zener clamp ( $Z_{\rm B}$ ) from  $V_{\rm S}$  to ground will be required.


**Over-Current Adjust Pin.** The over-current limit may be reduced from the default value ( $I_D$  MAX) by selection of an external resistor ( $R_{ADJ}$ ) at the PWM/ $I_D$  ADJ pin.

The external overcurrent adjust and the thermal shutdown are commoned at the PWM/I $_{\rm O}$  ADJ pin and tieing it to V $_{\rm cc}$  will disable the thermal shutdown. PWM current/speed control can be performed at the PWM/I $_{\rm O}$  ADJ pin from a standard totem-pole logic output with a series Schottky diode (1N5818,1N5819, or equivalent) or by pulling it low through an open-collector transistor (no pull-up resistor). PWM/I $_{\rm O}$  ADJ input voltages greater than 0.3 V are not recommended and may create an unstable operating condition.

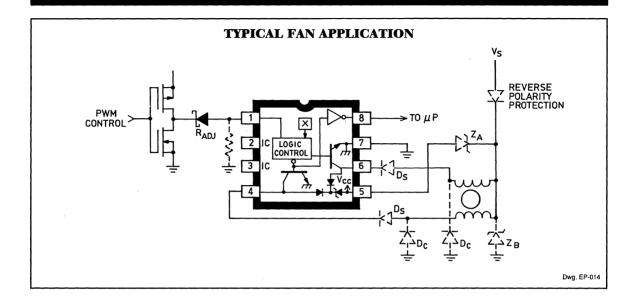




The north pole of a magnet is the north-seeking pole and is attracted to the earth's magnetic north pole. By accepted magnetic convention, lines of flux emanate from the north-seeking pole of a magnet and enter the south-seeking pole.

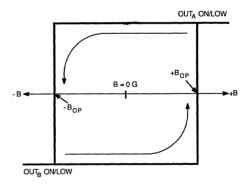

Dwg. GP-008

# 5140

# PROTECTED PowerHall® SENSOR — LAMP/SOLENOID DRIVER



Pinning is shown viewed from branded side.

Dwg. No. PH-001

# ABSOLUTE MAXIMUM RATINGS at $T_A = +25^{\circ}C$

\* Output is current limited at approximately 900 mA and junction temperature limited if current in excess of 900 mA is attempted. See Circuit Description and Applications for further information.

The UGQ5140K unipolar Hall effect switch is a monolithic integrated circuit designed for magnetic actuation of low-power incandescent lamps or inductive loads such as relays or solenoids. Included on chip is a Darlington power output that is capable of continuously sinking in excess of 300 mA. Internal protection circuitry limits surge (lamp turn-ON) or fault currents to approximately 900 mA. A sensitive magnetic threshold allows the device to be used in conjunction with inexpensive magnets or in applications that require relatively large operating distances.

Each sensor/driver includes a magnetic sensing Hall voltage generator, operational amplifier, Schmitt trigger, voltage regulator, and an open-collector, high-gain Darlington power output stage. The regulator allows use of the device with supply voltages of 4.5 V to 28 V. On-chip compensation circuitry stabilizes switch-point performance over temperature. The magnetic operation of this device is similar to that of the UGN3140U Hall effect switch.

The sensitive magnetic switch point coupled with the power output, current limiting, and thermal limiting circuitry allow the UGQ5140K to magnetically actuate various loads without requiring any external components.

The UGQ5140K is rated for operation over an extended temperature range of -40°C to +85°C. It is supplied in a four-pin mini-SIP plastic package, 0.200" (5.08 mm) wide, 0.130" (3.30 mm) high, and 0.060" (1.54 mm) thick.

#### FEATURES

- ☑ Magnetically Actuated Power Switch
- Temperature-Compensated Switch Points
- High Current-Sink Capability

300 mA Continuous

900 mA Peak Current Limit

- Output Short-Circuit Protection
- Low Quiescent Standby Current
- Linear Thermal Limiting
- Automotive Temperature Range -40°C to +85°C, Operating
- Internal Inductive Flyback/Clamp Diode Protection
- Reverse Battery Protection
- Low-Profile 4-Pin Mini-SIP

Always order by complete part number: | UGQ5140K | .

### 5140

### PROTECTED POWERHALL® SENSOR: LAMP/SOLENOID DRIVER


# ELECTRICAL CHARACTERISTICS at T $_{A}$ = -40°C to +85°C, V $_{\rm CC}$ = 4.5 V to 24 V (unless otherwise noted).


			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Supply Voltage Range	V <sub>cc</sub>	Operating	4.5	12	24	V
Output Leakage Current	l <sub>out</sub>	V <sub>OUT</sub> = 24 V	T -	<1.0	10	μΑ
Output Sustaining Voltage	V <sub>OUT(SUS)</sub>	I <sub>OUT</sub> = 100 mA	35	_	_	V
Output Saturation Voltage	V <sub>OUT(SAT)</sub>	$I_{OUT} = 300 \text{ mA}, V_{CC} = 24 \text{ V}$	T -	0.84	1.2	V
Over-Current Limit	I <sub>LIMIT</sub>	V <sub>CC</sub> = V <sub>OUT</sub> = 12 V, B 500 G	T -	900		mA
Output Rise Time	t,	$V_{CC} = 12 \text{ V}, V_{BB} = 18 \text{ V},$	T -	0.04	2.0	μs
Output Fall Time	t <sub>f</sub>	$R_L = 1.1  \text{k}  , C_L = 20  \text{pF}$	_	0.04	2.0	μs
Supply Current	l <sub>cc</sub>	Output OFF		5.5	10	mA
Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 300 mA	-	1.1	1.5	V
Diode Leakage Current	i <sub>R</sub>	V <sub>R</sub> = 35 V	T	<1.0	50	μA
Thermal Limit	T <sub>LIMIT</sub>	$V_{CC} = V_{OUT} = 12 \text{ V, B} 500 \text{ G,}$				
		I <sub>OUT</sub> = 10 mA		165	_	°C

Typical Data is at  $T_A = +25$ °C and is for design information only.


### MAGNETIC CHARACTERISTICS at $V_{CC}$ = 4.5 V to 24 V.


		T <sub>A</sub> = +25°C			T <sub>A</sub> = -40°C to +85°C			
Characteristic	Symbol	Min.	Тур.	Max.	Min.	Тур.	Max.	Units
Magnetic Operate Point	B <sub>OP</sub>	70	155	200	45	_	240	G
Magnetic Release point	B <sub>RP</sub>	50	100	180	25		220	G
Hysteresis	B <sub>hys</sub>	20	55	_	20		_	G







#### TYPICAL OPERATING CHARACTERISTICS






Dwg. GH-002





Dwg. GH-006 Dwg. GH-003

# TYPICAL TRANSFER CHARACTERISTICS at $T_{\perp} = +25^{\circ}C$



Dwg GH-007

# CIRCUIT DESCRIPTION AND OPERATION

The UGQ5140K merges state-of-the-art Hall effect sensing and power driving technologies to allow precision non-contact actuation of incandescent lamps or inductive loads. It is rated for operation over an extended temperature range as typically required in automotive applications.

#### **Magnetic Operation**

As shown in the Transfer Characteristics graph, the output of the device (pin 2) switches low when the magnetic field at the Hall sensor exceeds the operate point threshold (B $_{\rm OP}$ ). At this point, the output voltage is V $_{\rm OUT(SAT)}$ . When the magnetic field is reduced to below the release point threshold (B $_{\rm RP}$ ), the device output goes high. The difference in the magnetic operate and release points is called the hysteresis (B $_{\rm H}$ ) of the part. This built-in hysteresis allows clean switching of the output even in the presence of external mechanical vibration and electrical noise.

#### **Current and Thermal Limiting**

Output short circuits may be caused by faulty connectors, crimped wiring harnesses, or blown loads. In such cases, current and thermal limit circuitry will protect the output transistor against destruction.

Current through the output transistor is sensed with a low-value on-chip aluminum resistor. The voltage drop across this resistor is fed back to control the base drive of the output stage. This feedback prevents the output transistor from exceeding its maximum current density rating by limiting the output current to approximately 900 mA. It may also cause the output voltage to increase ( $V_{OUT} =$  $V_{BB}$  - [ $I_{LIMIT} \times R_{L}$ ]). In this mode, the device will dissipate an increased amount of power  $(P_D = V_{OUT} \times I_{LIMIT})$  and the output transistor will be thermally stressed. This stress, unless protected against (as in the UGQ5140K), will cause the device junction temperature to rise until it fails catastrophically.

Thermal stress protection is provided in two manners; delta temperature protection, and junction temperature protection. Under worst-case conditions (see Figures 1 and 2), if the output is shorted to supply, the output transistor will heat up much faster than the rest of the integrated circuit. This condition could cause localized failure in the output transistor. To prevent damage, a delta temperature limiting scheme is used. If a large thermal gradient is sensed across the device, the output transistor base drive is reduced to lower the output current. This reduces the power (heat) generated by the output transistor.

When thermal stresses cause the junction temperature to reach approximately +165°C, a linear thermal limiting circuit is activated. This circuit linearly reduces the base drive of the output transistor to maintain a constant junction temperature of 165°C. In this mode, the output current will be a function of the heat dissipating characteristics of the package and its environment. Linear thermal limiting eliminates the low-frequency thermal oscillation problems experienced by thermal shutdown (ON-OFF) schemes.

The output characteristics are shown in Figures 1 and 2. Note the three distinct operating regions: peak limit, delta limit, and thermal limit. In practice the output voltage and current may exhibit some oscillations during peak current limiting due to output load characteristics. These oscillations are of very-short duration (typically 50 ms) and may be damped with an external capacitor between pins 2 and 4.

When the fault condition that caused the output overload is corrected, the device returns to normal operating mode.

FIGURE 1 OUTPUT CURRENT UNDER SHORT-CIRCUIT CONDITIONS






FIGURE 2
OUTPUT VOLTAGE vs OUTPUT CURRENT




Dwg. GP-013-1

# FIGURE 3 TYPICAL LAMP DRIVER APPLICATION



Dwg. EH-001

#### FIGURE 4 LAMP CURRENT vs TIME



#### TYPICAL APPLICATIONS

#### **Incandescent Lamp Driver**


High incandescent lamp turn-ON currents (commonly called in-rush currents) can contribute to poor lamp reliability and destroy semiconductor lamp drivers. Warming resistors protect both driver and lamp but use significant power when the lamp is OFF while current-limiting resistors waste power when the lamp is ON. Lamps with steady-state current ratings to 300 mA can be driven by the UGQ5140K (Figure 3) without the need for warming or current limiting resistors. In applications using several sensor/drivers to control multiple lamps, the internal clamp diodes may be connected together to an appropriate current-limiting resistor and simple "lamp test" switch.

As shown in Figure 4, when an incandescent lamp is initially turned ON, the cold filament is at minimum resistance and will normally allow a 10x to12x peak in-rush current. As the lamp warms up, the filament resistance increases to its rated value and the lamp current is reduced to its steady-state rating. When switching a lamp with the UGQ5140K, the internal current-limiting circuitry limits the peak current to approximately 900 mA. The device will stay in the current limit and delta temperature limit modes until the lamp resistance increases to its rated steady-state value (Figure 4). A side-effect of this current-limiting feature is that lamp turn-on times will increase. Typical lamp turn-on times are shown in Figure 5.


#### **Inductive Load Driver**

Connecting the internal clamp diode (pin 3) to the positive supply allows relays or other inductive loads to be driven directly, as shown in Figure 6. The internal diode prevents damage to the output transistor by clamping the high-voltage spikes which occur when turning OFF an inductive load. An optional external Zener diode can be used to increase the flyback voltage, providing a much faster inductive load turn-OFF current decay, resulting in faster dropout (reduced relay contact arcing), and improved performance. The maximum Zener voltage, plus the load supply voltage, plus the clamp diode forward voltage should not exceed 35 volts.


FIGURE 5 LAMP TURN-ON TIME



#### SENSOR LOCATION AREA



Dwg. No. MH-001A

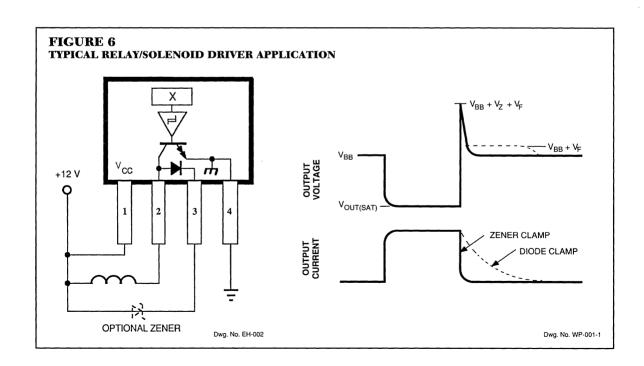

# 5275

# **COMPLEMENTARY OUTPUT** POWER HALL™ LATCH

Type UGN5275K latching Hall effect sensors are bipolar integrated circuits designed for electronic commutation of brushless dc motors. They feature open-collector complementary power outputs that are capable of sinking up to 300 mA continuously. Increased current ratings, complementary outputs, and sensitive switching points that are stable over temperature and time ideally suit these devices for minimum-component brushless dc motor designs.


Each sensor IC includes a Hall voltage generator, an operational amplifier, a Schmitt trigger, a voltage regulator, and large-area dual NPN output transistors. The regulator enables the IC to operate with supply voltages ranging from 4.5 V to 14 V. On-chip compensation circuitry stabilizes switch point performance over temperature. The large bipolar junction output transistors are fed by a unique driver stage which minimizes power dissipation within the IC. The magnetic operation of this device is similar to that of the UGN3275K complementaryoutput Hall effect latch.

Output Q of the IC switches to the LOW state when the internal Hall generator experiences a magnetic field that exceeds the rated operate point. Output Q switches HIGH within one us of the Output Q change of state. When the device is exposed to a sufficient magnetic field of opposite polarity, Output Q returns to the HIGH state, and Output  $\overline{Q}$ returns to the LOW state.

The UGN5275K is rated for operation over a temperature range of -20°C to +85°C, and is supplied in an environmentally rugged. four-pin miniature plastic SIP. Please consult the factory for alternate packaging and custom magnetic requirements.

#### **FEATURES**

- High Sink-Current Capability
- Magnetic Sensing, Complementary-Output Latch
- On-Chip Schmitt Trigger Provides Hysteresis
- Temperature-Compensated Switch Points
- Rugged, Low-Profile SIP



Dwg. PH-002

Pinning is shown viewed from branded side.

#### ABSOLUTE MAXIMUM RATINGS at $T_A = +25^{\circ}C$

Supply Voltage, V <sub>CC</sub> 14 V
Magnetic Flux Density, B Unlimited
Output OFF Voltage, V <sub>CE</sub> <b>60 V</b>
Output ON Current, I <sub>C</sub>
Continuous
Peak (Start Up) 0.9 A
Operating Temperature Range,
T <sub>A</sub>
Storage Temperature Range,
T <sub>S</sub> 65°C to +150°C
Package Power Dissipation,
D 750 mW

Always order by complete part number: | UGN5275K|

# **5275 COMPLEMENTARY OUTPUT POWERHALL™ LATCH**


# ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $V_{CC}$ = 4.5 V to 14 V (unless otherwise noted).


Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Supply Voltage	V <sub>cc</sub>		4.5	_	14	V
Output Saturation Voltage	V <sub>CE(SAT)</sub>	V <sub>CC</sub> = 14 V, I <sub>C</sub> = 300 mA	_	400	600	mV
Output Leakage Current	I <sub>CEX</sub>	V <sub>CE</sub> = 14 V, V <sub>CC</sub> = 14 V		_	10	μА
Supply Current	I <sub>cc</sub>	V <sub>CC</sub> = 14 V, Output Open		18	30	mA
Output Rise Time	t <sub>r</sub>	$V_{CC} = 14 \text{ V}, R_L = 45 \Omega, C_L = 20 \text{ pF}$		0.3	1.5	μs
Output Fall Time	t <sub>f</sub>	$V_{CC} = 14 \text{ V}, R_L = 45 \Omega, C_L = 20 \text{ pF}$	_	0.3	1.5	μ
Switch Time						
Differential	Δt	$V_{CC} = 14 \text{ V}, R_L = 45 \Omega, C_L = 20 \text{ pF}$		1.0	3.0	μs

#### **MAGNETIC CHARACTERISTICS**

		T <sub>A</sub> = +25°C		T <sub>A</sub> = -20°C to +85°C		
Characteristic	Symbol	Min.	Max.	Min.	Max.	Units
Operate Point	B <sub>OP</sub>	25	250	15	250	G
Release Point	B <sub>RP</sub>	-250	-25	-250	-15	G
Hysteresis	B <sub>hys</sub>	100	_	100	_	G


NOTE: As used here, negative flux densities are defined as less than zero (algebraic convention).






# 5275 COMPLEMENTARY OUTPUT POWERHALL<sup>TM</sup> LATCH

#### FIGURE 2

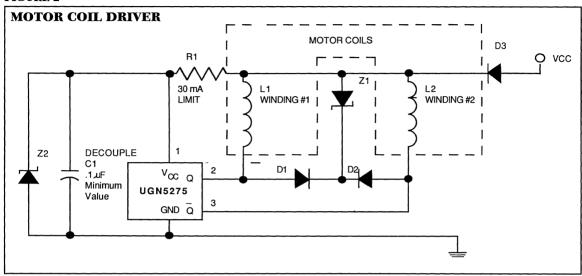

#### SWITCH POINTS VERSUS TEMPERATURE




#### APPLICATIONS

The increased current sinking capability of the UGN5275K ideally suits it for building small, inexpensive brushless dc motors using a minimum number of external components. Figure 2 shows that the only components required to commutate motor windings L1 and L2 are the Hall effect IC, flyback diodes D1 and D2, and one decoupling capacitor. The remaining components are optional for improving motor performance. Care should be taken to ensure that the motor winding impedances are high enough to guarantee that start-up surge currents do not exceed the maximum rating of the Hall effect IC.


In the circuit shown, diodes D1 and D2 supply a flyback path for the current of each winding to prevent reactive voltages from exceeding the sustained voltage rating of the Hall-effect IC output transistors. Zener diode Z1 enables the windings to switch more rapidly by allowing the output voltage to rise above the source voltage, while simultaneously clamping the extreme reactive voltages.

The maximum output voltage level will be restricted to the following:  $V_{\text{CC}} - V_{\text{D3}} + V_{\text{Z}} + V_{\text{p1}}$  (blocking diode D3 voltage drop). Blocking diode D3 provides reverse input-polarity protection, and should be used only if reverse battery voltage is a possibility. Capacitor C1 decouples the Hall-effect IC from any high dv/dt transients injected onto the  $V_{\text{CC}}$  rail to prevent regulator latch-up within the device. Zener diode Z2 and resistor R1 are required for operation from a  $V_{\text{CC}}$  exceeding 14 V.

# 5275 COMPLEMENTARY OUTPUT POWERHALL<sup>IM</sup> LATCH

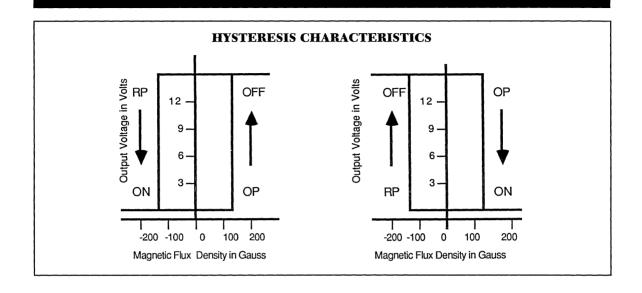


#### SENSOR LOCATION



Dwg. No. MH-001-3

#### **GUIDE TO INSTALLATION**



Dwg. No. A-12,062

- All Hall Effect integrated circuits are susceptible to mechanical stress effects. Caution should be exercised to minimize the application of stress to the leads or the epoxy package. Use of epoxy glue is recommended. Other types may deform the epoxy package.
- To prevent permanent damage to the Hall cell, heat-sink the leads during hand-soldering. Recommended maximum conditions for wave soldering are shown in the graph above.

# APPLICATIONS INFORMATION

## HALL EFFECT IC APPLICATIONS GUIDE

Allegro Microsystems uses the latest bipolar integrated circuit technology in combination with the century-old Hall effect to produce Hall effect ICs. These are contactless, magnetically activated switches and sensors with the potential to simplify and improve systems.

#### LOW-COST SIMPLIFIED SWITCHING

Simplified switching is a Hall sensor's strong point. Hall effect IC switches combine Hall voltage generators, signal amplifiers, Schmitt trigger circuits, and transistor output circuits on single integrated circuit chips. Output is clean, fast, and switched without bounce—an inherent problem with mechanical contact switches. A Hall effect switch typically operates at up to a 100 kHz repetition rate, and costs less than many common electromechanical switches.

#### EFFICIENT, EFFECTIVE, LOW-COST LINEAR SENSORS

The linear Hall effect sensor detects the motion, position, or change in field strength of an electromagnet, a permanent magnet, or a ferromagnetic material with an applied magnetic bias. Energy consumption is very low. The output is linear and temperature-stable. The sensor's frequency response is flat up to approximately 25 kHz.

A Hall effect sensor is more efficient and effective than inductive or optoelectronic sensors, and at a lower cost.

#### SENSITIVE CIRCUITS FOR RUGGED SERVICE

The Hall effect sensor is virtually immune to environmental contaminants and is suitable for use under severe service conditions. The circuit is very sensitive and provides reliable, repetitive operation in close tolerance applications. The Hall effect sensor can see precisely through dirt and darkness.


#### **CURRENT APPLICATIONS**


Current applications for Hall effect ICs include use in ignition systems, speed controls, security systems, alignment controls, micrometers, mechanical limit switches, computers, printers, disk drives, keyboards, machine tools, key-switches, and pushbutton switches. They are also used as tachometer pickups, current limit switches, position detectors, selector switches, current sensors, linear potentiometers and brushless dc motor commutators.

# THE HALL EFFECT SENSOR: HOW DOES IT WORK?

The basic Hall sensor is a small sheet of semiconductor material represented by Figure 1.

A constant voltage source, as shown in Figure 2, will force a constant bias current to flow in the semiconductor sheet. The output will take the form of a voltage measured across the width of the sheet that will have negligible value in the absence of a magnetic field.

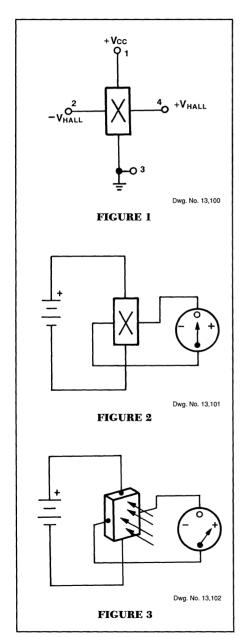

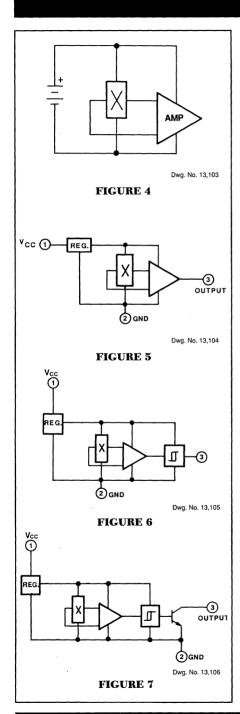

If the biased Hall sensor is placed in a magnetic field with flux lines at right angles to the Hall current (Figure 3), the voltage output is directly proportional to the strength of the magnetic field. This is the Hall effect, discovered by E. F. Hall in 1879.

#### LINEAR OUTPUT HALL EFFECT DEVICES.

The output voltage of the basic Hall effect sensor (Hall element) is quite small. This can present problems, especially in an electrically noisy environment. Addition of a stable high-quality dc amplifier and voltage regulator to the circuit (Figures 4 and 5) improves the transducer's output and allows it to operate over a wide range of supply voltages. The modified device provides an easy-to-use analog output that is linear and proportional to the applied magnetic flux density.

The UGN3501 is this type of linear output device. The UGN3503 has improved sensitivity and temperature-stable characteristics. The output of the UGN3503 is ratiometric; that is, its output is proportional to its supply voltage.

#### DIGITAL OUTPUT HALL EFFECT SWITCHES

The addition of a Schmitt trigger threshold detector with built-in hysteresis, as shown in Figure 6, gives the Hall effect circuit digital output capabilities. When the applied magnetic flux density exceeds a certain limit, the trigger provides a clean transition from OFF to ON without contact bounce. Built-in hysteresis eliminates oscillation (spurious switching of the output) by introducing a magnetic dead zone in which switch action is disabled after the threshold value is passed.


An open-collector NPN output transistor added to the circuit (Figure 7) gives the switch digital logic compatibility. The transistor is a saturated switch that shorts the output terminal to ground wherever the applied flux density is higher than the ON trip point of the device. The switch is compatible with all digital families. The output transistor can sink enough current to directly drive many loads, including relays, triacs, SCRs, LEDs, and lamps.

The circuit elements in Figure 7, fabricated on a monolithic silicon chip and encapsulated in a small epoxy or ceramic package, are common to all Hall effect digital switches. Differences between device types are generally found in specifications such as magnetic parameters, operating temperature ranges, and temperature coefficients.

#### **OPERATION**

All Hall effect devices are activated by a magnetic field. A mount for the the devices, and electrical connections, must be provided; Parameters such as load current, environmental conditions, and supply voltage must fall within the specific limits shown in the appropriate documentation.

Magnetic fields have two important characteristics—flux density and polarity (or orientation). In the absence of any magnetic field, most Hall effect digital switches are designed to be OFF (open circuit at output). They will turn ON only if subjected to a magnetic field that has both sufficient density and the correct orientation.

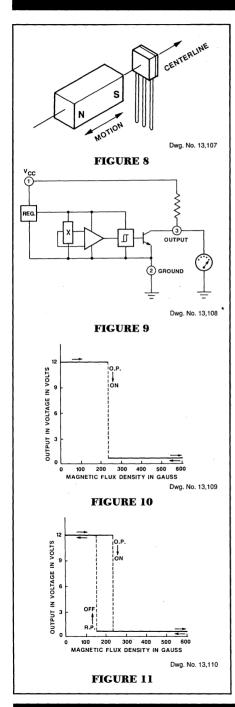

Hall switches have an active area that is closer to one face of the package (the face with the lettering, the branded face). To operate the switch, the magnetic flux lines must be perpendicular to this face of the package, and must have the correct polarity. If an approaching south pole would cause switching action, a north pole would have no effect. In practice, a close approach to the branded face of a Hall switch by the south pole of a small permanent magnet will cause the output transistor to turn ON (Figure 8).

A Transfer Characteristics Graph (Figures 10 and 11) plots this information. It is a graph of output as a function of magnetic flux density (measured in gauss) presented to the Hall cell. The magnetic flux density is shown on the horizontal axis. The digital output of the Hall switch is shown along the vertical axis.

To acquire data for this graph, add a power supply and a pull-up resistor that will limit current through the output transistor and enable the value of the output voltage to approach zero (Figure 9).

In the absence of an applied magnetic field (0 G), the switch is OFF, and the output voltage equals the power supply (12 V). A permanent magnet's south pole is then moved perpendicularly toward the active area of the device. As the magnet's south pole approaches the branded face of the switch, the Hall cell is exposed to increasing magnetic flux density. At some point (240 G in this case), the output transistor turns ON and the output voltage approaches zero (Figure 10). That value of flux density is called the operate point. If we continue to increase the field's strength, say to 600 G, nothing more happens. The switch turns ON once and stays ON.


To turn the switch OFF, the magnetic flux density must fall to a value far lower than the 240 G "operate point" because of the built-in hysteresis. For this example we use 90 G hysteresis, which means the device turns OFF when flux density decreases to 150 G (Figure 11). That value of flux density is called the "release point".

#### **CHARACTERISTICS AND TOLERANCES**

The exact magnetic flux density values required to turn Hall switches ON and OFF differ for several reasons, including design criteria and manufacturing tolerances. Extremes in temperature will also somewhat affect the operate and release points.


For each device type, worst-case magnetic characteristics for the operate value, the release value, and hysteresis are provided.

All switches are guaranteed to turn ON at or below the maximum operate point flux density. When the magnetic field is reduced, all devices will turn OFF before the flux density drops below the minimum release point value. Each device is guaranteed to have at least the minimum amount of hysteresis to ensure clean switching action. This hysteresis ensures that, even if mechanical vibration or electrical noise is present, the switch output is fast, clean, and occurs only once per threshold crossing.



Dwg. No. 13,126

#### FIGURE 12A



Dwg. No. 13,112

FIGURE 12B

#### **GETTING STARTED**

Since the electrical interface is usually straightforward, the design of a Hall effect system should begin with the physical aspects. In position-sensing or motion-sensing applications, the following questions should be answered:

How much and what type of motion is there?

What angular or positional accuracy is required?

How much space is available for mounting the sensing device and activating magnet?

How much play is there in the moving assembly?

How much mechanical wear can be expected over the lifetime of the machine?

Will the product be a mass-produced assembly, or a limited number of machines that can be individually adjusted and calibrated?

What temperature extremes are expected?

A careful analysis will pay big dividends in the long term.

#### THE ANALYSIS

The field strength of the magnet should be investigated. The strength of the field will be the greatest at the pole face, and will decrease with increasing distance from the magnet. The strength of the magnetic field can be measured with a gaussmeter or a calibrated linear Hall sensor, such as a UGN3503U (see Appendix II).

A plot of field strength (magnetic flux density) is a function of distance along the intended line of travel of the magnet. Hall device specifications (sensitivity in mV/G for a linear device, or operate and release points in gauss for a digital device) can be used to determine the critical distances for a particular magnet and type of motion. Note that these field strength plots are not linear, and that the shape of the flux density curve depends greatly upon magnet shape, the magnetic circuit, and the path traveled by the magnet.


#### TOTAL EFFECTIVE AIR GAP (TEAG)

Total effective air gap, or TEAG, is the sum of active area depth and the distance between the package's surface and the magnet's surface. A graph of flux density as a function of total effective air gap (Figure 12A) illustrates the considerable increase in flux density at the sensor provided by a thinner package. The actual gain depends on the characteristic slope of flux density for a particular magnet.

#### MODES OF OPERATION

Even with a simple bar or rod magnet, there are several possible paths for motion. The magnetic pole could move perpendicularly straight at the active face of the Hall device. This is called the head-on mode of operation. The curve of Figure 12B illustrates typical flux density (in gauss) as a function of TEAG for a cylindrical magnet.

The head-on mode is simple, works well, and is relatively insensitive to lateral motion. The designer should be aware that overextension of the mechanism could cause physical damage to the epoxy package of the Hall device.

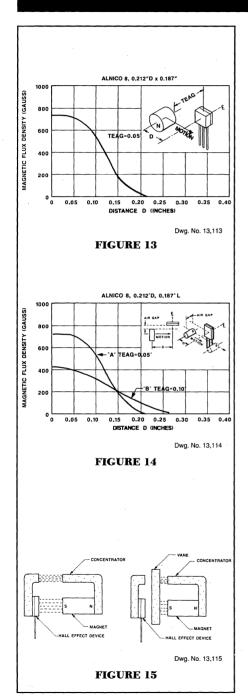

A second possibility would be to move the magnet in from the side of the Hall device in the slide-by mode of operation, as illustrated in Figure 13. Note that now the distance plotted is not total effective air gap, but rather the perpendicular distance from the centerline of the magnet to the centerline of the package. Air gap is specified because of its obvious mechanical importance, but bear in mind that to do any calculations involving flux density, the "package contribution must be added and the TEAG used, as before. The slide-by mode is commonly used to avoid contact if overextension of the mechanism is likely. The use of strong magnets and/or ferrous flux concentrators in well-designed slide-by magnetic circuits will allow better sensing precision with smaller magnet travel than the head-on mode.

Magnet manufacturers generally can provide head-on flux density curves for their magnets, but they often do not characterize them for slide-by operation, possibly because different air gap choices lead to an infinite number of these curves; however, once an air gap is chosen, the readily available head-on magnet curves can be used to find the peak flux density (a single point) in the slide-by application by noting the value at the total effective air gap.

#### STEEP SLOPES—HIGH FLUX DENSITIES


For linear Hall devices, greater flux changes for a given displacement give greater outputs, clearly an advantage. The same property is desirable for digital Hall devices, but for more subtle reasons. To achieve consistent switching action in a given application, the Hall device must switch ON and OFF at the same positions relative to the magnet.

To illustrate this concept, consider the flux density curves from two different magnet configurations in Figure 14. With an operate point flux density of 200 G, a digital Hall effect device would turn ON at a distance of approximately 0.14 inches in either case. If manufacturing tolerances or temperature effects shifted the operate point to 300 G, notice that for curve A (steep slope) there is very little change in the distance at which switching occurs. In the case of curve B, the change is considerable. The release point (not shown) would be affected in much the same way. The basic principles illustrated in this example can be modified to include mechanism and device specification tolerances and can be used for worse-case design analysis. Examples of this procedure are shown in later sections.

#### **VANE INTERRUPTER SWITCHING**


In this mode, the activating magnet and the Hall device are mounted on a single rigid assembly with a small air gap between them. In this position, the Hall device is held in the ON state by the activating magnet. If a ferromagnetic plate, or vane is placed between the magnet and the Hall device, as shown in Figure 15, the vane forms a magnetic shunt that distorts the flux field away from the Hall device.

Use of a movable vane is a practical way to switch a Hall device. The Hall device and magnet can be molded together as a unit, thereby eliminating alignment problems, to produce an extremely rugged switching assembly. The ferrous vane or vanes that interrupt the flux could have linear motion, or rotational motion, as in an automotive distributor. Ferrous vane assemblies, due to the steep flux density/distance curves that can be achieved, are often used where precision switching over a large temperature range is required.




Dwg. No. 13,116

#### FIGURE 16



Dwg. No. 13,117

#### FIGURE 17



Dwg. No. 13,118

#### FIGURE 18A




FIGURE 18B

The ferrous vane can be made in many configurations, as shown in Figure 16. With a linear vane similar to that of Figure 16B, it is possible to repeatedly sense position within 0.002" over a 125°C temperature range.

#### **ELECTRICAL INTERFACE FOR** DIGITAL HALL DEVICES

The output stage of a digital Hall switch is simply an open-collector NPN transistor. The rules for use are the same as those for any similar switching transistor.

When the transistor is OFF, there is a small output leakage current (typically a few nanoamps) that usually can be ignored, and a maximum (breakdown) output voltage (usually 24 V), which must not be exceeded.

When the transistor is ON, the output is shorted to the circuit common. The current flowing through the switch must be externally limited to less than a maximum value (usually 20 mA) to prevent damage. The voltage drop across the switch  $(V_{\text{ce(sat)}})$  will increase for higher values of output current. You must make certain this voltage is compatible with the OFF, or "logic zero," voltage of the circuit you wish to control.

Hall devices switch very rapidly, with typical rise and fall times in the 400 ns range. This is rarely significant, since switching times are almost universally controlled by much slower mechanical parts.

#### COMMON INTERFACE CIRCUITS

Figure 17 illustrates a simplified schematic symbol for Hall digital switches (Types 3113, 3120-23, 3130, 3132/33, and 3140). It will make further explanation easier to follow.


Interface for digital logic integrated circuits usually requires only an appropriate power supply and pull-up resistor.

With current-sinking logic families, such as DTL or the popular 7400 TTL series (Figure 18A), the Hall switch has only to sink one unit-load of current to the circuit common when it turns ON (1.6 mA maximum for TTL). In the case of CMOS gates (Figure 18B), with the exception of switching transients, the only current that flows is through the pull-up resistor (about 0.2 mA in this case).

Loads that require sinking currents up to 20 mA can be driven directly by the Hall switch.

A good example is a light emitting diode (LED) indicator that requires only a resistor to limit current to an appropriate value. If the LED drops 1.4 V at a current of 20 mA, the resistor required for use with a 12 V power supply can be calculated as:

$$\frac{12 \text{ V} - 1.4 \text{ V}}{0.02 \text{ A}} = 530$$



The nearest standard value is 560  $\Omega,$  resulting in the circuit of Figure 19.

Sinking more current than 20 mA requires a current amplifier. For example, if a certain load to be switched requires 4 A and must turn ON when the activating magnet approaches, the circuit shown in Figure 20 could be used.

When the Hall switch is OFF (insufficient magnetic flux to operate), about 12 mA of base current flows through the 1 k $\Omega$  resistor to the 2N5812 transistor, thereby saturating it and shorting the base of the 2N3055 to ground, which keeps the load OFF. When a magnet is brought near the Hall switch, it turns ON, shorting the base of the 2N5812 to ground and turning it OFF. This allows:


$$\frac{12 \text{ V}}{56 \Omega} = 210 \text{ mA}$$

of base current to flow to the 2N3055, which is enough to saturate it for any load current of 4 A or less.


The Hall switch cannot source current to a load in its OFF state, but it is no problem to add a transistor that can. For example, consider using a 40669 triac to turn ON a 115 V or 230 V ac load. This triac would require about 80 mA of gate current to trigger it to the ON condition. This could be done with a 2N5811 PNP transistor, as shown below in Figure 21.

When the Hall switch is turned ON, 9 mA of base current flows into the 2N5811, thereby saturating it and allowing it to supply 80 mA of current to trigger the triac. When the Hall switch is OFF, no base current flows in the 2N5811, which turns it OFF and allows no gate current to pass to the triac. The 4.7 k $\Omega$  and the 1 k $\Omega$  resistors were added as a safeguard against accidental turn-on by leakage currents, particularly at elevated temperatures.


Note that the +12 V supply common is connected to the low side of the ac line, and in the event of a mixup, the Hall switch and associated low-voltage circuitry would be 115 V above ground. Be careful!

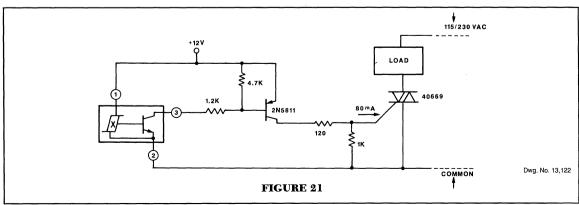

#### A. MAGNETIC ROTOR



#### **B. FERROUS VANE ROTOR**



Dwg. No. 13,123

FIGURE 22

#### A. RADIAL



**B. AXIAL** 



Dwg. No. 13,124

FIGURE 23

#### ROTARY ACTIVATORS FOR HALL SWITCHES

A frequent application involves the use of Hall switches to generate a digital output proportional to velocity, displacement, or position of a rotating shaft. The activating magnetic field for rotary applications can be supplied in either of two ways:

#### MAGNETIC ROTOR ASSEMBLY

The activating magnet(s) are fixed on the shaft and the stationary Hall switch is activated with each pass of a magnetic south pole (Figure 22A). If several activations per revolution are required, rotors can sometimes be made inexpensively by molding or cutting plastic or rubber magnetic material. Ring magnets can also be used. Ring magnets are commercially available disc-shaped magnets with poles spaced around the circumference. They will operate Hall switches dependably and at reasonable costs.

Ring magnets do have limitations:

The accuracy of pole placement (usually within 2 or 3 degrees). Uniformity of pole strength ( $\pm 5\%$ , or worse).

These limitations must be considered in applications requiring precision switching.

#### FERROUS VANE ROTOR ASSEMBLY

Both the Hall switch and the magnet are stationary (Figure 22B); the rotor interrupts and shunts the flux with the passing of each ferrous vane.

Vane switches tend to be a little more expensive than ring magnets, but because the dimensions and configuration of the ferrous vanes can be carefully controlled, they are often used in applications requiring precise switching or duty cycle control.

Properly designed vane switches can have very steep flux density curves, yielding precise and stable switching action over a wide temperature range.

#### RING MAGNETS FOR HALL SWITCH APPLICATIONS

Ring magnets suitable for use with Hall switches are readily available from magnet vendors in a variety of different materials and configurations. The poles may be oriented either radially (Figure 23A) or axially (Figure 23B) with up to 20 pole-pairs on a one-inch diameter ring. For a given size and pole count, ring magnets with axial poles have somewhat higher flux densities.

Materials most commonly used are various Alnicos, Ceramic 1, and barium ferrite in a rubber or plastic matrix material. Manufacturers usually have stock sizes with a choice of the number of pole pairs. Custom configurations are also available at a higher cost.

Alnico is a name given to a number of aluminum nickel-cobalt alloys that have a fairly wide range of magnetic properties. In general, Alnico ring magnets have the highest flux densities, the smallest changes in field strength with changes in temperature, and the highest cost. They are generally too hard to shape except by grinding and are fairly brittle, which complicates the mounting of bearings or arbor.


Ceramic 1 ring magnets (trade names Indox, Lodex) have somewhat lower flux densities (field strength) than the Alnicos, and their field strength changes more with temperature; however, they are considerably lower in cost and are highly resistant to demagnetization by external magnetic fields. The ceramic material is resistant to most chemicals and has high electrical resistivity. Like Alnico, they can withstand temperatures well above that of Hall switches and other semiconductors, and must be ground if


reshaping or trimming is necessary. They may require a support arbor to reduce mechanical stress.

The rubber and plastic barium ferrite ring magnets are roughly comparable to Ceramic 1 in cost, flux density, and temperature coefficient, but are soft enough to shape using conventional methods. It is also possible to mold or press them onto a shaft for some applications. They do have temperature limitations ranging from 70°C to 150°C, depending on the particular material, and their field strength changes more with temperature than Alnico or Ceramic 1.

Regardless of material, ring magnets have limitations on the accuracy of pole placement and uniformity of pole strength which, in turn, limit the precision of the output waveform. Evaluations have shown that pole placement in rubber, plastic, and ceramic magnets usually falls within 2° or 3° of target, but 5° errors have been measured. Variations of flux density from pole to pole will commonly be  $\pm 5\%$ , although variations of up to  $\pm 30\%$  have been observed.

Figure 24 is a graph of magnetic flux density as a function of angular position for a typical 4 pole-pair ceramic ring magnet, one inch in diameter, with a total effective air gap of 0.065" (0.050" clearance plus 0.015" package contribution). It shows quite clearly both the errors in pole placement and variations of strength from pole to pole.

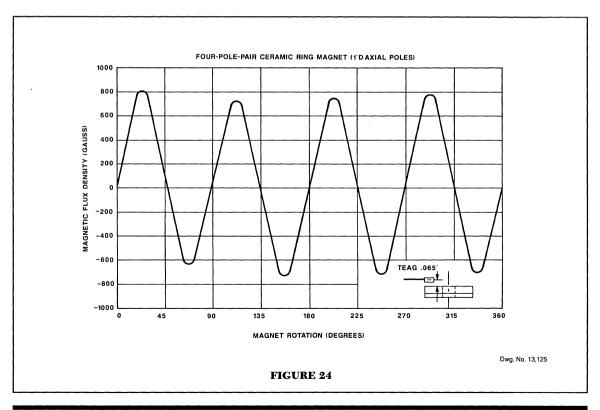

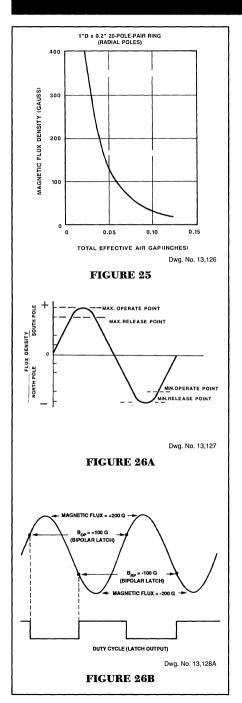

A frequent concern with ring magnets is ensuring sufficient flux density for reliable switching. There is a trade-off between the number of pole-pairs and the flux density for rings of a given size. Thus, rings with large numbers of poles have lower flux densities. It is important that the total effective air gap (TEAG) is kept to a minimum, since flux density at the Hall active area decreases by 5 G or 6 G per 0.001" for many common ring magnets. This is clearly shown in Figure 25, a graph of flux density at a pole as a function of TEAG for a typical 20-pole-pair plastic ring magnet. Also shown in Figure 25 is the effect of "package contribution" to the TEAG. The standard "U" package contributes about 0.016". The other factor contributing to TEAG is mechanical clearance, which should be as small as possible, consistent with dimensional tolerances of the magnet, bearing tolerances, bearing wear, and temperature effects on the Hall switch mounting bracket.

#### WHAT IS A BIPOLAR SWITCH?

A bipolar switch, the UGN/UGS3130, has a maximum operate point of +150 G, a minimum release point of -150 G, and a minimum hysteresis of 20 G at + 25°C; however, the operate point could be as low as -130 G (-150 G minimum release, 20 G minimum hysteresis) and the release could be as high as +130 G (+150 G maximum operate, 20 G minimum hysteresis). Figure 26A shows two cases of operate and release with one device operating at the maximum operate and release points, and the other with minimum operate and release points.

In applications previously discussed, the Hall switch was operated (turned ON) by the approach of a magnetic south pole (positive flux). When the south pole was removed (flux approaches zero), the Hall switch had to release (turn OFF). On ring magnets, both south and north poles are present in an alternating pattern. The release point flux density becomes less important, for if the Hall switch has not turned OFF when the flux density goes to zero (south pole has passed), it will certainly turn OFF when the following north pole causes flux density to go negative. Bipolar Hall switches take advantage of this extra margin in release point flux values to achieve lower operate point flux densities, a definite advantage in ring magnet applications.

#### THE BIPOLAR LATCH

Unlike the Type 3130 bipolar switch, which may operate and release with a south pole or north pole, the bipolar latch offers a more precise control of the operate and release parameters. This Hall integrated circuit has been designed to operate (turn ON) with a south pole only; it will then remain ON when the south pole has been removed. In order to have the bipolar latch release (turn OFF), it must be presented with a north magnetic pole. This alternating south pole-north pole operation, when properly designed, will produce a duty cycle approaching 50%.

The UGN3175 was designed specifically for applications requiring a tightly controlled duty cycle, such as in brushless dc motor commutation. This was accomplished with the introduction of the bipolar latch in 1982. The 3175 has become very popular as a brushless dc motor commutator, shaft encoder, speedometer element, and tachometer sensor.

Duty cycle is controlled with an alternating magnetic field, as shown in Figure 26B.

#### **DESIGN EXAMPLE**

#### Given:

Operating temperature range of -20° to +85°C.

Bipolar Hall switch UGN3130U in standard "U" package:

Maximum operate point +200 G from -20° to + 85°C.

Minimum release point -200 G from -20°C to + 85°C.

Air gap package contribution 0.016".

Necessary mechanical clearance 0.030".

First, find the total effective air gap:

TEAG = clearance + package contribution

TEAG = 0.030" + 0.016" = 0.046"

Now, determine the necessary flux density sufficient to operate the Hall switch, plus 40%.

To operate the Hall switch, the magnet must supply a minimum of  $\pm 200$  G at a distance of 0.046" over the entire temperature range. Good design practice requires the addition of extra flux to provide some margin for aging, mechanical wear, and other imponderables. If we add a pad of 100 G, a reasonable number, the magnet required must supply  $\pm 300$  G at a distance of 0.046" over the temperature range.

#### TEMPERATURE EFFECTS

Unfortunately, magnet strength is affected by temperature to some degree. Temperature coefficients of some common magnetic materials are given below:

Material	Temperature Coefficient
Rubber/Plastic	-0.2% to -0.3% per °C
Ceramic 1	-0.15% to -0.2% per °C
Alnico 2, 5	-0.02% to -0.03% per °C
Alnico 8	±0.01% per °C

If we are considering a ceramic ring magnet with a worst-case temperature coefficient of -0.2%/°C, we must add some extra flux density to the requirement at room temperature to ensure that we still have +300 G per south pole at +85°C. This amount is:

$$[(85^{\circ}\text{C} - 25^{\circ}\text{C}) \times 0.2\%/^{\circ}\text{C}] 300 \text{ G} = +36 \text{ G}$$

Thus, the flux density that will ensure that the Hall switch will operate over temperature is 300 G + 36 G = 336 G per south pole at  $+25^{\circ}\text{C}$ .

Follow the same procedure for the north pole requirements. If the magnet will supply +300 G per south pole and -300 G per north pole at +85°C, it will supply even more flux density per north pole at -20°C because of the negative temperature coefficient.

In applications where temperature conditions are more severe, Alnico magnets are considerably better than the ceramic magnets we considered. It is also possible to order custom Hall switches with specifications tailored to your application. For example, you can specify a range of operate and release points at a particular temperature, with temperature coefficients for operate and release points, if that is better suited to your application. On a custom basis, Hall switches are available with operate and release point temperature coefficients of less than 0.3 G/°C, and with operate flux densities of less than 100 G.


If you intend to use a low-cost, low flux density ring magnet, then the UGN3130U device in the 0.060" package would be a good choice. The package contribution is 0.016", which results in a significant improvement in peak flux density from a magnet, as shown in Figure 25.

If the rotor drive can withstand an increased torque requirement, consider a ferrous flux concentrator. Flux density can be increased by 10% to 40% in this manner. A concentrator of 0.03125" mild steel having the same dimensions as, and cemented to, the back surface of the Hall switch, will increase flux density by about 10%. A return path of mild steel from the back side of the device to the adjacent poles can add even more. Often the functions of mounting bracket and flux concentrator can be combined. Additional information can be found in the section on flux concentrators.




Dwg. No. 13,129

#### FIGURE 27



Dwg. No. 13,130

FIGURE 28



Dwg. No. 13.131

FIGURE 29



Dwg. No. 13,132

FIGURE 30

# RING MAGNETS —DETAILED DISCUSSION

#### AN INEXPENSIVE ALTERNATIVE

Innovative design can produce surprisingly good results. Rubber and plastic magnet stock comes in sheets. One side of the sheet is magnetic north; the other side is south. This material is relatively inexpensive and can easily be stamped or die-cut into various shapes.

These properties prompted one designer to fabricate an inexpensive magnetic rotor assembly that worked very well. The rubber magnet stock was die-cut into a star-shaped rotor form, as shown in Figure 27. A nylon bushing formed a bearing, as shown in Figure 28.

Finally, a thin mild steel backing plate was mounted to the back of the assembly to give mechanical strength and to help conduct the flux back from the north poles on the opposite side. This actually served to form apparent north poles between the teeth; the measured flux between south pole teeth is negative. Figure 29 shows the completed magnetic rotor assembly, essentially a ring magnet with axial poles.

The Hall switch was mounted with its active surface close to the top of the rotor assembly, facing the marked poles. There is some versatility in this approach, as asymmetrical poles can be used to fabricate a rotor that wll allow trimmable ON time and, thus, work as a timing cam. Figure 30 illustrates a cam timer adjusted to 180° ON and 180° OFF.

#### RING MAGNET SELECTION

When you discuss your application with a magnet vendor, the following items should be considered:

#### Mechanical Factors

- Dimensions and tolerances
- Mounting hole type and maximum eccentricity
- Rotational speed
- Mechanical support required
- Coefficient of expansion

#### **Magnetic Factors**

- Poles: number, orientation, and placement accuracy
- Flux density at a given TEAG (remember to add the Hall switch package contribution to the clearance figure)
- Magnetic temperature coefficient


#### **Environmental Factors**

■ Tolerance of the material to the working environment (temperature, chemical solvents, electric potentials)

Flux density curves from several typical ring magnets are included to present an idea of what can be expected from various sizes and materials. Figure 31 shows the curve for a ring similar in size and material to that of Figure 25, but with 10 pole-pairs instead of 20 (note increased flux density values). Figure 32 shows the curve from a one polepair Alnico 8 ring. Figure 33 shows the curve

from a three-pole-pair Ceramic 1 ring. Figure 34 shows the curves from a four-pole-pair Ceramic 1 ring, with and without a ferrous flux concentrator.

Incoming inspection of ring magnets is always advisable. You can ensure the magnets are within the agreed upon magnetic specifications by making measurements with a commercial gaussmeter, or a calibrated linear Hall device mounted in a convenient test fixture. Calibrated UGN3503U Hall devices and technical assistance are available.

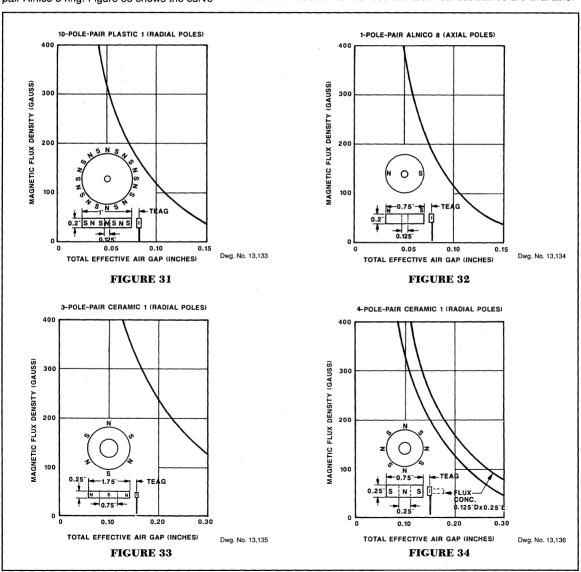


#### FERROUS VANE ROTARY ACTIVATORS

A ferrous vane rotor assembly is the alternative to magnetic rotors for rotary Hall switch applications. As shown previously, a single magnet will hold a Hall switch ON except when one of the rotor vanes interrupts the flux path and shunts the flux path away from the Hall switch. The use of a single stationary magnet allows very precise switching by eliminating ring magnet variations, placement, and strength. Unlike the evenly spaced poles on ring magnets, the width of rotor vanes can easily be varied. It is possible

to vary the Hall switch OFF and ON times, which gives the designer control over the duty cycle of the output waveform. Ferrous vane rotors are a good choice where precise switching is desired over a wide range of temperatures. As the vane passes between magnet and Hall switch, progressively more flux will be blocked or shunted. Small variations in lateral position have a very small effect on the transition point.

#### A FERROUS VANE IN OPERATION

Figure 35 combines top and front views of a ferrous vane magnet/ Hall switch system with the graph of flux density as a function of vane travel produced by this system. Note that the drawings and the graph are vertically aligned along the horizontal axis. Position is measured from the leading edge of the vane to the centerline of the magnet/ Hall device.

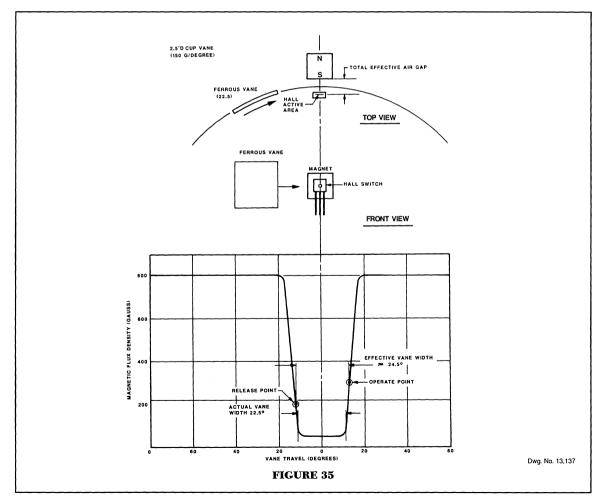

Initially, when the vane is located entirely to the left of the magnet, the vane has no effect and the flux density at the sensor is at a maximum of 800 G. As the leading edge of the vane nears the magnet, the shunting effect of the vane causes the flux density to decrease in a nearly linear fashion. There, the magnet is covered by the vane and flux density is at a minimum. As the vane travels on it starts to uncover the magnet. This allows the flux to increase to its original value. After that, additional vane travel has no further influence on flux density at the sensor.


A Hall switch located in the position of the sensor would initially be ON because of the presence of the magnetic field. Somewhere in the linearly decreasing region, the flux would fall below the release point, and the Hall switch would turn OFF. It would remain OFF until the increasing flux reaches the operate point for that particular Hall switch. Recall that the operate point flux density is greater than the release point flux density by the amount of hysteresis for that particular Hall switch.

The interval during which the Hall switch remains OFF is determined by the actual width of the vane and the steepness of the magnetic slope, as well as by the operate and release point flux density values for the Hall switch. This interval is called the effective vane width, and it is always somewhat greater than the physical vane width.

#### ROTOR DESIGN

Two commonly used rotor configurations are the disk and the cup, as shown in Figure 36.

The disk is easily fabricated and, hence, is often used for low-volume applications such



as machine control. Axial movement of the rotor must be considered. Vane activated switches tolerate this quite well, but the rotor must not hit the magnet or the Hall switch.

Cup rotors are somewhat more difficult to fabricate and so are more expensive, but dealing with a single radial distance simplifies calculations and allows precise control of the output waveforms. For cup rotors, radial bearing wear or play is the significant factor in determining the clearances, while axial play is relatively unimportant. Cup rotors have been used very successfully in automotive ignition systems. The dwell range is determined by the ratio of the vane-to-window widths when the rotor is designed. Firing point stability may be held to  $\pm 0.005$  distributor degrees per degree Celsius in a well-designed system.

#### MATERIAL

Vanes are made of a low carbon steel to minimize the residual magnetism and to give good shunting action. The vane thickness is chosen to avoid magnetic saturation for the value of flux density it must shunt. Vanes usually are between 0.03" and 0.06" thick.

### **VANE/WINDOW WIDTHS, ROTOR SIZE**

Generally, the smallest vanes and window on a rotor should be at least one and one-half times the width of the magnet pole to provide adequate shunting action and to maintain sufficient differential between the OFF and ON values of flux density.

In Table 1, the maximum flux density (obtained with window centered over the magnet, the minimum flux density (vane centered over the magnet), and the difference between the two values are tabulated for three cases:

- 1. Vane and window width the same as magnet pole width.
- Vane and window width one and one-half times magnet pole width.
- 3. Vane and window width two times the magnet pole width.

In each case the magnet is  $0.25" \times 0.25" \times 0.125"$  samarium cobalt; the air gap is 0.1"; the rotor vanes are made of 0.04" mild steel stock.

TABLE 1


Window Vane Width Factor	1.0	1.5	2.0
Flux Density with Window Centered	630 G	713 G	726 G
Flux Density with Vane Centered	180 G	100 G	80 G
Flux Change Density	450 G	613 G	646 G

If a small rotor with many windows and vanes is required, a miniature rare earth magnet must be used to ensure sufficient flux density for reliable operation. For example, a 0.1" cubical samarium cobalt magnet makes it practical to fabricate a 1.25" diameter rotor with as many as 10 windows and vanes. With fewer vanes, even further size reduction is possible.

TABLE 2

Curve	Magnet	Air Gap	Slope G/mil	*Concentrator
Α	0.25"D, 0.25"L Samarium Cobalt	0.1"	14	Yes
В	0.25"D, 0.25"L Samarium Cobalt	0.1"	9.85	No
С	0.25"D, 0.125"L Samarium Cobalt	0.1"	9.0	Yes
D	D 0.25"D, 0.125"L Samarium Cobalt E 0.25"D, 0.125"L Samarium Cobalt		8.7	Yes
E			7.8	No
F	0.25"D, 0.125"L Samarium Cobalt	0.125"	6.3	No
G	G 0.25"D, 0.125"L Samarium Cobalt		5.6	Yes
Н	0.25"D, 0.125"L Samarium Cobalt	0.125"	4.5	No

NOTE: The "U" package is used for all measurements.\*



### STEEP MAGNETIC SLOPES FOR CONSISTENT SWITCHING

The flux density vane travel graph for most common vane configurations (Figure 35), is very nearly linear in the transition regions. The Hall switch operate and release points fall in these linear transition regions, and it is easily seen that if these values change, the position of the vane which causes the switching must change also. Figure 37 shows the flux density as a function of vane position for two different magnetic circuits. In one case, the magnetic slope is 2.5 G/mil. In the second case, it is 5.0 G/mil.

If the 2.5 G/mil system is used with a Hall switch known to have an operate point flux density of 300 G at  $+25^{\circ}\mathrm{C}$ , the device would switch ON when the vane is 85 mils past the center of the window at this temperature. If the Hall switch operate point went up to 400 G at a temperature of  $+125^{\circ}\mathrm{C}$  (this represents Hall switch temperature coefficient of 1 G/°C), the vane must move to 120 mils past center, a change in switching position of 45 mils. If the same Hall switch is used in the second system having the 5 mil/G slope, the operate point would shift only 20 mils, or half as much, since the slope is twice as steep.

Slopes in typical vane systems range from 1 G/mil to 15 G/mil, and are affected by magnet type and size, the magnetic circuit, and the total effective air gap. It is interesting to note that, although slide-by operation can give very steep slopes, the transition point is much affected by lateral motion (change in air gap); therefore, vanes are often preferred for applications involving play or bearing wear.

### **SMALL AIR GAPS FOR STEEP SLOPES**


The air gap should be as small as the mechanical system allows. Factors to be considered are:

Vane material thickness and vane radius.

Maximum eccentricity for cup vanes.

Bearing tolerance and wear.

Change in air gap with temperature due to mounting considerations.

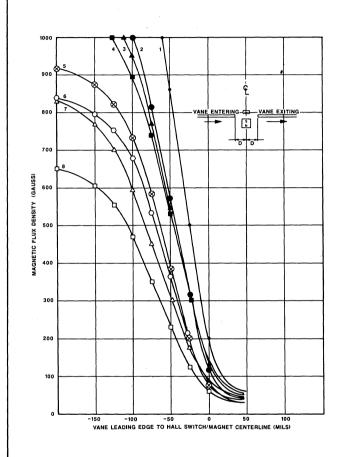

SYMBOL	MAGNET	AIR GAP	SLOPE(G/MIL)	*CONC.	
1 •	0.25'D,0.25'L SAM.CO.	0.1	14	YES	
2 •	0.25 D,0.25 L SAM.CO.	0.1	9.85	NO	
3 🛦	0.25 D,0.125 L SAM.CO.	0.1	9.0	YES	
4	0.25 D,0.25 L SAM.CO.	0.125	8.7	YES	
5 ⊗	0.25 D, 0.125 L SAM.CO.	0.1	7.8	NO	
6 ()	0.25'D,0.25'L SAM.CO	0.125	6.3	NO	
7 A	0.25°D,0.125°L SAM.CO.	0.125	5.6	YES	
8 🖸	0.25°D,0.125°L SAM.CO.	0.125	4.5	NO	

NOTE - THE 'U' PACKAGE IS USED FOR ALL MEASUREMENTS

N S MILD STEEL

Dwg. No. 13,140

FIGURE 38

In Figure 38, two different samarium cobalt magnets are used in a vane system to illustrate the effects of changes in air gap and magnet size. Note that only the falling transition region is shown (transition regions are symmetrical). The distances on the horizontal axis have been measured from the leading edge of the vane.

The term "air gap" as used in Figure 38 is not the total effective air gap; but is simply the distance from the face of the magnet to the surface of the Hall switch. It does not include the package contribution. The "U" package is often used in ferrous vane applications because it has a shallow active area depth.

#### FLUX CONCENTRATORS PAY DIVIDENDS

What if economic or size considerations dictated the smaller magnet used in Figure 38, and mechanical considerations dictated the larger (0.125") air gap, but the resulting flux density and slope (Curve 8) were not good enough? Curve 7 in Figure 38 shows the very substantial improvement that can be achieved by adding simple flux concentrators. Those used in the example were 0.125" in diameter by 0.250" long, and were fastened behind the Hall switch.

#### **DESIGN EXAMPLE**

The magnet/concentrator configuration we just considered (Curve 7, Figure 38) seems to offer a high performance/cost ratio. Following is an evaluation of its use in an automotive ignition system using a 2.5" diameter cup rotor.

The initial timing and wide operating temperature range requirements for this application have generally led designers to specify custom Hall switches in terms of the minimum and maximum operate or release

point at +25°C, plus a maximum temperature coefficient on these parameters over the operating temperature range. Representative specifications might be:

+25°C Operate Point, Minimum	300 G
+25°C Operate Point, Maximum4	↓50 G
+25°C Release Point, Minimum2	200 G


### Temperature Coefficients:

 $\Delta$  O.P./ $\Delta$  T, maximum = +0.7 G/°C

 $\Delta$  R.P./ $\Delta$  T, maximum = +1.0 G/°C

Solid-state Hall effect ignition systems can be designed to fire either on operate or release of the Hall switch. We have arbitrarily chosen to have the system in this example fire when the switch operates and, thus, the operate point specifications of the Hall switch (between 300 and 450 G at  $+125^{\circ}\mathrm{C}$ ) will determine the amount of uncertainty in the initial timing of the spark. It is possible that the mechanical system would also make a contribution, but that is not considered here.

Figure 39 shows the measured flux density at the position of the sensor as a function of the vane travel. The shape of the curve requires explanation: Because the flat minimum and maximum flux regions are irrelevant, it is convenient to measure from the vane's leading edge to

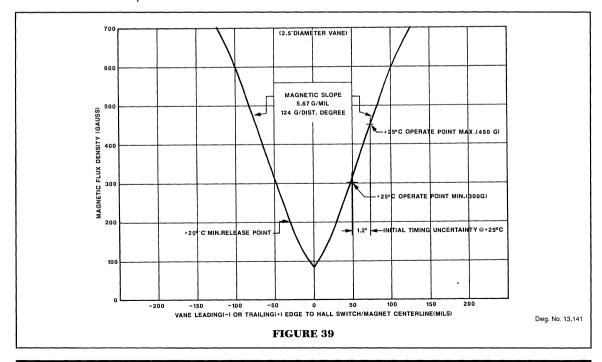

edge of the vane to the magnet centerline while plotting data for the rising transition. (The same presentation would result if all data were plotted while a vane passed the magnet, the center low flux areas were snipped out, and the ends containing the linear transitions were pulled together.) From this graph, we can identify the magnetic slope of the transition regions for our system—approximately 5.67 G per 0.001" of vane travel.

Calculations based on the rotor diameter (2.5") show we have 22 mils of vane travel per distributor degree. The 5.67 G/mil slope obtained from Figure 39 is equivalent to 125 G per distributor degree. From the specifications, it is known that the Hall switch will operate when flux is between 300 and 450 G, leaving a 150 G window of uncertainty. At +25°C, this will be:

1.2 Distributor Degrees

Additional contributions to the initial timing uncertainty will result if the total effective air gap is changed, as that would affect the shape or slopes of the magnetic flux density/vane travel curve of Figure 39. Factors to be considered are the magnet peak energy product tolerances, as well as manufacturing tolerances in the final Hall switch/magnet assembly.

#### TEMPERATURE STABILITY OF OPERATE POINT

The Hall switch operate point temperature coefficient is approximately 0.2 G/°C for a UGN/UGS3130. To translate this into distributor degrees per degree Celsius, we take:


$$\frac{0.2 \text{ G}}{1^{\circ}\text{C}} \times \frac{\text{Distributor Degrees}}{125 \text{ G}} =$$

0.0016 Distributor Degrees/°C

The distributor timing would, therefore, change 0.16 degrees for a temperature change of 100°C.

A typical samarium cobalt magnet temperature coefficient is -0.04%/°C. A magnetic field of 375 G at +25°C would decrease to 360 G at +125°C. For Figure 40, our system has a magnetic slope of 5.67 G/mil, giving an additional vane travel requirement at +125°C of:

$$(375 \text{ G}-360 \text{ G}) \times \frac{1 \text{ mil}}{5.67 \text{ G}} = 2.7 \text{ mils}$$

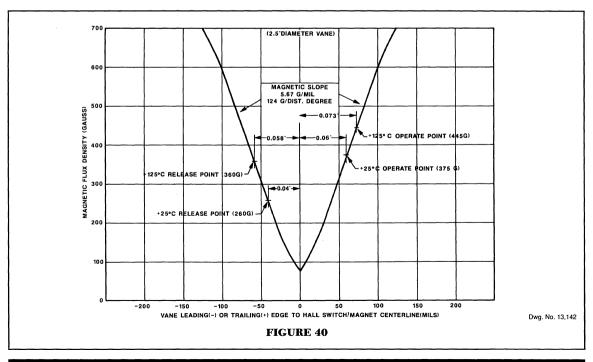

This translates to timing change of:

0.12 Distributor Degrees

for a temperature change of 100°C.

## CALCULATING DWELL ANGLE AND DUTY CYCLE VARIATIONS

The dwell angle in a conventional system is the number of distributor degrees during which the points are closed, which corresponds to the amount of time current can flow in the coil's primary winding. In our example, current flows in the coil primary from the time the Hall switch releases until it operates, which is called the effective vane width. For nostalgic reasons we will assume an eightcylinder engine, which requires a distributor rotor with eight windows and eight vanes of equal size. One window-vane segment thus occupies 45 distributor degrees and will fire one cylinder. Let us further assume a typical Hall switch operate point of 375 G at +25°C (A), and a +25°C release point of 260 G (B). From Figure 40 we find that the points will close 40 mils before the vane's leading edge passes the magnet centerline; they open 60 mils after the vane's trailing edge passes the magnet centerline. The effective vane width is greater than the mechanical vane width by an amount:

4.54 Distributor Degrees

This gives a dwell angle of  $(45^{\circ} + 4.54^{\circ}) = 49.54$  distributor degrees at  $+25^{\circ}$ C. The duty cycle is:

$$\frac{49.54^{\circ}}{90^{\circ}}$$
 = 55.0% at +25°C.

Using the specified worst-case temperature coefficients, we calculate the new operate and release points at +125°C to be 445 G (C) and 360 G (D), also shown in Figure 40. The dwell angle at +125°C would

then be: 
$$45^{\circ} + \left[ (73 \text{ mils} + 58 \text{ mils}) \times \frac{\text{Distributor Degree}}{22 \text{ mils}} \right] =$$

50.9 Distribution Degrees

The duty cycle is then:

$$\frac{50.9^{\circ}}{90^{\circ}} = 56.6\%$$

### EFFECTS OF BEARING WEAR

A  $\pm$ 10 mil radial movement of the vane, with its position adjusted to the approximate operate point of the Hall switch, gave a measured change of  $\pm$ 6 G. This translates into a change of:

$$6 G \times \frac{Distributor Degrees}{125 G} =$$

0.048 Distributor Degrees,

which is equivalent to 0.097 crankshaft degrees.


### MOUNTING ALSO AFFECTS STABILITY

In the example above, it was assumed that the physical relationship between the Hall switch and the magnet was absolutely stable. In practice, it is necessary to design the mountings with some care if this is to be true. It has been found that supporting the magnet or Hall switch with formed brackets of aluminum or brass will often contribute a significant temperature-related error to the system. Use of molded plastic housings has proven to be one of the better mounting techniques.

### INDIVIDUAL CALIBRATION TECHNIQUES

In some applications, it may be desirable to have the vane switch assemblies operate within a narrower range of vane edge positions than is possible with a practical operate point specification for the Hall switch; for example, if it were necessary to reduce the initial timing window in the previous case. One solution would be individual calibration. Possible techniques include:

- Adjusting the air gap by changing the magnet position.
- Adjusting the position of a flux concentrator behind the Hall switch.
- Adjusting the position of a small bias magnet mounted behind the Hall switch.
- 4) Demagnetizing the magnet in small increments that would decrease the magnetic slope and, thus, increase the temperature effects.
- 5) Adjusting the position of the Hall switch-magnet assembly relative to the rotor in a manner similar to rotating an automotive distributor to change the timing.

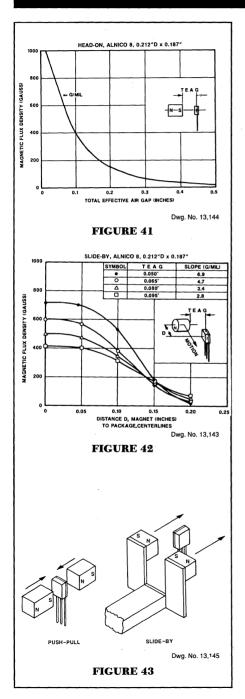

### **OPERATING MODES**

#### HEAD-ON AND SLIDE-BY MODES

The most common operating modes are head-on and slide-by. The head-on mode is simple and relatively insensitive to lateral motion, but cannot be used where overextension of the mechanism might damage the Hall switch. The flux density plot for a typical head-on operation (Figure 41) shows that the magnetic slope is quite shallow for low values of flux density, a disadvantage that generally requires extreme mechanism travel and extreme sensitivity to flux changes in operate and release points of the Hall switch. This problem can be overcome by selecting Hall switches with higher operate and release properties.

The slide-by mode is also simple, can have reasonably steep slopes (to about 10 G/mil) and has no problem with mechanism overtravel. It is, however, very sensitive to lateral play, as the flux density varies dramatically with changes in the air gap. This can be seen clearly in the curves of Figure 42, in which the flux density curves are plotted for actual slide-by operation with various air gaps. It is apparent that the operating mechanism can have little side play if precise switching is required.

## OPERATING MODE ENHANCEMENTS —COMPOUND MAGNETS

### **PUSH-PULL**

Because the active area of a Hall switch is close to the branded face of the package, it is usually operated by approaching this face with a magnetic south pole. It is also possible to operate a Hall switch by applying a magnetic north pole to the back side of the package. While a north pole alone is seldom used, the push-pull configuration (simultaneous application of a south pole to the branded side and a north pole to the back side) can give much greater field strengths than are possible with any single magnet (Figure 43). Perhaps more important, push-pull arrangements are quite insensitive to lateral motion and are worth considering if a loosely fitting mechanism is involved.

Figure 44 shows the flux density curve for an actual push-pull slideby configuration that achieves a magnetic slope of about 8 G/mil.

### **PUSH-PUSH**


Another possibility, a bipolar field with a fairly steep slope (which is also linear), can be created by using a push-push configuration in the head-on mode. (Figure 45)


In the push-push mode, head-on configuration as shown in Figure 45, the magnetic fields cancel each other when the mechanism is centered, giving zero flux density at that position. Figure 46 shows the flux density plot of such a configuration. The curve is linear and moderately steep at better than 8 G/mil. The mechanism is fairly insensitive to lateral motion.


### BIASED OPERATION

It is also possible to bias the Hall switch by placing a stationary north or south pole behind it to alter the operate and release points. For example, a north pole attached to the reverse face would turn the device normally ON until a north pole providing a stronger field in the opposite direction approached the opposite face. (Figure 47)

Figures 48-51 demonstrate four additional slide-by techniques. Compound magnets are used in push-pull, slide-by, edgewise configurations to achieve a magnetic slope of 17.4 G/mil. Rare earth magnets may be used to obtain substantially steeper slopes. A flux density curve of up to 100 G/mil is obtainable.

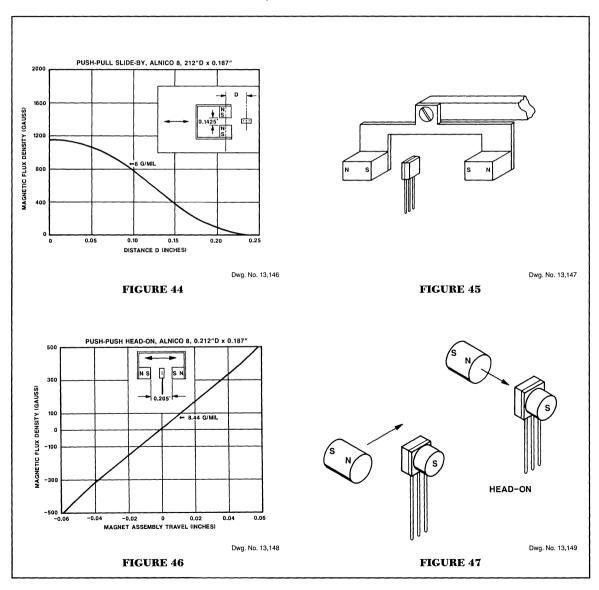







Dwg. No. 13,150

FIGURE 48

FIGURE 49





Dwg. No. 13,152

FIGURE 50


Dwg. No. 13,153

Dwg. No. 13,151

FIGURE 51

# INCREASING FLUX DENSITY BY IMPROVING THE MAGNETIC CIRCUIT

Magnetic flux can travel through air, plastic, and most other materials only with great difficulty. Since there is no incentive for flux from the activating magnet to flow through the (plastic and silicon) Hall device, only a portion of it actually does. The balance flows around the device and back to the other pole by whatever path offers the least resistance. (Figure 52)

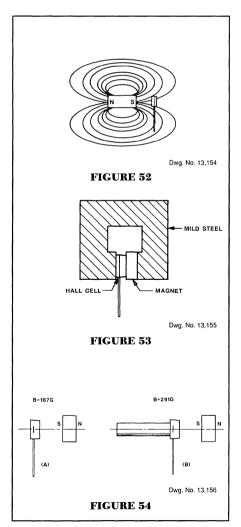

However, magnetic flux easily flows through a ferromagnetic material such as mild steel. The reluctance of air is greater by a factor of several thousand than that of mild steel.

In a Hall device application, the goal is to minimize the reluctance of the flux path from the magnetic south pole, through the Hall device, and back to the north pole. The best possible magnetic circuit for a Hall device would provide a ferrous path for the flux, as shown in Figure 53, with the only "air gap" being the Hall device itself.

While a complete ferrous flux path is usually impractical, unnecessary, and even impossible in applications requiring an undistorted or undisturbed flux field, it is a useful concept that points the way to a number of very practical compromises for improving flux density.

### FLUX CONCENTRATORS

Flux concentrators are low carbon (cold-rolled) steel magnetic conductors. They are used to provide a low reluctance path from a magnet's south pole, through the Hall sensor, and back to the north pole. Flux concentrators can take many forms and will often allow use of smaller or less expensive magnets (or less expensive, less sensitive Hall devices) in applications where small size or economy are important. They are of value whenever it is necessary or desirable to increase flux density at the Hall device. Increases of up to 100% are possible.

An example of the effectiveness of a concentrator is illustrated in Figures 54(A) and 54(B).

- (A) The south pole of a samarium cobalt magnet 0.25" square and 0.125" long, is spaced 0.25" from the Hall switch. There is a flux density of 187 G at the active area.
- (B) With a concentrator 0.125" in diameter and 0.5" long, the flux density increases to 291 G.

### SIZE OF THE CONCENTRATOR

The active area of the Hall device is typically 0.01" square. Best results are obtained by tapering the end of the concentrator to approximately the same dimensions. With the "U" package, however, there is 0.044" from the active area to the rear surface of the package. Due to this 0.044" distance, a slightly larger end to the concentrator results in higher values of flux density at the active area. If the end is too large, the flux is insufficiently concentrated. Figure 55(A), (B), and (C) illustrates these effects using cylindrical flux concentrators and a 0.25" gap.

The length of the concentrator also has an effect on the flux density. This is illustrated in Figure 56.

Cylindrical concentrators were used here for convenience, but the body of the concentrator has little effect. The important factors are the shape, position, and surface area of the magnet end nearest the Hall sensor.

The effectiveness of other concentrator configurations can be measured easily by using a calibrated linear Hall device, such as the UGN3503U, or a commercial gaussmeter.

#### MOUNTING THE MAGNET TO A FERROUS PLATE

Mounting the magnet to a ferrous plate will give an additional increase in flux density at the Hall element. Using the same configuration as in Figure 55(C), which produced 291 G, note the available flux attained in Figure 57(A) and (B) with the addition of the ferrous plate.

Figure 58 shows a possible concentrator for a ring magnet application. Using a flux concentrator that extends to both of the


adjacent north poles, flux density increases from 265 G to 400 G (0.015" air gap). Note that the concentrator has a dimple, or mesa, centered on the Hall device. In most applications, the mesa will give a significant increase in flux density over a flat mounting surface.

#### ATTRACTIVE FORCE AND DISTORTED FLUX FIELD

Whenever a flux concentrator is used, an attractive force exists between magnet and concentrator. That may be undesirable.

### **FEED-THROUGHS**

An example of the use of a magnetic conductor to feed flux through a nonferrous housing is shown in Figure 59. A small electric motor has a 0.125" cube samarium cobalt magnet mounted in the end of its rotor, as shown. A 0.125" cube ferrous conductor extends through the alloy case with a 0.031" air gap between it and the magnet's south pole. The Hall switch is mounted at the other end with a flux concentrator behind it.

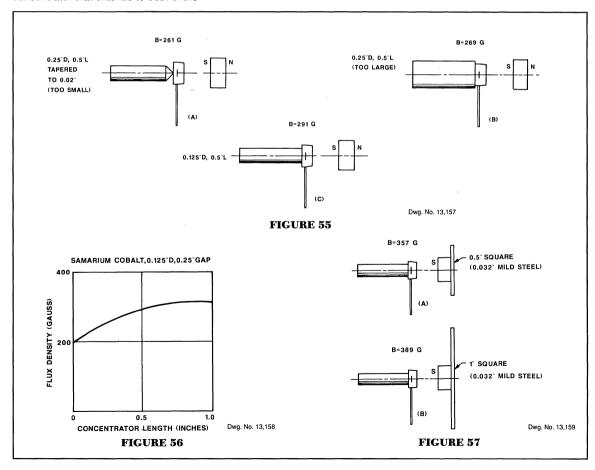

In general, the feed-through should be of approximately the same cross-sectional area and shape as is the magnet pole.

This concept can be used to feed flux through any non-ferrous material, such as a pump case, pipe, or panel.

The two curves of Figure 60 illustrate the effects on flux density of increasing the length of the feed-through, as well as the contribution by the flux concentrator behind the Hall switch. Values for curve A were obtained with the flux concentrator in place, those for curve B without it. In both cases, the highest flux densities were achieved with the shortest feed-through dimension L, which was 0.125". Peak flux density was 350 G with flux concentrator in place, 240 G without it.

### MAGNET SELECTION

A magnet must operate reliably with the total effective air gap in the working environment. It must fit the available space. It must be mountable, affordable, and available.


### FIGURES OF MERIT

The figures of merit commonly applied to magnetic materials are:

Residual Induction (B<sub>r</sub>) in gauss: How strong is the magnetic field?

Coercive Force ( $H_{\circ}$ ) in oersteds: How well will the magnet resist external demagnetizing forces?

Maximum Energy Product (BH<sub>max</sub>) in gauss-oersteds times 10<sup>6</sup>. A strong magnet that is also very resistant to demagnetizing forces has a high maximum energy product. Generally, the larger the energy product, the better, stronger, and more expensive the magnet.

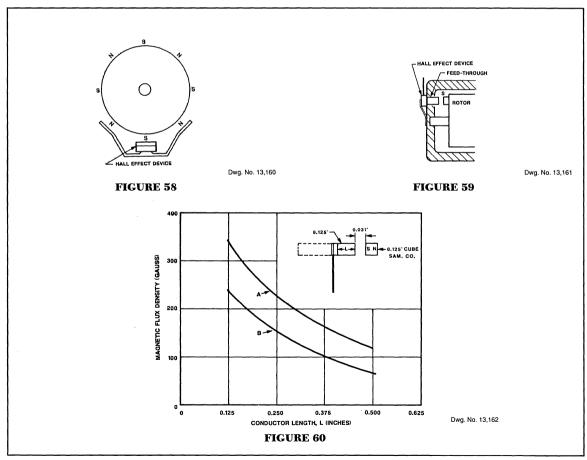

Temperature Coefficient: The rate of change of the operate or release point over temperature, measured in gauss per degree Celsius. How much will the strength of the magnet change as temperature changes?

### **MAGNETIC MATERIALS**

Neodymium (Ne-Fe B)—The new neodymium-iron-boron alloys fill the need for a high maximum-energy product, moderately priced magnet material. The magnets are produced by either a powdered-metal technique called orient-press-sinter or a new process incorporating jet casting and conventional forming techniques. Current work is being directed toward reducing production costs, increasing operating temperature ranges and decreasing temperature coefficients. Problems relating to oxidation of the material can be overcome through the use of modern coatings technology. Maximum energy products range from 7.0 to 15.0 MGOe depending on the process used to produce the material.


Rare Earth—Cobalt is an alloy of a rare earth metal, such as samarium, with cobalt (abbreviated RE cobalt). These magnets are the best in all categories, but are also the most expensive by about the same margins. Too hard for machining, they must be ground if shaping is necessary. Maximum energy product, perhaps the best single measure of magnet quality, is approximately 16 x 10°.

Alnico is a class of alloys containing aluminum, nickel, cobalt, iron, and additives that can be varied to give a wide range of properties. These magnets are strong and fairly expensive, but less so than RE cobalt. Alnico magnets can be cast, or sintered by pressing metal powders in a die and heating them. Sintered Alnico is well suited to mass production of small, intricately shaped magnets. It has more uniform flux density, and is mechanically superior. Cast Alnico magnets are generally somewhat stronger. The non-oriented or isotropic Alnico alloys (1, 2, 3, 4) are less expensive and magnetically weaker than the oriented alloys (5, 6, 5-7, 8, 9). Alnico is too hard and brittle to be shaped except by grinding. Maximum energy product ranges from  $1.3 \times 10^6$  to  $10 \times 10^6$ .

Ceramic magnets contain barium or strontium ferrite (or another element from that group) in a matrix of ceramic material that is compacted and sintered. They are poor conductors of heat and electricity,

TABLE 4
Properties of Magnetic Materials

Material	Maximum Energy Product (Gauss-Oersted)	Residual Induction (Gauss)	Coercive Force (Oersteds)	Temperature Coefficient	Cost	Comments
R.E. Cobalt	16 x 10 <sup>6</sup>	8.1 x 10 <sup>3</sup>	7.9 x 10 <sup>3</sup>	-0.05%/°C	Highest	Strongest, smallest, resists demagnetizing best
Alnico 1, 2, 3, 4	1.3 - 1.7 x 10 <sup>6</sup>	5.5 - 7.5 x 10 <sup>3</sup>	0.42 - 0.72 x 10 <sup>3</sup>	-0.02%/°C to -0.03%/°C	Medium	Non-oriented
Alnico 5, 6, 5-7	4.0 - 7.5 x 10 <sup>6</sup>	10.5 - 13.5 x 10 <sup>3</sup>	0.64 - 0.78 x 10 <sup>3</sup>	-0.02%/°C to -0.03%/°C	Medium- High	Oriented
Alnico 8	5.0 - 6.0 x 10 <sup>6</sup>	7 - 9.2 x 10 <sup>3</sup>	1.5 - 1.9 x 10 <sup>3</sup>	-0.01%/°C to +0.01%/°C	Medium- High	Oriented, high coercive force, best temperature coefficient
Alnico 9	10 x 10⁵	10.5 x 10 <sup>3</sup>	1.6 x 10 <sup>3</sup>	-0.02%/°C	High	Oriented, highest energy product
Ceramic 1	1.0 x 10 <sup>6</sup>	2.2 x 10 <sup>3</sup>	1.8 x 10 <sup>3</sup>	-0.2%/°C	Low	Non-oriented, high coercive force, hard, brittle, non-conductor
Ceramic 2, 3, 4, 6	1.8 - 2.6 x 10 <sup>6</sup>	2.9 - 3.3 x 10 <sup>3</sup>	2.3 - 2.8 x 10 <sup>3</sup>	-0.2%/°C	Low- Medium	Partially oriented, very high coercive force, hard, brittle, non-conductor
Ceramic 5, 7, 8	2.8 - 3.5 x 10 <sup>6</sup>	3.5 - 3.8 x 10 <sup>3</sup>	2.5 - 3.3 x 10 <sup>3</sup>	-0.2%/°C	Medium	Fully oriented, very high coercive force, hard, brittle, non-conductor
Cunife	1.4 x 10 <sup>6</sup>	5.5 x 10 <sup>3</sup>	0.53 x 10 <sup>3</sup>	_	Medium	Ductile, can cold form and machine
Fe-Cr	5.25 x 10 <sup>6</sup>	13.5 x 10 <sup>3</sup>	0.60 x 10 <sup>3</sup>	_	Medium- High	Can machine prior to final aging treatment
Plastic	0.2 - 1.2 x 10 <sup>3</sup>	1.4 - 3 x 10 <sup>3</sup>	0.45 - 1.4 x 10 <sup>3</sup>	-02%/°C	Lowest	Can be molded, stamped, machined
Rubber	0.35 - 1.1 x 10 <sup>6</sup>	1.3 - 2.3 x 10 <sup>3</sup>	1 - 1.8 x 10 <sup>3</sup>	-0.2%/°C	Lowest	Flexible
Neodymium	7 - 15 x 10 <sup>6</sup>	6.4 11.75 x 10 <sup>3</sup>	5.3 - 6.5 x 10 <sup>3</sup>	157%/°C to 192%/°C	Medium- High	Non-oriented

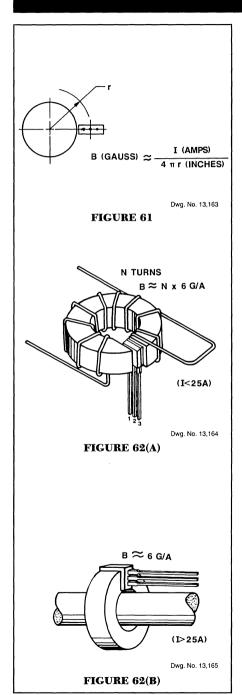

are chemically inert, and have-high values of coercive force. As with Alnico, ceramic magnets can be fabricated with partial or complete orientation for additional magnetic strength. Less expensive than Alnico, they also are too hard and brittle to shape except by grinding. Maximum-energy product ranges from 1 x 10° to 3.5 x 10°.

Cunife is a ductile copper base alloy with nickel and iron. It can be stamped, swaged, drawn, or rolled into final shape. Maximum energy product is approximately  $1.4\times10^6$ .

*Iron-Chromium* magnets have magnetic properties similar to Alnico 5, but are soft enough to undergo machining operations before the final aging treatment hardens them. Maximum energy product is approximately 5.25 x 10<sup>6</sup>.

Plastic and rubber magnets consist of barium or strontium ferrite in a plastic matrix material. They are very inexpensive and can be formed in numerous ways including stamping, molding, and machining, depending upon the particular matrix material. Since the rubber used is synthetic, and synthetic rubber is also plastic, the distinction between the two materials is imprecise. In common practice, if a plastic magnet is flexible, it is called a rubber magnet. Maximum energy product ranges from  $0.2 \times 10^6$  to  $1.2 \times 10^6$ .

#### CHOOSING MAGNET STRENGTH

A magnet must have sufficient flux density to reach the Hall switch maximum operate point specification at the required air gap. Good design practice suggests the addition of another 50 G to 100 G for insurance and a check for sufficient flux at the expected temperature extremes.


The data sheet on the UGN3120U Hall switch specifies a 350 G maximum operate point at +25°C. After adding a pad of 100 G, we have 450 G at +25°C. If operation to +70°C is needed, the requirement is 450 G + 45 G = 495 G. (For calculations, we use 0.7 G/°C operate point coefficient and 1 G/°C release point coefficient.) Since the temperature coefficient of most magnets is negative, this factor would also require some extra flux at room temperature to guarantee high-temperature operation.

#### **COERCIVE FORCE**

Coercive force becomes important if the operating environment will subject the magnet to a strong demagnetizing field, such as that encountered near the rotor of an ac motor. For such applications, a permanent magnet with high coercive force (ceramic, Alnico 8, or, best of all, RE cobalt) is clearly indicated.

### PRICE AND PEAK ENERGY PRODUCT

The common permanent magnet materials and their magnetic properties are summarized in Table 4. The cost column shows the relationship between the price paid for a magnet and its peak energy product.

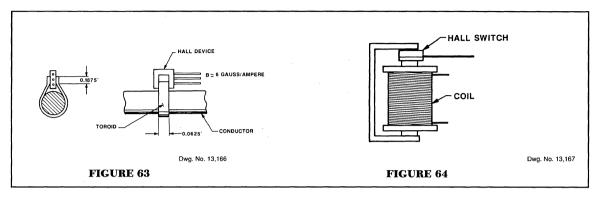

### **CURRENT LIMITING AND MEASURING**

### **CURRENT SENSORS**

Hall effect devices are excellent currentlimiting or measuring sensors. Their response ranges from dc to the kHz region. The conductor need not be interrupted in high-current applications.

The magnetic field about a conductor is normally not intense enough to operate a Hall effect device (Figure 61).

The radius, r, is measured from the center of the conductor to the active area of the Hall device. With a radius of 0.5" and a current of 1,000 A, there would be a magnetic flux density of 159 G at the Hall device. At lower current, use a toroid or closed magnetic circuit to increase the flux density, as illustrated in Figure 62(A) and (B).

With a 0.06" air gap for the "U" package, there would be 6 G/A per turn for Figure 62(A), and 6 G/A for Figure 62(B).

The core material can be of either ferrite or mild steel (C-1010) for low-frequency applications, and ferrite for high-frequency measurements.

The main concerns are:

That the core retains minimal field when the current is reduced to zero.

That the flux density in the air gap is a linear function of the current.

And that the air gap is stable over the operating temperature range.

The cross-sectional dimensions of the

core are at least twice the air gap dimension to ensure a reasonably homogeneous field in the gap. For example, a toroid with a 0.06" gap would have at least a 0.12" x 0.12" cross-section.

Another simple and inexpensive application is illustrated in Figure 63. A toroid of the appropriate diameter is formed from mild steel stock, 0.0625" thick and 0.1875" wide. The ends are formed to fit on each side of the central portion of the Hall device. One advantage of this technique is that the toroid can be placed around a conductor without disconnecting the conductor.

#### **MULTI-TURN APPLICATIONS**

There are several considerations in selecting the number of turns for a toroid such as the one in Figure 62(A):

### **Hall Switches**

Keep the flux density in the 200 G to 300 G range for a trip point. Devices can be supplied with a narrow distribution of magnetic parameters within this range. If, for example, you want the Hall switch to turn ON at 10 A:

$$N = \frac{300 \text{ G}}{6 \text{ G/A} \times 10 \text{ A}} = 5 \text{ turns}$$


It is possible to supply parts having a  $\pm 20\%$  operating point window in this range.

### **Hall Linears**

It is desirable to have flux density in the 200 G to 300 G range to maximize the output signal/zero drift ratio. In using the UGN3501, for example, the zero drift is typically 0.15 mV/°C, so from 0°C to +70°C there would be typically a  $\pm 7$  mV zero drift. A sensitivity of 1.4 mV/G and a 300 G field would give a 420 mV output signal.

The UGN3501 also has a -0.3%/°C sensitivity coefficient. For example, a 420 mV output signal at 0°C would drop to 330 mV at +70°C.

For low-current applications in which many turns are required, one can wind a bobbin, slip it over a core, and complete the magnetic circuit through the Hall device with a bracket-shaped pole piece, as shown in Figure 64.

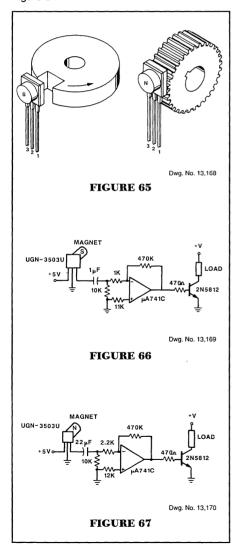

With this bobbin-bracket configuration, it is possible to measure currents in the low milliampere range or to replace a relay using a Hall switch. To activate a Hall switch at 10 mA ( $\pm 20\%$ ), using a device with a 200 G ( $\pm 40$  G) operate point, bobbin windings require:

$$N = \frac{200 \text{ G}}{6 \text{ G/A} \times 0.01 \text{ A}} = 3333 \text{ turns}$$

It would be practical to tweak the air gap for final, more precise calibration. In all cases, be careful not to stress the package.

#### OTHER APPLICATIONS FOR LINEAR SENSORS

Type UGN3503U and UGS3503U Hall Effect linear sensors are used primarily to sense relatively small changes in magnetic field—changes too small to operate a Hall Effect switching device. They are customarily capacitively coupled to an amplifier, which boosts the output to a higher level.

As motion detectors, gear tooth sensors, and proximity detectors (Figure 65), they are magnetically driven mirrors of mechanical events. As sensitive monitors of electromagnets, they can effectively measure a system's performance with negligible system loading while providing isolation from contaminated and electrically noisy environments.

Each Hall effect integrated circuit includes a Hall sensing element, linear amplifier, and emitter-follower output stage. Problems associated with handling tiny analog signals are minimized by having the Hall cell and amplifier on a single chip.

The output null voltage of Type 3503 is nominally one-half the supply voltage. A south magnetic pole presented to the branded face of the Hall effect sensor will drive the output higher than the null voltage level. A north magnetic pole will drive the output below the null level.

In operation, instantaneous and proportional output-voltage levels are dependent on magnetic flux density at the most sensitive area of the device. Greatest sensitivity is obtained with a supply voltage of 6 V, but at the cost of increased supply current and a slight loss of output symmetry. The sensor's output is usually capacitively coupled to an amplifier that boosts the output above the millivolt level.

In the two applications shown in Figures 66 and 67, permanent bias magnets are attached with epoxy glue to the back of the epoxy packages. The presence of ferrous material at the face of the package then acts as a flux concentrator.

The south pole of a magnet is attached to the back of the package if the Hall effect IC is to sense the presence of ferrous material. The north pole of a magnet is attached to the back surface if the integrated circuit is to sense the absence of ferrous material.

Calibrated linear Hall devices, which can be used to determine the actual flux density presented to the Type 3503 sensor in a particular application, are available.

#### FERROUS METAL DETECTORS

Two similar detector designs are illustrated in Figures 68 and 69. The first senses the presence of a ferrous metal; the other senses an absence of the metal. The two sensing modes are accomplished simply by reversing the magnet poles relative to the UGN3501. The pole of the magnet is affixed to the unbranded side of the UGN3501 in both cases

Frequency response characteristics of this circuit are easily controlled by changing the value of the input decoupling capacitor for the low-frequency break-point. If high-frequency attenuation is desired, a capacitor can be used to shunt the feedback resistor.


#### METAL SENSOR


The north pole of the magnet is affixed to the back side of a UGN3501. The sensor is in contact with the bottom of a 0.09375" epoxy board. A 20 mV output change (decrease) is produced as a 1" steel ball rolls over the sensor. This signal is amplified and inverted by the  $\mu\text{A}$  741C operational amplifier and drives the 2N8512 ON.

#### **NOTCH SENSOR**

The south pole of the magnet is fixed to the backside of a UGN3501. The sensor is 0.03125" from the edge of a steel rotor. A 0.0625" wide by 0.125' deep slot in the rotor edge passing the sensor causes a 10 mV peak output change (decrease). This signal is amplified and inverted by the  $\mu\text{A}$  741C op amp and drives the 2N5812 ON.

Note that, in both examples, the branded side of the UGN3501 faces the material (or lack of material) to be sensed. In both cases, the presence (or absence) of the ferrous metal changes the flux density at the Hall Effect sensor so as to produce a negative going output pulse. The pulse is inverted by the amplifier to drive the transistor ON.

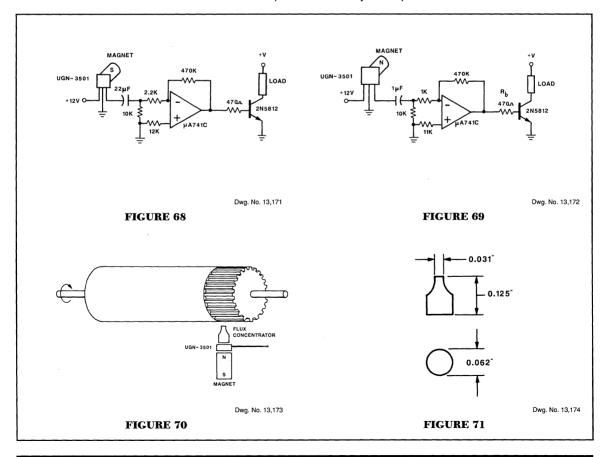



#### PRINTER APPLICATION

The device in Figure 70 senses lobes on a character drum. Lobes are spaces 0.1875" apart around the circumference, are 0.25" long and rise 10 to 15 mils from the surface of the drum.

A UGN3501 Hall effect linear IC sensor is used with an Indiana General Magnet Products Company SR8522 magnet. The north pole is affixed to the reverse side of the package. A flux concentrator is affixed to the branded face. Though it does not provide a flux return path, a concentrator will focus the magnetic field through the switch.

The concentrator blade, shown in Figure 71, is aligned with the drum lobe at an air gap distance of 0.01". The output change is 10 mV peak, amplified as shown to develop a +3 V output from the operational amplifier, driving the transistor ON, as illustrated in Figure 72.

Sensitivity is so great in this configuration that the UGN3501 output signal's baseline quite closely tracks eccentricities in the drum. This affects lobe resolution, but lobe position can still be measured.

#### USING CALIBRATED DEVICES

#### **UGN3503U**

The calibrated Type 3503 is an accurate, easy-to-use tool for measuring magnetic flux densities. Each device is individually calibrated and furnished with a calibration curve and sensitivity coefficient. Although calibration is performed in a south and north 500 G field, the UGN3503 is useful for measuring fields in both polarities to 1000 G.

A closely regulated 5 V ( $\pm 10$  mV) power supply is necessary to preserve accuracy in calibrated UGN3503 flux measurements. An ambient temperature range of 21°C to 25°C must also be maintained.

Connect Pin 1 to voltage  $V_{\rm cc}$ , Pin 2 to ground, and Pin 3 to a high-impedance voltmeter. Before use, the device should be powered-up and allowed to stabilize for one minute.

The calibration curve affords the most convenient method of flux measurement. Subject the device to the field in question. Read the output voltage from the voltmeter and find that value on the chart X axis. Locate the intersection of the output level with the calibration trace and read the corresponding flux density on the chart's Y axis.

The sensitivity coefficient can be used to calculate flux densities somewhat more precisely. First, determine the null output voltage of the device under 0 G or null field condition. Then, read the output of the device under an applied field condition by subjecting it to the flux in question. Magnetic flux density at the device may be calculated by:

 $\begin{array}{lll} & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & &$ 

#### **GLOSSARY**

**Active Area** — The site of the Hall element on the encapsulated IC chip.

**Air Gap** — The distance from the face of the magnetic pole to the face of the sensor.

**Ampere-turn (NI)** — The mks unit of magnetomotive force.

**Ampere-turns/meter (NI/m)** — The mks unit of magnetizing force. One ampere turn per meter equals 79.6 oersteds.

**Bipolar** — A method of operating a Hall sensor using both north and south magnetic poles.

**Coercive Force (H<sub>c</sub>)** — The demagnetizing force that must be applied to reduce the magnetic flux density in a magnetic material to zero. Measured in oersteds.

**Concentrator** — Any ferrous metal used to attract magnetic lines of force.

**Gauss (G)** — The CGS unit of magnetic flux density. Equivalent to one maxwell per square centimeter (Mx/cm²). One gauss equals 10<sup>-4</sup> tesla.

**Gilbert** — The CGS unit of magnetomotive force.

**Head-On** — A method by which the Hall sensor is actuated. The magnetic field is increased and decreased by moving the magnetic pole toward and away from the sensor face.

**Maximum Energy Product (BH\_{max})** — The highest product of B and H from the demagnetization curve of a magnetic material. Given in gauss-oersteds x 10 $^6$  (MGOe).

**Maxwell (Mx)** — The CGS unit of total magnetic flux. One maxwell equals 10<sup>-8</sup> webers.

**Oersteds (Oe)** — The CGS unit of magnetizing force. Equivalent to gilberts per centimeter (Gilberts/cm). One oersted equals 125.7 ampere-turns per meter.

Remanent Induction ( $\mathbf{B}_{d}$ ) — The magnetic induction that remains in a magnetic circuit after removal of an applied magnetomotive force. When there is no air gap in the magnetic circuit, remanent and residual induction are equal. With an air gap, remanence will be less than residual induction. Measured in gauss.

**Residual Induction (B,)** — The flux density remaining in a closed magnetic circuit of magnetic material when the magnetizing force adequate to saturate the material is reduced to zero. Measured in gauss.

**Slide-by** — A method which a Hall sensor is actuated. The magnetic field is increased and decreased as a permanent magnet is moved laterally past the sensor face.

**Tesla (T)** — The mks unit of magnetic flux density. Equivalent to one weber per square meter (Wb/ $m^2$ ). One tesla equals  $10^4$  gauss.

**Toroid** — A doughnut-shaped ring often composed of iron, steel or ferrite.

**Total Effective Air Gap (TEAG)** — The distance from the face of a magnetic pole to the active area of a Hall Effect sensor.

**Unipolar** — A method of operating a Hall sensor using a single magnetic pole, usually the south pole.

Vane — Any ferrous metal used to shunt a magnetic field away from the Hall sensor (at least 1.5 times the width of an associated magnet).

**Window** — An opening in a vane at least 1.5 times the width of an associated magnet.

### SOURCES FOR FERRITE TOROIDS AND MAGNETS

As a convenience, some sources for ferrite toroids and magnets are listed below.

Addresses and telephone numbers are correct to the best of our knowledge at time of printing.

#### TOROID SUPPLIERS

J.W. Miller Co. Division of Bell Industries 19070 Reyes Avenue P.O. Box 5825 Rancho Dominguez, CA 90224

213/537-5200 Fair-Rite Products Corp. P.O. Box J

Wallkill, NY 12589-0288 914/895-2055 Magnetics 900 East Butler Road P.O. Box 391 Butler, PA 16001 412/282-8282

Dexter Magnetic Materials Division 10 Fortune Drive Billerica, MA 01865 508/663-7500 Neosid Inc. 28 Main Street Eatontown, NJ 07724 201/389-4411

Ferrox/Division of Amperex Corp. 5083 Kings Highway Saugerties, NY 12477 914/246-2811

#### MAGNET SUPPLIERS

Arnold Engineering P.O. Box G Marengo, IL 60152 815/568-2000

Bunting Magnetics Company 1165 Howard St. Elk Grove Village, IL 60007

1165 Howard St. Elk Grove Village, IL 60007 312/593-2060

Ceramic Magnetics, Inc. 87 Fairfield Road Fairfield, NJ 07006 201/227-4222

Crucible Magnetics 101 Magnet Dr. Elizabethtown, NJ 42701 502/769-1333

Hitachi Magnetics 7800 Neff Road Edmore, MI 48829 517/427-5151

IG Technolog 405 Elm Street Valparaiso, IN 46383 219/462-3131

Ogallala Electronics P.O. Box 59 Ogallala, NE 69153 308/284-4093

Dexter Magnetic Materials Division 400 Karin Lane Hicksville, NY 11801 516/822-3311

Recoma, Inc. 2 Stewart Place Fairfield, NJ 07006 201/575-6970

#### **Types**

Alnico, Ceramic, Multipole Ring

Multipole Hillig

Alnico, Ceramic, Plastic

Ceramic, Multipole Ring

Alnico, Rare Earth

Alnico, Ceramic, Rare Earth

Alnico, Ceramic, Multipole Ring, Rare Earth

Ceramic, Multipole Ring

Representatives of various manufacturers. Dexter Magnetic also does custom grinding.

Rare Earth

Stackpole Carbon Co.

Magnet Division 700 Elk Ave. Kane, PA 16735 814/837-7000

TDK Corporation of America

Head Office 1600 Feehanville Drive Mount Prospect, IL 60056

312/803-6100 The Electrodyne Company

4188 Taylor Road Batavia, OH 45103 513/732-2822

Xolox Corporation 6932 Gettysburg Pike Ft. Wayne, IN 46804 219/432-0661

3-M Center Industrial Electric Products Div. Building 225-4N St. Paul, MN 55144 Attn: James Fenwick 800/328-1373

3-M Plastiform

Magnaquench Div. of Gen. Motors 6435 S. Scatterfield Rd. Anderson, IN 46011 317/646-2763

Dynacast Co. 921 Albion Ave. Schaumburg, IL 60193 312/351-6100 Ceramic, Flexible Plastic

Rare Earth

Plastic

Plastic, Multipole Ring

Plastic

Neodymium


# APPLICATIONS INFORMATION

### THE HALL-EFFECT SENSOR

<u>-</u> <u>-</u> <u>V</u> <u>X</u> + <u>V</u>


### FIGURE 1

If no magnetic field is present, the voltage measured across the width of the semiconductor material of the Hall-effect sensor is zero.



#### FIGURE 2

The output voltage of a Hall-effect sensor is directly proportional to the magnetic field present at right angles to the direction of current flow through the sensor.



### FIGURE 3

The transfer characteristic graph plots input on the horizontal axis vs output on the vertical axis. With no magnetic field present, the Hall-effect switch is off; as the field increases, the switch will turn on at a predesigned operating point. This particular device exhibits hysteresis of 90 gauss.

The basic Hall sensor is simply a small sheet of semiconductor material. A constant voltage source forces a constant bias current to flow in the semiconductor sheet. The output, a voltage measured across the width of the sheet, reads near zero if a magnetic field is not present (Figure 1).

If the biased Hall sensor is placed in a magnetic field oriented at right angles to the Hall current, the voltage output is in direct proportion to the strength of the magnetic field. This is the Hall effect, discovered by E. H. Hall in 1879 (Figure 2).

The basic Hall sensor is essentially a transducer that will respond with an output voltage if the applied magnetic field changes in any manner. Differences in the response of devices are generally related to tolerances and specifications, such as operate (turn on) and release (turn off) thresholds, as well as temperature range and temperature coefficients of these parameters. Also available are linear output sensors that differ in sensitivity or respond per gauss change.

A Hall sensor is activated by a magnetic field created by either electromagnets or permanent magnets. Magnetic fields have two important characteristics: magnitude and direction (or orientation). In the absence of any magnetic field, the most common Hall-effect digital switches are designed to be off (open circuit at output). They will turn on only if subjected to a magnetic field that has both sufficient strength and the correct polarity.

If the approach of the South pole of a magnet would cause switching action of a digital sensor, the approach of the North pole of a magnet would have no effect. In practice, a close approach by the South pole of a magnet will cause the output transistor to turn on.

The transfer characteristics graph (Figure 3) shows input vs output. The input variable, which is the strength of the activating magnetic field (magnetic flux density, measured in gauss), is plotted along the horizontal axis. The output variable, which is the digital (on, off) output from a Hall switch, is plotted along the vertical axis.

In the absence of any magnetic field (zero gauss), the Hall-effect switch is off and the output voltage equals the power supply (12 V). As the strength of the magnetic field increases, at some point (240 gauss in this case) the output transistor will turn on and the output voltage goes to zero. The output does not change even if the magnetic field's strength continues to increase.

The switch stays on until the magnetic field falls well below the 240 G operating point. This is a circuit design characteristic (hysteresis) that prevents oscillations. Our example uses a 90 gauss hysteresis (240-150), which will turn the device off at 150 gauss.

Reprinted from *Sensors*, March 1986, Copyright © North American Technology, Inc. 174 Concord Street, Peterborough, NH 03458.

### FIGURES OF MERIT COMMONLY APPLIED TO MAGNETIC MATERIALS

- Residual Induction (B<sub>i</sub>) in Gauss. How strong is the magnetic field? A magnet must have sufficient flux density to satisfy the Hall switch maximum operating point specification at the required air gap.
- Coercive Force (H<sub>o</sub>) in Oersteds.
  How well will the magnet resist external demagnetizing forces? This property becomes important if the operating environment will subject the magnet to a strong demagnetizing field, such as might be encountered near the rotor of an A.C. motor. For such applications, a permanent magnet with this coercive force (ceramic, alnico-8, or, best of all, RE cobalt) is clearly indicated.
- Maximum Energy Product [(B<sub>d</sub> x H<sub>d</sub>) Max x 10<sup>6</sup>] in Gauss-Oersteds. A strong magnet that is also very resistant to demagnetizing forces would have a high maximum energy product. Generally, the larger the energy product, the better, stronger, and more expensive the magnet.
- Temperature Coefficient in Percent per Degree Celsius. How much will the strength of the magnet change as the temperature changes?

All switches turn on at or below their maximum operating point flux density, and when the magnetic field is reduced, all devices turn off before the flux density drops below their minimum release point value. Additionally, each device has a minimum amount (typically, 20 gauss) hysteresis to ensure clean switching action. This hysteresis ensures that even if mechanical vibration or electrical noise is present, the switch output is fast, clean, and occurs only once per threshold crossing.

Linear Hall-effect sensors differ from digital Hall-effect sensors with respect to the output response from the sensor. The digital sensor has an off/on or high/low output; the linear sensor has an output proportional to the magnetic field subjected to the "active area." Hall-effect linear sensors are used primarily to sense relatively small changes in magnetic fields, changes too small to operate a Hall-effect digital switch.

The exact magnetic flux density values required to activate Hall sensors differ for several reasons, including design criteria and manufacturing tolerances. Extremes in temperature also affect the response characteristics of the sensors.

For each device type, worst-case magnetic specifications can be set out for the user by a Hall-effect sensor marketing or applications engineer, if it has been determined that a catalogue item will not meet required tolerances.


#### APPLICATIONS


With an understanding of how Hall-effect sensors work, it is possible to build devices around them. The physical aspects of their characteristics form the basis of Hall device applications.

Analysis. The field created by a magnet must be compatible with the characteristics of the Hall-effect device it is expected to operate. Measure the strength of the magnetic field, which is greatest at the magnet's pole face, with a gaussmeter or a calibrated linear Hall sensor. Then plot a graph of field strength (magnetic flux density) vs distance of the magnet from the device along the intended line of travel of the magnet. Then, by using the Hall device specifications sensitivity of mV/gauss for a linear device, or operate and release points in gauss for a digital device) one can find the critical distances for a particular magnet and type of motion. These field strength plots are not linear, and the shape of the plot depends greatly upon magnet shape, magnetic circuit (concentrators), and path traveled.

**Total Effective Air Gap.** Hall-effect switches are offered in many different packages, such as epoxy three-pin SIPs, ceramic substrate mounted chips, ceramic three-pin SIPs, and surface mount packages. The most critical difference between packages is the distance from the face of the package to the surface of the Hall cell: the active area depth, which effectively adds to the total effective air gap.


The total effective air gap (TEAG) is the sum of the active area depth and the distance between the package surface and the magnet's surface. For Hall device applications, the TEAG should be as small as possible, consistent with the limitations of the activating mechanical system. This will ensure that the magnetic flux will always be great





#### FIGURE 4

The ferromagnetic vane moves between the activating magnet and the Hall-effect switch shunting the flux field from the switch. These assemblies can be used for precision switching over large temperature ranges.



#### FIGURE 5

Hall devices must always switch on/off at the same point relative to the magnet. The effect of a change in flux density on switching distance is shown.

enough to switch the device. Remember, magnetic flux decreases very sharply as the total effective air gap increases.

Modes of Operation. There are many ways to operate a Hall sensor. For example, with a simple bar or rod magnet there are two possible paths for the magnet to travel—head-on and slide-by. In the head-on mode, the magnetic pole moves along a perpendicular path straight at the active face of the Hall device. The head-on mode is simple, works well, and is relatively insensitive to lateral motion; however, if the mechanism moving the magnet overshoots the mark, the sensor package could be damaged.

A second possible path is to move the magnet in from the side of the hall device in the slide-by mode of operation. The slide-by mode is commonly used to avoid contact with the sensor package. The use of strong magnets or ferrous flux concentrators in well-designed slide-by magnetic circuits allows better sensing precision with a shorter travel path than the head-on mode.

Magnet manufacturers generally can provide head-on flux density curves for their magnets, but they often do not characterize magnets for slide-by operation, possibly because different air gap choices lead to an infinite number of these curves. Once a TEAG is chosen, however, the head-on magnet curves can be used to find the peak flux density (a single point) for slide-by applications by noting the value of magnetic flux at the chosen TEAG.


A third mode of operation keeps the Hall-effect sensor and magnet a fixed distance from one another and switches the sensor with a movable ferromagnetic vane. The Hall device and magnet can be molded together as a unit in a single rigid assembly, separated by an air gap. This eliminates alignment problems and produces an extremely rugged switching assembly.

The Hall device is held in the on state by the activating magnet. Placing the vane between the magnet and the Hall device (Figure 4) forms a magnetic shunt that distorts the flux field away from the Hall device. The vane can be made in many configurations to repeatedly sense position within ±0.002 in. over a 125°C temperature range.

The ferrous vane or vanes that interrupt the flux could have linear motion or rotational motion (as for a shaft encoder). Ferrous vane assemblies, due to the steep flux density/distance curves that can be achieved, are often used where precision switching over a large temperature range is required.


Steep Slopes and High Flux Densities. For linear Hall devices, greater flux changes for a given displacement give greater outputs, clearly an advantage because the voltage output of the sensor will be much greater, reducing the possibility of instruments picking up electrical noise. The same property is desirable for digital Hall devices, but the reasons are more subtle. To achieve consistent switching action in a given application, the Hall device must always switch on and off at the same positions relative to the magnet.

Consider, for example, the flux density curves of the two different magnet configurations in Figure 5. With an operating point flux density of 200 gauss, a digital Hall-effect device would turn on at a distance of



#### FIGURE 6

This circuit could be used if a load required a current of 4 A to switch.



#### FIGURE 7

This circuit could be used to switch a 115 or 230 VAC load.

approximately 0.14 in. from either magnet. If manufacturing tolerance or temperature effects shifted the operating point of the sensor to 300 gauss, notice that in the curve for magnet "A" (steep slope) there is very little change in the distance at which switching occurs, while in the case of the curve of magnet "B", the change is considerable. The release point would be affected in much the same way.

The basic principles illustrated in this example can be modified to include mechanism and device specification tolerances and used for worst-case design analysis.

## ELECTRICAL INTERFACE FOR DIGITAL HALL DEVICES

A typical application for a Hall-effect sensor is interfacing the sensor signal to a microporocessor. The output of the Hall element is quite small; therefore, Hall ICs have been developed that contain a voltage regulator to allow a wide range of operating voltages, a high-quality DC amplifier to boost the element signal to a more easily used signal, a Schmitt trigger threshold detector to produce digital logic, and output stages for universal interfaces capable of current sinking or sourcing. The output of the Hall-effect digital switch can be either linear (proportional to the magnetic field present) or clean-switching (no bounce) digital logic. Energy consumption is very low, and frequency responses are well over 100 kHz.

The output stage of a digital switch is simply an open collector npn transistor switch, and the rules for use are the same as those for any similar switching transistor. When the transistor is off, there is a small leakage current (typically a few nanoamps) that usually can be ignored and a maximum (breakdown) voltage specification that must not be exceeded. When the transistor is on, the device output is shorted to the circuit common, and the current flowing through the switch must be externally limited to less than the maximum specified value to prevent damage (usually 20 mA).

Hall devices switch very rapidly; typical rise and fall times are in the 400 nano-second range. This is rarely significant, since switching times are almost universally controlled by the much slower mechanical parts of the device.

Interfacing with digital logic integrated circuits usually requires only an appropriate power supply and pull-up resistor.

Loads that require sinking currents up to 20 mA can be driven directly by a Hall switch. A good example is a light emitting diode (LED) indicator that requires only a resistor to limit current to an appropriate value.

Sinking more current than 20 mA requires a current amplifier. For example, if a certain load to be switched requires 4 amperes and must turn on when the activating magnet approaches, the circuit shown in Figure 6 could be used. To turn on a 115 or 230 VAC load, consider Figure 7. Note, however, that the +12 V supply common is connected to the low side of the AC line, and in the event of a mixup, the Hall switch and associated low voltage circuitry would be 115 volts above ground.

Due to the magnetic field around any current-carrying conductor, Hall-effect devices can be used to measure and limit current by converting this magnetic field to an electrical signal. The sensor response ranges from DC to the kHz range, and the conductor need not be interrupted. In low current applications, the magnetic field about a conductor is not normally intense enough to operate a Hall-effect digital switch; therefore, it would be best to use a toroid or closed magnetic circuit to increase the flux density.

Hall-effect linear sensors are used primarily to sense relatively small changes in magnetic fields—changes that are too small to operate a Hall-effect switching device. They are customarily capacitively coupled to an amplifier that boosts the output to a higher level (Figure 7).

As motion detectors, gear tooth sensors, and proximity detectors, linear Hall-effect sensors produce an electrical output that is a magnetically driven mirror of mechanical events. As sensitive monitors of electromagnets, they can effectively measure a system's performance with negligible system loading while producing isolation from contaminated and electrically noisy environments.

Hall-effect sensors, both digital and linear, are used in the commutation of brushless DC motors, speed sensors, shaft encoders, current limiters and monitors, position sensors, and gear tooth sensors. Recent technology breakthroughs in Hall-effect devices have made available sensors for temperature ranges as high as 170°C. These sensors have been integrated into a vast array of innovative high-technology applications where reliability, efficiency, and cost competitiveness are a must.

### MAGNETIC MATERIALS MOST COMMONLY USED

- Rare Earth—Cobalt. An alloy of rare earth metal, such as samarium, with cobalt (abbreviated RE cobalt). These magnets are the best in all categories but are also the most expensive. Too hard for machining, these magnets must be ground, if shaping is necessary. Maximum energy product, perhaps the best single measure of magnet quality, is approximately 16 x 10<sup>6</sup>.
- Alnico. A class of alloys containing aluminum, nickel, cobalt, iron, and additives, which can be varied to give a wide range of properties. The magnets are strong and fairly expensive, but less so than RE cobalt. Alnico magnets can be cast or sintered by pressing metal powders into a die and heating. Sintered alnico is well suited to mass production of small, intricately shaped magnets, has a more uniform flux density, and is mechanically superior, but cast alnico magnets are generally magnetically stronger. The nonoriented or isotropic alnico alloys (alnico-1, alnico-2, alnico-3, alnico-4) are lessexpensive and magnetically weaker than the oriented alloys (alnico-5, alnico-6...alnico-9). Alnico is too hard and brittle to be shaped except by grinding. Maximum energy products range from 1.3 to 10 x 10<sup>6</sup>.
- Ceramic. These magnets contain barium or strontium (or another element from that group) ferrite in a matrix of ceramic material that is compacted and sintered. They are poor conductors of heat and electricity, chemically inert, and have high values of coercive force. As with alnico, ceramic magnets can be fabricated with partial or complete orientation for additional magnetic strength. Less expensive than alnico, they are also too hard and brittle to shape except by grinding. Maximum energy products range from 1 to 1.3 x 10<sup>6</sup>.
- Cunife. A ductile copper base alloy with nickel and iron, cunife can be stamped, swaged, drawn, or rolled into final stage.

  Maximum energy product is approximately 1.4 x 10<sup>6</sup>.
- Iron-Chromium. These magnets have magnetic properties similar to alnico-5 but are soft enough to undergo machining operations before the final aging treatment hardens them.

  Maximum energy product is approximately 5.25 x 10<sup>6</sup>.
- Plastic and Rubber. These magnets consist of barium and strontium ferrite in a plastic matrix material. They are very inexpensive and can be formed in numerous ways, including stamping, molding, and machining, depending on the particular matrix material. Since synthetic rubber is a plastic, the distinction between the two materials is not very precise. If a plastic magnet is flexible like rubber, it is generally called a rubber magnet. Maximum energy products range from 0.2 to 1.2 x 10<sup>6</sup>.

CLUBRAL INFORMATION & PRODUCT INDEX

PRODUCOUS BIRCHIO SECUNDOS SE

PERIPHERAL POWER & DISPLAY DRIVER ICS

That is presented by a victorial ex-

MASS STORAGE APPLICATION ICS

AUTOMOTIVE, SIGNAL-PROCESSING, & CONSUMER IC:

DISCRETE TRANSISTORS, DIODES, & ARRAYS

QUALITY & RELIABILITY INFORMATION


PACKAGE INFORMATION

## SECTION 5. TECHNICAL DATA & APPLICATION NOTES for Mass Storage Application ICs

in Numerical Order	.Beginning a	ıt 5-	1
--------------------	--------------	-------	---

# 8901

### 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVER WITH BACK-EMF SENSING



### ABSOLUTE MAXIMUM RATINGS at $T_A = +25^{\circ}C$

Supply Voltage, $V_{BB} \dots V_{DD} + 1.0 V$	L
t Current, I <sub>OUT</sub> ±1.1 A	0
Supply Voltage, V <sub>DD</sub> 6.0 V	Lo
Input Voltage Range,	Lo
<sub>IN</sub> 0.3 V to V <sub>DD</sub> + 0.3 V	
ge Power Dissipation,	Ρ
D See Graph	
ting Temperature Range,	0
A 0°C to +70°C	
on Temperature, T <sub>J</sub> +150°C†	Jı
ge Temperature Range,	S
S	

† Fault conditions that produce excessive junction temperature will activate device thermal shutdown circuitry. These conditions can be tolerated, but should be avoided.

Output current rating may be restricted to a value determined by system concerns and factors. These include: system duty cycle and timing, ambient temperature, and use of any heatsinking and/or forced cooling. For reliable operation, the specified maximum junction temperature should not be exceeded.

The A8901CLB is a three-phase brushless dc motor controller/ driver for use in 5 V hard-disk drives. The three half-bridge outputs are low on-resistance n-channel DMOS devices capable of driving up to 1.25 A. The A8901CLB provides complete, reliable, self-contained back-EMF sensing motor startup and running algorithms. Linear current control circuitry provides precise motor speed regulation.


A serial port allows the user to program various features and modes of operation, startup current limit, sleep mode, and diagnostic modes.


The A8901CLB is fabricated in Allegro's BCD (Bipolar CMOS DMOS) process, an advanced mixed-signal technology that combines bipolar, analog and digital CMOS, and DMOS power devices. It is provided in a 24-lead wide-body SOIC batwing package. The package provides for the smallest possible construction in surface-mount applications.

### **FEATURES**

- DMOS Outputs
- Low r<sub>DS(on)</sub>
- Startup Commutation Circuitry
- Back-EMF Commutation Circuitry
- Serial Port Interface
- Programmable Start-Up Current
- Diagnostics Mode
- Sleep Mode
- Linear Current Control
- Internal Current Sensing
- Internal Thermal Shutdown Circuitry

Always order by complete part number: | A8901CLB |.

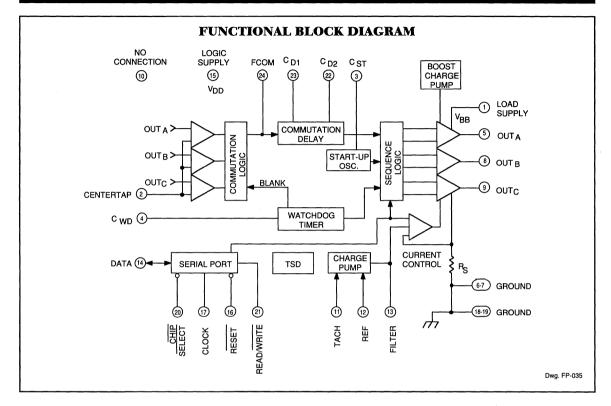



### ELECTRICAL CHARACTERISTICS at $T_A = +25$ °C, $V_{DD} = 5.0 \text{ V}$

				Limits		
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Logic Supply Voltage	V <sub>DD</sub>	Operating	4.5	5.0	5.5	V
Logic Supply Current	I <sub>DD</sub>	Operating	_	7.5	10	mA
		Sleep Mode	_	_	1.5	mA
Load Supply Voltage	V <sub>BB</sub>	Operating	T -	_	V <sub>DD</sub> + 1	V
Thermal Shutdown	TJ			165		°C
Thermal Shutdown Hys.	ΔTJ		_	20	_	°C
Output Drivers						
Output Leakage Current	I <sub>DSX</sub>	V <sub>BB</sub> = 14 V, V <sub>OUT</sub> = 14 V	T -	1.0	300	μΑ
		V <sub>BB</sub> = 14 V, V <sub>OUT</sub> = 0 V	_	-1.0	-300	μΑ
Total Output ON Resistance	r <sub>DS(on)</sub>	I <sub>OUT</sub> = 600 MA	_	1.2	1.4	Ω
Output Sustaining Voltage	V <sub>DS(sus)</sub>	V <sub>BB</sub> = 6 V, I <sub>OUT</sub> = 900 mA, L = 3 mH	6.0	_	_	٧
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 1.0 A		1.25	1.5	V
Control Logic						
Logic Input Voltage	V <sub>IN(0)</sub>	DATA, RESET, CLK, REF, R/W,	-0.3	_	1.5	٧
	V <sub>IN(1)</sub>	CHIP SELECT, TACH	3.5		5.3	٧
Logic Input Current	I <sub>IN(0)</sub>	V <sub>IN</sub> = 0 V	_		-0.5	μΑ
	I <sub>IN(1)</sub>	V <sub>IN</sub> = 5.0 V	_		1.0	μΑ
DATA Output Voltage	V <sub>OUT(0)</sub>	I <sub>OUT</sub> = 250 μA	_		1.5	٧
	V <sub>OUT(1)</sub>	I <sub>OUT</sub> = -100 μA	3.5	_	_	٧
FCOM Output Voltage	V <sub>OUT(0)</sub>	l <sub>OUT</sub> = 500 μA	_	_	1.5	٧
	V <sub>OUT(1)</sub>	I <sub>OUT</sub> = -200 μA	3.5	_	_	٧
C <sub>ST</sub> Current	I <sub>CST</sub>	Charging	16	20	28	μА
		Discharging	-16	-20	-28	μА
C <sub>ST</sub> Threshold	V <sub>CSTH</sub>		2.1	2.5	2.9	٧
	V <sub>CSTL</sub>		_	500	_	mV
Filter Current	I <sub>FILTER</sub>	Charging	8.0	10	15	μА
		Discharging	-8.0	-10	-15	μА
		Leakage, V <sub>FILTER</sub> = 2.5 V	_	5.0	_	nA
C <sub>D</sub> Current	I <sub>CD</sub>	Charging	16	23	30	μΑ
$(C_{D1} \text{ or } C_{D2})$		Discharging	-35	-53	-72	μΑ
C <sub>D</sub> Current Matching	T -	I <sub>CD(DISCHRG)</sub> /I <sub>CD(CHRG)</sub>	2.0	2.2	2.4	_
C <sub>D</sub> Threshold	V <sub>CD</sub>		T-	2.5		V
C <sub>WD</sub> Current	I <sub>CWD</sub>	Charging	16	22	28	μА


Continued next page...

### **ELECTRICAL CHARACTERISTICS continued**

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
C <sub>WD</sub> Threshold Voltage	V <sub>TL</sub>		1.4	1.5	1.55	٧
	V <sub>TH</sub>		2.25	2.5	2.75	٧
I <sub>OUT</sub> (MAX) Accuracy	_	I <sub>OUT</sub> = 1 A	_	±20	_	%
Transconductance Gain	g <sub>m</sub>		0.4	0.5	0.6	A/V
Centertap Resistors	R <sub>CT</sub>		5.5	10	12	kΩ
Back-EMF Hysteresis	_	V <sub>BEMF</sub> – V <sub>CTAP</sub> at	15	25	40	mV
		FCOM Transition	-15	-25	-40	mV

### **SERIAL PORT TIMING CONDITIONS**


### WRITE MODE



Dwg. WP-014A

Α.	Minimum READ/WRITE setup time before CHIP SELECT	150 ns
В.	Minimum DATA setup time before CLOCK rising edge	100 ns
C.	Minimum DATA hold time after CLOCK rising edge	100 ns
D.	Minimum READ/WRITE hold time after CHIP SELECT disable	100 ns
E.	Minimum CLOCK low time before CHIP SELECT	. 50 ns
F.	Minimum CHIP SELECT hold time after CLOCK rising edge	150 ns
G.	Maximum CLOCK frequency	.3 MHz

#### READ MODE



Dwg. WP-023

Η.	Minimum READ/WRITE setup time before CHIP SELECT	150 ns
l.	Minimum time until output DATA valid	150 ns
J.	Minimum READ/WRITE hold time after CHIP SELECT disable	150 ns

### **TERMINAL FUNCTIONS**

Term.	Terminal Name	Function
1	LOAD SUPPLY	V <sub>BB</sub> ; the 5 V motor supply.
2	CENTERTAP	Motor centertap connection for back-EMF detection circuitry.
3	C <sub>ST</sub>	Startup oscillator timing capacitor.
4	C <sub>WD</sub>	Timing capacitor used by the watchdog circuit to disable the back-EMF comparators during commutation transients, and to detect incorrect motor position.
5	OUTA	Power amplifier A output to motor.
6-7	GROUND	Power and logic ground and thermal heat sink.
8	OUTB	Power amplifier B output to motor.
9	OUT <sub>C</sub>	Power amplifier C output to motor.
10	NC	No internal connection; may be used as tie point or wired through.
11	TACH	Logic-level tachometer input for speed control loop.
12	REF	Logic-level reference input for speed control loop.
13	FILTER	Analog voltage input to control motor current. Also, compensation node for speed control loop.
14	DATA	Serial port data input/output line.
15	LOGIC SUPPLY	V <sub>DD</sub> ; the 5 V logic supply.
16	RESET	When pulled low forces the chip into sleep mode; clears all serial port bits.
17	CLOCK	Clock input for serial port.
18-19	GROUND	Power and logic ground and thermal heat sink.
20	CHIP SELECT	Strobe input (active low) for data word.
21	READ/WRITE	Logic-level input to control direction of serial-port data; logic high = read, logic low = write.
22	C <sub>D2</sub>	One of two capacitors used to generate the ideal commutation points from the back-EMF zero crossing points.
23	C <sub>D1</sub>	One of two capacitors used to generate the ideal commutation points from the back-EMF zero crossing points.
24	FCOM	Logic-level signal that changes state at every back-EMF zero crossing.


### **FUNCTIONAL DESCRIPTION**

**Power Outputs.** The power outputs of the A8901CLB are n-channel DMOS transistors with a total source plus sink  $r_{DS(on)}$  of typically 1.1  $\Omega$ . Internal charge pump boost circuitry provides voltage above supply for driving the high-side DMOS gates. Intrinsic ground clamp and flyback diodes provide protection when switching inductive loads and may be used to rectify motor back-EMF in power-down conditions. An external Schottky power diode or pass FET is required in series with the load supply to allow motor back-EMF rectification in power down conditions.


Back-EMF Sensing Motor Startup and Running Algorithm. The A8901CLB provides a complete self-contained back-EMF sensing startup and running commutation scheme. The three half-bridge outputs are controlled by a state machine. There are six possible combinations. In each state, one output is high (sourcing current), one low (sinking current), and one is OFF (high impedance or 'Z'). Motor back-EMF is sensed at the OFF output. The truth table for the output drivers sequencing is:

Sequencer State	OUTA	OUTB	OUT <sub>C</sub>
1	High	Low	Z
2	Z	Low	High
3	Low	Z	High
4	Low	High	Z
5	Z	High	Low
6	High	Z	Low

At startup, the outputs are enabled in one of the sequencer states shown. The back-EMF is examined at the OFF output by comparing the output voltage to the motor centertap voltage at CENTERTAP. The motor will then either step forward, step backward, or remain stationary (if in a null-torque position). If the motor moves, the back-EMF detection circuit waits for the correct polarity back-EMF zero crossing (output crossing through centertap). True back-EMF zero crossings are used by the adaptive commutation delay circuit to advance the state sequencer (commutate) at the proper time to synchronously run the motor. Back-EMF zero crossings are indicated by FCOM, an internal signal that toggles at every zero crossing. FCOM is available at the DATA terminal via the programmable data out multiplexer.

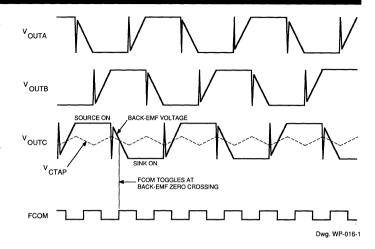

**Startup Oscillator.** If the motor does not move at the initial startup state, then it is in a null-torque position. In this case, the outputs are commutated automatically by the startup oscillator after a period set by the external capacitor at  $C_{\rm ST}$ .




Dwg. WP-020

$$\label{eq:tcst} \text{where} \qquad t_{CST} = \frac{4 (V_{CSTH} - V_{CSTL}) \ \text{x} \ C_{ST}}{I_{ST(charge)} + I_{ST(discharge)}}$$


In the next state, the motor will move, back EMF will be detected, and the motor will accelerate synchronously. Once normal synchronous back-EMF commutation occurs, the startup oscillator is defeated by pulses of pulldown current at  $C_{ST}$  at each commutation, which prevents  $C_{ST}$  from reaching its upper threshold and thus completing a cycle and commutating.

Adaptive Commutation Delay. The adaptive commutation delay circuit uses the back-EMF zero-crossing indicator signal (FCOM) to determine an optimal commutation time for efficient synchronous operation. This circuit commutates the outputs, delayed from the last zero crossing, using two external timing capacitors,  $C_{D1}$  and  $C_{D2}$ , to measure the time between crossings.



where 
$$t_{CD} = t_{FCOM} \times \frac{I_{CD(charge)}}{I_{CD(discharge)}}$$

 $C_{\rm D1}$  charges up with a fixed current from its 2.5 V reference while  $_{\rm FCOM}$  is high. When  $_{\rm FCOM}$  goes low at the next zero crossing,  $C_{\rm D1}$  is discharged at approximately twice the charging current. When  $C_{\rm D1}$  reaches the CD threshold, a commutation occurs.  $C_{\rm D2}$  operates similarly except on the opposite phase of  $_{\rm FCOM}$ . Thus the commutations occur approximately halfway between zero crossings. The actual delay is slightly less than halfway to compensate for electrical delays in the motor, which improves efficiency.




**Blanking and Watchdog Timing Functions.** The blanking and watchdog timing functions are derived from one timing capacitor, C<sub>WD</sub>.

where 
$$t_{BLANK} = \frac{V_{TL} \times C_{WD}}{I_{CWD}}$$
 and 
$$t_{WD} = \frac{V_{TH} \times C_{WD}}{I_{CWD}}$$

The CWD capacitor begins charging at each commutation, initiating the BLANK signal. BLANK is an internal signal that inhibits the back-EMF comparators during the commutation transients, preventing errors due to inductive recovery and voltage settling transients.

The watchdog timing function allows time to detect correct motor position by checking the back-EMF polarity after each commutation. If the correct polarity is not observed between  $t_{\rm BLANK}$  and  $t_{\rm WD}$ , then the watchdog timer commutates the outputs to the next state to synchronize the motor. This function is useful in preventing excessive reverse rotation, and helps in resynchronizing (or starting) with a moving spindle.

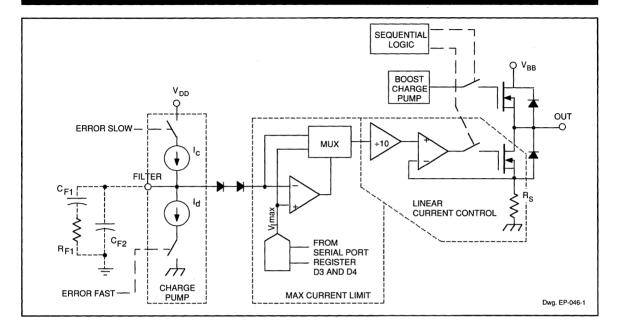


Current Control. The A8901CLB provides linear current control of the sink drivers during start-up and running modes. In the start-up mode, the maximum load current can be programmed via the serial port (see Serial Port). During the running mode, the output current is linearly controlled for low noise in frequency-locked or phase-locked speedcontrol systems. To accomplish this the load current is monitored by an internal sense resistor (RS). The voltage across the sense resistor is compared to one-tenth the voltage at the FILTER terminal less two diode drops (see Figure 1), generating an error voltage to drive the gate of the appropriate output sink transistor. This creates a load current that is proportional to the voltage at the FILTER terminal less two diode drops. This transconductance function is I<sub>OUT</sub> = (V<sub>FILTER</sub> - $2V_D$ ) /  $10R_S$ . Where  $R_S$  is nominally 0.2  $\Omega$ . and V<sub>D</sub> is approximately 0.7 V.

**Speed Control.** The A8901CLB has been configured to operate in conjunction with external digital circuitry to provide frequency-locked loop speed control of spindle motors. The TACH and REF inputs are used to turn on current sources Ic and I $_{\rm d}$  to charge and discharge a lead/lag loop filter compensation network (see Figure 2). The truth table for this function is:

REF	TACH	l <sub>c</sub>	l <sub>d</sub>
0	0	off	off
0	1	on	off
1	0	off	on
1	1	off	off

The external circuitry required for implementation of the speed control loop is shown in Figure 2. The operation of this circuit is as follows: the FCOM signal is a logic signal that changes state every time the A8901CLB detects a back-EMF zero crossing. By dividing the FCOM signal by three times the number of poles in the motor, a TACH signal is developed that changes state every mechanical revolution. This is done to develop a low-jitter tachometer signal. The low jitter is achieved because each time the TACH signal changes state the back-EMF circuitry is looking at the same magnet pole pair.

Figure 2
EXTERNAL DIGITAL CIRCUITRY REQUIRED FOR FREQUENCY-LOCK LOOP SPEED CONTROL

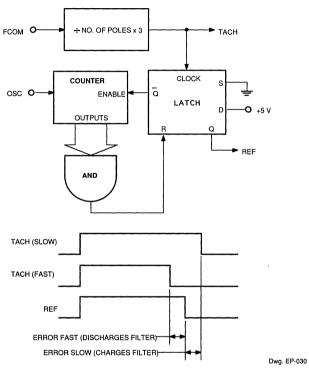

The derived TACH signal is compared to the desired time (REF) for one revolution. This is done by using the positive-going edge of the TACH signal to trigger a latch that enables a counter. The counter is driven by an accurate oscillator signal and (in conjunction with an AND gate) is used to count the desired number of oscillator cycles in a single revolution. When the counter reaches its desired number the latch is reset and the REF signal goes low (see Figure 2). The TACH and REF signals are fed back to the A8901CLB to charge and discharge the filter compensation network. If the TACH signal goes low before REF an Error-Fast signal turns on  $\mathsf{I}_{\mathsf{G}}$  lowering the current in the motor and thereby reducing its speed. If the REF signal goes low before TACH an Error-Slow signal turns on  $\mathsf{I}_{\mathsf{G}}$  which increases the load current and thereby the speed of the motor. The loop filter components are used to dampen the response of the loop and achieve optimal settling time.

Response time to disturbances in speed can be improved by synchronizing to sector data once information is being read from the disc. This change can be made by changing the count number in the counter and switching TACH to a sector tachometer signal. This should be done when TACH and REF are in the low state so as not to generate an erroneous error signal.

Microprocessor controlled phase-locked loop speed control systems can use the FILTER terminal as a transconductance input by omitting the loop filter components and connecting TACH and REF to ground.

Serial Port. The serial port functions to read or write various operational and diagnostic modes from or to the A8901CLB. The serial port DATA is enabled/disabled by the CHIP SELECT terminal; its direction is controlled by the READ/WRITE terminal. When CHIP SELECT is high the serial port is disabled and the chip is not affected by changes in data at the DATA or CLOCK terminals.

There are five bits in the serial input port. D0 will be the last bit written to the serial port. Their functions are:

### **Serial Port Bit Definitions.**

D0 - Sleep/Run Mode; LOW = Sleep, HIGH = Run This bit allows the A8901CLB to be powered down when not in use.

D1 - Step Mode:

LOW = Normal Operation, HIGH = Step Only

When in the step-only mode the back-EMF detection circuitry is disabled and the power outputs are stepped through their normal commutation sequence by the start-up oscillator. This mode is intended to facilitate device and system testing.

D2 - Read Output Select; LOW = Thermal Shutdown Status, HIGH = Start-Up Oscillator.

D3 and D4 - These two bits set the maximum output current according to the following truth table:

D3	D4	I <sub>OUT</sub> (MAX)
0	0	1 A
0	1	800 mA
1	0	600 mA
1	1	400 mA

#### 8901 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVER WITH BACK-EMF SENSING

Write Mode (READ/WRITE Low).
To write data to the serial port, the READ/WRITE terminal and the CLOCK terminal should be low prior to the CHIP SELECT terminal going low. Once CHIP SELECT goes low, information on the DATA terminal is read into the shift register on the positivegoing transition of the CLOCK. Data written into the serial port is latched and becomes active on the low-to-high transition of the CHIP SELECT terminal at the end of the

write cycle.

Read Mode (READ/WRITE High). The transitions of the start-up oscillator or the status of the thermal shutdown of the A8901CLB can be read from the serial port DATA terminal. The choice between these two functions is selected by the D2 bit in the serial port's latches. To read data the READ/WRITE terminal must be high prior to CHIP SELECT going low. When CHIP SELECT goes low the DATA terminal will register the status of the selected function. If the status of the selected function is changing, the data output will reflect this as long chip select is held low and READ/WRITE is held high.

Thermal Shutdown Status: LOW = No Fault, HIGH = Fault

Oscillator: Each change represents a step to the next state in the six step output sequence.


The READ/WRITE terminal should be held high until the CHIP SELECT terminal has returned high to avoid erroneous data being written to the device.

**Reset.** The RESET terminal when pulled low clears all serial port bits, including the D0 latch, which puts the A8901CLB in the sleep mode.

**Centertap.** The A8901CLB internally simulates the centertap voltage of the motor. To obtain reliable start-up performance from motor to motor, the motor centertap should be connected to this terminal.

#### **External Component Selection.**

Applications information is available from the factory for external component selection, frequency-locked loop speed control, and commutation delay capacitor selection.

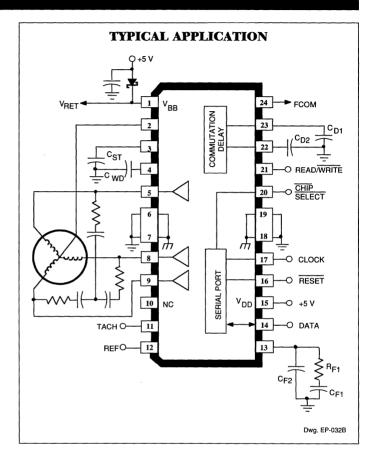

## 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVER WITH BACK-EMF SENSING

#### A8902CLB LOAD COMMUTATION 23 DATA IN C<sub>D2</sub> PORT 22 CLOCK CWD SERIAL 21 CHIP SELECT $\mathsf{c}_{\mathsf{ST}}$ 20 RESET GROUND GROUND 19 GROUND 18 GROUND DATA OUT 17 16 OUT<sub>C</sub> 9 FII OSCILLATOR LOGIC SUPPLY V<sub>DD</sub> 15 CENTERTAP 10 SECTOR 14 BRAKE CHARGE FILTER CRES

Dwg. PP-040B

#### ABSOLUTE MAXIMUM RATINGS at $T_A = +25$ °C

Load Supply Voltage, V <sub>BB</sub>	ļ	٧
Output Current, I <sub>OUT</sub> ±1.25	,	Α
Logic Supply Voltage, V <sub>DD</sub> 6.0	)	٧
Logic Input Voltage Bange		

 $V_{\text{IN}}$ ......................-0.3 V to  $V_{\text{DD}}$  + 0.3 V Package Power Dissipation,  $P_{\text{D}}$ . See Graph Operating Temperature Range,

T<sub>S</sub>..... -55°C to +150°C

† Fault conditions that produce excessive junction temperature will activate device thermal shutdown circuitry. These conditions can be tolerated, but should be avoided.

Output current rating may be restricted to a value determined by system concerns and factors. These include: system duty cycle and timing, ambient temperature, and use of any heatsinking and/or forced cooling. For reliable operation, the specified maximum junction temperature should not be exceeded.

The A8902CJT and A8902CLB are three-phase brushless dc motor controller/drivers for use in 5 V or 12 V hard-disk drives. The three half-bridge outputs are low on-resistance n-channel DMOS devices capable of driving up to 1.25 A. The A8902— provides complete, reliable, self-contained back-EMF sensing motor startup and running algorithms. A programmable digital frequency-locked loop speed control circuit together with the linear current control circuitry provides precise motor speed regulation.

A serial port allows the user to program various features and modes of operation, such as the speed control parameters, startup current limit, sleep mode, diagnostic modes, and others.


The A8902— is fabricated in Allegro's BCD (Bipolar CMOS DMOS) process, an advanced mixed-signal technology that combines bipolar, analog and digital CMOS, and DMOS power devices. The A8902CLB is provided in a 24-lead wide-body SOIC batwing package while the A8902CJT is supplied in a 64-lead TQFP. Both packages provide for the smallest possible construction in surface-mount applications.


#### **FEATURES**

- DMOS Outputs
- Low r<sub>DS(on)</sub>
- Startup Commutation Circuitry
- Back-EMF Commutation Circuitry
- Serial Port Interface
- Frequency-Locked Loop Speed Control
- Sector Data Tachometer Signal Input
- Programmable Start-Up Current
- Diagnostics Mode
- Sleep Mode
- Linear Current Control
- Internal Current Sensing
- Dynamic Braking Through Serial Port
- Power-Down Dynamic Braking
- System Diagnostics Data Out
- Data Out Ported in Real Time
- Internal Thermal Shutdown Circuitry

Always order by complete part number:

Part Number	Package
A8902CJT	64-Lead Thin Quad Flatpack
A8902CLB	24-Lead Batwing SOIC

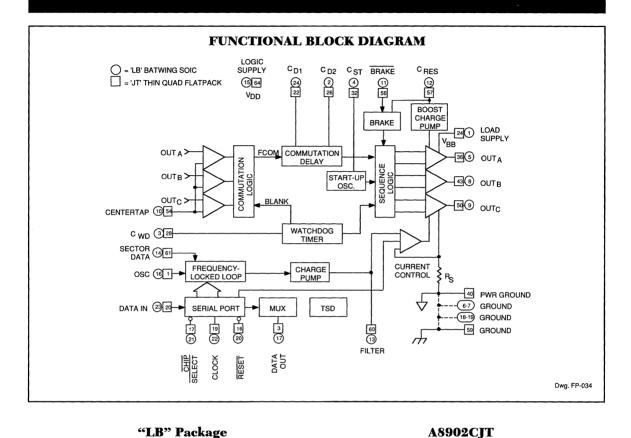



## PLL SERIAL PORT COMMUTATION DELAY VBB

Dwg. GP-019A

Dwg. PP-055

#### 8902 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVER

#### ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $V_{DD}$ = 5.0 V


				Lin	nits	
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Logic Supply Voltage	V <sub>DD</sub>	Operating	4.5	5.0	5.5	٧
Logic Supply Current	I <sub>DD</sub>	Operating	-	7.5	10	mA
		Sleep Mode	-	_	1.5	mA
Load Supply Voltage	V <sub>BB</sub>	Operating	4.5		14	V
Thermal Shutdown	TJ		-	165	_	°C.
Thermal Shutdown Hys.	$\Delta T_{ m J}$		_	20	_	°C
Output Drivers						
Output Leakage Current	I <sub>DSX</sub>	V <sub>BB</sub> = 14 V, V <sub>OUT</sub> = 14 V		1.0	300	μА
		V <sub>BB</sub> = 14 V, V <sub>OUT</sub> = 0 V	_	-1.0	-300	μА
Total Output ON Resistance	r <sub>DS(on)</sub>	I <sub>OUT</sub> = 600 MA, A8902CJT	_	1.4	1.8	Ω
(Source + Sink + R <sub>S</sub> )		I <sub>OUT</sub> = 600 MA, A8902CLB	_	1.1	1.4	Ω
Output Sustaining Voltage	V <sub>DS(sus)</sub>	$V_{BB} = 14 \text{ V}, I_{OUT} = I_{OUT}(MAX), L = 3 \text{ mH}$	14	-	_	V
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 1.0 A	-	1.25	1.5	V
Control Logic	<del></del>					<b>-</b>
Logic Input Voltage	V <sub>IN(0)</sub>	SECTOR DATA, RESET, CLK,	-0.3		1.5	V
	V <sub>IN(1)</sub>	CHIP SELECT, OSC, BRAKE	3.5	_	5.3	٧
Logic Input Current	I <sub>IN(0)</sub>	V <sub>IN</sub> = 0 V	-		-0.5	μА
	I <sub>IN(1)</sub>	V <sub>IN</sub> = 5.0 V		-	1.0	μА
DATA Output Voltage	V <sub>OUT(0)</sub>	l <sub>OUT</sub> = 500 μA	T-	_	1.5	V
	V <sub>OUT(1)</sub>	I <sub>OUT</sub> = -500 μA	3.5	_	_	V
C <sub>ST</sub> Current	I <sub>CST</sub>	Charging	14	20	28	μА
		Discharging	-14	-20	-28	μА
C <sub>ST</sub> Threshold	V <sub>CSTH</sub>		2.1	2.5	2.9	٧
	V <sub>CSTL</sub>		-	500	-	mV
Filter Current	IFILTER	Charging	7.0	10	15	μА
		Discharging	-7.0	-10	-15	μА
		Leakage, V <sub>FILTER</sub> = 2.5 V	_	5.0	-	nA
C <sub>D</sub> Current	I <sub>CD</sub>	Charging	14	22	28	μА
$(C_{D1} \text{ or } C_{D2})$		Discharging	-26	-35	-66	μА
C <sub>D</sub> Current Matching	-	Icd(dischrg)/Icd(chrg)	1.7	2.2	2.3	_
C <sub>D</sub> Threshold	V <sub>CD</sub>		T	2.5	-	V
C <sub>WD</sub> Current	I <sub>CWD</sub>	Charging	14	22	28	μА

Continued next page ...

#### ... continued from previous page

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
C <sub>WD</sub> Threshold Voltage	V <sub>TL</sub>		0.80	0.85	0.95	٧
,	V <sub>TH</sub>		2.4	2.75	3.0	٧
Max. FLL Oscillator Frequency	fosc	V <sub>DD</sub> = 5.1 V, T <sub>A</sub> = 25°C	20	_	_	MHz
		V <sub>DD</sub> = 4.5 V, T <sub>A</sub> = 70°C	_	10	_	MHz
I <sub>OUT</sub> (MAX) Accuracy	_	I <sub>OUT</sub> = 1 A	_	±20	_	%
BRAKE Threshold	$V_{BRK}$		1.4	1.7	2.0	٧
Transconductance Gain	g <sub>m</sub>		0.26	0.35	0.50	A/V
Centertap Resistors	R <sub>CT</sub>		5.0	10	13	kΩ
Back-EMF Hysteresis	_	V <sub>BEMF</sub> – V <sub>CTAP</sub> at	15	25	40	mV
		FCOM Transition	-15	-25	-40	mV

#### **SERIAL PORT TIMING CONDITIONS**

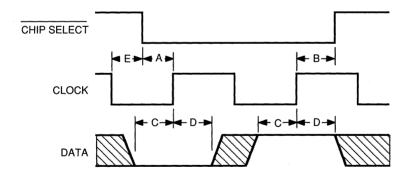

Dwg. WP-019

A. Minimum CHIP SELECT setup time before CLOCK rising edge	. 100 ns
B. Minimum CHIP SELECT hold time after CLOCK rising edge	. 150 ns
C. Minimum DATA setup time before CLOCK rising edge	. 150 ns
D. Minimum DATA hold time after CLOCK rising edge	. 150 ns
E. Minimum CLOCK low time before CHIP SELECT	50 ns
F. Maximum CLOCK frequency	3.3 MHz

#### 8902 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVER

#### **TERMINAL FUNCTIONS**

"JT" Term.	"LB" Term.	Terminal Name	Function
24	1	LOAD SUPPLY	V <sub>BB</sub> ; the 5 V or 12 V motor supply.
26	2	C <sub>D2</sub>	One of two capacitors used to generate the ideal commutation points from the back-EMF zero crossing points.
28	3	C <sub>WD</sub>	Timing capacitor used by the watchdog circuit to disable the back-EMF comparators during commutation transients, and to detect incorrect motor position.
32	4	C <sub>ST</sub>	Startup oscillator timing capacitor.
36	5	OUT <sub>A</sub>	Power amplifier A output to motor.
	6-7	GROUND	Power and logic ground and thermal heat sink.
40	-	PWR GROUND	Power ground.
43	8	OUT <sub>B</sub>	Power amplifier B output to motor.
50	9	OUT <sub>C</sub>	Power amplifier C output to motor.
54	10	CENTERTAP	Motor centertap connection for back-EMF detection circuitry.
56	11	BRAKE	Active low turns ON all three sink drivers shorting the motor windings to ground. External capacitor and resistor at Brake provide brake delay. The brake function can also be controlled via the serial port.
57	12	C <sub>RES</sub>	External reservoir capacitor used to hold charge to drive the source drivers' gates. Also provides power for brake circuit.
59		GROUND	Low-level analog and digital ground.
60	13	FILTER	Analog voltage input to control motor current. Also, compensation node for internal speed control loop.
61	14	SECTOR DATA	External tachometer input. Can use sector or index pulses from disk to provide precise motor speed feedback to internal frequency-locked loop.
64	15	LOGIC SUPPLY	V <sub>DD</sub> ; the 5 V logic supply.
1	16	OSCILLATOR	Clock input for the speed reference counter. Typical max. frequency is 10 MHz.
3	17	DATA OUT	Thermal shutdown indicator, FCOM, TACH, or SYNC signals available in real time, controlled by 2-bit multiplexer in serial port.
_	18-19	GROUND	Power and logic ground and thermal heat sink.
16	20	RESET	When pulled low forces the chip into sleep mode; clears all serial port bits.
17	21	CHIP SELECT	Strobe input (active low) for data word.
19	22	CLOCK	Clock input for serial port.
20	23	DATA IN	Sequential data input for the serial port.
22	24	C <sub>D1</sub>	One of two capacitors used to generate the ideal commutation points from the back-EMF zero crossing points.

#### 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVER

#### **FUNCTIONAL DESCRIPTION**


Power Outputs. The power outputs of the A8902CLB and A8902CJT are n-channel DMOS transistors with a total source plus sink  $r_{\rm DS(on)}$  of typically 1.1  $\Omega$  and 1.4  $\Omega$ , respectively. Internal charge pump boost circuitry provides voltage above supply for driving the high-side DMOS gates. Intrinsic ground clamp and flyback diodes provide protection when switching inductive loads and may be used to rectify motor back-EMF in power-down conditions. An external Schottky power diode or pass FET is required in series with the load supply to allow motor back-EMF rectification in power down conditions.

Back-EMF Sensing Motor Startup and Running Algorithm. The A8902– provides a complete self-contained back-EMF sensing startup and running commutation scheme. The three half-bridge outputs are controlled by a state machine. There are six possible combinations. In each state, one output is high (sourcing current), one low (sinking current), and one is OFF (high impedance or 'Z'). Motor back EMF is sensed at the OFF output. The truth table for the output drivers sequencing is:


Sequencer State	OUTA	OUTB	OUTc
1	High	Low	Z
2	Z	Low	High
3	Low	Z	High
4	Low	High	Z
5	Z	High	Low
6	High	Z	Low
ľ			

At startup, the outputs are enabled in one of the sequencer states shown. The back EMF is examined at the OFF output by comparing the output voltage to the motor centertap voltage at CENTERTAP. The motor will then either step forward, step backward, or remain stationary (if in a null-torque position). If the motor moves, the back-EMF detection circuit waits for the correct polarity back-EMF zero crossing (output crossing through centertap). True back-EMF zero crossings are used by the adaptive commutation delay circuit to advance the state sequencer (commutate)

at the proper time to synchronously run the motor. Back-EMF zero crossings are indicated by FCOM, an internal signal that toggles at every zero crossing. FCOM is available at the DATA OUT terminal via the programmable data out multiplexer.

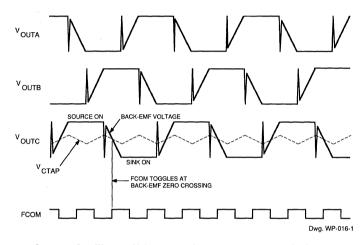

**Startup Oscillator.** If the motor does not move at the initial startup state, then it is in a null-torque position. In this case, the outputs are commutated automatically by the startup oscillator after a period set by the external capacitor at  $C_{\rm ST}$ .




Dwg. WP-020

where 
$$t_{CST} = \frac{4(V_{CSTH} - V_{CSTL}) \times C_{ST}}{I_{ST(charge)} + I_{ST(discharge)}}$$

In the next state, the motor will move, back EMF will be detected, and the motor will accelerate synchronously. Once normal synchronous back-EMF commutation occurs, the startup oscillator is defeated by pulses of pulldown current at  $C_{ST}$  at each commutation, which prevents  $C_{ST}$  from reaching its upper threshold and thus completing a cycle and commutating.

#### 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVER

Adaptive Commutation Delay. The adaptive commutation delay circuit uses the back-EMF zero-crossing indicator signal (FCOM) to determine an optimal commutation time for efficient synchronous operation. This circuit commutates the outputs, delayed from the last zero crossing, using two external timing capacitors,  $C_{\rm D1}$  and  $C_{\rm D2}$ , to measure the time between crossings.



 $\label{eq:tcd} \text{where} \qquad t_{CD} = t_{FCOM} \, x \, \, \frac{I_{CD(\text{charge}),}}{\left[I_{CD(\text{discharge})}\right]}$ 


 $C_{D1}$  charges up with a fixed current from its 2.5 V reference while FCOM is high. When FCOM goes low at the next zero crossing,  $C_{D1}$  is discharged at approximately twice the charging current. When  $CD_1$  reaches the CD threshold, a commutation occurs.  $C_{D2}$  operates similarly except on the opposite phase of FCOM . Thus the commutations occur approximately halfway between zero crossings. The actual delay is slightly less than halfway to compensate for electrical delays in the motor, which improves efficiency.

**Blanking and Watchdog Timing Functions.** The blanking and watchdog timing functions are derived from one timing capacitor,  $C_{WD}$ .

where 
$$t_{\text{BLANK}} = \frac{V_{TL} \, x \, C_{WD}}{I_{CWD}}$$
 and 
$$t_{WD} = \frac{V_{TH} \, x \, C_{WD}}{I_{CWD}}$$


The CWD capacitor begins charging at each commutation, initiating the BLANK signal. BLANK is an internal signal that inhibits the back-EMF comparators during the commutation transients, preventing errors due to inductive recovery and voltage settling transients.

The watchdog timing function allows time to detect correct motor position by checking the back-EMF polarity after each commutation. If the correct polarity is not observed between  $t_{\text{BLANK}}$  and  $t_{\text{WD}}$ , then the watchdog timer commutates the outputs to the next state to synchronize the motor. This function is useful in preventing excessive reverse rotation, and helps in resynchronizing (or starting) with a moving spindle.

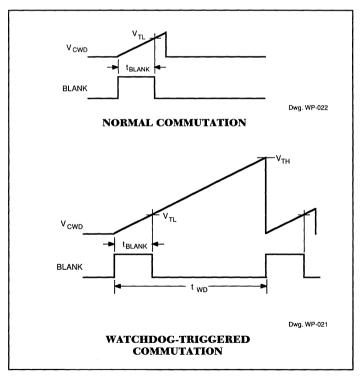


#### 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVER

Current Control. The A8902– provides linear current control via the FILTER terminal, an analog voltage input. Maximum current limit is also provided, and is controlled in four steps via the serial port. Output current is sensed via an internal sense resistor (Rs). The voltage across the sense resistor is compared to one-tenth the voltage at the FILTER terminal less two diode drops, or to the maximum current limit reference, whichever is lower. This transconductance function is  $I_{\text{OUT}} = (V_{\text{FILTER}} - 2V_{\text{D}}) / 10R_{\text{S}}$ , where  $R_{\text{S}}$  is nominally 0.3  $\Omega$  and  $V_{\text{D}}$  is approximately 0.7 V.

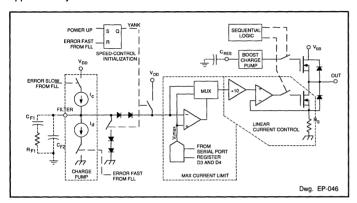

**Speed Control.** The A8902—includes a frequency-locked loop speed control system. This system monitors motor speed via internal or external digital tachometer signals, generates a precision speed reference, determines the digital speed error, and corrects the motor current via an internal charge pump and external filtering components on the FILTER terminal.

A once per revolution TACH signal can be generated by counting cycles of FCOM (the number of motor poles must be selected via the serial port). TACH is then a jitter-free signal that toggles once per motor revolution. The rising edge of TACH triggers REF, a precision



speed reference derived by a programmable counter. The duration of REF is set by programming the counter to count the desired number of OSC cycles

$$\frac{\text{desired}}{\text{total count}} = \frac{60 \text{ x f}_{OSC}}{\text{desired motor speed (rpm)}}$$


where the total count (number of oscillator cycles) is equal to the sum of the selected (programmed low) count numbers corresponding to bits D5 through D18.

The speed error is detected as the difference in falling edges of TACH and REF. The speed error signals control the error-correcting charge pump on the FILTER terminal, which drive the external loop compensation components to correct the motor current.

Sector Mode. An external tachometer signal, such as sector or index pulses, may be used to create the TACH signal, rather than the internally derived once around. To use this mode, the signal is input to the SECTOR terminal, and the sector mode must be enabled via the serial port. When Switching from the once-around mode to sector mode, it is important to monitor the SYNC signal on DATA OUT, and switch modes only when SYNC is low. This ensures making the transition without disturbing the speed control loop. The speed reference counter should be reprogrammed at the same time.

Speed Loop Initialization (YANK). To improve the acquire time of the speed control loop, there is an automatic feature controlled by an internal YANK signal. The motor is started at the maximized programmed current by bypassing the FILTER terminal. The FILTER terminal is clamped to two diodes above ground, initializing it near the closed loop operating point. YANK is enabled at startup and stavs high until the desired speed is reached. Once the first error-fast occurs. indicating the motor crossed through the desired speed, YANK goes low. This releases the clamp on the FILTER terminal and current control is returned to FILTER. This feature optimizes speed acquire and minimizes settling. The Current Control Block Diagram illustrates the YANK signal and its effects.

#### 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVER




**Braking.** A dynamic braking feature of the A8902– shorts the three motor windings to ground. This is accomplished by turning the three source drivers OFF and the three sink drivers ON. Activation of the brake can be implemented through the BRAKE input or through the D2 bit in the serial port. The supply voltage for the brake circuitry is the C<sub>RES</sub> voltage, allowing the brake function to remain active after power failure. Power-down braking with delay can be implemented by using an external RC and other components to control the brake terminal, as shown. Brake delay can be set using the equation below to ensure that voice-coil head retract occurs before the spindle motor brake is activated. Once the brake is activated, due to the inherent capacitive input, the three sink drivers will remain active until the device is reset.

$$t_{BRK} = R_B C_B \left( 1 - I_n \frac{V_{BRK}}{V_{FAULT} \cdot V_D} \right)$$

**Centertap.** The A8902– internally simulates the centertap voltage of the motor. To obtain reliable start-up performance from motor to motor, the motor centertap should be connected to this terminal.

External Component Selection. Applications information regarding the selection of external component values is available from the factory for external component selection, frequency-locked loop speed control, and commutation delay capacitor selection.

#### TYPICAL APPLICATION



Dwg. EP-036C

#### 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVER

**Serial Port.** The serial port functions to write various operational and diagnostic modes to the A8902—. The serial port DATA IN is enabled/disabled by the CHIP SELECT terminal. When CHIP SELECT is high the serial port is disabled and the chip is not affected by changes in data at the DATA IN or CLOCK terminals.

To write data to the serial port, the CLOCK terminal should be low prior to the CHIP SELECT terminal going low. Once CHIP SELECT goes low, information on the DATA IN terminal is read into the shift register on the positive-going transition of the CLOCK. There are 24 bits in the serial input port.

Data written into the serial port is latched and becomes active upon the low-to-high transition of the CHIP SELECT terminal at the end of the write cycle. Do will be the last bit written to the serial port.

#### SERIAL PORT BIT DEFINITIONS.

- D0 Sleep/Run Mode; LOW = Sleep, HIGH = Run This bit allows the device to be powered down when not in use.
- D1 Step Mode; LOW = Normal Operation, HIGH = Step Only When in the step-only mode the back-EMF commutation circuitry is disabled and the power outputs are commutated by the startup oscillator. This mode is intended for device and system testing.
- D2 Brake; LOW = Run, HIGH = Brake.

D3 and D4 - These two bits set the output current limit:

D3	D4	Current Limit
0	0	Saturated
0	1	1 A
1	0	800 mA
1	1	600 mA

D5 thru D18 - This 14-bit word (active low) programs the REF time to set desired motor speed.

Bit Number	Count Number
D5 D6	16 32
D7	64
D8	128
D9	256
D10	512
D11	1 024
D12	2 048
D13	4 096
D14	8 192
D15	16 384
D16	32 768
D17	65 536
D18	131 072


- D19 Speed-control mode switch; LOW = internal once-around speed signal, HIGH = external sector data.
- D20 and D21 These bits program the number of motor poles for the once-around FCOM counter:

	D20	D21	Motor Poles
	0	0	8
l	0	1	_
1	1	0	16
	1	1	12

D22 and D23 - Controls the multiplexer for DATA OUT:

	D22	D23	DATA OUT
	0	0	TACH (once around or sector)
Ì	0	1	Thermal Shutdown
I	1	0	SYNC
١	1	1	FCOM

**Reset.** The RESET terminal when pulled low clears all serial port bits, including the D0 latch, which puts the A8902– in the sleep mode.




#### **DUAL SCHOTTKY DIODE**

Schottky barrier diodes combine high rectification efficiency with high switching speeds and low series resistance. The A8920SLR dual-diode is designed specifically for hard-disk drive applications requiring low voltage drop rectification of the spindle motor back emf during power-down head retraction. It is supplied in a 3-lead small-outline transistor package (SOT-23/TO-236AB) for surface-mounting for use over the operating temperature range of -20°C to +85°C.

#### **FEATURES**

- Low Forward Voltage Drop 440 mV Typical at 150 mA
- 500 mA Forward Current
- 20 V Reverse Voltage



#### ABSOLUTE MAXIMUM RATINGS at T<sub>A</sub>=+25°C

at 14-120 C
Forward Current, I <sub>F</sub> <b>500 mA</b>
Reverse Voltage, V <sub>R</sub> 20 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Storage Temperature Range,
T65°C +0 .150°C


Always order by complete part number: A8920SLR.


#### 8920 DUAL SCHOTTKY DIODE

#### ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C (unless otherwise specified).

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Reverse Breakdown Voltage	V <sub>(BR)</sub>	I <sub>R</sub> = 100 μA	20	_		٧
Reverse Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 10 V	_	1.6	20	μА
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 50 mA		346	400	mV
		I <sub>F</sub> = 150 mA		440	500	mV
Junction Capacitance	Ст	V <sub>R</sub> = 0 V, f = 1 MHz	_	370	_	pF
Reverse Recovery Time	t <sub>rr</sub>	I <sub>F</sub> = I <sub>R</sub> = 100 mA	_	32	_	ns


#### TYPICAL CHARACTERISTICS






Dwg. 140. GD-000

Dwg. No. GD-004



Dwg. No. GD-002

#### 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/ DRIVER WITH LINEAR CURRENT CONTROL AND POWER DMOS OUTPUTS

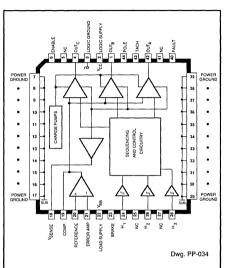

#### ABSOLUTE MAXIMUM RATINGS AT $T_A = +25$ °C

Load Supply Voltage, V <sub>BB</sub> 1	4	٧
Output Current, I <sub>OUT</sub> ±4.0	0	A
Logic Supply Voltage, V <sub>CC</sub> 1	4	٧
Logic Input Voltage Range,		

T<sub>A</sub> ...... 0°C to +70°C

Junction Temperature, T<sub>J</sub> ...... +150°C†

Storage Temperature Range,

T<sub>S</sub> ...... —55°C to +150°C

† Fault conditions that produce excessive junction temperature will activate device thermal shutdown circuitry. These conditions can be tolerated, but should be avoided.

Output current rating may be restricted to a value determined by system concerns and factors. These include: system duty cycle and timing, ambient temperature, and use of any heatsinking and/or forced cooling. For reliable operation, the specified maximum junction temperature should not be exceeded.

The A8925CEB is a DMOS three-phase brushless dc motor controller/driver designed for use in Winchester disk drives and other data storage applications. The power output stages are capable of  $\pm 4$  A output currents and have DMOS power outputs with less than 0.25  $\Omega$  rps(on) for low power dissipation. Intrinsic ground clamp and flyback diodes protect the output drivers when switching inductive loads. Thermal shutdown circuitry is provided to protect the device from excessive junction temperature.

A transconductance amplifier is used to linearly regulate the load current and control motor speed. Internal current-sensing circuitry eliminates the need for external sense resistors. Analog and digital control circuitry provide complete sequencing of the output drivers as well as providing brake, disable, and tachometer functions. A FAULT output flag indicates the presence of an under-voltage condition on the 12 V supply, excessive junction temperature, or an invalid Hall input combination. The A8925CEB's commutation logic is compatible with motors that have digital Hall-effect sensors with 120° of electrical separation. Internal charge pump circuitry is provided to drive the N-channel DMOS source drivers to their required gate voltages.


The A8925CEB is provided in a 44-lead PLCC power package for surface-mount applications. The copper batwing provides for maximum allowable package power dissipation in the smallest possible construction.

#### **FEATURES**

- DMOS Outputs
- Low  $r_{DS(on)}$  0.25  $\Omega$  Maximum
- Linear Current Control
- Internal Commutation Circuitry
- Internal Current Sensing
- Thermal Shutdown Circuitry
- Under Voltage Detection Circuitry
- Fault Output Flag
- Power Surface-Mount Package

Always order by complete part number: A8925CEB

## 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVER WITH LINEAR CURRENT CONTROL AND POWER DMOS OUTPUTS

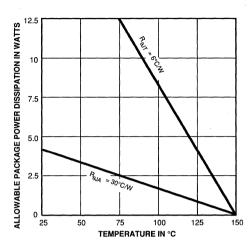

Dwg. GP-020B

#### ELECTRICAL CHARACTERISTICS AT $T_A = +25^{\circ}C$ , $V_{CC} = V_{BB} = 12 \text{ V}$

	1 1			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units	
Logic Supply Voltage	V <sub>cc</sub>	Operating	10	12	14	٧	
Load Supply Voltage	V <sub>BB</sub>	Operating	10	12	14	V	
Supply Current	Icc	Operating	_	30	50	mA	
Thermal Shutdown	TJ		_	165	_	°C	
Output Drivers							
Output ON Resistance	r <sub>DS(on)</sub>	I <sub>OUT</sub> = 4.0 A, Pulse Test	_	0.20	0.25	Ω	
Output Sustaining Voltage	V <sub>DS(sus)</sub>	I <sub>OUT</sub> = 4.0 A, L = 2 mH	14	_	_	V	
Clamp Diode Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 4.0 A	_	1.5	2.0	V	
Output Leakage Current	I <sub>DSX</sub>	V <sub>OUT</sub> = 14 V	_	10	300	μА	
		V <sub>OUT</sub> = 0 V	_	-10	-300	μА	
Control Logic						·	
Logic Input Voltage	V <sub>IN(0)</sub>	ENABLE, POLE	_	_	0.8	V	
	V <sub>IN(1)</sub>		2.4	_	_	V	
Logic Input Voltage	V <sub>IN(0)</sub>	BRAKE	_	_	0.8	V	
	V <sub>IN(1)</sub>		3.0	_	_	٧	
Logic Input Current	I <sub>IN(0)</sub>	V <sub>IN</sub> = 0 V	-	_	-1.0	μА	
	I <sub>IN(1)</sub>	V <sub>IN</sub> = 5.0 V	-	_	1.0	μА	
Logic Output Voltage	V <sub>OUT(0)</sub>	I <sub>OUT</sub> = 3 mA			0.8	V	
(FAULT, TACH)	VOLIT(1)	Ι <sub>Ουτ</sub> = -50 μΑ	2.0	_	_	V	

 $I_{OUT} = -50 \,\mu A$ 

NOTE: Negative current is defined as coming out of (sourcing) the specified device terminal.

 $V_{OUT(1)}$ 

Continued next page...

#### 8925 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVER WITH LINEAR CURRENT CONTROL AND POWER DMOS OUTPUTS

#### **ELECTRICAL CHARACTERISTICS CONTINUED**

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Error Amplifier						
Input Bias Current	I <sub>B</sub>	$V_{IN(+)} - VI_{N(-)} = 0$	-	5.0	10	μΑ
Input Offset Voltage	Vos	A <sub>VD</sub> = 100	_	3.0	5.0	mV
Input Common-Mode Voltage Range	V <sub>IC</sub>		0		6.0	V
Error Voltage Gain	A <sub>VD</sub>	V <sub>S OUT</sub> / V <sub>S IN</sub>	_	80	-	dB
Unity Gain Bandwidth	BW			1.0	_	MHz
Common-Mode Rejection Ratio	CMRR		_	80	-	dB
Power Supply Rejection Ratio	PSRR		-	50	_	dB
Miscellaneous						
Current Sense Gain	A <sub>iCS</sub>	I <sub>OUT</sub> = 1.0 A	1/1k	1/1.2k	1/1.4k	
Under-Voltage Trip Point	V <sub>cc</sub>		8.0	_	9.5	٧
Hall Input Current	I <sub>IN(0)</sub>	V <sub>IN</sub> = 0 V	_	-500	_	μΑ
	l <sub>IN(1)</sub>	V <sub>IN</sub> = 5.0 V	_	250	_	μΑ
Hall Input Threshold	V <sub>IN</sub>			3.8	_	٧
Hall Input Pull-Up Resistance	R <sub>PU</sub>		_	25	-	kΩ

NOTE: Negative current is defined as coming out of (sourcing) the specified device terminal.

#### **COMMUTATION TRUTH TABLE**


Hall S	Sensor Inp	outs				Outputs			
H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	ENABLE	BRAKE	FAULT	OUTA	OUTB	OUT <sub>C</sub>	
High	Low	High	High	High	High	High	Low	Z	
High	Low	Low	High	High	High	High	Z	Low	
High	High	Low	High	High	High	Z	High	Low	
Low	High	Low	High	High	High	Low	High	Z	
Low	High	High	High	High	High	Low	Z	High	
Low	Low	High	High	High	High	Z	Low	High	
High	High	High	High	High	Low	Z	Z	Z	
Low	Low	Low	High	High	Low	Z	Z	Z	
X	X	Х	Low	High	Х	Z	Z	Z	
Х	Х	Х	Х	Low	Х	Low	Low	Low	

X = Irrelevant Z = High Impedance

#### 8925 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVER WITH LINEAR CURRENT CONTROL AND POWER DMOS OUTPUTS

#### TERMINAL FUNCTIONS

Term.	Terminal Name	Function
1	OUT <sub>B</sub>	Power DMOS output.
2	LOGIC SUPPLY	V <sub>CC</sub> ; low-current 12 V supply for the logic.
3	LOGIC GROUND	Low-level logic ground.
4	OUT <sub>C</sub>	Power DMOS output.
6	ENABLE	Active high chip enable.
7–17	POWER GROUND	Power ground and thermal heat sink.
18	$V_{SENSE}$	External precision resistor for sense-FET current.
19	COMP.	Compensation; error amplifier output.
20	REFERENCE	V <sub>REF</sub> ; voltage input that sets the power output current.
21	ERROR AMP.	Input that controls the current in the load.
22	LOAD SUPPLY	V <sub>BB</sub> ; high-current 12 V supply for the voice-coil motor.
23	BRAKE	A logic low turns OFF all source drivers and turns ON all sink drivers (shorts the windings to ground).
24	H <sub>1</sub>	High-level input from a Hall sensor.
26	H <sub>2</sub>	High-level input from a Hall sensor.
28	H <sub>3</sub>	High-level input from a Hall sensor.
29–39	POWER GROUND	Power ground and thermal heat sink.
40	FAULT	A logic low at this output indicates a thermal shutdown, under -voltage fault, or an invalid Hall input combination.
42	OUT <sub>A</sub>	Power DMOS output.
43	TACH	Speed reference output; the H <sub>1</sub> Hall input divided by the number of motor poles.
44	POLE	Designates four- or eight-pole motor; Low = 4 pole, High = 8 pole.

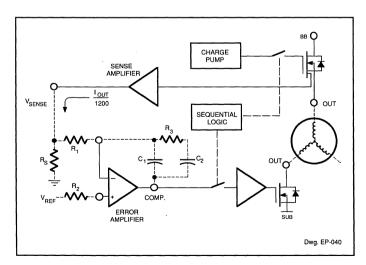

#### **FUNCTIONAL DESCRIPTION**

Power Outputs (OUT<sub>A</sub>, OUT<sub>B</sub>, and OUT<sub>C</sub>). The power outputs of the A8925CEB are DMOS transistors with a maximum  $r_{DS(on)}$  of 0.25  $\Omega$ . Intrinsic ground clamp and flyback diodes clamp transient voltage spikes when switching inductive loads. Internal charge pump circuitry is used to drive the gates of the N-channel source drivers to their required gate voltages.

**Current Control.** Current in the load is monitored by an internal sense amplifier that produces an output current that is approximately one twelve hundredth that of the load current (see Figure). This current is output to the  $V_{SENSE}$  terminal and develops a voltage across  $R_S$  that equals  $R_S \cdot I_{LOAD}/1200$ . This sense voltage ( $V_{SENSE}$ ) is compared to a ref-

Continued next page...

#### 8925 3-PHASE BRUSHLESS DC MOTOR CONTROLLER/DRIVER WITH LINEAR CURRENT CONTROL AND POWER DMOS OUTPUTS

erence voltage (V<sub>REF</sub>) and an error voltage is developed that is gated in by the sequential control logic to drive the gate of the appropriate output sink transistor. A transconductance control function is thus realized where  $I_{OUT} = V_{REF} \bullet 1200/R_S$ . External components  $C_1,\,C_2,\,R_1,\,R_2,\,$  and  $R_3$  are compensation components used to obtain optimal response and settling of the current control loop. Information on how to select these components is available.

**FAULT.** The FAULT terminal when low indicates the presence of one of three fault conditions:

- An under-voltage condition on the logic supply. The trip point for this function is between 8 and 9.5 volts.
- An invalid Hall input combination ... all inputs High or all inputs Low.
- C) An excessive device junction temperature. The thermal shutdown circuitry disables the output drivers in addition to forcing the FAULT output signal low.

TACH and POLE. In order to develop a low-jitter tachometer signal (TACH) for use in controlling motor speed, the A8925CEB divides the frequency of the  $\rm H_1$  input by the number of poles in the motor. This eliminates the jitter caused by variations in Hall-effect device placement , sensitivity, and magnet strengths by always changing state when looking at the same magnet/sensor pair. The resulting TACH signal changes state every mechanical revolution of the motor. The POLE input sets the TACH signal for four-pole motors when Low or eight-pole motors when High.

**Hall Inputs** (H<sub>1</sub>, H<sub>2</sub>, H<sub>3</sub>). The A8925CEB is configured for use with open-collector Hall-effect devices. Internal 25 k $\Omega$  pull up resistors to 10 volts are connected to these inputs.

**ENABLE.** The ENABLE terminal when Low puts the device in a low current consumption, power-down mode. When ENABLE is High the device is active.

**BRAKE.** When the BRAKE input goes Low the output source drivers are disabled and the gates of the sink drivers are pulled high and left floating. This achieves optimum passive braking performance since the sink power DMOS output drivers are ON until the motor has fully completed braking. The braking control circuitry operates off the load supply  $(V_{BB})$  to allow it to remain operational during power loss by using the back-EMF voltage of the motor as it's supply.

**LOAD SUPPLY (VBB).** This terminal is the power supply connection for the power output drivers and braking control circuitry. This terminal should be decoupled with a large-value capacitor to absorb load currents dumped back into the supply during the de-energization of motor windings. These currents can cause the supply voltage to exceed the maximum voltage rating of the device if not properly decoupled. The intrinsic ground clamp and flyback diodes will rectify the motor's back-EMF voltage during power loss. In applications were use of the motor's back-EMF voltage is desired a series diode should be used to isolate this terminal from the logic supply ( $V_{\rm CC}$ ). This is to avoid dumping the charge back into the supply and therefor clamping the voltage available from rectification of the motor's back-EMF voltage.

**LOGIC SUPPLY (Vcc).** This is the 12 volt supply terminal for the A8925CEB and powers all circuitry except the power outputs and brake control circuitry.

**LOGIC GROUND.** This must be connected to the power ground terminals in systems that do not use separate power and logic grounds.

**POWER GROUND.** Terminals 7 through 17 and 29 through 39 are webbed together and attach to the die mounting area to form a low thermal resistance path to allow heat to be conducted out of the device. The power dissipation of the package can be further enhanced by soldering these terminals to a large area of copper foil on the printed wiring board.

## 8932-A

# RET REF 1 28 RET SET 27 VSENS CIRCUIT 26 VLOAD 25 VSENS FB 24 SGND N 24 OUT P 6 OUT 7 SWITCH 8 OUTSW 18 PROTECT 27 VSENS FB 24 SGND P OUTSW 18 PROTECT 29 SGND P OUTSW 18 PROTECT 17 H GAIN CIRCUIT WP RESET 13 PWR OFF FAULT 12 PROTECT 17 H GAIN SIJPPLY 14 VCC 15 ACT

Dwg. PP-042B

#### ABSOLUTE MAXIMUM RATINGS

Supply Voltages, V <sub>CC</sub> and V <sub>DD</sub> <b>6.0 V</b>
Output Current, IOUT (peak) ±600 mA
(continuous) ±500 mA
Analog Input Voltage Range,
V <sub>IN</sub>
Logic Input Voltage Range,
V <sub>IN</sub> 0.3 V to +6.0 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 0°C to +70°C
Junction Temperature, T <sub>1</sub> +150°C <sup>†</sup>
Storage Temperature Range,

† Fault conditions that produce excessive junction temperature will activate device thermal shutdown circuitry. These conditions can be tolerated, but should be avoided.

T<sub>s</sub> .....-55°C to +150°C

Output current rating may be restricted to a value determined by system concerns and factors. These include: system duty cycle and timing, ambient temperature, and use of any heatsinking and/or forced cooling. For reliable operation the specified maximum junction temperature should not be exceeded.

#### **VOICE COIL MOTOR DRIVER**

Providing control and drive of the voice coil motor used for head positioning in 5 V disk drive applications, the second-generation A8932–A is a full-bridge driver which can be configured so that its output current is a direct function of an externally applied control voltage or current. This linear current control function is supplemented by additional circuitry to protect the heads and the data disk during system failure or normal system shutdown.


The two ±500 mA MOS driver outputs provide very low saturation voltage and minimal power dissipation. Additional headroom is achieved by the sense-FET structure eliminating the need for an external current-sense resistor. Internal circuitry can be configured to provide closed-loop velocity control of the actuator by utilizing the generated back-EMF of the voice coil motor. Thermal protection and under-voltage lockout disables the system in a controlled sequence if a fault condition occurs.


#### **FEATURES**

- Internal Back-EMF Velocity Loop Option
- Lossless Current Sensing
- Zero Deadband
- High Transconductance Bandwidth
- User-Adjustable Transconductance Gain
- Digital Transconductance Gain Switch (4:1 Ratio)
- 5 Volt Monitor with Selectable UV Trip Point
- Retract Circuitry Functional to 0 Volts
- Chip Enable/Sleep Mode Function
- 1 V at 500 mA Output Saturation Voltage
- Internal Thermal Shutdown Circuitry

Always order by complete part number:

Part Number	Package
A8932CJTA	64-Lead Thin Quad Flatpack
A8932CLWA	28-Lead SOIC

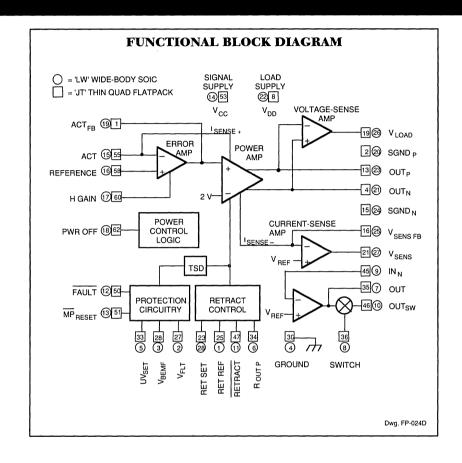

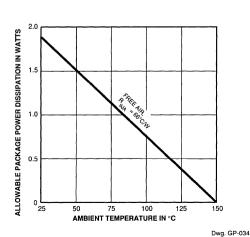

## VCC PROTECTION ORIGINATE OF THE PROTECTION ORIGINATE ORIGI

A8932CJTA

Dwg. PP-053-1

## ELECTRICAL CHARACTERISTICS at T $_A$ = +25°C, V $_{CC}$ = V $_{DD}$ = 5.0 V, V $_{REF}$ = V $_{IN}$ = 2.0 V, Load = 150 $\mu$ H/3.5 $\Omega$ (unless otherwise noted).

		1		Lin	nits	
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Error Amplifier						
Input Offset Voltage	V <sub>IO</sub>	I <sub>LOAD</sub> = 0 mA		_	50	mV
Current Gain	A <sub>iH</sub>	H GAIN ≥ 3.5 V	7200	8000	8800	_
	A <sub>iL</sub>	H GAIN ≤ 0.7 V	1800	2000	2200	_
Current Gain Linearity	E <sub>L(adj)</sub>	$I_{OUT} = 5$ mA to 500 mA, $A_i = A_{iL}$		_	±10	%
		I <sub>OUT</sub> = 5 mA to 500 mA, A <sub>i</sub> = A <sub>iH</sub>	<u> </u>	_	±10	%
Reference Voltage Range	$V_{REF}$		1.5	_	2.5	٧
Voltage-Sense Amplifier						
Voltage Gain	A <sub>VD</sub>		0.36	0.40	0.44	<u> </u>
Output Offset Voltage	V <sub>oo</sub>	I <sub>LOAD</sub> = 0 mA	_	_	±25	mV
Current-Sense Amplifier						
Voltage Gain	A <sub>VD</sub>	$R_s = R_{gm}$	_	1.0		_
Input Offset Voltage	V <sub>iO</sub>	$I_{LOAD} = 0$ mA, $A_i = A_{iL}$		_	±25	mV
Output Drivers						
Output Saturation Voltage	V <sub>DS(SAT)</sub>	I <sub>LOAD</sub> = 100 mA	_	0.25	_	V
		I <sub>LOAD</sub> = 500 mA		1.5		٧
Retract Output Saturation Voltage	V <sub>DS(SAT)</sub>	I <sub>OUT</sub> ≤ 150 mA		_	1.0	V
Output Current	lo	Pulse Test, ±600 mA Limited	T -	_	±500	mA
Full Power Bandwidth	BW	-3 dB	1.0	_	_	kHz
Uncommitted Op Amp						
Voltage Gain	A <sub>VS</sub>		T -	91	_	dB
Unity Gain Bandwidth	BW		T -	1.0	_	MHz
Max. Load Capacitance	C <sub>LOAD</sub>		40			pF
Slew Rate	SR		_	4.2	_	V/µs
Output Voltage	Vo	V <sub>SWITCH</sub> ≤ 0.7 V	2.5		3.5	V
	V <sub>osw</sub>	V <sub>SWITCH</sub> ≥ 3.5 V	2.2	_	2.9	V
Max. Output Current	I <sub>O</sub>		_	±250		μА
Input Offset Voltage	V <sub>IO</sub>			_	±10	mV
		<u> </u>				

Negative current is defined as coming out of (sourcing) the specified device terminal.

Typical Data is for design information only.

Continued next page...

## ELECTRICAL CHARACTERISTICS at T $_A$ = +25°C, V $_{CC}$ = V $_{DD}$ = 5.0 V, V $_{REF}$ = V $_{IN}$ = 2.0 V, Load = 150 $\mu$ H/3.5 $\Omega$ (unless otherwise noted).

				Lin	nits	
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Miscellaneous						
Supply Voltage	V <sub>cc</sub>	Operating	4.5	5.0	5.5	٧
	V <sub>DD</sub>	Operating	4.5	5.0	5.5	V
Under-Voltage Lockout Voltage	V <sub>cc</sub>	$V_{CC} = V_{DD}$	3.9	4.2	4.35	V
Fault Logic Output	V <sub>FAULT</sub>	V <sub>RETRACT</sub> ≥ 3.5 V		_	500	mV
	ŀ	V <sub>RETRACT</sub> ≤ 0.7 V	4.5	_	_	٧
	I <sub>FAULT</sub>	V <sub>FLT</sub> = 2.25 V	20			μА
Power-On Reset	V <sub>MPRESET</sub>	V <sub>RETRACT</sub> ≥ 3.5 V	4.5	_	_	٧
		V <sub>RETRACT</sub> ≤ 0.7 V, I <sub>MPREST</sub> = 1.5 mA	-	_	800	mV
Total Supply Current	I <sub>CC</sub> + I <sub>DD</sub>	Outputs Balanced, No Load	I -	_	10	mA
		Sleep Mode, PWR OFF = V <sub>CC</sub>	-	_	2.0	mA
Logic Input Voltage	V <sub>IN(0)</sub>		T -	_	0.7	٧
	V <sub>IN(1)</sub>		3.5		_	٧
Thermal Shutdown Temperature	TJ		-	165		°C
Thermal Shutdown Hysteresis	ΔΤ		_	20	_	°C

Negative current is defined as coming out of (sourcing) the specified device terminal.

Typical Data is for design information only.

#### **TERMINAL FUNCTIONS**

"JT" Term	"LW" Term.	Terminal Name	Function
25	1	RET REF	The reference supply for setting the voltage across the load during retract.
27	2	V <sub>FLT</sub>	Reservoir (energy storage) capacitor used to operate fault circuitry.
28	3	V <sub>BEMF</sub>	Back-EMF voltage from spindle motor used to retract heads during loss of power.
30	4	GROUND	Circuit reference.
33	5	UV <sub>SET</sub>	Under-voltage trip point reference input. Set internally to 4.2 V but may be overridden by external resistor divider. (Equation 4).
34	6	R <sub>OUT P</sub>	Source driver used for retract; externally connected to OUT <sub>P</sub> .
35	7	OUT	Output of uncommitted operational amplifier.
36	8	SWITCH	Logic input for transmission gate; a high level connects OUT to OUT <sub>SW</sub> .
45	9	IN <sub>N</sub>	Inverting input to uncommitted operational amplifier.
46	10	OUT <sub>sw</sub>	Transmission-gated output of uncommitted operational amplifier.
47	11	RETRACT	An active-low logic input that initiates the retract sequence.
50	12	FAULT	A logic low at this MOS output indicates a thermal shutdown, under-voltage fault, or retract command.
51	13	MP <sub>RESET</sub>	(Power-On Reset) A logic low at this open-collector output may be used to reset the system on under-voltage fault or power ON.
53	14	SIGNAL SUPPLY	V <sub>CC</sub> ; low-current supply voltage in the range of 4.5 V to 5.5 V.
55	15	ACT	Input which controls the current in the load. Transconductance gain is set with an external resistor in series with this input (Equation 1).
58	16	REFERENCE	V <sub>REF</sub> ; reference input for all amplifiers; ac ground.
60	17	H GAIN	Logic input to switch the error amplifier transconductance gain: LOW = 2100, HIGH = $8400$ .
62	18	PWR OFF	An active-high logic input that puts the device in a "sleep mode". All fault circuitry remains active.
1	19	ACT <sub>FB</sub>	Input connection for feedback network which sets the error amplifier gain and bandwidth.
2	20	SGND₽	Power ground for the OUT <sub>P</sub> sink driver.
4	21	OUT <sub>N</sub>	Power output. Sinks current when V <sub>ACT</sub> < V <sub>REF</sub> .
8	22	LOAD SUPPLY	V <sub>DD</sub> ; high-current supply voltage for the voice-coil motor.
13	23	OUT <sub>P</sub>	Power output. Sinks current when V <sub>ACT</sub> > V <sub>REF</sub> .
15	24	SGND <sub>N</sub>	Power ground for the OUT <sub>N</sub> sink driver.
16	25	V <sub>SENS</sub> FB	Input connection for feedback network which sets the current-sense amplifier gain and bandwidth. Also called gm SET.
19	26	$V_{LOAD}$	An output voltage proportional to the load voltage. Used in conjunction with closed-loop velocity control.
21	27	V <sub>SENS</sub>	Voltage output representing load current (Equation 2). Also called MONITOR.
23	28	RET SET	An external resistor divider to set the retract voltage across the load. Used in conjunction with $V_{\text{RET-REF}}$ (Equation 3).

#### 8932-A <u>VOICE COIL M</u>OTOR DRIVER

#### **DEVICE DESCRIPTION**

Current Amplifier. The A8932CJTA and A8932CLWA voice coil motor drivers feature a wide transconductance bandwidth and no measurable crossover distortion. The transconductance gain is user selectable:

$$g_{m} = \frac{A_{i}}{R_{gm}}$$
 (Equation 1)

where A<sub>i</sub> is either 2000 (H GAIN = Low) or 8000 (H GAIN = High)

The error amplifier's bandwidth and load compensation zero are set utilizing external resistor and capacitor feedback components around the amplifier.

The actuator main loop compensation can be set by applying a square wave and adjusting R<sub>2</sub> and C<sub>2</sub> for optimum response.

Current and Voltage Sensing. The load current is sensed internally. Three auxiliary amplifiers are also included to allow various control functions to be implemented. The first of these amplifiers provides a voltage output that is proportional to the load current:

$$V_{SENSE} = \frac{R_S I_{LOAD}}{A_a}$$
 (Equation 2)

The second and third auxiliary amplifiers may be used in conjunction with the first to provide a closed-loop velocity control system for the actuator arm during a controlled retract for head parking. This is achieved by determining the back-EMF voltage generated by the voice coil and feeding back this information to the main actuator control input. The back-EMF feedback voltage can be switched in as required by means of the SWITCH logic input.

The back EMF-voltage represents the velocity of the actuator. By subtracting the

 $I_{\text{LOAD}}R_{\text{LOAD}}$  voltage component from the voltage across the load, the back-EMF term can be isolated and fed back to close a velocity control loop.

The amplifier output voltage  $V_{\text{LOAD}}$  is proportional to the voltage across the load  $(A_{\text{VD}}(V_{\text{OUTN}} - V_{\text{OUTP}}))$ .  $R_{\text{s}}$  is selected so that  $V_{\text{SENSE}}$  represents  $I_{\text{LOAD}}$  while  $R_{\text{s}}$  is dependent on  $R_{\text{LOAD}}$  as shown in the following equations:

$$V_{LOAD} = -A_{VD} ((I_{LOAD} R_{LOAD}) + V_{BEMF})$$

$$V_{SENSE} = R_{e} I_{LOAD} / A_{u}$$

where A<sub>i</sub> = 2000 (H GAIN = logic Low)

$$OUT_{SW} = 0.4 (V_{BEMF} R_1/R_2)$$


$$R_3 = \frac{R_2 R_S}{0.4 A_i R_{LOAD}}$$

$$\frac{V_{BEMF}}{V_{IN}} = \frac{R_2 R_{Vgm}}{0.4 R_{gm} R_1}$$

$$BW = 0.4 \frac{R_1 K_B K_T A_i}{2\pi R_{VOL} R_0 J}$$

where J is the moment of inertia,  $K_{\rm B}$  is the back-emf motor constant, and  $K_{\rm T}$  is the torque constant.

Velocity loop compensation =  $L_{LOAD}/R_{LOAD} = R_1 C_1 = R_3 C_2$ 

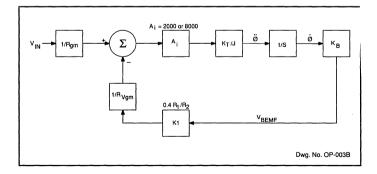

Retract and Brake. A retract-brake sequence is initiated on receiving a fault indication from the internal thermal shutdown (TSD), or under-voltage lockout (UVLO), or an externally applied logic High at the RETRACT input.

If the velocity control scheme is implemented, the head can be retracted under the full control of INPUT in conjunction with OUT<sub>sw</sub> back-EMF voltage if no fault condition exists. If a fault condition were to occur however, the retract velocity would be controlled by applying a constant user-defined voltage across the load:

$$V_{RET-SET} = \frac{2 R_8}{1000 + R_7 + R_8}$$
 (Equation 3)

where  $R_7 + R_8 >> 1000 \Omega$ .

When the sequence is operated, the output voltage is forced to approximately  $V_{\text{RET-SET}}$  to retract the heads, and then a fault command ("brake") is sent to the spindle motor driver.

The user determines the total time for the retract sequence, before the spindle brake is enabled, by the choice of an external resistor and capacitor at the FAULT output.

Power for the retract function is provided by the rectified back EMF of the spindle motor by way of the  $V_{\text{BEMF}}$  terminal. The A8932-A will perform the retract function under low supply conditions (nominally down to 2 V). Operation down to almost 0 V requires an energy-storage capacitor at the  $V_{\text{FLT}}$  terminal.


**Protective Features.** The A8932-A has a number of protective features incorporated into the design. Under-voltage lockout provides system protection in the event of reduced primary supply voltages. The under-voltage trip point is internally set at approximately 4.2 V. It can be user-defined with an external resistor voltage divider:

$$UV_{TRIP} = \frac{2 (R_5 + R_6)}{R_6}$$
 (Equation 4)

where  $R_5 + R_6 \ll 200 \text{ k}\Omega$ .

Thermal shutdown circuitry is included to protect the device from excessive junction temperature. It is only intended to protect the chip from catastrophic failures due to excessive junction temperature.

#### TEST CIRCUIT AND TYPICAL APPLICATION

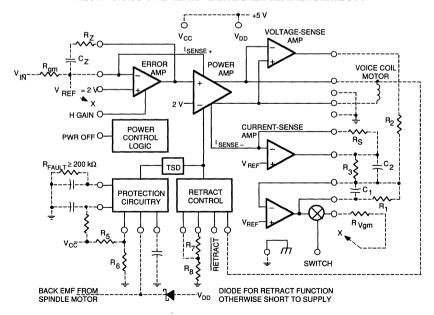

Dwg. No. EP-0410

#### A8936CLW BET BEE 28 RET SET PROTECT CIRCUIT ā s VEL FLT WINDOV 25 V<sub>SENS FB</sub> GROUND COMP. 24 SGND N UV<sub>SET</sub> VREF OUTP ROUTP OUT OUTN EN VEL FLT ACT FB BETBACT 11 18 PWR OFF REFERENCE SIGNAL 14 ACT

Dwg. PP-046A

#### ABSOLUTE MAXIMUM RATINGS

Supply Voltages, V <sub>CC</sub> and V <sub>DD</sub> 6.0 V
Output Current, I <sub>OUT</sub> (peak) ±600 mA
(continuous) ±500 mA
Analog Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>CC</sub>
Logic Input Voltage Range,
V <sub>IN</sub> 0.3 V to +6.0 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 0°C to +70°C
Junction Temperature, T <sub>J</sub> +150°C <sup>†</sup>
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C

† Fault conditions that produce excessive junction temperature will activate device thermal shutdown circuitry. These conditions can be tolerated, but should be avoided.

Output current rating may be restricted to a value determined by system concerns and factors. These include: system duty cycle and timing; ambient temperature, and use of any heatsinking and/or forced cooling. For reliable operation the specified maximum junction temperature should not be exceeded.

#### **VOICE COIL MOTOR DRIVER**

Providing control and drive of the voice coil motor used for head positioning in 5 V disk drive applications, the A8936— is a full-bridge driver which can be configured so that its output current is a direct function of an externally applied control voltage or current. This linear current control function is supplemented by additional circuitry to protect the heads and the data disk during system failure or normal system shutdown. An under- or over-velocity sense disables the system in a controlled sequence if a fault condition occurs.


The two  $\pm 500$  mA MOS driver outputs provide very low saturation voltage and minimal power dissipation. Additional headroom is achieved by the sense-FET structure eliminating the need for an external current-sense resistor. Thermal protection and under-voltage lockout disables the system in a controlled sequence if a fault condition occurs.

#### **FEATURES**


- Over-Velocity Fault Function
- Lossless Current Sensing
- Zero Deadband
- High Transconductance Bandwidth
- User-Adjustable Transconductance Gain
- Digital Transconductance Gain Switch (4:1 Ratio)
- 5 Volt Monitor with Selectable UV Trip Point
- Retract Circuitry Functional to 0 Volts
- Chip Enable/Sleep Mode Function
- 1 V at 500 mA Output Saturation Voltage
- Internal Thermal Shutdown Circuitry

Always order by complete part number:

Part Number	Package
A8936CJT	64-Lead Thin Quad Flatpack
A8936CLW	28-Lead SOIC

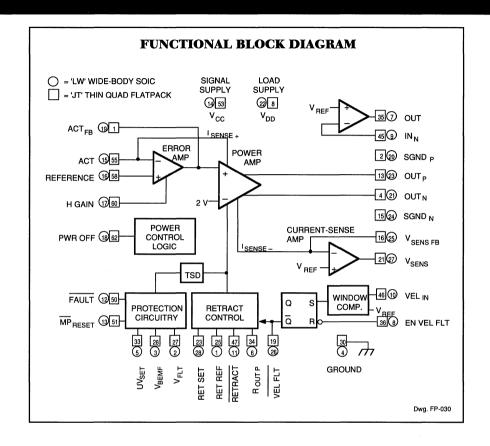

#### **A8936CJT**



Dwg. PP-052-1

## ELECTRICAL CHARACTERISTICS at T $_A$ = +25°C, V $_{CC}$ = V $_{DD}$ = 5.0 V, V $_{REF}$ = V $_{IN}$ = 2.0 V, Load = 150 $\mu$ H/3.5 $\Omega$ (unless otherwise noted).

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Error Amplifier						
Input Offset Voltage	V <sub>IO</sub>	I <sub>LOAD</sub> = 0 mA		_	50	mV
Current Gain	A <sub>iH</sub>	H GAIN ≥ 3.5 V	7200	8000	8800	_
	A <sub>iL</sub>	H GAIN ≤ 0.7 V	1800	2000	2200	_
Current Gain Linearity	E <sub>L(adj)</sub>	$I_{OUT} = 5$ mA to 500 mA, $A_i = A_{iL}$	<u> </u>	_	±10	%
		I <sub>OUT</sub> = 5 mA to 500 mA, A <sub>i</sub> = A <sub>iH</sub>		_	±10	%
Reference Voltage Range	V <sub>REF</sub>		1.5	_	2.5	٧
Current-Sense Amplifier						
Voltage Gain	A <sub>VD</sub>	$R_s = R_{gm}$		1.0	_	_
Input Offset Voltage	V <sub>iO</sub>	$I_{LOAD} = 0$ mA, $A_i = A_{iL}$	T -		±25	mV
Output Drivers						
Output Saturation Voltage	V <sub>DS(SAT)</sub>	I <sub>LOAD</sub> = 100 mA	] -	0.25		٧
(Source + Sink)		I <sub>LOAD</sub> = 500 mA		1.5	_	٧
Retract Output Saturation Voltage	V <sub>DS(SAT)</sub>	I <sub>OUT</sub> ≤ 150 mA	T -	_	1.0	٧
Output Current	Io	Pulse Test, ±600 mA Limited	T -	_	±500	mA
Full Power Bandwidth	BW	-3 dB	1.0	_	_	kHz
Window Comparator						
Lower Trip Point	VELIN		1.12	1.25	1.38	V
Upper Trip Point	VELIN		2.47	2.75	3.03	٧
Uncommitted Op Amp						
Voltage Gain	A <sub>VS</sub>		T-	91	_	dB
Unity Gain Bandwidth	BW		T -	1.0		MHz
Max. Load Capacitance	C <sub>LOAD</sub>		40	_		pF
Slew Rate	SR			4.2	_	V/µs
Output Voltage	Vo	V <sub>IO</sub> = 100 mV	2.5	_	3.5	V
Max. Output Current	lo		-	±250	_	μА
Input Offset Voltage	V <sub>IO</sub>				±10	mV

Negative current is defined as coming out of (sourcing) the specified device terminal.

Typical Data is for design information only.

Continued next page...

ELECTRICAL CHARACTERISTICS at T<sub>A</sub> = +25°C, V<sub>CC</sub> = V<sub>DD</sub> = 5.0 V, V<sub>REF</sub> = V<sub>IN</sub> = 2.0 V, Load = 150  $\mu$ H/3.5  $\Omega$  (unless otherwise noted).

			Limits				
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units	
Miscellaneous							
Under-Voltage Lockout Voltage	V <sub>cc</sub>	$V_{CC} = V_{DD}$	3.9	4.2	4.35	٧	
Fault Logic Output	V <sub>FAULT</sub>	V <sub>RETRACT</sub> ≥ 3.5 V	_	_	500	mV	
		V <sub>RETRACT</sub> ≤ 0.7 V	4.5		_	٧	
	IFAULT	V <sub>FLT</sub> = 2.25 V	20	_	_	μА	
Power-On Reset	V <sub>MPRESET</sub>	V <sub>RETRACT</sub> ≥ 3.5 V	4.5	_		٧	
		V <sub>RETRACT</sub> ≤ 0.7 V, I <sub>MPRESET</sub> = 1.5 mA	_		800	mV	
Total Supply Current	Icc + IDD	Outputs Balanced, No Load	T =		10	mA	
		Sleep Mode, PWR OFF = V <sub>CC</sub>	T -	_	2.0	mA	
Logic Input Voltage	V <sub>IN(0)</sub>				0.7	V	
	V <sub>IN(1)</sub>		3.5	_		٧	
Thermal Shutdown Temperature	TJ		_	165	_	°C	
Thermal Shutdown Hysteresis	ΔT <sub>J</sub>		_	20	_	°C	

Negative current is defined as coming out of (sourcing) the specified device terminal.

Typical Data is for design information only.

#### **TERMINAL FUNCTIONS**

"JT" Term.	"LW" Term.	Terminal Name	Function
25	1	RET REF	The reference supply for setting the voltage across the load during retract.
27	2	V <sub>FLT</sub>	Reservoir (energy storage) capacitor used to operate fault circuitry.
28	3	V <sub>BEMF</sub>	Back-EMF voltage from spindle motor used to retract heads during loss of power.
30	4	GROUND	Circuit reference.
33	5	UV <sub>SET</sub>	Under-voltage trip point reference input. Set internally to 4.2 V but may be overridden by external resistor divider. (Equation 4).
34	6	R <sub>OUT P</sub>	Source driver used for retract; externally connected to OUT <sub>P</sub> .
35	7	OUT	Output of uncommitted operational amplifier.
36	8	EN VEL FLT	Logic input for over-velocity fault latch.
45	9	IN <sub>N</sub>	Inverting input to uncommitted operational amplifier.
46	10	VELIN	Analog voltage input corresponding to motor speed.
47	11	RETRACT	An active-low logic input that initiates the retract sequence.
50	12	FAULT	A logic low at this MOS output indicates a thermal shutdown, under-voltage fault, or retract command.
51	13	MP <sub>RESET</sub>	(Power-On Reset) A logic low at this open-collector output may be used to reset the system on under-voltage fault or power ON.
53	14	SIGNAL SUPPLY	V <sub>CC</sub> ; low-current supply voltage in the range of 4.5 V to 5.5 V.
55	15	ACT	Input which controls the current in the load. Transconductance gain is set with an external resistor in series with this input (Equation 1).
58	16	REFERENCE	V <sub>REF</sub> ; reference input for all amplifiers; ac ground.
60	17	H GAIN	Logic input to switch the error amplifier transconductance gain: LOW = 2100, HIGH = 8400.
62	18	PWR OFF	An active-high logic input that puts the device in a "sleep mode". All fault circuitry remains active.
1	19	ACT <sub>FB</sub>	Input connection for feedback network which sets the error amplifier gain and bandwidth.
2	20	SGND <sub>P</sub>	Power ground for the OUT <sub>P</sub> sink driver.
4	21	OUT <sub>N</sub>	Power output. Sinks current when V <sub>ACT</sub> < V <sub>REF</sub> .
8	22	LOAD SUPPLY	V <sub>DD</sub> ; high-current supply voltage for the voice-coil motor.
13	23	OUT <sub>P</sub>	Power output. Sinks current when V <sub>ACT</sub> > V <sub>REF</sub> .
15	24	SGND <sub>N</sub>	Power ground for the OUT <sub>N</sub> sink driver.
16	25	V <sub>SENS</sub> FB	Input connection for feedback network which sets the current-sense amplifier gain and bandwidth. Also called gm SET.
19	26	VEL FLT	An active-low logic output indicating an over-velocity fault.
21	27	V <sub>SENS</sub>	Voltage output representing load current (Equation 2). Also called MONITOR.
23	28	RET SET	An external resistor divider to set the retract voltage across the load. Used in conjunction with $V_{\text{RET-REF}}$ (Equation 3).

#### **DEVICE DESCRIPTION**

**Current Amplifier.** The A8936CJT and A8936CLW voice coil motor drivers feature a wide transconductance bandwidth and no measurable crossover distortion. The transconductance gain is user selectable:

$$g_m = \frac{A_i}{R_{am}}$$
 (Equation 1)

where A<sub>i</sub> is either 2000 (H GAIN = Low) or 8000 (H GAIN = High)

The error amplifier's bandwidth and load compensation zero are set utilizing external resistor and capacitor feedback components around the amplifier.

The actuator main loop compensation can be set by applying a square wave and adjusting  $R_{\rm p}$  and  $C_{\rm p}$  for optimum response.

Current and Voltage Sensing. The load current is sensed internally. Two auxiliary amplifiers are also included to allow various control functions to be implemented. The first of these amplifiers provides a voltage output that is proportional to the load current:

$$V_{SENS} = \frac{R_S I_{LOAD}}{A_{iL}}$$
 (Equation 2)

The second auxiliary amplifier may be used in conjunction with the first to provide a closed-loop velocity control system for the actuator arm during a controlled retract for head parking.

**Under- & Over-Velocity Fault.** For a constant load, motor current  $(I_{LOAD})$  and therefore  $V_{SENS}$  are proportional to motor velocity.  $V_{SENS}$  is amplified by the uncommitted amplifier and compared against the internal 2 V reference and used to indicate a velocity fault if the voltage is greater than a nominal  $\pm 0.75$  V from the 2 V reference. EN VEL FLT may be tied to the FAULT terminal to reset the velocity fault after a tripout.

**Retract and Brake.** A retract-brake sequence is initiated on receiving a fault indication from the internal thermal shutdown (TSD), under-voltage lockout (UVLO), the under- or over-velocity fault, or an externally applied logic High at the RETRACT input.

If the velocity control scheme is implemented, the head can be retracted under the full control of INPUT in conjunction with  ${\rm OUT}_{\rm sw}$  back-EMF voltage if no fault condition exists. If a fault condition were to occur however, the retract velocity would be controlled by applying a constant user-defined voltage across the load:

$$V_{RET-SET} = \frac{2 R_8}{1000 + R_7 + R_8}$$
 (Equation 3)

where  $R_7 + R_8 >> 1000 \Omega$ .

When the sequence is operated, the output voltage is forced to approximately  $V_{\text{RET-SET}}$  to retract the heads, and then a fault command ("brake") is sent to the spindle motor driver. The user determines the total time for the retract sequence, before the spindle brake is enabled, by the choice of an external resistor and capacitor at the FAULT output.


Power for the retract function is provided by the rectified back EMF of the spindle motor by way of the  $V_{\text{BEMF}}$  terminal. The A8936—will perform the retract function under low supply conditions (nominally down to 2 V). Operation down to almost 0 V requires an energy-storage capacitor at the  $V_{\text{FLT}}$  terminal.

**Protective Features.** The A8936– has a number of protective features incorporated into the design. Under-voltage lockout provides system protection in the event of reduced primary supply voltages. The under-voltage trip point is internally set at approximately 4.2 V. It can be user-defined with an external resistor voltage divider:

$$UV_{TRIP} = \frac{2(R_5 + R_6)}{R_6}$$
 (Equation 4)

where  $R_5 + R_6 \ll 200 \text{ k}\Omega$ .

Thermal shutdown circuitry is included to protect the device from excessive junction temperature. It is only intended to protect the chip from catastrophic failures due to excessive junction temperature.

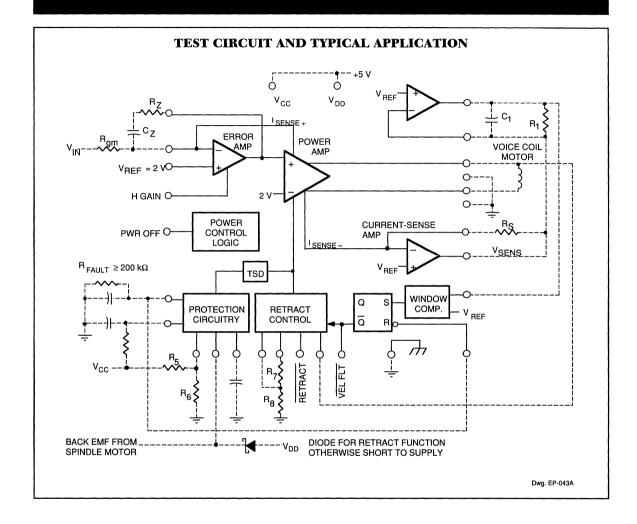

#### 28 DAC OUT VEL MIN 27 DAC WRITE 26 D7 CD ON 3 25 D6 ARCD PES 24 D5 GROUND 23 D4 22 D3 BHF2 21 D2 S CD 20 D1 SAB 19 D0 SUPPLY 10 Vcc 18 DIGITAL GROUND WINDOW COMPARATOR ON TRACK II 17 REFERENCE VRFB V<sub>SET2</sub> 12 BAND GAP REG O CD 13 16 VRNEG ICD 14 15 V<sub>SET1</sub>

#### Dwg. No. PC-006

#### ABSOLUTE MAXIMUM RATINGS at $T_A = 25^{\circ}C$

Supply Voltage, V <sub>CC</sub> 6.0 V
Output Current, I <sub>OUT</sub> ±1.0 mA
Reference Output Current, I <sub>RFB</sub> ±5.0 mA
Input Voltage Range,
V <sub>IN</sub> 0.3 V to V <sub>cc</sub> + 0.3 V
Package Power Dissipation, P <sub>D</sub> 1.2 W
Operating Temperature Range,
T <sub>A</sub> 0°C to +70°C
Junction Temperature, T <sub>J</sub> 150°C
Storage Temperature Range,
T <sub>S</sub> 55°C to +150°C

Caution: This CMOS device has input static protection but is susceptible to damage when exposed to extremely high static electrical charges.

#### SERVO CONTROLLER SYSTEM

The A8951CLW generates the analog position-error signal used for the voice-coil actuator in 5 V hard disk drives. Digital circuitry provides tracking signals to the system microcontroller. This device, with the A8952CLW loop compensator, is an alternative to a full DSP servo approach. Included on chip are an 8-bit, R/2R, digital-to-analog converter and a stable band gap voltage reference.

Each circuit function is optimized for the servo controller application. The signal-path switching transmission gates feature short propagation delays, the operational amplifiers feature low input offset voltages and individual logic-switched feedback loops, and the CMOS sample-and-hold amplifiers provide low droop.


The A8951CLW is supplied in a 28-lead SOIC for surface-mount applications. It is rated for continuous operation over the temperature range of  $0^{\circ}$ C to  $+70^{\circ}$ C.


#### **FEATURES**

- Position-Error Signal Generation
- Track Position Detection Functions
- On-Track Signal Generation
- 8-Bit DAC
- Low Offset Operational Amplifiers
- Low Droop Sample/Hold Amplifiers
- Short Delay Transmission Gates
- Guaranteed DAC Monotonicity

Always order by complete part number: A8951CLW .

## 8951 SERVO CONTROLLER SYSTEM

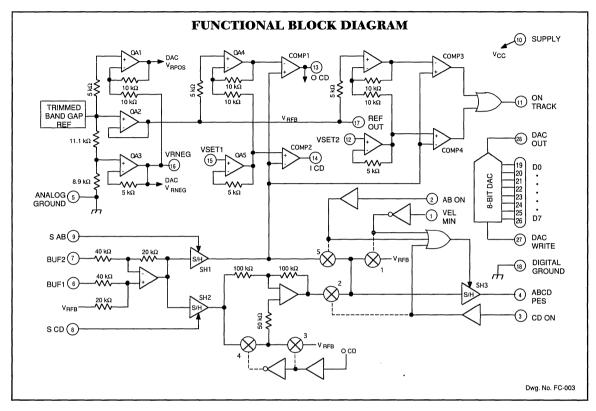



#### 8951 SERVO CONTROLLER SYSTEM

ELECTRICAL CHARACTERISTICS at  $T_A$  = +25°C,  $V_{CC}$  = SAB = AB ON = VEL MIN = 5.0 V, CD ON = 0 V, BUF1 = BUF2 =  $V_{RFB}$  (unless otherwise specified).

					Limits				
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units			
Supply Voltage Range	V <sub>cc</sub>	Operating	4.5	5.0	5.5	. V			
Supply Current	l <sub>cc</sub>	No Load	_		15	mA			
Logic Input Voltage	V <sub>IN(0)</sub>		_		0.8	٧			
	V <sub>IN(1)</sub>		3.5	_	_	٧			
Logic Input Current	I <sub>IN</sub>		_		±100	nA			

#### REFERENCE PARAMETERS

Reference Output Voltage	V <sub>RFB</sub>	No Load	2.228	2.250	2.273	V
Dropout Voltage	V <sub>cc</sub>		-	_	4.5	V
Load Regulation	$\Delta V_{RFB}$	0 mA ≤ I <sub>RFB</sub> ≤ -2 mA	T -	_	±20	mV
		0 mA ≤ I <sub>RFB</sub> ≤ +2 mA		_	±20	mV
Power Supply Rejection Ratio	PSRR	f = 1 kHz, V <sub>in</sub> = 250 mV	60	75	_	dB

#### **DIGITAL-TO-ANALOG CONVERTER PARAMETERS**

Linearity Error	E <sub>L</sub>	End-point method	_	_	±3.0	%
Full-Scale Output Voltage	V <sub>FS</sub>		3.40	3.50	3.60	V
Zero-Scale Output Voltage	V <sub>zs</sub>		0.90	1.00	1.10	٧
Minimum Write Pulse Duration	t <sub>w</sub>				320	ns
Minimum Data Set-Up Time	t <sub>ds</sub>		_		320	ns
Minimum Data Hold Time	t <sub>dh</sub>		_	_	300	ns
Power Supply Rejection Ratio	PSRR	f = 1 kHz, V <sub>in</sub> = 250 mV	_	75	60	dB

#### COMPARATOR TRIP POINTS REFERENCED TO BUF2; BUF1 = $V_{RFB}$

ICD	_	V <sub>SET1</sub> = 1.75 V	3.061		3.448	٧
O CD	_	V <sub>SET1</sub> = 1.75 V	1.162	_	1.337	٧
ON TRACK Low		V <sub>SET2</sub> = 2.10 V	2.379	_	2.730	V
ON TRACK High	_	V <sub>SET2</sub> = 2.10 V	1.816		2.087	٧

Continued...

### 8951 SERVO CONTROLLER SYSTEM

... Electrical Characteristics (continued)

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units

### ABCD PES Parameters with S AB = S CD = AB ON = CD ON = VEL MIN = O CD = 0 V (unless otherwise specified); offset measurements are referenced to $V_{\rm RFB}$

ABCD PES Gain	A <sub>e</sub>	S AB = AB ON = 5 V, S CD = 0 V	_	0.5	_	V/V
ABCD PES Gain	A <sub>e</sub>	S CD = AB ON = 5 V, S AB = 0 V		0.5	_	V/V
AB Channel Offset Voltage	_	S AB = AB ON = VEL MIN = 5.0 V	_	_	±25	mV
CD Channel Offset Voltage	_	S CD = CD ON = VEL MIN = 5.0 V			±30.5	mV
VEL MIN Channel Offset Voltage	_		_	_	±15	mV


#### SAMPLE AND HOLD PARAMETERS

SH1 Pedestal Error	E <sub>p1</sub>	V <sub>IN</sub> = 2.5 V, switch S AB	_	±10	±50	mV
SH2 Pedestal Error	E <sub>p2</sub>	V <sub>IN</sub> = 2.5 V, switch S CD	_	±10	±50	mV
SH3 Pedestal Error	E <sub>p3</sub>	V <sub>IN</sub> = 2.5 V, switch AB ON	_	±10	±50	mv
SH3 Pedestal Error	E <sub>p3</sub>	V <sub>IN</sub> = 2.5 V, switch CD ON	_	±10	±50	mv
SH3 Pedestal Error	E <sub>p3</sub>	V <sub>IN</sub> = 2.5 V, switch VEL MIN		±10	±50	mv
SH1 Droop	_	Hold on 2.25 V, average over 10 ms		100	500	μV/ms
SH2 Droop	<del>-</del>	Hold on 2.25 V, average over 10 ms	_	100	500	μV/ms
SH3 Droop	_	Hold on 2.25 V, average over 10 ms	_	100	500	μV/ms

Negative current is defined as coming out of (sourcing) the specified device terminal.

Typical Data is for design information only.

# 8951 SERVO CONTROLLER SYSTEM

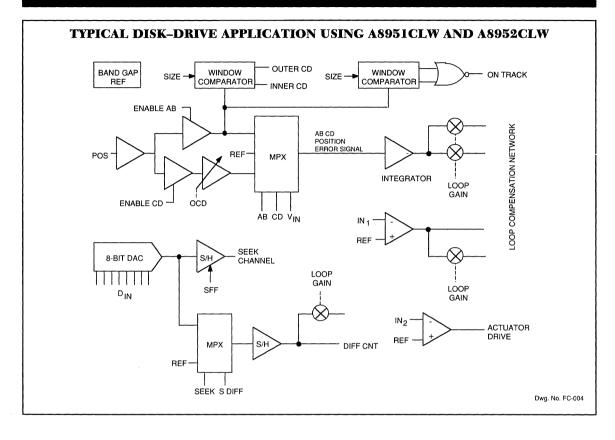


Voice—coil servo motors in disk—drive head—positioning systems utilize complex algorithms and sophisticated circuitry to provide good track—seeking and track—following performance. A typical hard—disk track geometry requires precise voice—coil motor control to ensure accurate positioning of the head above the desired track.

The A8951CLW servo controller system and A8952CLW servo loop compensator are companion devices that provide most of the circuitry to accomplish the head–positioning servo functions. A digital velocity command is converted into an analog signal and, through signal processing with multiple operational amplifiers and sample–and–hold circuits, is utilized to develop a position–error signal to correct the servo loop.

Surface—mount technology provides major benefits of reduced package size and weight, and improved system reliability through the reduction of printed wiring board through holes. Improved quality as well as lower assembly cost are obtained through the adaptability of these devices to high–speed, automated, pick–and–place assembly.

# 8952

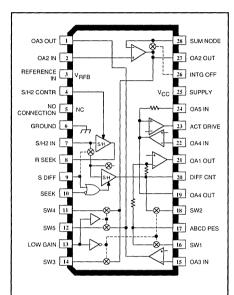

Dwg No PC-005

#### ABSOLUTE MAXIMUM RATINGS at $T_A = 25^{\circ}C$

Caution: This CMOS device has input static protection but is susceptible to damage when exposed to extremely high static electrical charges.

## SERVO LOOP COMPENSATOR

The A8952CLW provides all of the active circuitry for the servo loop compensation in the control and drive to the voice coil driver used for head positioning in disk-drive applications. Included are multiple transmission gates, operational amplifiers, and two sample-and-hold amplifiers. Circuit functions are isolated and major circuit nodes are accessible for a complete user-configurable system architecture.


Each circuit function is optimized for the loop compensation application. The signal-path switching transmission gates feature short propagation delays, the operational amplifiers feature low input offset voltages and individual logic-switched feedback loops, and the CMOS sample-and-hold amplifiers provide low droop.


The A8952CLW is supplied in a 28-lead SOIC for surface-mount applications. It is rated for continuous operation over the temperature range of 0°C to +70°C.

#### **FEATURES**

- User-Configurable Architecture Loop Compensation
- Low Offset Operational Amplifiers
- Low Droop Sample & Hold Amplifiers
- Short Delay Transmission Gates

Always order by complete part number: | A8952CLW |.

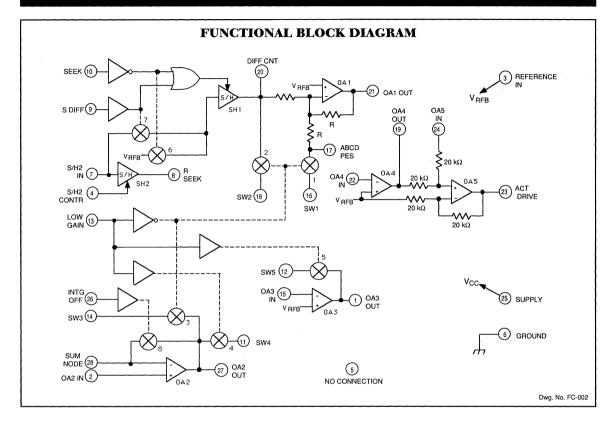

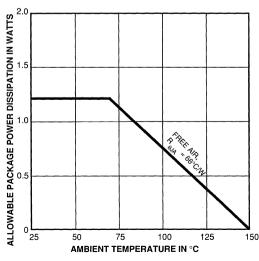

# 8952 LOOP COMPENSATOR

# ELECTRICAL CHARACTERISTICS at $T_A = +25$ °C, $V_{CC} = 5.0 \text{ V}$

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Supply Voltage Range	V <sub>cc</sub>	Operating	4.5	5.0	5.5	V
Supply Current	lcc	No Load	_	4.5	9.0	mA

#### TRANSMISSION GATE PARAMETERS

On Resistance	R <sub>ON</sub>		-	140	280	Ω
Propagation Delay	t <sub>PD</sub>		_	_	50	ns
Input Current	I <sub>IO</sub>	V <sub>IN</sub> = 0 V	_	<1.0	100	nA
		V <sub>IN</sub> = 5.0 V	-	<1.0	100	nA
INTG OFF Bias Current	1 <sub>IB</sub>	V <sub>IN</sub> = 0 V	-	<1.0	100	nA
		V <sub>IN</sub> = 5.0 V	_	<1.0	100	nA
ABCD PES Bias Current	I <sub>IB</sub>	V <sub>IN</sub> = 2.5 V		1.0	2.0	μА
LOW GAIN Bias Current	I <sub>IB</sub>	V <sub>IN</sub> = 5.0 V	-	3.0	300	nA
S DIFF Bias Current	I <sub>IB</sub>	V <sub>IN</sub> = 0 V	_	<1.0	100	nA
		V <sub>IN</sub> = 5.0 V	_	<1.0	100	nA
Switch Bias Current	I <sub>IB</sub>	V <sub>IN</sub> = 0 V	_	<1.0	50	nA
(SW1, SW2, and SW3)		V <sub>IN</sub> = 5.0 V	_	<1.0	50	nA
Attenuation	α	f = 1 kHz, V <sub>in</sub> = 800 mV <sub>RMS</sub>	_	80	_	dB
Distortion	THD	f = 1 kHz, V <sub>in</sub> = 800 mV <sub>RMS</sub>	_	<0.1	_	%

#### **OPERATIONAL AMPLIFIER PARAMETERS**

Input Offset Voltage	V <sub>IO</sub>	V <sub>IN</sub> = 2.5 V, I <sub>OUT</sub> = 0 mA	-	0.75	4.0	mV
Input Bias Current	I <sub>IB</sub>	$V_{IN} = 2.5 \text{ V}, I_{OUT} = 0 \text{ mA}$	_	35	250	nA
Input Offset Current	I <sub>os</sub>		-	4.0	50	nA
Open Loop Gain	A <sub>e</sub>	I <sub>OUT</sub> = 0 mA	60	100		dB
Gain Bandwidth Product	BW	No Load	-	1.0	_	MHz
Slew Rate	SR		-	1.0		V/μs
Output Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>OUT</sub> = -900 μA	-	0.9	1.0	٧
		I <sub>OUT</sub> = 900 μA		0.9	1.0	٧
Reference Input Bias Current	I <sub>RFB</sub>	Total input current, V <sub>RFB</sub> = 2.5 V	_	300	750	nA
Power Supply Rejection Ratio	PSRR	$\Delta V_{CC} = 1.0 \text{ V}$	60	75	_	dB

Continued...


# 8952 LOOP COMPENSATOR

...Electrical Characteristics (continued)

				Limits		
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
SAMPLE AND HOLD PARA	METERS					
Gain	A <sub>e</sub>	$\Delta V_{in} = 1.0 \text{ V}$	_	1.0	_	V/V
Output Offset Voltage	V <sub>oo</sub>		. –	4.0	12.5	mV
Pedestal Error	Ep	V <sub>IN</sub> = 2.5 V	-	±10	±50	mV
Droop	ΔV <sub>O</sub> /t	V <sub>IN</sub> = 2.5 V, t = 10 ms	-	100	500	μV/ms
SEEK Bias Current	I <sub>IB</sub>	$V_{IN} = 0.V$		<1.0	100	nA
		V <sub>IN</sub> = 5.0 V	-	<1.0	100	nA
S/H2 IN Bias Current	I <sub>IB</sub>	V <sub>IN</sub> = 2.5 V	-	30	350	nA
S DIFF Bias Current	I <sub>IB</sub>	V <sub>IN</sub> = 0 V	_	<1.0	100	nA
		V <sub>IN</sub> = 5.0 V	-	<1.0	100	nA

Negative current is defined as coming out of (sourcing) the specified device terminal.

Typical Data is for design information only.

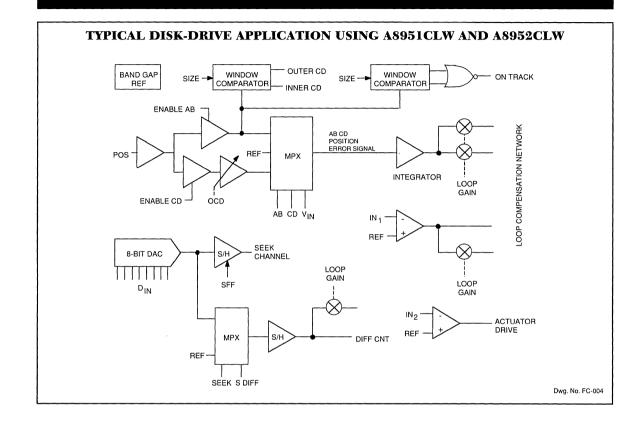


Voice—coil servo motors in disk—drive head—positioning systems utilize complex algorithms and sophisticated circuitry to provide good track—seeking and track—following performance. A typical hard—disk track geometry requires precise voice—coil motor control to ensure accurate positioning of the head above the desired track.

The A8951CLW servo controller system and A8952CLW servo loop compensator are companion devices that provide most of the circuitry to accomplish the head–positioning servo functions. A digital velocity command is converted into an analog signal and, through signal processing with multiple operational amplifiers and sample–and–hold circuits, is utilized to develop a position–error signal to correct the servo loop.

Surface—mount technology provides major benefits of reduced package size and weight, and improved system reliability through the reduction of printed wiring board through holes. Improved quality as well as lower assembly cost are obtained through the adaptability of these devices to high–speed, automated, pick–and–place assembly.

# 8958



# ABSOLUTE MAXIMUM RATINGS at T<sub>.</sub> = 25°C

at $T_A = 25^{\circ}C$
Supply Voltages, V <sub>BB</sub> and V <sub>CC</sub> 16 V
Output Current, I <sub>OUT</sub> ±1.0 A
Park Drive Output Current, IPARK
Continuous250 mA
Peak1.0 A
Amplifier Input Voltage Range,
V <sub>IN</sub> 2.0 V to V <sub>CC</sub>
Sense Input Voltage Range,
V <sub>SENSE IN</sub> 0.3 V to V <sub>CC</sub>
Comparator and Digital Inputs,
V <sub>IN</sub> 0.3 V to 10 V
l <sub>IN</sub> ±10 mA
Power OK Output, V <sub>CEX</sub> 20 V
I <sub>C</sub> 30 mA
Output Clamp Diode Current,
I <sub>F</sub> (pulsed)1.0 A
Package Power Dissipation, PpSee Graph
Operating Temperature Range,
T <sub>A</sub> 0°C to +70°C
Junction Temperature, T <sub>J</sub> 150°C*

<sup>\*</sup> Fault conditions that produce excessive junction temperature will activate device thermal shutdown circuitry. These conditions can be tolerated but should be avoided.

T<sub>S</sub> .....-55°C to +150°C

Storage Temperature Range,

## **VOICE COIL MOTOR DRIVER**

Providing control and drive of the voice coil motor used for head positioning in disk drive applications, the A8958— is a full-bridge driver which can be configured so that its output current is a direct function of an externally applied control voltage or current. This linear current control function is supplemented by additional circuitry to protect the heads and the data disk during system failure or normal system shutdown.

The two  $\pm 800$  mA driver outputs provide very-low saturation voltage drops and precise current control utilizing a single current-sensing resistor connected in series with the load. Under-voltage lockout disables the system in a controlled sequence if a fault condition occurs.

When activated by the under-voltage comparator, or a park command, the output power drivers change from a controlled current to a user-determined constant park voltage. Other features include a power ok flag, a limit input to force the outputs to their maximum level in either polarity, an over-riding output disable to shut down both power amplifiers and reduce quiescent supply current, and internal thermal shutdown which disables the load (but still allowing the head to be parked) in the event of excessive junction temperatures. The load is re-enabled when the junction temperature returns to a safe level.

The A8958CEA is supplied in a 28-lead power PLCC for surface-mount applications; the A8958CLB is supplied in a 24-lead power SOIC. The copper half-batwing/batwing construction provides for maximum package power dissipation in a minimum package size. Both are rated for continuous operation over the temperature range of 0°C to +70°C.


#### **FEATURES**


- Controlled-Velocity Head Parking
- 4 V to 15 V Operation
- Zero Deadband
- High Transconductance Bandwidth
- User-Adjustable Transconductance Gain
- ±800 mA Load Current
- Dual Under-Voltage Monitors with Flag and User-Selectable Trip Points
- Internal Thermal Shutdown Circuitry
- Replaces UC3175

Always order by complete part number:


Part Number	Package
A8958CEA	28-Lead Half-Batwing PLCC
A8958CLB	24-Lead Batwing SOIC

#### A8958CLB

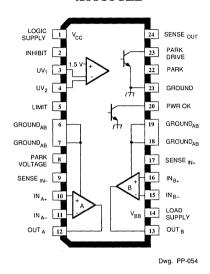

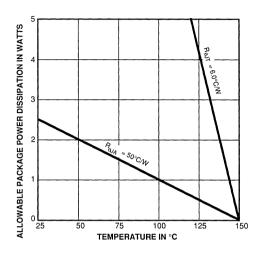

Dwg. GP-033

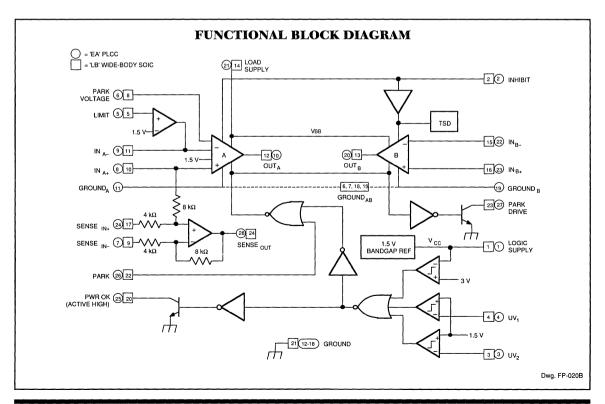

# ELECTRICAL CHARACTERISTICS at $T_A = +25$ °C, $V_{CC} = V_{BB} = 12 \text{ V}$

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Logic Supply Voltage Range	V <sub>CC</sub>	Operating	3.0	12	16	V
Logic Supply UV Threshold	V <sub>CC</sub>	High-to-low transition	_	2.8	3.0	V
Logic Supply UV Hysteresis	ΔV <sub>CC</sub>		_	200	_	mV
Supply Current	I <sub>BB</sub>	V <sub>OUT</sub> = 6 V, no load	T -	2.0	_	mA
	Icc		_	23		mA
Inhibited Supply Current	T -	I <sub>BB</sub> + I <sub>CC</sub> , V <sub>2</sub> ≥ 1.7 V	_	3.0	8.0	mA
Thermal Shutdown Temp.	TJ			165	_	°C
Thermal Shutdown Hysteresis	ΔTJ		_	8.0	_	°C

#### **Output Power Drivers**

Output Saturation Voltage	V <sub>SAT</sub>	I <sub>OUT</sub> = 250 mA	_	250	_	mV
		I <sub>OUT</sub> = 800 mA	_	450	_	mV
		I <sub>OUT</sub> = -250 mA		750	_	mV
	l	I <sub>OUT</sub> = -800 mA	_	950	_	mV
Total Saturation Voltage	V <sub>SAT</sub>	I <sub>LOAD</sub> = 250 mA	_	1.0	1.4	V
(Source + Sink)		I <sub>LOAD</sub> = 800 mA	_	1.4	2.0	V
Input Offset Voltage	V <sub>IO</sub>	V <sub>CM</sub> = 6 V	_	5.0	8.0	mV
Input Offset Drift	$\Delta V_{IO}$			_	25	μV/°C
Input Bias Current	I <sub>IN</sub>	Except IN <sub>A+</sub> , V <sub>CM</sub> = 6 V	_	-150	-500	nA
		$IN_{A+}$ to $SENSE_{IN+} = 12 \text{ k}\Omega$ , $T_J = 25^{\circ}\text{C}$	69	84	105	μ <b>Α</b> /V
Input Offset Current	I <sub>IO</sub>	IN <sub>B</sub> only, V <sub>CM</sub> = 6 V	_		200	nA
Differential Sense Input Current	I <sub>ID</sub>	I <sub>OUT</sub> = 5 mA	_	±300	_	μА
		I <sub>OUT</sub> = 500 mA	_	3.0	_	mA
Large Signal Gain	A <sub>VS</sub>	$V_{OUT} = 2 \text{ V to } 10 \text{ V}, I_{OUT} = \pm 500 \text{ mA}$	1.5	5.0	_	V/mV
Slew Rate	SR		_	4.0	_	V/µs
Unity Gain Bandwidth	BW	Amplifier A	0.5	1.0	1.7	MHz
		Amplifier B	0.5	2.0	2.2	MHz
Common-Mode Rejection	k <sub>CMR</sub>	V <sub>CM</sub> = 1 V to 10 V	70	90	_	dB
Clamp Diode Forward Voltage	V <sub>F</sub>	$I_F = 800 \text{ mA}, V_2 \ge 1.7 \text{ V}$	_	1.0	1.2	٧
High-Side Current Limit	l <sub>out</sub>	T <sub>J</sub> = 25°C	_	1.0	1.2	Α
Power Supply Rejection	k <sub>SVR</sub>	V <sub>CC</sub> = 4 V to 15 V, V <sub>CM</sub> = 1.5 V	70	90		dB

Negative current is defined as coming out of (sourcing) the specified device terminal.

Typical Data is for design information only.

Continued next page...

### **ELECTRICAL CHARACTERISTICS continued**


				Li	mits	S
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Current Sense Amplifier						
Input Offset Voltage	V <sub>IO</sub>	V <sub>CM</sub> = 6 V	_	_	2.0	mV
Input Offset Drift	$\Delta V_{1O}$	V <sub>CM</sub> = 0 V to 12 V	_		3000	μV/V
					8.0	μV/°C
Voltage Gain	A <sub>VS</sub>	$V_{ID} = -1 \ V \ to \ +1 \ V, \ V_{CM} = 6 \ V$	1.95	2.00	2.05	_
Output Saturation Voltage	$V_{SAT}$	V <sub>OUT</sub> , I <sub>OUT(SINK)</sub> = 1.5 mA		300	500	mV
		V <sub>CC</sub> - V <sub>OUT</sub> , I <sub>OUT(SOURCE)</sub> = -1.5 mA	_	400	700	mV
Park Function						
PARK DRIVE Leakage Current	I <sub>CEX</sub>	V <sub>CEX</sub> = 20 V	_	_	100	μΑ
PARK DRIVE Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>C</sub> = 200 mA	1	300	500	mV
PARK Input Threshold	V <sub>PARK</sub>		0.7	1.1	1.7	V
PARK Input Current	I <sub>PARK</sub>	V <sub>PARK</sub> = 1.7 V	T	_	100	μА
PARK VOLTAGE Input Current	I <sub>PARK V</sub>		T -	-150	-500	nA
Under-Voltage Protection						
UV Threshold	V <sub>UV</sub>	Low-to-High Trans., Other Input = 6 V	1.48	1.50	1.52	V
UV Threshold Hysteresis	$\Delta V_{UV}$		15	25	45	mV
UV Input Current	l <sub>UV</sub>	V <sub>UV</sub> = 1 V	T -	-0.5	-1.5	μА
PWR OK Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>C</sub> = 5 mA	T		450	mV
PWR OK Leakage Current	I <sub>CEX</sub>	V <sub>CEX</sub> = 20 V	T		5.0	μА
Auxiliary Functions						
LIMIT Input Voltage	V <sub>LIMIT(L)</sub>	OUT <sub>A</sub> forced Low	0.7	0.8		V
	V <sub>LIMIT(H)</sub>	OUT <sub>A</sub> forced High	_	2.2	2.3	V
	V <sub>LIMIT</sub>	Limit inactive	1.2	_	1.8	٧
		Open circuit	1.45	1.50	1.55	V
LIMIT Input Resistance	R <sub>LIMIT</sub>	V <sub>LIMIT</sub> = 1.2 V to 1.8 V	1	10		kΩ
INHIBIT Input Threshold	V <sub>2</sub>		0.7	1.1	1.7	V
INHIBIT Input Current	l <sub>2</sub>	V <sub>2</sub> = 1.7 V			200	μА

Negative current is defined as coming out of (sourcing) the specified device terminal. Typical Data is for design information only.

# TERMINAL FUNCTIONS


'EA' Term.	'LB' Term.	Terminal Name	Function
1	1	LOGIC SUPPLY	$V_{CC}$ ; logic supply voltage in the range of +3 V to +16 V.
2	2	INHIBIT	An active-high logic input that inhibits the output stages without initiating a park.
3 & 4	3 & 4	UV <sub>1</sub> and UV <sub>2</sub>	Under-voltage detection inputs. If not used, these terminals must be connected to the logic supply ( $V_{CC}$ ).
5	5	LIMIT	A tri-state input that forces the output of amplifier A into saturation in either direction, or allows normal linear operation.
	6 & 7	GROUND <sub>AB</sub>	Power amplifiers' ground and thermal heat sink.
6	8	PARK VOLTAGE	Auxiliary inverting input to power amplifier A.
7	9	SENSE <sub>IN-</sub>	Inverting input to current sense error amplifer.
8	10	IN <sub>A+</sub>	Non-inverting input to power amplifier A.
9	11	IN <sub>A-</sub>	Inverting input to power amplifier A.
10	12	OUTA	Power amplifier A output to voice coil motor.
11	_	GROUND <sub>A</sub>	Power ground of amplifier A.
12-18	_	GROUND	Circuit reference and thermal heat sink.
19	_	GROUND <sub>B</sub>	Power ground of amplifier B.
20	13	OUT <sub>B</sub>	Power amplifier B output to voice coil motor.
21	14	LOAD SUPPLY	$V_{BB}$ ; load supply voltage in the range of +3 V to +16 V.
22	15	IN <sub>B-</sub>	Inverting input to power amplifier B.
23	16	IN <sub>B+</sub>	Non-inverting input to power amplifier B.
24	17	SENSE <sub>IN+</sub>	Non-inverting input to current sense error amplifer.
_	18 & 19	GROUNDAB	Power amplifiers' ground and thermal heat sink.
25	20	PWR OK	A logic low at this output indicates an under-voltage condition.
	21	GROUND	Circuit reference.
26	22	PARK	An active-high logic input that activates the park function.
27	23	PARK DRIVE	Power transistor for retract current control on power down or park command.
28	24	SENSE <sub>OUT</sub>	Output of current sense error amplifier.

#### **CURRENT SENSING**

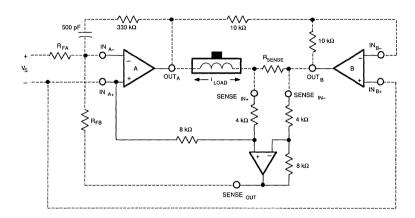

Dwg. EP-034


#### **PARKING FUNCTION**

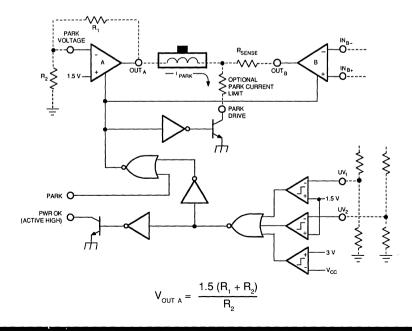

Dwg. EP-039

# 8980

# SUPERSERVO™ SPINDLE & VOICE-COIL ACTUATION MANAGER/DRIVER



Dwg. PP-048

#### ABSOLUTE MAXIMUM RATINGS at $T_A = +25^{\circ}C$

Load Supply Voltage, V <sub>CC(PWR)</sub>	7.0 V
Spindle Output Current, I <sub>OUT(S)</sub>	±1.6 A
Voice-Coil Ouput Current, I <sub>OUT(A)</sub>	±0.9 A
Logic Supply Voltage V <sub>CC(D)</sub>	6.0 V
Operating Temperature Range,	
T0°C	to +70°C

Output current rating may be restricted to a value determined by system concerns and factors. These include: system duty cycle and timing, ambient temperature, and use of any heatsinking and/or forced cooling.

The A8980CJT provides complete drive, management, and control of the voice-coil and spindle motor power actuation subsystems used in hard disk drives. Extensive programmable control features and system diagnostics are provided via a serial interface under the direction of an external microcontroller. The large-scale integration and use of advanced DABiC™ (digital/analog-BiCMOS) merged technologies results in minimum power dissipation, minimum operating voltage requirements, and minimum external components.

The spindle drive function incorporates a three-phase MOS power driver and a back-EMF sensing motor commutation scheme. Internal logic and analog circuitry provide complete start-up and uC-assisted run modes without the need for snubbers or other external components. Additional headroom is achieved by a proprietary circuit, which eliminates the need for an external current-sense resistor. Intrinsic ground clamp and flyback diodes are also provided.

The voice-coil function contains a 12-bit DAC, tunable low-pass and notch filters, and a full-bridge power driver. The MOS outputs provide increased available voltage and lower power dissipation over bipolar devices. Voice-coil current is sensed by internal circuitry that eliminates the need for an external current-sense resistor. Additional internal circuitry can be configured to provide an over-velocity fault limit by utilizing the internally monitored current of the voice-coil motor.

The spindle and voice-coil control functions are supplemented by an Energy Manager<sup>TM</sup> subsystem, which efficiently channels available power to protect the heads and the data disk during system failure or normal system shutdown. Synchronous rectification of spindle back-EMF voltage provides nearly lossless conversion of spindle rotational inertia into power to operate the voice coil motor for parking the heads. A dc-to-dc converter provides continuous operation at minimum supply voltages. In addition, the Energy Manager subsystem provides several sleep modes and latched fault states for under-voltage or thermal faults.


The A8980CJT is supplied in a 64-lead thin guad flatpack for surface-mount applications.

#### **FEATURES**

#### **Voice Coil Motor Driver:**

- Low r<sub>DS(on)</sub> MOS Outputs
   Lossless Current Sensing
- Zero Deadband
- User-Adjustable Transconductance Gain
- Retract Circuitry Functional to 0 V

continued next page ...

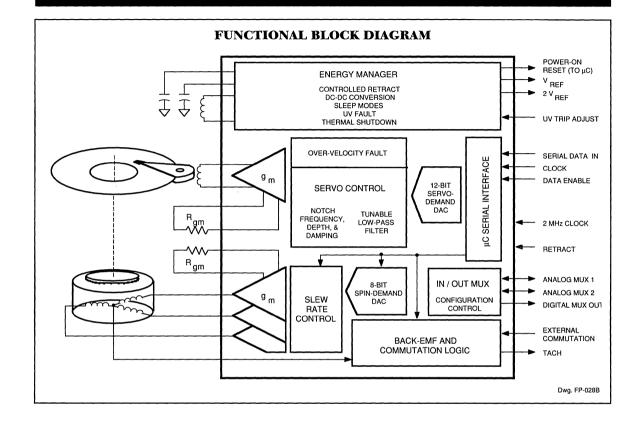

#### Spindle Motor Controller/Driver:

- Low r<sub>DS(on)</sub> MOS Outputs
- Back-EMF Circuitry Eliminates Hall-Effect Sensors
- Programmable Slew Rate Eliminates Snubbers
- Lossless Current Sensing
- Improved Speed Disturbance Performance
- Dvnamic Braking with Delay
- Active Braking

#### Servo Compensator/Notch:

- Over-Velocity Fault Circuitry
- 12-Bit Servo-Demand DAC
- Programmable Complex Pole Low-pass-Filter
- Programmable Notch Frequency, Depth, and Damping

#### **Energy Manager:**

- 3.0 V to 5.5 V Operation
- Independent Power-Down (Sleep) Modes for all Functional Blocks
- Efficient Synchronous Rectification Supplies Power During Blackout
- Thermal Fault Shutdown Circuitry
- Trimmed Bandgap Voltage Reference
- Smart DAC Reference Generator
- Programmable Voltage Reference for Relative Ground
- Over-Velocity Fault Circuitry
- Supply Under-Voltage Monitor with Adjustable Trip Point
- System Diagnostics Data Out
- Power-On Reset Generator

#### **FUNCTIONAL DESCRIPTION**

#### **ACTUATOR**

Servo-Demand DAC. A 12-bit DAC is provided to bridge the DSP "soft" domain to the analog hardware domain. The term "demand" refers to the distinction between the newly requested voice-coil current and the prior current being supplied. The DAC, operating in straight binary format, spans the full dynamic range between a large signal velocity and a precision position mode. The DAC output is updated synchronously with the notch functions to avoid the creation of aliasing products.


Low-Pass Filter. This double, nonintrinsic complex-pole low-pass filter is provided to attenuate undesirable, out-ofband information. The input of this discrete time filter is sampled synchronously with the 12-bit DAC and notch function in order to avoid aliasing products. **Notch Filter.** This notch filter has a programmable center frequency and programmable notch depth to provide truly independent control of notch damping. Enough range and granularity are provided to allow versatile and accurate out-of-band attenuation of undesirable energy sources.

**Actuator Transconductance Amplifier.** The final transconductance function of the voice-coil actuation signal path is achieved by monitoring the load current and generating an error voltage to drive a local  $g_m$  amplifier control loop. The error voltage is scaled by an external precision resistor ( $R_{gm(act)}$ ). This resistor does not carry load current and is intended only for accurate determination of the transconductance. The function is:

$$g_{m(act)} = \frac{5800}{R_{gm(act)}} A/V$$

and 
$$I_{OUT} = V_{SERVO} \cdot g_{m(ACT)}$$

**Actuator Power Outputs.** The voice-coil output driver is a full-bridge power driver operating in a class-B mode. The power output devices are enhancement-mode MOS transistors. Special internal circuitry results in nearly zero cross-over distortion when switching from one source/sink pair to another.

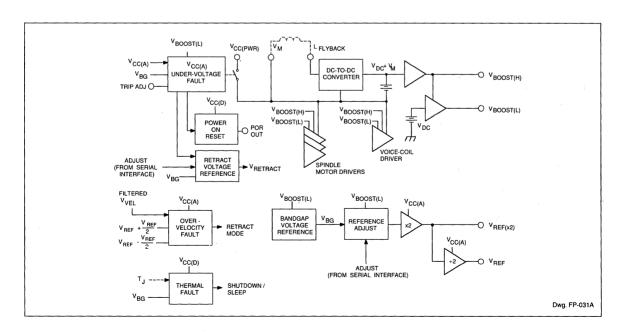

## 8980 Super-Servo™ SPINDLE & VOICE-COIL ACTUATION MANAGER/DRIVER

#### **SPINDLE**

The spindle function is a three-phase back-EMF sensing motor controller and driver. During start-up, internal circuitry provides complete spindle control and drive. At speed however, an external microcontroller is used to provide speed (phase/frequency) detection as well as compensation.

#### **ENERGY MANAGER**

The management of available energy is provided by automatic operating modes envoked by the fault monitor or sleep-mode manager. The fault monitor consists of an over-velocity fault circuit, a  $V_{\text{CC(A)}}$  under-voltage fault circuit, and a thermal fault circuit. The operating modes include  $V_{\text{CC(PWR)}}$  isolation, active rectification of spindle back-EMF voltage to provide nearly lossless conversion of spindle rotational inertia into power to operate the voice-coil motor for parking the heads, actuator retract mode controlled by

constant voltage, and several sleep modes. In addition, a power-on reset function and two programmable voltage references ( $V_{\text{REF}}$  and  $V_{\text{REF}(xz)}$ ) are provided that are suitable for output to the user.

An onboard dc-to-dc converter generates two regulated "high" (greater than the supply) voltages referred to as  $V_{\text{BOOST}(\mu)}$  and  $V_{\text{BOOST}(\mu)}$ . These voltages supply critical functions with maximum immunity from supply variations.

#### SERIAL INTERFACE

The serial interface is used to alter the control state of the device from an external microcontroller or other digital CMOS source. In addition to the various operational and diagnostic control states (modes), all critical constants, variables, and parameters can be adjusted through this interface. The serial interface is a synchronous serial three-wire port with serial data input, clock, and load (active low) functions. When LOAD is high, the serial interface is disabled and the chip is not affected by changes in SER DATA IN or CLK SER. To write data to the serial interface, CLK SER should be low prior to LOAD going low. Once LOAD goes low, information at SER DATA IN is read into the shift register on the positive-going transitions of CLK SER.

#### TERMINAL FUNCTIONS

ANALOG SUPPLY	$V_{CC(A)}$ ; supplies all analog functions except for gate drive of power output transistors. For most
	applications, $V_{cc(A)}$ , $V_{cc(D)}$ , and $V_{cc(PWR)}$ are connected together.

DIGITAL SUPPLY	$V_{CC(D)}$ ; supplies all digital functions.	For most applications,	V <sub>CC(A)</sub> ,	V <sub>cc(D)</sub> , and	V <sub>CC(PWR)</sub> are
	connected together.				, ,

LOAD SUPPLY	V <sub>CC(PWB)</sub> ; supplies all voice-coil and spindle power output transistors. This terminal is internally
	connected to the source of the blocking FET used to isolate V <sub>M</sub> from V <sub>CC(PWB)</sub> on system failure
	or shutdown. For most applications, $V_{CC(A)}$ , $V_{CC(D)}$ , and $V_{CC(PWR)}$ are connected together.

SUB	Substrate. This terminal must be connected to ground	4
300	Substrate. This terminal must be connected to ground	٨.

V <sub>M</sub>	Supplies power to the voice-coil and spindle power output transistors. Connect this terminal to
	the external flyback inductor for the dc-to-dc converter; internally connected to the drain of the
	blocking FET.

L <sub>FLYBCK</sub>	External inductor for the dc-to-dc converter.

V <sub>BOOST(H)</sub>	Internally generated "high" voltage for driving the gates of all source-side power output
50001(11)	transistors. This source is regulated and requires a compensation capacitor from this terminal

to ground.

V<sub>BOOST(L)</sub> Internally generated intermediate voltage for driving the gates of all sink-side power output transistors, the bandgap reference, and fault monitors. This source is regulated and requires

a compensation capacitor from this terminal to ground.

## 8980 SUPER-SERVOT SPINDLE & VOICE-COIL ACTUATION MANAGER/DRIVER

Control voltage provided to drive the gate of an optional external enhancement-mode power FET. V<sub>PF(GATE)</sub>

augmenting the internal blocking FET between V<sub>cc/PWR)</sub> and V<sub>M</sub>.

Programmable reference voltage output. This reference tracks V<sub>BEF(x2)</sub> and may be used as a

relative signal ground.

Programmable reference voltage output. Derived from a trimmed internal bandgap reference. V<sub>RFF(Y2)</sub>

May be used as the reference for system DAC and ADC.

POR<sub>OUT</sub> Power-on reset for the application system. Active low guaranteed by design to be active on

power up. Also occurs as a result of V<sub>CC(A)</sub> degrading below the BLACKOUT under-voltage

threshold.

 $V_{_{UV,(TRIIP)}}$ ; trip threshold adjust input (an external resistor divider between  $V_{_{CC(A)}}$  and ground) for the under-voltage BLACKOUT fault monitor. A capacitor at this terminal can provide for time domain **TRIP ADJ** 

filterina.

 $f_{\text{CLK}(2\text{MHz})}$ , reference for all internal analog signal-processing functions. Affects frequency domain placement of all poles, zeros, and bandwidths. CLK

**SER DATA IN** Non-inverting microcontroller serial-data input used for transferring data to all internal parameter-

and mode-control registers.

 $f_{\text{CLK(SER)}}$ ; reference for the serial data interface. Data is transferred on the positive-going edge of this clock. **CLK SER** 

LOAD Active low. Begins and ends data transfer.

**EXT XFR** Direct clock gating data from temporary internal latch to control register. This continuous time

input is redundant to the XFR bit, which is embedded in the serial data format. It is internally

synchronized to the  $f_{CLK(2MHz)}$  positive-going edge.

AMUX, Analog input or output. Also used to drive internal nodes.

AMUX. Analog input or output. Also used to drive internal nodes for calibration and measurement on

internal analog functions.

 $\mathbf{DMUX}_{\mathsf{OUT}}$ Non-inverting digital multiplexer output. Used to probe internal nodes allowing precise time-

domain measurements. Also used to extract internal status and diagnostic information.

OUT V<sub>OLITIO</sub>; voice-coil power output. Full-bridge differential complement to V<sub>OLITIO</sub>.

OUT, VOLUTION; voice-coil power output. Full-bridge differential complement to VOLUTION

The voltage at this terminal is proportional to voice-coil actuator current. V<sub>SENS(act)</sub>

A resistor between this terminal and  $V_{\text{SENS(act)}}$  is used to adjust the forward transconductance gain of the voice-coil transconductance amplifier. R<sub>gm(act)</sub>

RETRACT Active high retract input from the system. Continuous-time direct input to cause immediate

retract mode.

## 8980 Super-Servo<sup>th</sup> SPINDLE & VOICE-COIL ACTUATION MANAGER/DRIVER

**EXT ACT**  $V_{\text{SERVO}}$ ; summing junction at the input of the voice-coil transconductance amplifier. This direct continuous-time input to the actuator  $g_{_{m}}$  amplifier provides diagnostic as well as feed-forward

OP<sub>1(IN)</sub> Operational amplifier inverting input. The non-inverting input is internally connected to Vacc.

Operational amplifier output. This undedicated operational amplifier functions in continuous time. OP<sub>1(OUT)</sub>

**VEL**<sub>INN</sub> Inverting input of operational amplifier portion of over-velocity fault circuit.

**VEL**<sub>INP</sub> Non-inverting input of operational amplifier portion of over-velocity fault circuit.

VEL  $V_{vel}$ ; output of the over-velocity operational amplifier. Also internally connected to the inputs of

two comparators that provide the positive and negative velocity fault thresholds.

OUT, V<sub>OUT(A)</sub>; spindle motor power output terminal.

V<sub>OUT(B)</sub>; spindle motor power output terminal. OUT

OUT V<sub>OUT(C)</sub>; spindle motor power output terminal.

C TAP Connection to spindle motor center tap; provides the differential reference for detection of back-

EMF zero crossings. If this terminal is not connected, the device will internally simulate the

centertap of the motor.

V<sub>SENS(spin)</sub> The voltage at this terminal is proportional to the spindle motor current.

A resistor connected from this terminal to  $V_{\text{SENS}(\text{spin})}$  provides for adjusting the forward transconductance gain of the spindle transconductance amplifier. R<sub>qm(spin)</sub>

f<sub>com</sub> A digital logic output that goes low to high on a back-EMF zero crossing; provides tach-like

information to the spin controller.

**EXT COM** f<sub>sync</sub>; hard external commutation sequence start (positive-edge triggered). May be used to place

spindle commutation edges in the inter-sector gap, or for phase-locking multiple spindle drivers.

**EXT SPIN** V<sub>snin</sub>; direct continuous time input to the spindle transconductance amplifier/driver. Zero demand

current occurs at 2.00 V; full-scale positive demand current occurs at 4.00 V.

SWIN Input for uncommitted analog switch.

SWout Output of uncommitted analog switch.

 $\mathrm{SW}_{\mathrm{ON}}$ Logic input for uncommitted analog switch; a high level connects SW<sub>IN</sub> to SW<sub>OUT</sub>.

# 8980 Super-Servo™ SPINDLE & VOICE-COIL ACTUATION MANAGER/DRIVER

#### ADDRESS MAP AND DATA BIT ASSIGNMENTS

Address Word	Data Bit	Function
00H	0 – 3 4 – 7	Blanking Time Commutation Delay Time
01H	0 – 5 6 7	Coast Time Commutation Multiplexer Not used at this time
02H	0 – 3 4 – 7	Startup Time Watchdog Time
03H	0 – 7 8	Spindle-Demand DAC Current Magnitude Reverse Commutation Mode
04H	0 – 3 4 – 6 7	Spindle Slew Rate Control Spindle Multiplexer Not used at this time
05H	0 – 3 4 – 6	Spindle Transconductance Amp. Bandwidth Spindle Transconductance Amp. Local Zero
06H	0 – 3 4 – 7	Internal 6.25 kHz Oscillator Frequency Trim Not used at this time
07H	0 – 7	Not used at this time
08H	0 – 11	Servo-Demand DAC Current Magnitude
09H	0 – 7	Not used at this time
0AH	0 – 3	Low-Pass Filter Damping (Zeta) Control
	4 5 6 – 7	Not used at this time Low-Pass Filter Reset Control Not used at this time
0BH	0 – 3 4 – 7	Notch Depth $(\alpha_3)$ Control Not used at this time

Address	Data	
Word	Bit	Function
0CH	0 – 3 4 5 – 7	Notch Width (Zeta D <sub>Z3</sub> ) Control Notch Reset Control Not used at this time
0DH	0 – 3 4 – 7	Low-Pass Filter Freq. Synth. $(D_{n^2})$ Control Not used at this time
0EH	0 – 3 4 – 7	Notch Center Frequency (D <sub>n3</sub> ) Control Not used at this time
0FH	0 – 3 4 – 6 7	Actuator Bandwidth (BW <sub>ACT</sub> ) Control Actuator Zero (Damping) Control Not used at this time
10H	0-2 3-5 6-7	Retract Velocity Demand Voltage Actuator Analog Multiplexer Input Select Not used at this time
11H	0 – 7	Sleep Mode Manager
12H	0 – 3 4 – 6 7	Fault Control Monitor Programmable References Voltage Select Not used at this time
13H	0-2 3-5 6-7	Analog Multiplexer-2 Selection Digital Multiplexer Output Selection Not used at this time
14H	0 - 2 3 4 .5 - 7	Analog Multiplexer-1 Selection Chopper Stabilization of LP & Notch Filters Use Notch Not-used at this time

arionuca spinerios guides

PERIPHERAL POWER & DISPLAY DRIVER IC

HARLEDINGE OF SENSOR IC

MASS STORAGE APPLICATION IC

AUTOMOTIVE, SIGNAL-PROCESSING, & CONSUMER ICs

6

DISCRETE TRANSISTÓRS, DIODES, & ARRAYS


QUALITY & RELIABILITY INFORMATION

PACKAGE INFORMATION

# SECTION 6. TECHNICAL DATA & APPLICATION NOTES for Automotive, Signal-Processing, and Consumer ICs

n Numerical Order	Beginning at 6-1
-------------------	------------------

# 2429



Dwg. No. PS - 017

#### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V <sub>CC</sub>
(continuous)50 V to +16 V
(1 hr. at +25°C) 24 V
(10 μs)
Output Voltage, V <sub>OUT</sub> 30 V
Output Current, I <sub>OUT</sub>
(continuous) 700 mA
(1 hr. at +25°C) 1.0 A
Package Power Dissipation, P <sub>D</sub> 1.33 W*
Operating Temperature Range,
T <sub>A</sub> 40°C to +85°C
Storage Temperature Range,
T <sub>s</sub> 65°C to +150°C

Derate at the rate of 16.67 mW/°C above

T<sub>A</sub>= +70°C.

## **FLUID DETECTOR**

Primarily designed for use as an automotive low coolant detector, the ULN2429A monolithic bipolar integrated circuit is ideal for detecting the presence or absence of many different types of liquids in automotive, home, or industrial applications. Especially useful in harsh environments, reverse voltage protection, internal voltage regulation, temperature compensation, and high-frequency noise immunity are all incorporated in the design.

A simple probe, immersed in the conductive fluid being monitored, is driven with an ac signal to prevent plating problems. The presence, absence, or condition of the fluid is determined by comparing the loaded probe resistance with an internal (pin 8) or external (pin 6) resistance. Typical conductive fluids which can be sensed are tap water, sea water, weak acids and bases, wet soil, wine, beer, and coffee.

The high-current output is typically a square wave signal for use with an LED, incandescent lamp, or loudspeaker. A capacitor can be connected (pin 12) to provide a dc output for use with inductive loads such as relays and solenoids.

These devices are furnished in an improved 14-lead dual in-line plastic package with a copper alloy lead frame for superior thermal characteristics. However, in order to realize the maximum current-handling capability of these devices, both of the output pins (1 and 14) and both ground pins (3 and 4) should be used.

#### **FEATURES**


- High Output Current
- AC or DC Output
- Single-Wire Probe
- Low External Parts Count
- Internal Voltage Regulator
- Reverse Voltage Protection

Always order by complete part number: ULN2429A .


## 2429 FLUID DETECTOR

ELECTRICAL CHARACTERISTICS at T<sub>A</sub> = +25°C, V<sub>CC</sub> = V<sub>OUT</sub> = 12 V (unless otherwise specified).

		Test			Lir	nits	
Characteristic	Symbol	Pin	Test Conditions	Min.	Тур.	Max.	Units
Supply Voltage Range	V <sub>cc</sub>	13	Operating	10	_	16	V
Supply Current	l <sub>cc</sub>	13	V <sub>CC</sub> = 16 V	_	_	10	mA
Oscillator Output Voltage	V <sub>osc</sub>	6	$R_L = 18 \text{ k}\Omega$	_	3.0		V <sub>PP</sub>
Output ON Voltage	V <sub>out</sub>	1, 14	$R_L \ge 30 \text{ k}\Omega$ , $I_{OUT} = 500 \text{ mA}$	_	0.9	1.5	V
Output OFF Current	OUT	1, 14	$R_L \le 10 \text{ k}\Omega, V_{OUT} = V_{OUT}(\text{max})$			100	μА
Oscillator Frequency	fosc	6	$R_L = 18 \text{ k}\Omega$		2.4	_	kHz

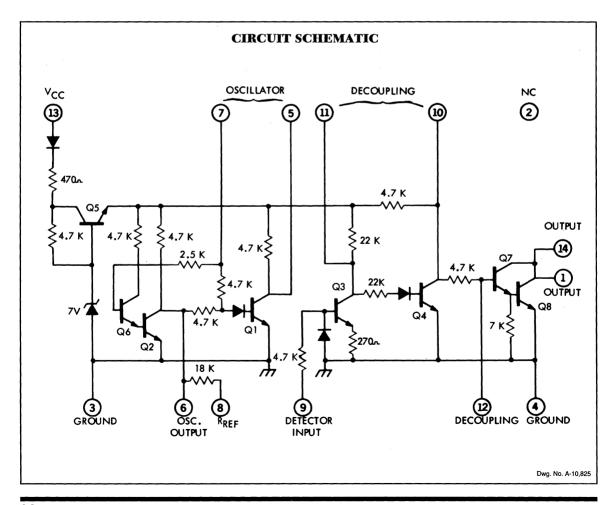


#### **TEST CIRCUIT**

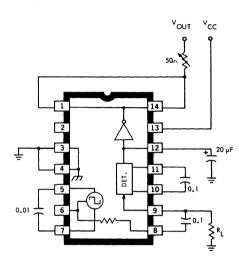


Dwg. No. A-10,707


#### TYPICAL APPLICATIONS

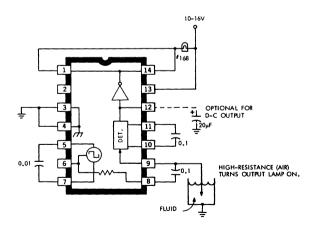



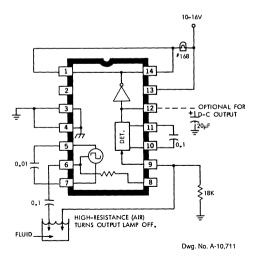

# 2436



## **COUNTDOWN POWER TIMER**

The ULQ2436M is a rugged, long-duration countdown timer specifically designed to operate in an automotive or industrial environment. It uses an internal RC oscillator to drive a digital countdown circuit for timing periods of typically 2-1/2 to 5 minutes. The ULQ2436M multiplies the oscillator period by 4064. Internal logic can automatically cause the timeout to be halved for successive timeouts. I²L technology is used for the countdown and logic circuitry and conventional linear bipolar devices for the oscillator and output power functions. This combination, together with the low-cost 8-pin mini-DIP plastic package, results in a very economical power timer suitable for a wide variety of applications.

The Darlington-connected output driver is capable of switching loads up to 400 mA.

#### **FEATURES**

- 28 V/400 mA Output Switch
- Low-Cost Ceramic Timing Capacitor
- Dual-Mode Timing Operation
- -40°C to +85°C Operation
- 10 V to 16 V Operation
- Internal Stabilizing Regulator
- Low-Cost 8-Pin Mini-DIP

#### **APPLICATIONS**


- Automotive Rear-Window Defogger Timer
- Automotive Courtesy Light Timer
- Appliance Power Timer
- Power Control System


# ABSOLUTE MAXIMUM RATINGS at $T_A = +25^{\circ}C$

Supply Current, I <sub>REG</sub> 15 mA  Output Voltage, V <sub>OUT</sub> 28 V
Output Current, I <sub>OUT</sub> 400 mA
Input Voltage, V <sub>1</sub> or V <sub>4</sub> (2 min.) 24 V
(continuous) 16 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 40°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 65°C to +150°C

Always order by complete part number: **ULQ2436M**.

## 2436 COUNTDOWN POWER TIMER



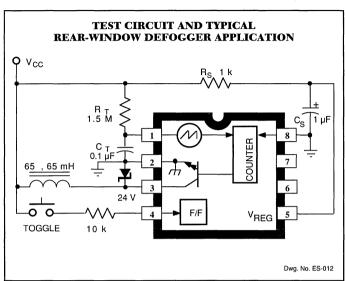

# ELECTRICAL SPECIFICATIONS at $T_A$ = -40°C to +85°C, $V_{CC}$ = 12 V (unless otherwise specified).

Characteristic	<b>Test Conditions</b>	Min.	Max.	Units
Regulator Voltage	I <sub>REG</sub> = 12 mA, Output Off	7.0	9.0	V
Output Saturation Voltage	I <sub>OUT</sub> = 400 mA, T <sub>A</sub> = +25°C	_	2.5	V
	I <sub>OUT</sub> = 250 mA, T <sub>A</sub> = +25°C		1.35	V
Output Leakage Current	V <sub>OUT</sub> = 28 V, V <sub>CC</sub> = 12 V		100	μA
	V <sub>OUT</sub> = 22 V, V <sub>CC</sub> = Open Circuit	_	100	μА
Input Threshold Voltage	10 k Series Resistor	1.0	5.0	V
Oscillator Tolerance	$T_A = +25^{\circ}C$		±3.0	%
	$T_A = -40^{\circ}C \text{ to } +85^{\circ}C$	_	±6.0	%
Divider Count	Initial Timeout	4064	4064	_
(V <sub>CC</sub> = 10 V to 16 V)	Subsequent Timeouts	2032	2032	

## 2436 COUNTDOWN POWER TIMER

#### CIRCUIT DESCRIPTION

**OSC.** An external resistor in the range of 200 k to 2 M and an external capacitor in the range of 0.001  $\mu$ F to 1  $\mu$ F determine the frequency of the internal oscillator. The period of oscillation is nominally  $R_{\tau}C_{\tau}$  with the overall output time period (after the digital countdown) of

$$t = 4064 R_T C_T$$


where t is in seconds. See also MODE SELECT.

**OUTPUT.** The output is an open-collector of a Darlington-connected transistor. The output is ON (low) during the timing period. An external Zener diode is used to protect the output against inductive-load switching transients and automotive "load dump".

**TOGGLE.** A push-button, momentary-action switch at this input toggles the timer from the OFF to the ON state. The oscillator and countdown circuitry are started on the falling edge of the input pulse. Internal de-bounce circuitry is included.


**SUPPLY.** The timer requires a supply current applied to this pin through a current-limiting resistor ( $R_s$ ). An internal 8 volt Zener diode shunt regulator provides a stable supply to the device over wide supply voltage variations. Capacitor  $C_s$  is used to provide decoupling.

MODE SELECT. With MODE SELECT connected to GROUND, the first activation will run for the preset time delay. All activations after the first will time out at half of the initial preset time. This sequence is reseteach time the supply is interrupted. With MODE SELECT connected to SUPPLY (V<sub>REG</sub>), the timer will repeat the preset time delay each time it is activated.

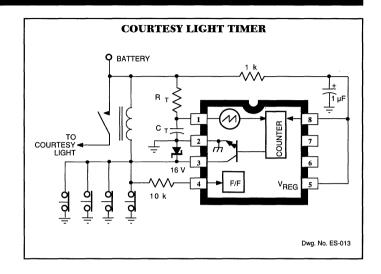

# 2454 AND 2455

## **AUTOMOTIVE LAMP MONITORS**



Dwg. No. PS-013

# ■ No Standby Power

**FEATURES** 

- Integral to Wiring Assembly
- Fail-Safe
- Reverse Voltage Protected
- Internal Transient Protection
- DIP or SOIC Plastic Packages

# ABSOLUTE MAXIMUM RATINGS at +25°C Free-Air Temperature

T<sub>A</sub>.....-40°C to +85°C Storage Temperature Range,

T<sub>S</sub>.....--65°C to +150°C

Always order by complete part number:

Part Number	Function	Style
ULN2454L	Dual Comparator with OR Output	8-Lead SOIC
ULN2454M Dual Comparator with OR Output		8-Pin Mini-DIP
ULN2455A	Quad Comparator	14-Pin DIP

Capable of monitoring all types of automotive lamps, the ULN2454L, ULN2454M, and ULN2455A lamp monitors provide multiple LED outputs to pinpoint the area in which a lamp has failed. The ULN2455A is a quad comparator capable of monitoring eight individual lamps or groups of lamps. The ULN2454L/M are dual comparators featuring an additional output to trigger an alarm if either of the comparators detects a lamp failure. This output can be used to drive an audible signaling device or centrally located warning indicator. All devices can be used to monitor lamps, multiple low-voltage power supplies, or, with appropriate sensors, industrial processes.

Installation and operation of these lamp monitors has no effect on normal lamp operation. Comparators sense the normal voltage drop in the lamp wiring (approximately 20 mV) for each of the monitored lamp circuits. Little additional wiring is necessary for installation because the system can be completely integral to the wiring assembly. No standby power is required...the operating voltage is obtained from the sense leads; the system is energized only when the lamps are turned ON.


All devices are designed for use in the severe automotive environment. Lateral PNP transistors provide high-frequency noise immunity and differential transient-voltage protection. Reverse voltage protection, internal regulators, and temperature compensation are all embodied in the circuit designs. A failure within a device will not affect lamp operation.

These versatile lamp monitors are packaged in 14-pin plastic DIPs (suffix A), 8-lead surface-mountable SOICs (suffix L), or 8-pin mini-DIPs (suffix M) and are rated for operation over the temperature range of -40°C to +85°C.

# 2454 AND 2455 AUTOMOTIVE LAMP MONITORS


#### PIN OUT & FUNCTIONAL BLOCK DIAGRAMS


#### ULN2454L and ULN2454M





Dwg. No. FS-010A

#### **ULN2455A**











Dwg. No. A-12,033A

Note that the dual in-line package and the small-outline IC package are electrically identical and share a common pin number assignment.

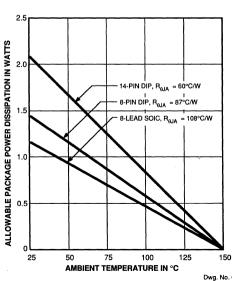

Dwg. No. GS-008-1

# 2454 AND 2455 AUTOMOTIVE LAMP MONITORS

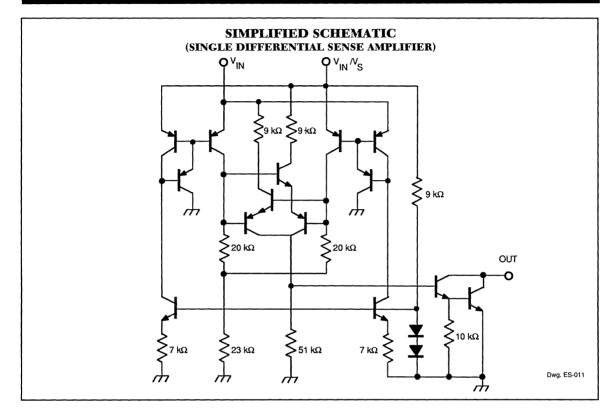

ELECTRICAL CHARACTERISTICS at  $T_A = +25$ °C,  $V_{CC} = V_{IN} = 10$  to 16 V (unless otherwise noted).


		T	Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Output Leakage Current	I <sub>CEX</sub>	$V_{OUT} = 80 \text{ V}, \Delta V_{IN} < 7 \text{ mV}$	_	_	100	μΑ
Output Saturation Voltage	V <sub>CE(SAT)</sub>	$I_{OUT} = 5 \text{ mA}, \Delta V_{IN} > 20 \text{ mV}$	_	8.0	1.0	V
		$I_{OUT} = 30 \text{ mA}, \Delta V_{IN} > 20 \text{ mV}$		1.4	2.0	٧
Differential Switch Voltage	ΔV <sub>IN</sub>	V <sub>IN</sub> -V <sub>IN</sub> /V <sub>S</sub>	7.0	13	20	mV
Input Current	I <sub>IN</sub>	$\Delta V_{IN} = V_{IN} - V_{IN} / V_{S} = +30 \text{ mV}$	150	300	800	μА
	I <sub>IN</sub> /I <sub>S</sub>	$\Delta V_{IN} = V_{IN} - V_{IN} / V_S = -30 \text{ mV}$	0.5	1.7	3.5	mA

# 2454 AND 2455 AUTOMOTIVE LAMP MONITORS

#### PRINCIPLE OF OPERATION


Operation of these lamp monitors is similar to that of a simple bridge circuit in which the top two legs of the bridge are formed by the wiring assembly resistance or discrete low-value resistors. The bottom legs of the bridge are the monitored lamps. These differential amplifier circuits sense the voltage drops in the wiring assemblies (approximately 20 mV) for each of the lamp circuits. When the system detects a difference in voltage due to an open filament, the appropriate output driver is turned ON.

#### BASIC BRIDGE MONITORING SYSTEM



Dwg. No. A-11,473A


#### TYPICAL SWITCH CHARACTERISTICS



Dwg. No. A-12,187


#### TYPICAL APPLICATIONS

#### POWER SUPPLY SUPERVISORY CIRCUIT

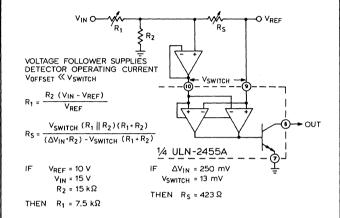

Dwg. No. B-1524

#### QUAD LAMP MONITOR

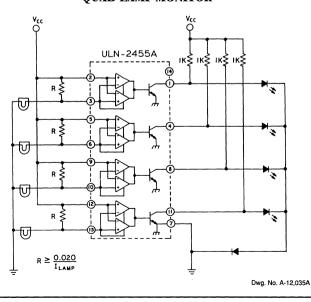

# **2460**

#### **ULO2460A** 14 PICKUP + PICKUP -13 TACH ADVANCE BIAS DWELL CONTROL GROUND E 11 EST COMPUTER SUPPLY REFERENCE 10 OUTPUT WAVESHAPE 9 BYPASS MODE SENSE POWER NO GROUND CONNECTION

Dwg. No. PS-014

## ELECTRONIC SPARK TIMING

The ULQ2460A, ULQ2460C, and ULQ2460LW electronic spark timing circuits are intended to interface between conventional electromagnetic pick-ups, a computer-controlled electronic spark timing (EST) computer, and a high-efficiency ignition coil.

In application, the devices are designed to withstand various load dump and battery supply transients and to protect their output. They provide a positive shut down feature if battery supply voltages exceed 35 V. In the event of an open or shorted signal input, they provide a fail-safe mode that shuts off the output. If the EST computer fails or is disconnected, the ULQ2460A/C/LW will continue to process the pickup signal and thus allow the engine to continue to operate in a "limp" or soft-failure mode. For additional reliability improvement, a constant-current ignition coil drive eliminates the need for the usual ballast resistor.

The ULQ2460A is furnished in a 14-pin dual in-line plastic package. The ULQ2460LW is supplied in a surface-mountable 16-lead wide-body SOIC. The ULQ2460C is an unpackaged, passivated, chip for hybrid applications. All devices are rated for operation over the automotive/industrial temperature range of -40°C to +85°C.

#### **FEATURES**

- Improved System Reliability
- Internal Bypass Mode
- Constant-Current Drive to Ignition Coil
- 180 mJ Primary Coil Energy

# ABSOLUTE MAXIMUM RATINGS in Typical Application

Supply Voltage, V <sub>CC</sub> (100 ms) 80 V
(5 min.)
(continuous) 16 V
Peak Reverse Voltage, V <sub>R</sub> 5.0 V
Package Power Dissipation,
P <sub>D</sub> See Graph
Operating Temperature Range,
T <sub>A</sub> 40°C to +85°C


T<sub>S</sub>.....--65°C to +150°C


Storage Temperature Range,


Always order by complete part number:

ULQ2460A	14-Pin DIP
ULQ2460C	Unpackaged Chip
ULQ2460LW	16-Lead Wide-Body SOIC

## 2460 ELECTRONIC SPARK TIMING

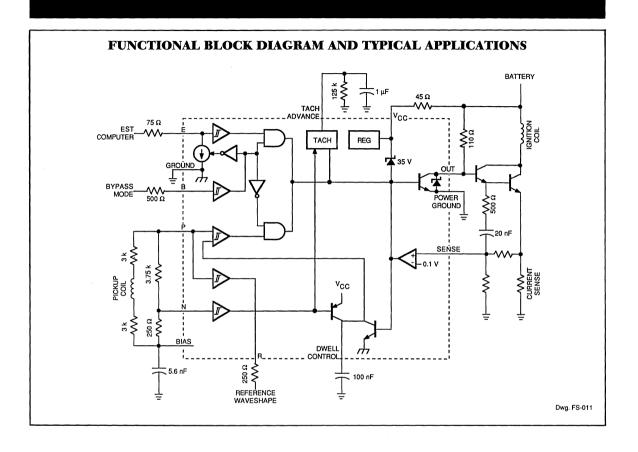

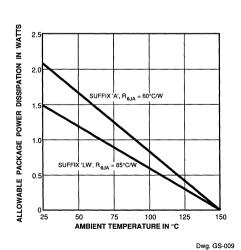

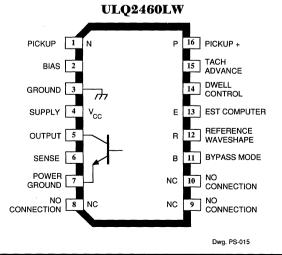

# 2460 ELECTRONIC SPARK TIMING

# ELECTRICAL CHARACTERISTICS at T $_{\rm A}$ = +25°C, V $_{\rm CC}$ = 16 V, in typical application (unless otherwise noted).

			Limits				
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units	
Supply Voltage Range	V <sub>cc</sub>	Operating	4.0	_	16	٧	
Bypass Threshold	V <sub>B(ON)</sub>	V <sub>11</sub> = 2.3 V, 160 μA ≤ I <sub>11</sub> ≤ 360 μA	1.4	1.8	2.3	٧	
	V <sub>B(OFF)</sub>	$V_{11} = 2.3 \text{ V}, 3 \text{ mA} \le I_{11} \le 15 \text{ mA}$	0.7	1.0	1.3	٧	
Bypass Hysteresis	ΔV <sub>B</sub>		0.45	1.0	_	٧	
Bypass Input Current	I <sub>B</sub>	V <sub>9</sub> = 2.3 V	160	_	360	μΑ	
EST Threshold	V <sub>E(ON)</sub>	V <sub>9</sub> = 2.3 V, Output HIGH	1.4	1.8	2.3	٧	
	V <sub>E(OFF)</sub>	V <sub>9</sub> = 2.3 V, Output LOW	0.7	1.0	1.3	٧	
EST Hysteresis	ΔV <sub>E</sub>		0.45	1.0		٧	
EST Input Current	I <sub>E</sub>	V <sub>11</sub> = 2.3 V, V <sub>9</sub> = 2.3 V	160	_	360	μΑ	
		V <sub>11</sub> = 2.3 V, V <sub>9</sub> = 0 V	3.0	_	15	mA	
Reference Output	V <sub>R(HI)</sub>	$I_{10} = -10 \mu A, V_9 = 0 V, V_{PN} = 700 \text{ mV}$	_	_	6.0	٧	
	` ′	I <sub>10</sub> = -1 mA, V <sub>PN</sub> = 700 mV	2.4	_	_	٧	
	V <sub>R(LO)</sub>	I <sub>10</sub> = 1 mA, V <sub>PN</sub> = 30 mV	_	_	0.75	٧	
Input Threshold	V <sub>PN(ON)</sub>	V <sub>CC</sub> = 4 V, V <sub>6</sub> = 0 V, Output HIGH	70	250	500	mV	
		$V_{10} \ge 2.4 \text{ V}, V_9 = 0 \text{ V}$	130	275	650	mV	
		$V_{10} \ge 2.4 \text{ V}, V_9 = 5 \text{ V}$	275	900	1500	mV	
	V <sub>PN(OFF)</sub>	V <sub>CC</sub> = 4 V, V <sub>6</sub> = 0 V, Output LOW	5.0	100		mV	
		V <sub>10</sub> ≤ 0.75 V	40	100	_	mV	
Input Hysteresis	$\Delta V_{PN}$	V <sub>6</sub> = 0 V, V <sub>CC</sub> = 4 V	30	150	_	mV	
		V <sub>9</sub> = 0 V	75	150	_	mV	
Output Saturation	V <sub>OUT(SAT)</sub>	I <sub>OUT</sub> = 150 mA	_	200	500	500 mV	
Voltage		Load Dump, I <sub>OUT</sub> = 750 mA	_		1.0	٧	
Output Leakage Current	l <sub>out</sub>	V <sub>OUT</sub> = 3 V	_	_	2.0	μА	
Output Current Limit Threshold Voltage	V <sub>SENSE</sub>	4 V ≤ V <sub>CC</sub> ≤ 26 V	65	100	135	mV	
Output Current Temperature Coefficient	l <sub>out</sub>	V <sub>CC</sub> = 14.5 V, V <sub>PN</sub> = 2 V	_	_	±2000	ppm/°(	
Dwell Control Charge Current	I <sub>DWELL</sub>	$V_{PN} = 7 \text{ V}, V_6 = 0 \text{ V}, V_9 = 0 \text{ V}, V_{12} = 4 \text{ V}$	15		70	μА	
Dwell Control Discharge Current	DWELL	$V_{PN} = 2.5 \text{ V}, V_6 = 200 \text{ mV}, V_B = 0 \text{ V}, V_{12} = 4 \text{ V}$	30	_	80	μΑ	

NOTE: Pin numbers apply to ULQ2460A.

Continued next page...


# 2460 ELECTRONIC SPARK TIMING

#### **ELECTRICAL CHARACTERISTICS continued**

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Dwell ON Threshold Control	V <sub>PN</sub>	V <sub>6</sub> = 0 V, V <sub>12</sub> = 4 V, Output HIGH	-0.8	_	-2.4	٧
Dwell Threshold Control Clamp	V <sub>PN</sub>	V <sub>6</sub> = 0 V, V <sub>12</sub> = 7.5 V, Output HIGH	-3.5	_	-5.7	V
Advance Control Charge	V <sub>P</sub>	$V_{PN} = 7 \text{ V} \supseteq 2.5 \text{ V}, V_{12} = 0 \text{ V}$	1.7	_	3.0	V
Advance Control Discharge	V <sub>P</sub>	V <sub>PN</sub> = 2.5 V \ 0 V, V <sub>12</sub> = 0 V	_	_	900	mV
Advance Control Comparator Enabled	V <sub>P(ON)</sub>	V <sub>PN</sub> = 8 V, Output LOW	_	_	1.3	V
Advance Control Comparator Disabled	V <sub>P(OFF)</sub>	V <sub>PN</sub> = 8 V, Output HIGH	0.5	_		٧
Advance Control Differential Voltage	V <sub>P</sub>		1.2		1.7	V
Input Signal Clamp	l <sub>13</sub>	V <sub>2</sub> = -0.5 V	-0.5	_	-3.5	mA
Zener Clamp Current	I <sub>cc</sub>	V <sub>CC</sub> = 35 V, pulse test	29		77	mA

NOTE: Pin numbers apply to ULQ2460A.

ULQ2460C (Pad numbers apply to ULQ2460A)



#### CIRCUIT DESCRIPTION & TYPICAL APPLICATION

The ULQ2460A, ULQ2460C, or ULQ2460LW electronic spark timing circuit is connected to the electronic spark timing computer at three points:

**REFERENCE WAVESHAPE (R).** Sends engine crankshaft position and speed information to the electronic spark timing computer as determined by the state of the bypass control input.

**ELECTRONIC SPARK TIMING (E).** Receives dwell and timing information from the electronic spark timing computer for the initiation of primary coil current and spark timing. When the EST computer is in control (input B pulled high), a constant-current sink at this input turns ON as confirmation back to the computer.

BYPASS MODE (B). With an active-low signal from the electronic spark timing computer or open circuit at this input (either is indicative of a computer failure), the device senses and processes the input signal received from the pickup coil, thereby generating and controlling dwell, spark timing, and spark advance without the aid of the computer (bypass mode). With a high signal input from the computer, the ULQ2460A/C/LW processes the input signal received from the pickup coil, generating a modified pulse train at the reference waveshape output which, after processing by the EST computer, is returned to the device through the EST terminal thereby allowing the computer to determine dwell, spark timing, and spark advance (EST mode).


The floating, ground-isolated signal generated by the electromagnetic pick-up is connected to the circuit through the P (positive) and N (negative) inputs.

The output of the circuit is connected through an external Darlington-connected power driver and the primary winding of a high-efficiency ignition coil to the battery without the need for ballast resistor protection and provides the following functions:

- Stores energy in the magnetic field of the ignition coil based on the available dwell time.
- Limits the maximum energy stored in the magnetic field of the ignition coil by limiting the maximum current that can be achieved (typically 5.5 A).
- At the required time, it rapidly shuts off the coil current causing a collapse of the magnetic field and dumping the stored energy through the secondary winding at a veryhigh voltage into the spark plug.

In the EST mode of operation, the output is totally under the control of the computer.

# LOW-VOLTAGE **AUDIO POWER AMPLIFIER**



Dwg. No. A-11,715

Providing a low-cost, compact alternative to discrete transistor amplifiers, the ULN3718M integrated circuit is ideal for application as a headphone driver in portable radios, tape players, and other battery-operated equipment. The low-power audio amplifier's wide frequency response and low noise ensure premium performance.

The amplifier will operate (at reduced volume) with supply voltages as low as 1.8 V without a significant increase in distortion. This feature allows operation with a 3 V battery supply and minimizes concern about weak batteries. The class-AB audio amplifier has low quiescent current drain for maximum battery life. This device is rated for operation with supply voltages up to 9 V.

The ULN3718M audio amplifier is supplied in an 8-pin mini-DIP plastic package. A copper alloy lead frame gives the amplifier enhanced power dissipation ratings.

#### **FEATURES**

- Wide Operating Voltage Range 1.8 9.0 V
- Low Quiescent Current
- AC Short-Circuit Protection
- Low External Parts Count
- Low Distortion
- 40 dB Voltage Gain
- Low Noise

#### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V<sub>CC</sub>..... 10 V Package Power Dissipation, P<sub>D</sub>..... See Graph Operating Temperature Range, Storage Temperature Range,

T<sub>S</sub>.....-65°C to +150°C


Always order by complete part number: **ULN3718M** .

## 3718 LOW-VOLTAGE AUDIO POWER AMPLIFIER

# ELECTRICAL CHARACTERISTICS at T $_{\rm A}$ = +25°C, V $_{\rm CC}$ = 3 V, R $_{\rm L}$ = 32 $\Omega$ , f $_{\rm in}$ = 400 Hz (unless otherwise noted).

				Lim	Limits				
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units			
Supply Voltage Range	V <sub>CC</sub>		1.8	3.0	9.0	٧			
Quiescent Supply Current	lcc	V <sub>CC</sub> = 3.0 V	_	6.0	1.0	mA			
		V <sub>CC</sub> = 6.0 V	_	9.0	15	mA			
	į	V <sub>CC</sub> = 9.0 V	_	12	20	mA			
Voltage Gain	A <sub>V</sub>		36	40	44	dB			
Audio Power Output	Роит	$R_L = 8\Omega$ , $V_{CC} = 3.0$ V, $THD = 10\%$	_	80	_	mW			
		$R_L = 8\Omega$ , $V_{CC} = 6.0$ V, $THD = 10\%$	250	430	_	mW			
		$R_L = 32\Omega$ , $V_{CC} = 3.0$ V, THD = 10%	15	25	_	mW			
		$R_L = 32\Omega$ , $V_{CC} = 6.0$ V, $THD = 10\%$	_	125	_	mW			
Distortion	THD	P <sub>OUT</sub> = 10 mW	_	0.3	1.0	%			
		P <sub>OUT</sub> = 1.0 mW, V <sub>CC</sub> = 1.8 V	_	1.5	3.0	%			
Output Noise	V <sub>out</sub>	Input Shorted, BW = 80 kHz	_	200	500	μV			
Input Resistance	R <sub>IN</sub>	Pin 8	_	250	_	kΩ			
Power Supply Rejection	PSRR	$C_D$ (Pin 1) = 500 $\mu$ F, f = 120 Hz	_	28	_	dB			

#### TEST CIRCUIT AND TYPICAL APPLICATION



Dwg. No. A-11,716A


# 3718 LOW-VOLTAGE AUDIO POWER AMPLIFIER

#### TYPICAL CHARACTERISTICS


# 

#### Dwg. No. GP-009-1A

# TYPICAL OUTPUT POWER AS A FUNCTION OF SUPPLY VOLTAGE




Dwg. No. GS-010



#### Dwg. No. GS-011

#### POWER SUPPLY REJECTION RATIO AS A FUNCTION OF FREQUENCY



Dwg. No. GS-012

#### APPLICATIONS INFORMATION

Selection of power-supply voltage and speaker impedance allows a designer to choose audio power levels within the allowable package power dissipation rating for any maximum operating temperature. No unique precautions are necessary when designing with this device. It is stable and ac short-circuit immune.


External component selection for this low-power amplifier involves only two capacitors — one for output coupling and one for feedback and ripple decoupling. The coupling capacitor value should be selected to provide the desired low-frequency cutoff with the chosen load impedance. The decoupling capacitor should be chosen for both low-frequency audio rolloff and supply-ripple rejection.

Ripple rejection is not practical to calculate due to the large number of mechanisms involved. A 500  $\mu\text{F}$  capacitor achieves typically 25 dB rejection at 120 Hz.

The high gain and the high input impedance of the power amplifier recommend use of this device in many diverse applications. However, the input stage does have other characteristics that should be taken into account for best results. The input is referenced to ground for internal biasing and must be provided with a dc path to ground. A current of typically 1  $\mu A$  flows from the input through the volume control. This produces an IR drop that is multiplied by the closed loop dc gain of the amplifier and appears as an error in output centering. This recommends a value of 200 k $\Omega$  or less for the volume control; values of less than 100 k $\Omega$  are preferred.

The selection of amplifier load impedance involves more than just consideration of the desired power output. A low load impedance will produce the highest power output for any given supply voltage. Higher impedances will furnish significant reduction in harmonic distortion and improvement in overall repeatability in power output capacity.

Special steps toward minimizing tendencies towards instabilities of all types were taken in the design of this device. However, as with all high-gain circuits, care should be given to printed wiring board layout to avoid undesirable effects. Inputs and outputs should be well separated and should avoid common-mode impedances wherever possible. For best performance, connect low-level input-signal ground terminals and the decoupling capacitor ground terminal together at pin 3 (signal ground); connect the high-level speaker ground terminal and the power supply ground terminal together at pin 2 (power ground). The signal ground and the power ground should be interconnected at only one point.



## FM STEREO DECODER

The A3828EA FM stereo decoder utilizes advanced demodulation techniques for improved performance under adverse receiving conditions. This is particularly important in automotive receivers where the signal strength and multipath effects are continuously changing. It is designed to provide the best possible performance under the widest range of signal conditions while also reducing the cost and complexity of standard FM multiplex receivers. This is accomplished through the use of a dual-bandwidth phase-locked loop and a Walsh function for the regenerated carrier. These two improvements to the carrier recovery system produce the best possible immunity to noise and interference of any modern PLL stereo decoder under poor signal conditions. The A3828EA is an improved, direct replacement for the ULN3827A.

The dual-bandwidth phase-locked loop switches to a very narrow bandwidth to assure optimal phase stability under noisy reception conditions. Noise-actuated blending adjusts the stereo separation as a function of signal-to-noise ratio to reduce the background noise for low-signal levels and eliminate transition problems at the stereo/mono switch point. The regenerated 19 kHz reference and 38 kHz carrier are free from 3rd and 5th harmonics to improve adjacent channel rejection and signal-to-noise ratio as well as providing good rejection of ARI (Auto Radio Information), RDS (Radio Data System), and other data

The A3828EA is supplied in a 20-pin dual in-line plastic package with a copper lead frame that eliminates many decoupling problems.


#### **FEATURES**

- Reduced Automotive Stereo Multi-Path Effects
- Dual Bandwidth Phase-Locked Loop
- No Adjustments Required
- Improved Adjacent-Channel Rejection
- Good ARI/RDS Rejection
- 19 kHz Pilot Canceling
- Noise-Actuated Blending and High Cut
- Ceramic Resonator Controlled Oscillator
- Automatic Stereo/Mono Switching

#### ABSOLUTE MAXIMUM RATINGS

Package Power Dissipation, Pp......1.0 W Operating Temperature Range, T<sub>A</sub>.....-40°C to +85°C Storage Temperature Range, T<sub>S</sub>.....--65°C to +150°C

Always order by complete part number: A3828EA .

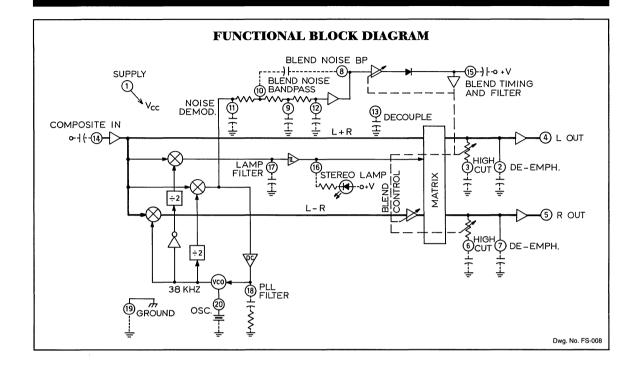

## 3828 FM STEREO DECODER

# ELECTRICAL CHARACTERISTICS at TA = $+25^{\circ}$ C, VCC = 10.0 V, Composite Input = 400 mVrms (L = R, pilot OFF), Pilot Level = 40 mVrms, fm = 1 kHz, unless otherwise specified.

		Limits			
Characteristic	Test Conditions	Min.	Тур.	Max.	Units
Supply Voltage Range	Functional	8.5	10	12	V
Max. Composite Input	THD = 1.0 %	600	800	_	mVrms
Input Impedance		15	25	35	kΩ
Output Impedance		0.4	1.0	3.0	kΩ
Stereo Channel Separation	f <sub>m</sub> = 100 Hz	_	50		dB
(100 Hz to 1 kHz)	f <sub>m</sub> = 1.0 kHz	30	50		dB
	f <sub>m</sub> = 10 kHz	_	40		dB
Monaural Gain	19 kHz Pilot Level = 0	- 0.4	0.6	1.6	dB
Monaural Channel Balance	19 kHz Pilot Level = 0	_	0	±1.0	dB
Total Harmonic Distortion	19 kHz-Pilot = 0	_	0.05	0.5	%
	L or R only	_	0.1	0.5	%
Ultrasonic Frequency Rejection	19 kHz	36	51		dB
	38 kHz	35	45	_	dB
SCA Rejection	67 kHz (Note 2)	55	65	_	dB
Spurious Response	114 kHz, 10% modulation	_	65		dB
	190 kHz, 10% modulation		65	_	dB
PLL Bandwidth	Loop Locked	_	20		Hz
Stereo Switch Level	19 kHz Pilot Only, Lamp ON	10	15	22	mVrms
	19 kHz Pilot Only, Lamp OFF	6.0	11	16	mVrms
Stereo Lamp Hysteresis	Lamp OFF to Lamp ON	_	3.0	_	dB
Capture Range	Pilot = 6.0 mV	_	300	_	Hz
Lock Range	Pilot = 20 mV	_	300	_	Hz
Blend Threshold	S+N/N	_	36		dB
Stereo Lamp Output Current	Short Circuit, Lamp ON	5.0	20	40	mA
	Lamp OFF, V <sub>CC</sub> = 12 V		< 0.1	3.0	μА
Quiescent Supply Current	Lamp OFF	_	22	35	mA

NOTES: 1) Typical values are given for circuit design information only.


<sup>2)</sup> Measured with a stereo composite signal of 80% stereo, 10% pilot, and 10% SCA.

#### THE ALLEGRO FM STEREO SYSTEM

This new stereo decoder utilizes advanced demodulation techniques for improved performance under adverse receiving conditions. This is particularly important in automotive receivers where the signal strength and multipath effects are continuously changing. The A3828EA FM stereo decoder also reduces the cost and complexity of FM multiplex receivers. It is designed to provide the best possible performance under the widest range of signal conditions. This is accomplished through the use of a variable-bandwidth phase-locked loop and the use of a Walsh function for the regenerated carrier.

Prior integrated stereo decoders utilized a loop bandwidth of typically 300 Hz, which was a compromise between acquisition performance and carrier recovery. Acquisition is generally satisfactory with this bandwidth, however, carrier recovery integrity often degrades under noisy conditions; in the worst case to complete loss of carrier. This is more apparent under multipath conditions. Although this is not the only noise observed under multipath events, it is a real source of disturbance. A secondary feature of the wider bandwidth is a peak in L - R distortion at the loop resonance frequency at 9.5 kHz. Clearly, to provide optimal performance, the loop bandwidth should be sub-audible. To provide reasonable acquisition times, the A3828EA phase-locked loop is operated in a wide-band mode until carrier acquisition. Upon capture, the loop is then switched to a narrow-band mode (typically 20 Hz) to provide superior noise immunity under adverse signal conditions.

Currently available stereo decoders generate square waves for the regenerated 19 kHz pilot and 38 kHz carrier. Although this is convenient from the standpoint of circuit design, the spurious response of the receiver, as observed at RF, exhibits a sine n/n spurious response pattern centered about the received frequency and spaced at 38 kHz intervals. The most detrimental harmonic is the 5th, located at 190 kHz, since this spurious seriously degrades adjacent channel rejection. The preferred technique for eliminating these spurious responses would be the use of a pure sine-wave regenerated carrier.

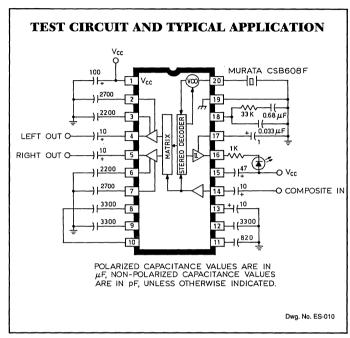

The typical application and circuit constants herein are included only as an example and provide no guarantee for designing equipment to be mass-produced. The information herein is believed to be accurate and reliable. However, no responsibility is assumed by Allegro MicroSystems for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

However, this is impractical using digital carrier regeneration techniques. A more conveniently implemented method is the Walsh function which is a digital technique for generating the odd-ordered harmonics in a waveform that can be subtracted from the square wave to produce a sine-wave approximation. This avoids much of the previously described spurious responses. The implementation of this function is relatively easy in a modern stereo decoder employing a high-frequency ceramic resonator for the oscillator since the required divider can readily produce the Walsh function as a side product.

This stereo decoder also incorporates a noise-operated blending system that is completely contained within the chip. Other devices with signal-strength operated blending are frequently fooled into full stereo operation by strong but poor quality signals during multipath events. The noise-operated blending system is also actuated by environmentally generated and multipath-induced noise since the system is based exclusively on signal-to-noise ratio as observed at the FM detector output. Since the technique of blending on noise is inherently more repeatable than signal-strength based blending, production blend adjustments are not required.

## 3828 FM STEREO DECODER

In addition to the advanced features previously described, the A3828EA decoder uses a ceramic oscillator to eliminate the last remaining adjustment. Forced mono can be accomplished externally which also stops the oscillator.


Implementation is in DABiC which is a bipolar plus CMOS process. It has the advantages of low-noise linear circuitry and CMOS logic that is dense (for reduced cost) and fully characterized for operation over a very-wide temperature range.

#### **PIN FUNCTIONS**

	Pin	DC Voltage	Function	Notes
	1	10.0	Supply	_
į	2	4.0	Left De-Emphasis	$R_s = 27.8 \text{ k}\Omega$
į	3	4.3	Left High Cut	$R_s^s = 20 \text{ k}\Omega$
	4	3.4	Left Output	$R_s^s = 1 k\Omega$
	5	3.4	Right Output	$R_s^s = 1 k\Omega$
	6	4.3	Right High Cut	$R_s^s = 20 \text{ k}\Omega$
	7	4.0	Right De-Emphasis	$R_{s}^{3} = 27.8 \text{ k}\Omega$
	8	3.0	Blend Capacitor	_
	9	3.7	Blend Capacitor	_
	10	4.4	Blend Capacitor	_
ı	11	5.1	Blend Capacitor	_
	12	5.4	Blend Capacitor	_
l	13	5.4	Blend Decouple	_
	14	3.6	Composite Input	$R_{IN} = 25 k\Omega [1]$
	15	8.3	Blend Timing & Filter	[2]
	16	9.0	Stereo Indicator	Locked = 0.1 V
	17	5.0	Lock Detector Filter	Locked = 4.7 V
ı	18	5.6	Loop Filter	Locked = 4.7 [3]
	19	0.0	Ground	<u> </u>
	20	9.0	608 kHz Resonator	_

**NOTES** 

- The decoder matrix does not account for FM detector frequency roll-off. An input RC network can be used to correct for this if separation is not sufficient.
- 2) Blend threshold can be increased to about 42 dB (but separation will be reduced at lower levels) by adding 470 k $\Omega$  to  $V_{cc}$ . Smaller values will cause blending when it is not desired.
- The loop filter capacitor should be low-leakage current because the phase detector output current is very low.

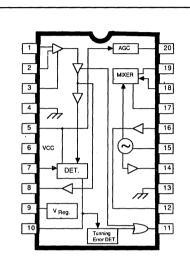

## AM SIGNAL PROCESSOR

Providing the AM signal processing functions for an electronicallytuned AM receiver (ETR), the ULN3841A includes a balanced mixer, buffered local oscillator, IF amplifier, AM detector, scan control detectors, and a switchable voltage regulator. The addition of a JFET matched to a whip antenna, RF tuning components, IF selectivity. and audio stages gives a complete AM radio which can be used in automotive receivers. Additional applications are in high-quality home entertainment receivers (especially with the addition of an AM stereo decoder) and scanning-type shortwave receivers. The frequencydetecting stop circuit is also capable of recovering narrow-band FM. making it useful for scanners or weatherband radio applications.

The ULN3841A has a greatly improved stop detection system over other existing devices. It uses the dual criteria of frequency and amplitude for establishing a valid stop. Tuning accuracy (frequency criteria) is established by evaluating phase shift across the detector coil. The circuitry is similar to that used in FM discriminators. Since this detection system is phase operated, it remains effective even in the presence of strong signals, which can cause false stops in systems using narrowband filters. The amplitude criterion for stop is determined by evaluating the IF level. It includes a unique circuit that removes the effect of the AGC action. This allows the AGC tuning components to be selected for low-frequency audio performance without compromising scanning speed.

These AM signal processors are packaged in 20-pin plastic DIPs and are rated for operation over the temperature range of -40°C to +85°C.

#### **FEATURES**

- Low Noise Figure
- Balanced Mixer
- Buffered Local Oscillator
- Improved 'Stop' Detector
- Wide-Band AGC
- Delayed AGC
- Narrow-Band FM Output
- Low Supply Current
- 7 to 16 Volt Operation

#### ABSOLUTE MAXIMUM RATINGS

Package Power Dissipation, P<sub>D</sub> . . . . 1.18 W Operating Temperature Range,

T<sub>A</sub> . . . . . . . . . -40°C to +85°C Storage Temperature Range,

T<sub>S</sub>.....--65°C to +150°C

Always order by complete part number: ULN3841A .

# ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $V_{CC}$ = 14.4 V, $f_o$ = 1 MHz, $f_{if}$ = 450 kHz, $f_m$ = 1 kHz at 30% AM (unless otherwise noted).

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Minimum Operating Voltage	V <sub>6</sub>		— <i>j</i>	7.0		٧
Quiescent Supply Current	I <sub>cc</sub>	No Signal		25	33	mA
Sensitivity	V <sub>in</sub>	V <sub>OUT</sub> = 50 mV	_	6.0	10	μV
	]	V <sub>CC</sub> = 11 V	_	6.0	12	μV
Usable Sensitivity	V <sub>in</sub>	S + N/N = 20 dB	_	6.0	10	μV
Recovered Audio	V <sub>OUT</sub>	V <sub>in</sub> = 1 mV	173	245	346	mV
Total Harmonic Distortion	THD	V <sub>in</sub> = 1 mV, 80% AM	_	0.4	3.0	%
Oscillator Output Voltage	V <sub>out</sub>		150	200	400	mV
Stop Output Voltage	V <sub>11</sub>	V <sub>in</sub> = 0	4.3	4.6		٧
	1	V <sub>in</sub> = 1 mV	_		2.7	٧
Stop Sensitivity	V <sub>in</sub>	V <sub>11</sub> = 1.5 V, 0% AM	27	35	80	μV
Stop Bandwidth		V <sub>in</sub> = 1 mV, V <sub>11</sub> = 1.5 V, 0% AM	8.0	10.2	13.5	kHz
Wide-Band AGC	V <sub>agc</sub>	V <sub>in</sub> = 0	_	_	0.2	V
		V <sub>in</sub> = 60 mV	2.0	_	_	V
Overload	V <sub>in</sub>	THD = 10%, 80% AM	25	70	_	mV
Input Limiting Threshold	V <sub>TH</sub>	Pin 10, $\Delta f = \pm 3 \text{ kHz}$ , -3 dB	_	12	_	μV
FM Recovered Audio	V <sub>10</sub>	$\Delta f = \pm 3 \text{ kHz}, f_{\text{m}} = 50 \text{ Hz}$	_	380	_	mV
Signal-to-Noise Ratio	S + N/N	V <sub>in</sub> = 250 μV	45	50	_	dB
		V <sub>in</sub> = 10 mV	_	60	_	dB
AGC Figure of Merit	V <sub>in</sub>	$\Delta V_{OUT}$ = -10 dB ref. $V_{in}$ = 5 mV	4.2	6.0	8.4	μV
Delayed AGC Voltage	V <sub>17</sub>	V <sub>in</sub> = 0	1.5	1.65	1.8	V
		V <sub>in</sub> = 1 mV	0.6	0.85	1.2	٧
Regulator Voltage	V <sub>9</sub>		_	5.1	_	V
		Pin 20 Grounded (Muted)	_	_	0.6	٧

# Small-Signal AC Parameters at $T_A$ = +25°C, $V_{CC}$ = 14.4 V, $f_o$ = 1 MHz, $f_{if}$ = 450 kHz

Characteristic	Pins	Typical Value				
MIXER						
Input Resistance	18	5 kΩ				
Input Capacitance	18	20 pF				
Transconductance	18 to 19	4 mmho				
Output Resistance	19	75 kΩ				
Output Capacitance	19	4 pF				
IF						
Input Resistance	1	8 kΩ				
Input Capacitance	1	7 pF				

1 to 8

Voltage Gain


Output Resistance


# 

#### TYPICAL CHARACTERISTICS

54 dB


45 Ω







Typical values are given for circuit design information only.

#### TYPICAL CHARACTERISTICS







#### A HIGH-PERFORMANCE ELECTRONICALLY-TUNED AM STEREO RECEIVER FOR AUTOMOTIVE APPLICATION USING THE ULN3841A

The advent of AM stereo has changed the perception of AM as a low-fidelity medium. This has caused a revaluation of AM receiver performance objectives, particularly minimum audio bandwidth. To achieve satisfactory stereo imaging, a minimum high-frequency response of 4 kHz has been shown to be necessary. Additionally, AM stereo has imposed the totally new requirements of phase linearity and freedom from incidental phase noise and modulation.

#### RF SECTION

RF gain is provided by a large-area JFET, selected for high gate-to-channel capacity to provide a capacitive match to the broad-band antenna. To further improve this match, a wide-band step-up transformer T1 is also included. The inductance of this transformer was selected to resonate with typically 90 pF cable capacity at the lower band edge to improve across the band gain uniformity. T1 improves usable sensitivity, typically 3 dB. A cascode bipolar stage is also included to prevent Miller effect from loading the antenna, providing typically 2 dB improvement in usable sensitivity at 1400 kHz.

Overall gain of the RF stage is low to minimize cross-modulation, made possible by a low noise figure mixer. At moderate signal levels, cross-modulation is primarily limited by the performance of the JFET. At higher levels, wide-band AGC is applied to a clamp transistor at the antenna. This signal is derived from the secondary to T2 and is rectified and amplified by the ULN3841A.

A wider RF bandwidth is used to reduce the effects of mistracking and misalignment on stereo separation and distortion. The overall bandwidth (audio response) and band shape of the receiver should be determined by the IF selectivity.

To achieve widest bandwidth with minimum sacrifice in out-band selectivity, a double-tuned section was selected, T2 and T3. To further enhance bandwidth vs. selectivity performance across the band, a combination of frequency-dependent loading and coupling is used. The 330 µH choke is used

as top coupling and is constant across the band; the .047  $\mu$ F capacitor is a bottom-coupling element which decreases coupling with increasing frequency. The varactor diode series-loading resistors (6.8 $\Omega$ ) are also employed to reduce Q at the lower end of the band. This produces typical 6 dB bandwidths of 18.6 kHz at 600 kHz and 24 kHz at 1400 kHz. Variable coupling also reduces gain variation across the band (ref. 1).


#### MIXER AND IF


The output from the double-tuned RF is applied to the balanced mixer, pin 18, which is biased from pin 17. Output from the mixer is taken via T5. The primary impedance is  $15\ k\Omega.$  Secondary and Q are selected for the ceramic filter which was chosen for stereo performance and bandwidth. This filter has a quasi-parabolic band pass and reasonably constant group delay. Termination resistors at pin 1 are configured as a pad to permit adjustment of overall gain.

The detector coil (L1) serves as the AM detector and also establishes the stop bandwidth. Tuning accuracy is established by evaluating phase shift across the detector coil employing circuitry similar to that used in FM discriminators. Stop phase criteria is internally set to one-half the 3 dB bandwidth (f<sub>ii</sub>/2x loaded Q) of L1. The value in the application is 20. This circuit also recovers narrow-band FM at pin 10.


AGC rate is selected for audio performance. AGC action is removed from the stop circuit, which effectively eliminates the tradeoff between AGC performance and permitted scanning rate. Monaural output is provided in this application for alignment and evaluation. If the monaural output is not required the  $10~\rm k\Omega$  and .005  $\rm \mu F$  components can be deleted without affecting stereo performance. In this application the ULN3841A stop detector output (pin 11) is applied through a time delay to the AM stereo decoder force monaural input to reset the decoder counters during the tuning. The IF signal for the decoder is taken out at the detector coil.


#### TYPICAL CHARACTERISTICS





#### TYPICAL CHARACTERISTICS





#### STEREO DECODER

The component values used with the AM stereo decoder are based on the applications information as given elsewhere. Note that the pilot-tone and co-channel components should be precision as shown (ref. 2, 3).

#### REFERENCES

- "Development of High Quality Receiver for AM Stereo" by Jon P. Grosjean and Oliver Richards, publication TP80-5.
- "Pilot-Tone Band-Pass Filter Circuit Component Tolerance Considerations," Motorola, publication M68465.
- "VCO and Phase-Lock Loop Performance," Motorola publication M684131.

AM STEREO

RECEIVER FOR AUTOMOTIVE APPLICATION

#### **COIL INFORMATION FOR TEST CIRCUIT AND** HIGH-PERFORMANCE ETR AM STEREO RECEIVER N1/ N3 Symbol Q **Toko Part Number**

MURATA SFG 450F

Ė

DET.

-O &1 OUT

ULN 3841 LW

47K

MIXER

MUTE

OSC. OUT

STOP OUT

₹100Ω

\_330 µН ₹

1500

470

100 Ω.≩

T.047

TPJ309

. 15 μΗ

ANTENNA

TUNING 1-9 V

.047 μF

220 Ω €

4.7K

1.5K 

CAPACITOR VALUES ≤ -1 ARE IN µF; > 1 ARE IN pF UNLESS OTHERWISE SHOWN TOKO KV 1235Z

HI = AUTOMATIC MONO STEREO LO = FORCED MONO

MONO AUDIO OUT Q

STEREO IND.

≱910Ω 1%

LOW LEAKAGE

Antenna T1 T1 T2, T3 T20 T3. T3. T4 T4 T5. T4 T5. T5 T5 T5. T5 T5. T6. T5. T6. T6. T6. T6. T6. T6. T6. T6. T6. T6							
		Antenna	T1		1:1.6		7HN-60064CY
Mixer       T5       2:1       8.9:1       7LC-502112N4, $C_T = 180 \text{ pF}$ Detector (test)       L1       100       7NRES-A5622AAG, $C_T = 100 \text{ pF}$		RF	T2, T3	120		10:1	RWOS-6A7894A0, L = 178 μH
Detector (test) L1 100 7NRES-A5622AAG, $C_T = 100 \text{ pF}$		Local Osc.	T4	120		5:1	7TRS-A5609A0
		Mixer	T5		2:1	8.9:1	7LC-502112N4, C <sub>τ</sub> = 180 pF
(application) L2 100 A7BRS-T1041Z, $C_T = 1000 \text{ pF}$	ı	Detector (test)	L1	100			7NRES-A5622AAG, C <sub>T</sub> = 100 pF
		(application)	L2	100			A7BRS-T1041Z, $C_{T} = 1000 pF$
	ı						


‡ 220 µF

OUTPUTS

3300

10 μF

## **DUAL-CONVERSION AM RECEIVER**



Dwg. No. PS-012



#### **ABSOLUTE MAXIMUM RATINGS**

Supply Voltage, V <sub>CC</sub>
Package Power Dissipation, P <sub>D</sub> 1.2 W
Operating Temperature Range,
T <sub>A</sub> 40°C to +85°C
Storage Temperature Range,
T <sub>S</sub> 65°C to +150°C

Providing the AM signal processing functions for an electronically tuned AM receiver (ETR), the A3844EEP includes two balanced mixers, a crystal local oscillator, an L/C-tuned local oscillator, oscillator buffer, IF amplifier, AM detector, scan control detectors, and a switchable voltage regulator. This dual-conversion device mixes the incoming RF up to a first IF of 10.7 MHz, then down to 450 kHz, and then detects the audio. The addition of a JFET matched to a whip antenna, RF low-pass filter, IF selectivity, and audio stages gives a complete AM radio which can be used in automotive receivers. The frequency-detecting stop circuit is also capable of recovering narrow-band FM, making it useful for scanners or weather band radio applications.

The A3844EEP has a greatly improved stop detection system over other existing devices. It uses the dual criteria of frequency and amplitude for establishing a valid stop. Tuning accuracy (frequency criterion) is established by evaluating phase shift across the detector coil. The circuitry is similar to that used in FM discriminators. Since this detection system is phase operated, it remains effective even in the presence of strong signals, which can cause false stops in systems using narrowband filters. The amplitude criterion for stop is determined by evaluating the IF level. It includes a unique circuit that removes the effect of the AGC action. This allows the AGC tuning components to be selected for low-frequency audio performance without compromising scanning speed. The A3844EEP is an improved, direct replacement for the ULN3847EP.

This AM signal processor is packaged in a 28-lead plastic leaded chip carrier (PLCC) for surface-mount applications and is rated for operation over the temperature range of -40°C to +85°C. Devices for operation over a temperature range of -40°C to +105°C are available on special order.

#### **FEATURES**

- Low Noise Figure
- High Dynamic Range First Mixer
- Balanced Mixers
- Buffered Oscillators
- Very Effective Stop Detector
- Dual Wide-Band AGC
- Delayed AGC
- Narrow-Band FM Output
- Full-Wave Detector
- Low Temperature Drift
- 6.5 V to 12 V Operating Range

#### **APPLICATIONS**

- Automobile Radios
- High-Quality Home Entertainment Receivers
- World-Band Receivers
- CB Transceivers

Always order by complete part number: A3844EEP .

# 3844 DUAL-CONVERSION AM RECEIVER

ELECTRICAL CHARACTERISTICS at  $T_A$  = +25°C,  $V_{CC}$  = 10 V,  $f_o$  = 1 MHz,  $f_{if1}$  = 10.7 MHz,  $f_{if2}$  = 450 kHz,  $f_m$  = 1 kHz

			Limits			
Characteristic Symbol		Test Conditions	Min.	Тур.	Max.	Units
Supply Current	I <sub>cc</sub>	I <sub>2</sub> , V <sub>in</sub> = 0	_	50	65	mA
		I <sub>2</sub> , V <sub>in</sub> = 0, V <sub>24</sub> = 0 (Muted)	_	3.0	_	mA
Sensitivity	V <sub>in</sub>	V <sub>out</sub> = 50 mV		6.0	_	μV
Usable Sensitivity	V <sub>in</sub>	S + N/N = 20 dB		14		μV
Recovered Audio	V <sub>out</sub>	V <sub>in</sub> = 1 mV	200	250		mV
Total Harmonic Dist.	THD	V <sub>in</sub> = 1 mV, Mod = 80%	_	0.4	1.5	%
Oscillator Output	V <sub>o</sub>	V <sub>15</sub>	_	300	_	mV
Stop Output Voltage	V <sub>STP</sub>	V <sub>7</sub> , V <sub>in</sub> = 0		4.8		V
		$V_7$ , $V_{in} = 1 \text{ mV}$		0.05		V
Stop Sensitivity	V <sub>stp</sub>	V <sub>11</sub> = 2.5 V, Mod = 0%		100	_	μV
Stop Bandwidth	BW <sub>STP</sub>	V <sub>in</sub> = 1 mV, V <sub>11</sub> = 1.5 V, Mod = 0%	_	10.2		kHz
Wide-Band AGC	V <sub>AGC</sub>	V <sub>in</sub> = 0	_	7.5		V
		V <sub>in</sub> = 18 mV	_	6.5	_	٧
	}	V <sub>in</sub> = 60 mV	_	1.0	_	V
Overload	V <sub>in</sub>	V <sub>out</sub> = 10% THD, Mod = 80%		200		mV
		First Mixer		450	_	mV
-3dB Limiting	V <sub>in</sub>	Mod = 3 kHz peak deviation		12		μV
IF Output Voltage	V <sub>out</sub>	V <sub>in</sub> = 1 mV		197	_	mV
FM Recovered Audio	V <sub>out</sub>	V <sub>6</sub> , Mod = 3 kHz peak deviation	_	380		mV
Signal to Noise Ratio	S+N/N	V <sub>in</sub> = 1 mV	_	55		dB
		V <sub>in</sub> = 10 mV	_	60	_	dB
AGC Figure of Merit	FOM	Ref. at $V_{in} = 5 \text{ mV}$ , $V_{in}$ or $V_{out} = -10 \text{ dB}$		30	_	μV
Regulator Voltage	V <sub>REG</sub>	V <sub>5</sub>		5.1	_	V
		V <sub>5</sub> , V <sub>24</sub> = 0 (Muted)	_	0	0.2	V
Reference Voltage	V <sub>REF</sub>	V <sub>13</sub>	T	3.5		V

# $3845_{ m AND}$

## AM NOISE BLANKERS

These noise blanker integrated circuits contain all of the necessary circuitry for adding an extremely efficient noise blanking technique (patents pending) to any type of AM tuner or receiver with RF input frequencies (or a first IF) to 30 MHz. The ULN3845A features dual audio channels and is intended for AM-stereo or independent sideband applications. The ULN3846A has only a single audio channel but is electrically identical to the ULN3845A in all other respects.

A high input impedance, high-gain, broadband RF amplifier permits these devices to be directly connected to the RF stage of a tuner. The internal automatic gain control circuitry insures that the noise detection threshold remains constant with changes in input signal level. The AGC circuitry is identical to that of the ULN3841A AM signal processor and is especially recommended for use with those devices. The response time of the RF gate is sufficiently fast to blank the noise pulse at the output of the mixer before the IF filter. Very-short blanking times will effectively suppress most of the interfering noise. Residual audio noise is removed by an audio sample-and-hold gate. The RF blanking time, audio gate delay time, and audio gate blanking time can all be independently adjusted to suit the particular application.

These AM noise blankers are packaged in plastic DIPs and are rated for operation over the temperature range of -40°C to +85°C.

#### **FEATURES**

- RF Blanking to 30 MHz
- Single-Channel or Stereo Audio Blanking
- Adjustable RF and Audio Blanking Time
- Adjustable Audio Blanking Delay
- Sample-and-Hold MOS Audio Gates
- Internal Voltage Regulation
- Minimum External Components

#### APPLICATIONS

- AM and AM-Stereo Automotive Radios
- CB Transmitter/Receivers
- Short-Wave Receivers
- Mobile Communications Equipment

# ABSOLUTE MAXIMUM RATINGS

ULN3845A

RF IN [

RF BYPASS 2

AUDIO DELAY 5

AUDIO BLANK TIME (R)

AUDIO BLANK T

AUDIO OUT1 3

AUDIO IN1 T9

RF BIAS 3 RF AGC 4 Vcc 18 SUPPLY

NC 17 NO CONNECTION

RF GATE

RF GATE
HIGH
GROUND
RF BLANK
TIME
12 NOISE
VIDIO OUT 2

IDI AUDIO IN2


Dwg. No. PS-003

Supply Voltage, V<sub>CC</sub> . . . . . . . . . . . . . . . . 12 V Package Power Dissipation, P<sub>D</sub>..... 880 mW Operating Temperature Range, T<sub>A</sub> .....-40°C to +125°C Storage Temperature Range, T<sub>S</sub> .....-55°C to +125°C

Always order by complete part number:


Part Number	Function
ULN3845A	Stereo Noise Blanker
ULN3846A	Mono Noise Blanker

#### **ULN3646A**




Dwg. No. PS-004

#### TEST CIRCUIT FIGURE 1



Dwg. No. ES-007

Note that the noise-pulse input is attenuated 20 dB by the test circuit.

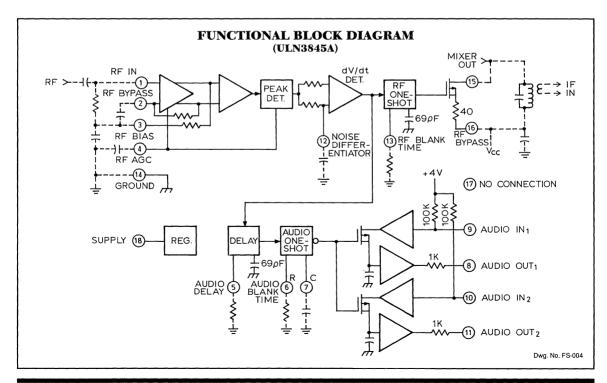

# ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $V_{CC}$ = 9 V, $f_{rf}$ = 1 MHz, Noise ( $f_{noise}$ ) = 500 Hz Square Wave, $f_{af}$ = 1 kHz, Test Figure 1.

	Test		Limits			
Characteristic	Pins*	Test Conditions	Min.	Тур.	Max.	Units
Supply Voltage Range	18	Operating	7.5	9.0	12	V
Quiescent Supply Current	18	V <sub>RF</sub> = 0		12	20	mA

#### RF INPUT AMPLIFIER:

Trigger Threshold	1	Noise Pulse Amplitude for V <sub>RF</sub> = 0		100	_	μV
Modulation Threshold	1	Noise Pulse Modulation for $V_{RF} = 1 \text{ mV}$	_	85		%
Detector Rise Time	12	$C_{12} = 0$	_	500	_	ns

#### RF SWITCH:

ON Resistance	15-16			50	70	
OFF Resistance	15-16			100		k
Time Delay	1-15	From Beginning of RF Pulse to Beginning of RF Blanking	_	1.5	3.0	μs

#### **AUDIO SWITCHES:**

Attenuation	9-8, 10-11		60	80	_	dB
Noise	8, 11			1.5	6.0	mVpp
Crosstalk	8, 11	ULN3845A Only	_	60	_	dB
Gain	9-8, 10-11		-1.0	-0.5	0	dB
Total Harmonic Distortion	8, 11	$V_{af} = 300 \text{ mV}, V_{noise} = 0$	-	<0.1	0.5	%
Input Impedance	9, 10			100		k
Output Impedance	8, 11		_	1.0	_	k

#### **BLANKING TIMERS:**

RF Blanking	15	R <sub>13</sub> = 350 k	45	55	65	μs
Audio Delay	8	R <sub>5</sub> = 350 k	40	50	62	μs
Audio Blanking	8	R <sub>6</sub> = 110 k , C <sub>7</sub> = 0.0012 μF	220	290	360	μs

<sup>\*</sup>Pin numbers are for ULN3845A.

#### CIRCUIT DESCRIPTION

Previous attempts at suppression of impulse noise in AM receivers have used a variety of approaches ranging from gating the signal OFF at the antenna to simply clipping (limiting) any signal that was larger than the average modulation. Unfortunately, the former can generate as much noise as it removes while the latter only reduces the level of noise impulses and does not remove them.

A major problem in attempting to suppress impulse noise in an AM receiver can best be described by looking at the shape of a noise pulse as it passes through a typical tuner as shown in Figure 2. Here, a typical 0.5 us pulse is applied to the antenna input. The resulting waveforms are essentially the impulse response of the different selectivity sections as limited only by the dynamic range of the individual sections. Note that the signal remains quite narrow until the IF filter is reached. Because of the relatively narrow bandwidth of the IF filter, the limiting of the IF amplifier, and the filtering effect of the detector, the audio output resulting from the impulse is much wider than the original input pulse and is therefore much more objectionable.

One blanking scheme currently in use senses the noise pulse in the IF amplifier and blanks the audio output. This results in a long blanking time and poor performance at the higher frequencies where a short blanking time is needed most.

The ULN3845A and ULN3846A take a different approach to the noise suppression problem by sensing the noise pulse in the receiver's RF section and blanking the pulse before it reaches the IF. This requires a noise amplifier with a minimum propagation delay and high-speed gating.

Blanking the noise pulse in this way is very effective, but some of the interference can still reach the audio output due to the loss of carrier during the blanking interval. For this purpose, an additional delay, blanking interval, and audio gate (or gates in the case of the ULN3845A) are included to further suppress any residual signal. The result is almost 100% suppression of impulse noise including that from ignition systems and from sources producing interference at a power line rate such as light dimmers and fluorescent lamps.

# QUIESCENT DC VOLTAGES (FOR CIRCUIT DESIGN INFORMATION ONLY)

Pin N	umber		Typical
ULN3845A	ULN3846A	Pin Function	DC Voltage
1	1	RF In	3.1
2	2	RF Bypass	3.1
3	3	RFBias	3.1
4	4	RF AGC	0.9
5	5	Audio Delay	4.8
6	6	Audio Blank Time (R)	4.8
7	7	Audio BlankTime (C)	4.8
8	8	Audio Out <sub>x</sub>	4.75
9	9	Audio In <sub>x</sub>	4.0
10	_	Audio In <sub>2</sub>	4.75
11	_	Audio Out <sub>2</sub>	4.0
12	10	Noise Differentiator	4.9
13	11	RF Blank Time	4.8
14	12	Ground	Reference
15	13	RF Gate High	_
16	14	RF Gate Low	
17	15	No Connection	0
18	16	Supply	v <sub>cc</sub>


Referring to the Functional Block Diagram, the RF input stage is a differential amplifier, so that the input impedance is high. The triggering threshold at the RF amplifier input is about 15  $\mu V$  at 1 MHz. This means that a pulsed RF input signal of 15  $\mu V$  will exceed the threshold and trigger the blanker. The external capacitor at the dV/dt detector circuit (C $_{12}$ ) is selected so that audio signals do not cause triggering. At high input levels, the threshold is internally set so that an RF burst of 50% modulation triggers the blanker. A resistor in parallel with C $_{13}$  will increase the detection threshold level.

The RF-switching MOSFET (pins 15-16) is controlled by the RF one-shot whose gate time is determined by the value of  $\rm R_{13}$ .

RF Gate Time ( $\mu$ s) = 157 x 10<sup>-12</sup> x R<sub>13</sub>

where R $_{13}$  should be greater than 33 k . Smaller values for C $_{12}$  will reduce the sensitivity to RF input pulses. The MOSFET turns ON within approximately 1.5  $\mu$ s (shunting the RF signal to ground) after a noise pulse is detected and then turns OFF over a 15  $\mu$ s period after the end of the RF gate time. The ON resistance of the MOSFET is about 40 The slow turn-OFF prevents any additional transients from being introduced into the receiver by the RF gate. The internal gate circuit also includes charge-balancing circuits so that switching transients are canceled and do not appear at the output. These features ensure transient-free switching even when the RF gate is connected to the low-level input stages of a receiver. Note that the RF gate must be

# TYPICAL PULSE RESPONSE FIGURE 2

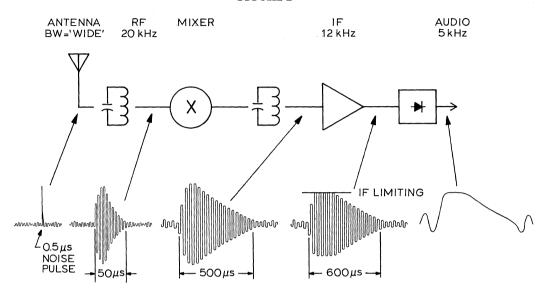

Dwg. No. OS-001

connected to a supply to obtain the minimum ON-resistance of the MOSFET gate. This makes it convenient to connect the RF gate in parallel with the receiver mixer output transformer primary.

Blanking in the RF or mixer sections of the receiver removes most of the noise pulse but a small amount still remains due to the hole punched in the carrier. This residual noise is theoretically somewhere between the peak audio and 100% negative modulation but is significantly smaller and narrower than that which the impulse would normally produce without blanking. An audio delay, one-shot, and audio gate(s) are included to eliminate this residual signal.

The audio delay is determined by the value of R<sub>s</sub>:


Audio Gate Delay (
$$\mu$$
s) = 143 x 10<sup>-12</sup> x R<sub>5</sub>

where  $R_{\scriptscriptstyle 5}$  should be greater than 33 k . The amount of delay required will depend on the IF filtering characteristics of the particular receiver design. After the audio delay time, the audio one-shot is triggered. The audio switching MOSFETs (pins 8-9 and pins 10-11) are controlled by the audio one-shot whose gate time is determined by the values of  $R_{\scriptscriptstyle 5}$  and  $C_{\scriptscriptstyle 7}$ :

Audio Gate Time ( $\mu$ s) = 2.2 x R<sub>6</sub> x C<sub>7</sub>

The MOSFET audio gates also include charge-balancing circuits to eliminate switching transients.

#### TYPICAL RF FREQUENCY RESPONSE



Dwg. No. GS-006

#### TYPICAL APPLICATION

A typical application using the ULN3845A in a C-QUAM® AM stereo car radio tuner is shown in Figure 3. Although there is a 1.5  $\mu s$  delay from the beginning of the noise pulse to the start of blanking, this is small compared with the impulse response time of the receiver. It takes almost 10  $\mu s$  for the RF noise burst to reach 70% amplitude at the mixer input. The blanker RF input could have been connected to the collector of the discrete RF amplifier, but the bandwidth is much wider there and false triggering from strong adjacent channel signals could occur.


The ULN3845A and ULN3846A noise blankers can also be used in dual-conversion AM tuners. The blanker RF input would then be connected at the first IF amplifier input and the blanker RF gate connected at the second mixer output. Since the first IF band-width is usually relatively wide, the noise pulses are narrower, and the RF blanking time will be correspondingly less. In this case, it may be necessary to reduce the value of capacitor  $C_{12}$  so that the noise separator does not extend the RF blanking time.

#### COIL INFORMATION FOR HIGH-PERFORMANCE ETR AM STEREO RECEIVER WITH NOISE BLANKING


	Symbol	Q	N1:N2	N1:N3	Toko Part Number
Antenna	Т,		1:1.6		7HN-60064CY
RF	T <sub>2</sub> , T <sub>3</sub>	120		10:1	RWOS-6A7894AO, L = 178 μH
Local Osc.	T <sub>4</sub>	120		5:1	7TRS-A5609AO
Mixer	T <sub>5</sub>		2:1	8.9:1	7LC-502112N4, C <sub>T</sub> = 180 pF
Detector	L <sub>2</sub>	100			A7BRS-T1041Z, C <sub>T</sub> = 1000 pF

<sup>®</sup> Registered trademark of MOTOROLA, INC.

#### ETR AM STEREO RECEIVER WITH NOISE BLANKING

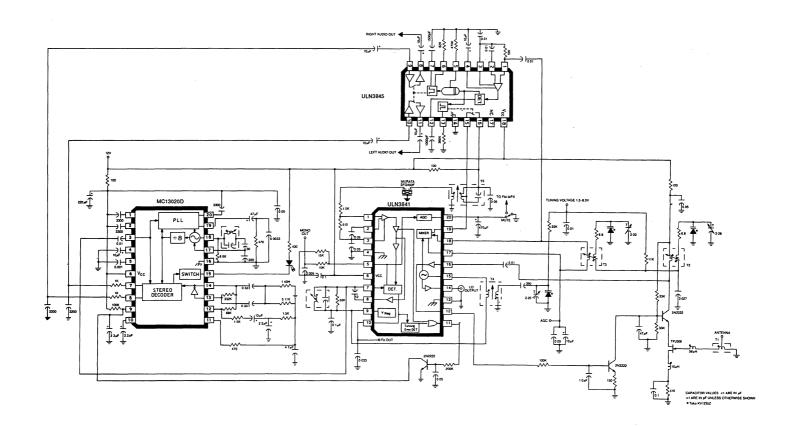

## **DUAL-CONVERSION AM RECEIVER**



Dwg. No. PS-012-1



#### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V<sub>CC</sub> . . . . . . . . . . . . . . . 12 V Package Power Dissipation, Pp..... 1.2 W Operating Temperature Range, T<sub>A</sub>.....-40°C to +85°C

Storage Temperature Range.

T<sub>S</sub>.....--65°C to +150°C

Providing the AM signal processing functions for an electronically tuned AM receiver (ETR), the A3848EEQ includes two balanced mixers, a crystal local oscillator, an L/C-tuned local oscillator, oscillator buffer, IF amplifier. AM detector, scan control detectors, and a switchable voltage regulator. This dual-conversion device mixes the incoming RF up to a first IF of 10.7 MHz, then down to 450 kHz, and then detects the audio. The addition of a JFET matched to a whip antenna, RF low-pass filter, IF selectivity, and audio stages gives a complete AM radio which can be used in automotive receivers. The frequency-detecting stop circuit is also capable of recovering narrow-band FM, making it useful for scanners or weather band radio applications. Two AGC and field-strength indicator modes provide special features for scanning.

The A3848EEQ has a greatly improved stop detection system over other existing devices. It uses the dual criteria of frequency and amplitude for establishing a valid stop. Tuning accuracy (frequency criterion) is established by evaluating phase shift across the detector coil. The circuitry is similar to that used in FM discriminators. Since this detection system is phase operated, it remains effective even in the presence of strong signals, which can cause false stops in systems using narrowband filters. The amplitude criterion for stop is determined by evaluating the IF level. It includes a unique circuit that removes the effect of the AGC action. This allows the AGC tuning components to be selected for low-frequency audio performance without compromising scanning speed.

In the normal AGC mode (AGC RESET low), a slow, narrow-band field-strength indicator (FSI) is provided for controlling signal-dependent functions such as stereo blending. A fast AGC mode (AGC RESET high) resets the AGC holding capacitors to maximum gain. This mode allows cataloging station strengths quickly during a band sweep.

This AM signal processor is packaged in a rectangular, 32-lead. plastic, leaded chip carrier (PLCC) for surface-mount applications and is rated for operation over the temperature range of -40°C to +85°C. Devices for operation over a temperature range of -40°C to +105°C are available on special order.

#### **FEATURES**

- Low Noise Figure
- High Dynamic Range First Mixer
- Balanced Mixers
- Field-Strength Indicator
- Buffered Oscillators
- Very Effective Stop Detector
- Dual Wide-Band AGC
- Delayed AGC
- Narrow-Band FM Output
- Full-Wave Detector
- Low Temperature Drift
- 6.5 V to 12 V Operating Range

Always order by complete part number: | A3848EEQ | .

#### **APPLICATIONS**

- Automobile Radios
- High-Quality Home Entertainment Receivers
- World-Band Receivers
- CB Transceivers

## 3848 DUAL-CONVERSION AM RECEIVER


# ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $V_{CC}$ = 10 V, $f_o$ = 1 MHz, $f_{if1}$ = 10.7 MHz, $f_{if2}$ = 450 kHz, $f_m$ = 1 kHz

					nits	,
Characteristic	Symbol	Test Conditions	Min	Тур	Max	Units
Supply Current	lcc	$I_2$ , $V_{in} = 0$		50	65	mA
		$I_2$ , $V_{in} = 0$ , $V_{27} = 0$ (Muted)		3.0		mA
Sensitivity	$V_{in}$	V <sub>out</sub> = 50 mV	<u> </u>	6.0	_	μV
Usable Sensitivity	$V_{in}$	S + N/N = 20 dB		14	_	μV
Recovered Audio	$V_{out}$	$V_{in} = 1 \text{ mV}$	200	250		mV
Total Harmonic Dist.	THD	$V_{in} = 1 \text{ mV}, \text{Mod} = 80\%$	_	0.4	1.5	%
Oscillator Output	Vo	V <sub>17</sub>		300	_	mV
Stop Output Voltage	V <sub>STP</sub>	$V_8, V_{in} = 0$		4.8		V
		$V_8$ , $V_{in} = 1 \text{ mV}$		0.05	_	V
Stop Sensitivity	$V_{stp}$	V <sub>12</sub> = 2.5 V, Mod = 0%	_	100		μV
Stop Bandwidth	BW <sub>STP</sub>	$V_{in} = 1 \text{ mV}, V_{12} = 1.5 \text{ V}, Mod = 0\%$	_	10.2		kHz
Wide-Band AGC	V <sub>AGC</sub>	V <sub>in</sub> = 0	_	7.5	_	V
		V <sub>in</sub> = 18 mV	_	6.5		V
		$V_{in} = 60 \text{ mV}$	_	1.0		V
Field-Strength V <sub>FSI</sub>		V <sub>in</sub> = 0	T -		0.5	V
Indicator Output Voltage (unmodulated, AGC Reset High)		$V_{in} = 10 \mu V$	_	1.1		٧
		$V_{in} = 100 \mu V$	-	2.2	_	V
		V <sub>in</sub> = 1 mV	_	3.3	_	V
		$V_{in} = 10 \text{ mV}$	4.0	4.4	5.0	V
Field-Strength	V <sub>FSI</sub>	V <sub>in</sub> = 0	T -		0.5	V
Indicator Output Voltage		$V_{in} = 10 \mu V$	_	1.1		V
(unmodulated,		V <sub>in</sub> = 100 μV	_	2.2		V
AGC Reset Low)		V <sub>in</sub> = 1 mV	_	3.3	_	· V
		V <sub>in</sub> = 10 mV	4.0	4.4	5.0	V
Overload	V <sub>in</sub>	V <sub>out</sub> =10% THD, Mod = 80%		200	_	mV
		First Mixer (Note 2)	T -	450		mV
-3dB Limiting	V <sub>in</sub>	Mod = 3 kHz peak deviation		12	_	μV
IF Output Voltage	V <sub>out</sub>	V <sub>in</sub> = 1 mV	_	197	_	mV
FM Recovered Audio	V <sub>out</sub>	V <sub>7</sub> , Mod = 3 kHz peak deviation	_	380	_	mV
Signal to Noise Ratio S+N/N		V <sub>in</sub> = 1 mV	_	55		dB
		V <sub>in</sub> = 10 mV	T -	60	_	dB
AGC Figure of Merit	FOM	Ref. at V <sub>in</sub> = 5 mV, V <sub>in</sub> or V <sub>out</sub> = -10 dB	_	30	_	μV
Regulator Voltage	$V_{REG}$	V <sub>6</sub>	_	5.1	_	V
		V <sub>6</sub> , V <sub>27</sub> = 0 (Muted)	_	. 0	0.2	V
Reference Voltage	V <sub>REF</sub>	V <sub>15</sub>	_	3.5		V

NOTES: 1. Typical data is for design information only.

<sup>2.</sup> Attenuate MIXER 1 output with 50  $\Omega$  load on mixer coil secondary,  $V_{out}$  =10% THD, Mod = 80%

## FM COMMUNICATIONS IF SYSTEM



This low-power, narrow-band FM IF system provides the second converter, second IF, demodulator, and squelch circuitry for communications and scanning receivers.

The ULN3859A's double-balanced mixer permits low-noise operation while eliminating spurious responses, effectively rejecting tweet and IF feedthrough, and reducing local oscillator radiation. The mixer's high input impedance matches popular 10.7 MHz crystal filters while its output impedance matches most 455 kHz ceramic filters. Although designed for use with a 10.7 MHz first IF and a 455 kHz second IF, the mixer operates at other RF or IF input frequencies through 30 MHz.

A multi-stage 1 MHz differential amplifier/limiter following the second IF filter operates as a high gain stage with excellent commonmode rejection.

Audio is recovered by a quadrature FM detector that requires only a single low-cost tuned circuit.

The ULN3859A has both a low-impedance emitter-follower audio output and an AFC output. Few external components are needed for operation with noise-activated or tone squelch.

This communications IF system meets the stability requirements of many automotive applications, and also meets the low-power demands of portable radio design. Internal voltage regulators and bias supplies ensure stable performance despite variations in external supply voltage (4 to 9 V) or temperature (-30°C to +70°C).

#### **FEATURES**

- Dual Conversion
- Low Current Drain
- Wide Operating Voltage Range
- High Sensitivity
- Replaces MC3359P

#### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V<sub>CC</sub> . . . . . . . . . . . . . . . . 12 V Mixer Input Voltage, V<sub>in</sub>..... 1.0 V Mute Terminal Voltage Range, V<sub>16</sub> . . . . . . . . . . -0.5 V to +12 V

Operating Temperature Range, Τ<sub>Δ</sub> . . . . . . . . . . . -30°C to +70°C Storage Temperature Range,

T<sub>S</sub>.....--65°C to +150°C

Always order by complete part number: ULN3859A .

# 3859 FM COMMUNICATIONS IF SYSTEM


# ELECTRICAL CHARACTERISTICS at $T_A$ = +25°C, $V_{CC}$ = 8.0 V, $f_o$ = 10.7 MHz, $f_m$ = 1.0 kHz, $f_d$ = ±3.0 kHz (unless otherwise noted).

	Test			Lir	nits	
Characteristic	Pin	Test Conditions	Min.	Тур.	Max.	Units
Operating Voltage Range	4		4.0	8.0	9.0	V
Quiescent Supply Current	4	V <sub>14</sub> = 0, Mute OFF	_	3.0	6.0	mA
		V <sub>14</sub> ≥ 0.7 V, Mute ON	_	4.0	7.0	mA
Input Limiting Threshold	18	-3 dB Limiting		2.0	6.0	μV
Mixer Conversion Gain	- 3	See Note 1, Below	_	24		dB
Mixer Input Resistance	18		_	3.6	· <del>-</del>	kΩ
Mixer Input Capacitance	18	See Note 2, Below	_	2.2	_	pF
Mixer Output Impedance	3			1.8		kΩ
Limiter Input Impedance	5		_	1.8		kΩ
Quiescent DC Output Voltage	10	V <sub>in</sub> = 0	2.4	3.6	4.4	٧
Audio Output Impedance	10		_	500	_	Ω
Recovered Audio Output	10	V <sub>in</sub> = 3.0 mV	450	700	_	mV <sub>rms</sub>
Amplifier Gain	13	f = 4.0 kHz, V <sub>in</sub> = 5.0 mV	40	53		dB
Quiescent DC Output Voltage	13	V <sub>in</sub> = 0		1.7	_	V
Mute Switch Resistance	16	$I_{16} = 2.5 \text{ mA}, V_{14} \ge 0.7 \text{ V}$		4.0	10	Ω
Scan Source Current	15	V <sub>14</sub> = V <sub>15</sub> = 0, Mute OFF	2.0	4.0	_	mA


#### **APPLICATION INFORMATION**

- 1. In a typical application, with a 3.6 k $\Omega$  crystal filter source, the ULN3859A will give 23 dB conversion gain.
- 2. Because crystal filters are extremely sensitive to reactive loading, radio designers frequently have added a coil and/or capacitor at pin 18 to cancel the input reactance component. This practice is not required with ULN3859A, since its input is designed to match typical 10.7 MHz crystal filters. However, if an external reactive component is used, it is important to adjust it for optimal passband shape and not simply peak if for maximum sensitivity.
- Pin 11 provides AFC. If AFC is not required, pin 11 should be grounded, or tied to pin 9 to double the available recovered audio.
- 4. Pin 10 may require an external resistor (2  $k\Omega$  minimum) to ground to prevent audio rectification with some capacitive loads.

#### TEST CIRCUIT



# FM COMMUNICATIONS IF AND AUDIO SYSTEM



Dwg. PS-019

The ULN3883A low-power, narrow-band FM IF system provides the second converter, second IF demodulator, and audio amplifier circuitry for communications and scanning receivers. A double-balanced mixer permits low-noise operation while eliminating spurious responses, effectively rejecting IF feedthrough, and reducing local oscillator radiation. The mixer high input impedance matches popular 10.7 MHz crystal filters and is designed to handle strong adjacent signal rejection. while its open-collector output is suitable for driving tuned transformer networks. Although designed for use with a 10.7 MHz first IF and a 455 kHz second IF, the mixer operates at other RF or IF input frequencies through 50 MHz. After the second IF filter, a multistage 1 MHz differential amplifier/limiter operates as a high-gain stage with excellent common-mode rejection. Audio is recovered by a quadrature FM detector that requires only a single low-cost tuned circuit. An onboard audio amplifier provides 250 mW output (at V<sub>CC</sub> = 5 V) with low distortion for driving a speaker. The audio switches OFF in the mute mode, thus reducing power consumption.

This communications IF system meets the stability requirements of many automotive applications and also meets the low-power demands of portable radio design. Internal voltage regulators and bias supplies ensure stable performance despite variations in external supply voltage (3 V to 9 V) or temperature (-20°C to +85°C).

The ULN3883A is supplied in an 18-pin dual in-line plastic package with a copper lead frame that eliminates many decoupling problems.

#### FEATURES

- Dual Conversion
- Wide Operating Voltage Range
- High Sensitivity
- Large Dynamic Range Mixer
- Audio Power Amplifier OFF in Standby

#### APPLICATIONS

- Cordless Telephones
- Scanning Receivers
- Amateur Radio
- Land-Mobile Service

#### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V<sub>CC</sub>...... 12 V Mixer Input Voltage, Vin . . . . . . 1 Vrms Mute Input Voltage Range. V<sub>8</sub> . . . . . . . . . . . . . -0.5 V to +12 V Package Power Dissipation, PD .... 1.2 W Operating Temperature Range, T<sub>A</sub> . . . . . . . . . . . . . . . -20°C to +85°C Storage Temperature Range, T<sub>S</sub> . . . . . . . . . . . . -65°C to +150°C

Always order by complete part number: | ULN3883A | .


# 3883 FM COMMUNICATIONS IF AND AUDIO SYSTEM

ELECTRICAL CHARACTERISTICS at  $T_A$  = +25°C,  $V_{CC}$  = 4.8 V,  $f_{in}$  = 10.7 MHz,  $f_m$  = 1 kHz,  $f_d$  =  $\pm 3$  kHz,  $R_L$  =  $8\Omega$  (unless otherwise specified).

				Lin	nits	
Characteristic	Test Pin	Test Conditions	Min.	Тур.	Max.	Units
Operating Voltage Range	5	Functional	3.0	4.8	9.0	V
Quiescent Current	5	Mute ON	T -	3.0	6.0	mA
		Mute OFF	_	10	15	mA
Input Limiting Threshold	10	-3 dB Limit	T -	5.4	8.0	μV
Detector Output Voltage	18		1.1	1.3	1.4	V
Recovered Audio	18	$V_{CC} = 3.0 \text{ V}, V_{in} = 1 \text{ mV}$	95	-	_	mV
		V <sub>CC</sub> = 4.8 V, V <sub>in</sub> = 1 mV	100	170	-	mV
		V <sub>CC</sub> = 9.0 V, V <sub>in</sub> = 1 mV	110	_	_	mV
Muting Attenuation	4	Mute ON	<b> </b>	>100	_	dB
Audio Amplifier Gain	4		30	35	_	dB
Power Amplifier THD	4	P <sub>o</sub> = 100 mW	-	1.0	3.0	%
Audio Power Output	4	$V_{CC} = 3.0 \text{ V, f} = 1 \text{ kHz, THD} = 10\%$	50	_	_	mW
		V <sub>CC</sub> = 3.6 V, f = 1 kHz, THD = 10%	_	93	_	mW
		$V_{CC} = 4.8 \text{ V}, f = 1 \text{ kHz}, THD = 10\%$	160	260	_	mW
		V <sub>CC</sub> = 9.0 V, f = 1 kHz, THD = 10%	300	_	_	mW
Mute Control Threshold	8	:	-	0.6	-	V
Quiescent Noise Amp. Volt.	7		0.9	1.6	2.2	V
Noise Amplifier Gain	6–7	$V_{in} = 600 \mu V, f = 4 \text{ kHz}$	45	53	_	dB

NOTE: Typical values are given for circuit design information only.

#### TEST CIRCUIT AND TYPICAL APPLICATION

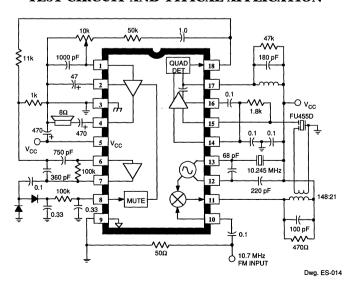

# 3883 FM COMMUNICATIONS IF AND AUDIO SYSTEM

# CIRCUIT DESCRIPTION AND APPLICATIONS INFORMATION

A test circuit and typical application (such as might be used for a low-cost cordless telephone) is shown. The oscillator uses a 10.245 MHz crystal to convert the first IF signal to 455 kHz. The second IF filter consists of a tuned transformer matched to a ceramic filter with about a 15 kHz bandwidth.

The output of the ceramic filter is matched with a 1.8  $k\Omega$  resistor at the input of the IF amplifier. The detector coil is loaded with a 47 k $\Omega$  resistor to give a loaded Q of about 25 to produce an audio output of about 170 mVrms with a 3 kHz peak deviation. This is more than enough to drive the audio amplifier, so a resistor between the detector output and volume control can be added together with a capacitor to produce a desired de-emphasis network. Muting is accomplished by amplifying the noise present at the detector output in the absence of a signal, rectifying it and applying the rectified signal to the mute input. The audio amplifier is turned OFF when the voltage at pin 8 exceeds 0.6 V. The internal noise amplifier is connected as an active band-pass filter centered at 7 kHz. In a telephone application, this filter could be designed to respond to the guard tone signal being transmitted.

#### MIXER (pins 10 and 11)

The mixer is internally biased, so that only a coupling capacitor is needed at the input. The mixer ground is pin 9 and should be connected to the input circuit ground. Pin 10 is equivalent to 3 k $\Omega$  in parallel with 20 pF. The mixer output current is about 400  $\mu A$  and the output is equivalent to about 100 k $\Omega$  in parallel with 3 pF. Conversion transconductance is 600  $\mu mho$ . The mixer can be used as an IF preamplifier, instead of a mixer, by connecting pin 12 to 13. In this configuration its transconductance is about 1.4 mmho.

#### OSCILLATOR (pins 12 and 13)

The oscillator is a transistor with the base connected to pin 13 and the emitter through a 400  $\mu$ A current source to pin 12. The stray capacitance at pin 13 is about 7 pF.

#### IF AMPLIFIER (pins 14, 15, and 16)

Pin 15 is the base of the first stage, and it is biased through the 1.8 k $\Omega$  resistor from pin 14 but this can be from 0 to about 10 k $\Omega$  for proper balance of the IF amplifier. The -3 dB frequency response of the IF amplifier is about 1.5 MHz, and it falls off at about 6 dB per octave above this. The -3 dB limiting sensitivity at 455 kHz is about 13  $\mu$ V.

#### **DETECTOR** (pins 17 and 18)

The IF output is a 570 mVpp square wave in series with a 10 pF capacitor to the detector input. The detector

transistors at pin 17 should have at least 100 mVrms across them for linear detector operation. The quadrature coil R and C values are selected as:

$$C = \frac{1400 \ Q_L}{V_{17}} - 10 \ and \ R = \frac{Q_O \ X_C \ Q_L}{Q_O - Q_L}$$

The detector output is an emitter with a low output impedance of approximately 400  $\Omega$ . Some of the 455 kHz signal appears at the output, and the circuit layout should separate the pin 18 and pin 16 circuitry.

#### AUDIO AMPLIFIER (pins 1, 2, 3, and 4)

Pin 3 is the main circuit ground and the ground for the audio power amplifier. The speaker ground should be connected close to this pin. The output coupling capacitor at pin 4 can be selected to give a desired -3 dB low-frequency response and to reduce power consumption by reducing the low-frequency output. The capacitor at pin 3 serves as the bypass for the internal amplifier feedback and also determines the response speed of the mute circuit. Pin 1, the amplifier input, is the base of a pnp transistor, and an external resistance of less than 50 k $\Omega$  to ground is needed.

#### NOISE AMPLIFIER/MUTE DRIVER (pins 6 and 7)


The noise amplifier is an inverting amplifier with a typical gain at 4 kHz of 53 dB. DC feedback between pins 6 and 7 is required. A low-pass, band-pass, or high-pass filter can be built with this configuration.

In the band-pass configuration, ceramic capacitors should not be used because of their usually low Q. Polystyrene- or polycarbonate-film capacitors are recommended. The gain of the active filter must be high enough so that the output can be rectified to drive the mute input. This depends on the output level of the detector, the bandwidth of the IF filter, and the active filter frequency. For example, an IF bandwidth of 15 kHz will result in a detector output roll-off around 7 kHz, so the amplifier operating frequency should not be set much higher than this. The active filter can be used instead as a low-pass filter in the audio circuit to improve sensitivity or to remove unwanted tones, or as a high-pass filter to amplify tones to be applied to tone-detector circuits. It is recommended that impedances be kept less than 100 k $\Omega$  in order to avoid the loading effects of the noise amplifier.

#### **MUTE INPUT (pin 8)**

The mute input is a 22 k $\Omega$  resistor in series with the base of a grounded emitter transistor. Thus, the mute threshold is about 0.6 V. A capacitor from pin 8 to ground filters the output of the rectifier circuit and should be selected to give the desired mute characteristics for marginal signals.

# **SMOKE DETECTOR** WITH INTERCONNECT AND TIMER



The A5348CA is a low-current, CMOS circuit providing all of the required features for an ionization-type smoke detector. A networking capability allows as many as 125 units to be interconnected so that if any unit senses smoke, all units will sound an alarm. In addition, special features are incorporated to facilitate alignment and test of the finished smoke detector. This device is designed to comply with Underwriters Laboratories Specification UL217.

The internal oscillator and timing circuitry keeps standby power to a minimum by powering down the device for 1.66 seconds and sensing smoke for only 10 ms. Every 24 on/off cycles, a check is made for low battery condition. By substituting other types of sensors, or a switch for the ionization detector, this very-low power device can be used in numerous other battery-operated safety/security applications.

The A5348CA is supplied in a low-cost, 16-pin dual in-line plastic package. It is rated for continuous operation over the temperature range of 0°C to +50°C.

#### **FEATURES**


- Interconnect Up to 125 Detectors
- Piezoelectric Horn Driver
- Guard Outputs for Detector Input
- Pulse Testing for Low Battery
- Power-ON Reset
- Internal Reverse Battery Protection
- Internal Timer & Control for Reduced Sensitivity
- Built-In Hysteresis Reduces False Triggering

#### ABSOLUTE MAXIMUM RATINGS (Voltages are referenced to V<sub>ss</sub>)

Supply Voltage Range, V<sub>DD</sub> .....-0.5 V to +15 V Reverse Battery (10.5 V) ......20 s Input Voltage Range, V<sub>IN</sub> .....-0.3 V to V<sub>DD</sub> + 0.3 V Input Current, I<sub>IN</sub> ...... 10 mA Operating Temperature Range, T<sub>A</sub> ......0°C to +50°C Storage Temperature Range, T<sub>S</sub> ......-55°C to +125°C

CAUTION: CMOS devices have input static protection but are susceptible to damage when exposed to extremely high static electrical charges.

Always order by complete part number: A5348CA .

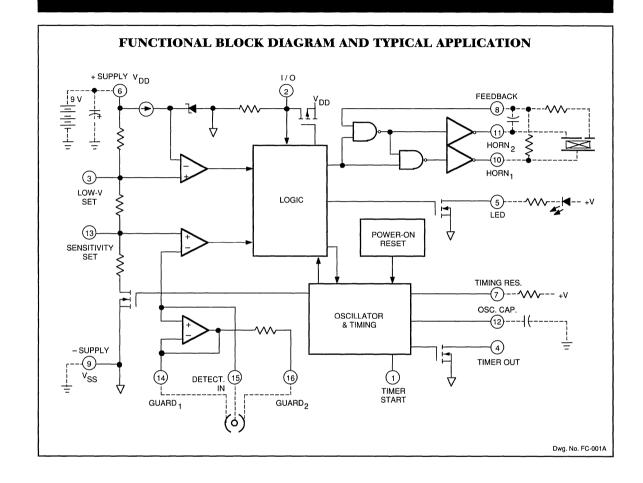

## 5348 SMOKE DETECTOR WITH INTERCONNECT AND TIMER

ELECTRICAL CHARACTERISTICS at T<sub>A</sub> = +25°C, V<sub>DD</sub> = 9.0 V, V<sub>SS</sub> = 0 V, C<sub>12</sub> = 0.1  $\mu$ F, R<sub>7</sub> = 8.2 M $\Omega$  (unless otherwise noted).

	Test			Limits			
Characteristic	Pin	Test Conditions	Min.	Тур.	Max.	Units	
Supply Voltage Range	6	Operating	6.0	9.0	12	V	
Detector Input Current	15	0 to 40% RH, V <sub>IN</sub> = 0 to 9.0 V	_		±1.0	pА	
Input Offset Voltage	14-15	Active Guard	_	_	±100	mV	
	16-15	Active Guard	_	_	±100	mV	
	15-13	Detect Comparator	_	_	±50	mV	
Hysteresis	13	No Alarm to Alarm	90	130	170	mV	
Common Mode Range	14-15	Guard Amplifier	2.0	_	V <sub>DD</sub> - 0.5	٧	
	13-15	Smoke Comparator	0.5	_	V <sub>DD</sub> - 2.0	٧	
Active Guard Impedance	14	to V <sub>SS</sub>	_	10		kΩ	
	16	to V <sub>SS</sub>	-	500	_	kΩ	
Oscillator Period	12	No Alarm	1.34	1.67	2.00	s	
		Alarm	32	40	48	ms	
Oscillator Pulse Width	4		8.0	10	12	ms	
Timer Period	4	After Pin 1 High-to-Low, No Smoke	8.0	10	12	min	
Low Voltage Threshold	6	T <sub>A</sub> = 0 to 50°C	7.2		7.8	V	
Sensitivity Adj. Voltage	13	V <sub>13</sub> /V <sub>DD</sub> , pin 13 open circuit	48.5	50	51.5	%	
Horn Output Voltage	10-11	I <sub>OUT</sub> = 16 mA, V <sub>DD</sub> = 9.0 V	_	0.1	0.5	٧	
		I <sub>OUT</sub> = 16 mA, V <sub>DD</sub> = 7.2 V	_		0.9	٧	
		$I_{OUT} = -16 \text{ mA}, V_{DD} = 9.0 \text{ V}$	8.5	8.8	_	V	
		I <sub>OUT</sub> = -16 mA, V <sub>DD</sub> = 7.2 V	6.3		_	V	
Horn Output ON Time	10-11	Alarm	120	160	208	ms	
		Low Battery	8.0	10	12	ms	
Horn Output OFF Time	10-11	Alarm	60	80	104	ms	
		Low Battery	32	40	48	s	
Timer Start Logic Levels	1	V <sub>IH</sub>	3.5	_	_	V	
		V <sub>IL</sub>		_	1.5	V	
Timer Start Input Current	1	V <sub>IN</sub> = 9.0 V	20		80	μА	

NOTE 1: Negative current is defined as coming out of (sourcing) the specified device pin.

NOTE 2: Alarm (Smoke) Condition is defined as  $V_{15} < V_{13}$ ; No Alarm (No Smoke) Condition as  $V_{15} > V_{13}$ .

Continued next page . . .

## 5348 SMOKE DETECTOR WITH INTERCONNECT AND TIMER

#### ELECTRICAL CHARACTERISTICS continued

	Test		Limits				
Characteristic	Pin	Test Conditions	Min.	Тур.	Max.	Units	
Timer Out Output Current	4	V <sub>OUT</sub> = 0.5 V	500			μΑ	
LED Output ON Current	5	V <sub>DD</sub> = 7.2 V, V <sub>OUT</sub> = 1.0 V	10	_	_	mA	
LED Output ON Time	5		8.0	10	12	ms	
LED Output OFF Time	5	No Alarm, In Standby	32	40	48	s	
		No Alarm, Timer Mode After Pin 1 High-to-Low	8.0	10	12	s	
I/O Current	2	No Alarm, $V_{I/O} = V_{DD} - 2.0 \text{ V}$	25		60	μА	
		Alarm, $V_{I/O} = V_{DD} - 2.0 \text{ V}$	-7.5	_	_	mA	
I/O Alarm Voltage	2	External "Alarm" In	3.0	_	_	V	
I/O Delay	2	"Alarm" Out	T	3.0	_	s	
Supply Current	6	V <sub>DD</sub> = 9.0 V, No Alarm, No Loads		5.0	9.0	μА	
		V <sub>DD</sub> = 12 V, No Alarm, No Loads			12	μА	

NOTE 1: Negative current is defined as coming out of (sourcing) the specified device pin.

NOTE 2: Alarm (Smoke) Condition is defined as  $V_{15} < V_{13}$ ; No Alarm (No Smoke) Condition as  $V_{15} > V_{13}$ .

#### CIRCUIT DESCRIPTION

The A5348CA is a low-current CMOS circuit providing all of the required features for an ionization-type smoke detector.

**Oscillator.** An internal oscillator operates with a period of 1.67 seconds during no-smoke conditions. Every 1.67 seconds, internal power is applied to the entire circuit and a check is made for smoke. Every 24 clock cycles (40 seconds), the LED is pulsed and a check is made for low battery by comparing  $V_{\rm DD}$  to an internal reference. Since very-low currents are used in the device, the oscillator capacitor at pin 12 should be a low-leakage type (PTFE, polystyrene, or polypropylene).

Detector Circuitry. When smoke is detected, the resistor divider network that sets the sensitivity (smoke trip point) is altered to increase the sensitivity set voltage (pin 13) by typically 130 mV with no external connections to pins 3 or 13. This provides hysteresis and reduces false triggering. An active guard is provided on both pins adjacent to the detector input (pin 15). The voltage at pins 14 and 16 will be within 100 mV of the input. This will keep surface leakage currents to a minimum and provide a method of measuring the input voltage without loading the ionization chamber. The active guard amplifier is not power strobed and thus provides constant protection from surface leakage currents. The detector input has internal diode protection against static damage.

**Alarm Circuitry.** If smoke is detected, the oscillator period changes to 40 ms and the horn is enabled. The horn output is typically 160 ms ON, 80 ms OFF. During the OFF time, smoke is again checked and

## 5348 SMOKE DETECTOR WITH INTERCONNECT AND TIMER

inhibit further alarm output if smoke is not sensed. During smoke conditions the low battery alarm is inhibited and the LED is driven at a 1 Hz rate.


Sensitivity Adjust. The detector sensitivity to smoke is set internally by a voltage divider connected between V<sub>DD</sub> and V<sub>ss</sub>. The sensitivity can be externally adjusted to the individual characteristics of the ionization chamber by connecting a resistor between pin 13 and V<sub>pp</sub>, or between pin 13 and V<sub>ss</sub>.

Low Battery. The low battery threshold is set internally by a voltage divider connected between  $V_{\text{DD}}$  and  $V_{\text{SS}}$ . The threshold can be increased by connecting a resistor between pin 3 and V<sub>DD</sub>. The threshold can be decreased by connecting a resistor between pin 3 and V<sub>ss</sub>. The battery voltage level is checked every 40 seconds during the 10 mA, 10 ms LED pulse. If an LED is not used, it should be replaced with an equivalent resistor (typically 500  $\Omega$  to 1000  $\Omega$ ) such that the battery loading remains at 10 mA.

Timer. An internal timer is provided that can be used in various configurations to allow for a period of reduced smoke detector sensitivity ("hush"). When a high-to-low transition occurs at pin 1, the internal timer is reset, the timer mode enabled, and the circuit reset to a no alarm condition. The LED will flash at a 10 second rate. If the level of smoke is increased such that the reduced sensitivity level is reached, the device will go into the alarm condition. The timer, however, will continue to completion of the nominal 10-1/4 minute period (368 clock cycles). If the timer mode is not used, pin 1 should be tied low.

I/O. A connection is provided at pin 2 to allow multiple smoke detectors to be commoned. If any single unit detects smoke (I/O is driven high), all connected units will sound their associated horns after a nominal 3 second delay. The LED is suppressed when an alarm is signaled from an interconnected unit.

**Testing.** On power up, all internal counters are reset. Internal test circuitry allows for low battery check by holding pins 8 and 12 low during power up, then reducing V<sub>DD</sub> and monitoring HORN, (pin 10). All functional tests can be accelerated by driving pin 12 with a 2 kHz square wave. The 10 ms strobe period must be maintained for proper operation of the comparator circuitry.

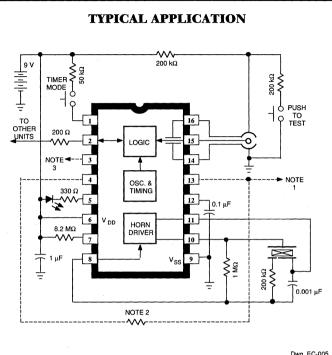

Dwg. EC-005

NOTE 1: Use an external resistor to adjust sensitivity for a particular smoke chamber.


NOTE 2: Select resistor to reduce sensitivity during timer mode.

NOTE 3: A resistor to ground or  $V_{DD}$  may be added to this pin to modify low battery voltage threshold.

## 5348 SMOKE DETECTOR WITH INTERCONNECT AND TIMER


### TIMING DIAGRAMS IN TYPICAL APPLICATION

#### **NON-TIMER MODE**

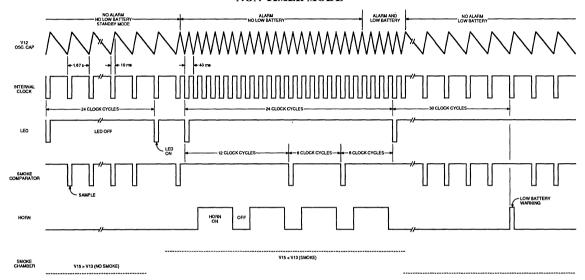

Dwg. WC-003


#### TIMER MODE

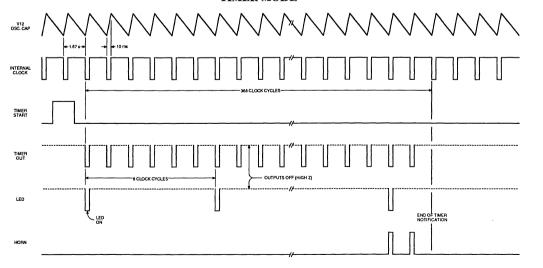


Dwg. WC-005

## 5348 SMOKE DETECTOR WITH INTERCONNECT AND TIMER

### I/O OPERATION

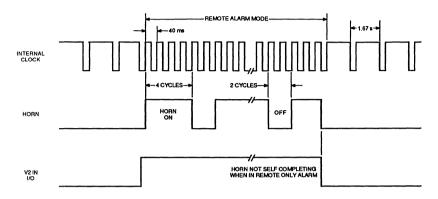




Dwg. WC-004

## **5616**

## 2-FUNCTION, 4-DIGIT LCD AUTOMOTIVE CLOCK—PROGRÁMMARLE



The SCL5616HW is a 2-function digital automotive clock circuit. Fabricated on a single monolithic chip using silicon-gate CMOS PROM technology, it offers low cost, low power, and high reliability. It also includes digital frequency correction, stored in the internal nonvolatile memory, for easy adjustment of the oscillator nominal frequency. The SCL5616HW is supplied in wafer form and is rated for

continuous operation over the automotive temperature range of -40°C to +85°C.

### **FEATURES**


- Digital Tuning of Crystal Frequency
- PROM for Storing Frequency Correction Information
- 12 or 24 Hour Timekeeping Option
- Flashing Colon
- Two Switches Control All Setting Functions
- High Noise Immunity
- Internal Power-Up Reset Circuitry
- Internal Voltage Regulation

#### ABSOLUTE MAXIMUM RATINGS

Supply Current, I<sub>DD</sub> ...... 2.0 mA Input Voltage Range, VIN (except V<sub>PP</sub>).....--0.3 V to V<sub>DD</sub> (Programming Power Dissipation, Pn ...... 300 mW Operating Temperature Range, T<sub>A</sub> .....-40°C to +85°C Storage Temperature Range, T<sub>S</sub> .....-65°C to +150°C

Caution: These CMOS devices have static protection, but are susceptible to damage if exposed to extremely high static electrical charges.

Always order by complete part number: | SCL5616HW |.

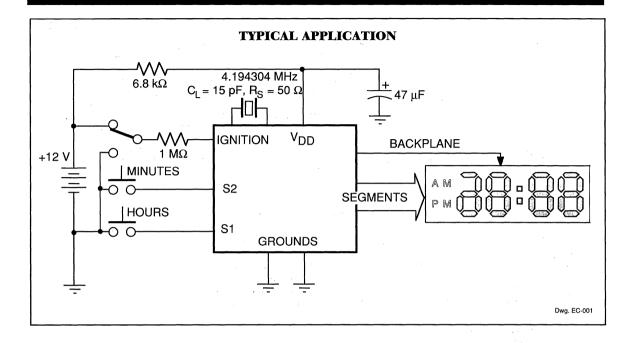


## 5615 AND 5616 2-FUNCTION, 4-DIGIT LCD AUTOMOTIVE CLOCK

## ELECTRICAL CHARACTERISTICS at $T_A$ = -40°C to +85°C, in Typical Application (unless otherwise noted).

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Operating Voltage Range	V <sub>DD</sub>	T <sub>A</sub> = +25°C	4.5		_	٧
Zener Voltage	V <sub>DD</sub>	I <sub>DD</sub> = 1.0 mA	5.5	_	6.8	٧
Segment Output Current	l <sub>out</sub>	V <sub>DD</sub> = 5.0 V, V <sub>OUT</sub> = 4.8 V	-20		_	μΑ
		V <sub>DD</sub> = 5.0 V, V <sub>OUT</sub> = 0.2 V	120	_	_	μА
Backplane Output Current	l <sub>out</sub>	V <sub>DD</sub> = 5.0 V, V <sub>OUT</sub> = 4.8 V	-80		_	μА
		V <sub>DD</sub> = 5.0 V, V <sub>OUT</sub> = 0.2 V	240		_	μА
LCD Drive Signal	V <sub>DISP</sub>	V <sub>DD</sub> ≥5.0 V	4.0	_	_	٧
Input Current	I <sub>IN</sub>	S1, S2, DATA, or SELECT	-55		-700	μΑ
Oscillator Frequency	f <sub>osc</sub>			4.194 304	_	MHz
Oscillator Starting Time	t <sub>osc</sub>	V <sub>DD</sub> = Zener voltage	T -		200	ms
Oscillator Stability	$\Delta f_{OSC}$	$\Delta V_{DD} = \pm 100 \text{ mV}$	_		±1.0	ррМ
Backplane Frequency	f <sub>BP</sub>		T -	64		Hz
Switch Debounce Time	t <sub>DB</sub>		0		62.5	ms
Osc. Feedback Resistance	R <sub>osc</sub>		_	16	_	ΜΩ
Osc. Input Capacitance	C <sub>osci</sub>		-	15	_	pF
Osc. Output Capacitance	C <sub>osco</sub>		-	30		pF
Supply Current	I <sub>DD</sub>	V <sub>DD</sub> = 5.0 V	_	_	1.0	mA

NOTE: Negative current is defined as coming out of (sourcing) the specified device terminal.

### **DISPLAY FORMAT**



Dwg. OC-001

## FUNCTIONAL DESCRIPTION DATA Logic Levels are V<sub>pp</sub> and Ground

**Power-Up Reset.** When power up occurs, the hours and minutes counters are reset, and the clock starts running:

#### Operation


12-Hour mode and counting starts from 1:00 AM

**Programming Modes.** Data is loaded by pulling DATA low (1  $\mu$ s pulse duration) n times to set the desired bits for frequency correction into the data input register. This information is latched in the RAM, thus allowing the testing of the oscillator frequency adjustment without storing the selected pattern in the PROM cells. The data latched in the RAM is stored in the PROM cells when DATA is held low for a minimum of 10 ms.


The data stored in the data input register is cleared on any SELECT transition (low to high or high to low). It is also cleared when the program power voltage ( $V_{\rm pp}$ ) is reduced from 18 V to  $V_{\rm DD}$ . Clearing the data input register does not affect the data latched in the RAM.

Program V <sub>PP</sub>	DATA V <sub>D</sub>	SELECT V <sub>S</sub>	Operation
18 V	Pulse	Ground	DATA load for frequency correction
18 V	Ground	$V_{DD}$	DATA store
$V_{DD}$	$V_{DD}$	Ground	Verify stored data

### **FREQUENCY CORRECTION**



VERIFY CYCLE (V<sub>PP</sub> = V<sub>DD</sub> )



Dwg. No. WC-001-1

**Frequency Correction.** The on-chip oscillator circuit increases the crystal frequency approximately 40 ppm. This ensures that the typical crystal will operate within the tuning range. With  $\rm V_s$  at ground, data pulses are then used to trim the internal clock frequency by 2 to 254 ppm to the required value. The quantity of data pulses needed (1 to 127) is

$$n = \frac{f_{BP} - 64}{128 \times 10^{-6}}$$

where f<sub>pp</sub> is the measured frequency at BACKPLANE. Prior to trim-

**Operating Modes.** The operating modes of the clock are controlled by the voltages applied to  $V_{\rm pp}$ , SELECT, IGNITION, and switches S1 and S2.

Program V <sub>pp</sub>	SELECT V <sub>S</sub>	S1	S2	IGNITION	Mode
V <sub>DD</sub>	V <sub>DD</sub>	Open	Open	X	Clock running
V <sub>DD</sub>	$V_{DD}$	Ground	Ground	12 V	Diagnostic
18 V	Ground	Open	Open	Х	Programming

X = Irrelevant, ground or 12 V

Clock Running Mode. During the clock running mode, setting functions are achieved by either momentary or continuous operation of switches S1 and S2, which are enabled by IGNITION. Hours or minutes are incremented on S1 or S2 (respectively) depression and continue at a 1 Hz rate while the switch is depressed.

S1	S2	IGNITION	Operation
Open	Open	Х	Clock running
X	Х	Ground	Setting disabled
Ground	Open	12 V	Set hours
Open	Ground	12 V	Set Minutes
Ground	Ground	12 V	Change counting sequence (12 to 24 hour
L			or 24 to 12 hour)

X = Irrelevant, ground or 12 V for IGNITION, ground or open for S1 and S2

**Diagnostic Mode.** To enter the diagnostic mode, S1 and S2 are operated with IGNITION connected to 12 V. All segments are displayed for as long as S1 and S2 are depressed. On opening S1 and S2, the clock will leave the diagnostic mode and go through a power-up sequence. In the SCL5616HW, the counting sequence will change (from 12 hour to 24 hour or from 24 hour to 12 hour). To inhibit the power-up reset, hold the DATA input low (ground). The counting mode will change without resetting the hours or minutes counters.

Stored Data Verification. In the verify mode, the complement value of the information stored in the PROM cells is brought out directly to the segment output terminals for easy verification of the stored data. If a bit is programmed (high), the appropriate segment output is turned ON (low). The segments represent the binary equivalent of the number of frequency correction data pulses entered.

Frequency Selection Pulses	64	32	16	8	4	2	1
Segment	b4	c4	d4	e4	сЗ	e3	c2

# RECOMMENDED FLASH PROGRAMMING CHARACTERISTICS at $T_A$ = +25°C, Logic Levels are $V_{\rm DD}$ and Ground (except PROGRAM High)

Characteristic	Symbol	Min.	Max.	Units
PROGRAM High (18 V) to DATA Low	t <sub>PHDL</sub>	1.0	_	μs
SELECT Valid to DATA Low	t <sub>SVDL</sub>	25	_	μs
DATA Low to DATA High	t <sub>DLH</sub>	1.0	1.5	μs
DATA High to DATA Low	t <sub>DHL</sub>	1.0	_	μs
DATA Store Pulse Duration	t <sub>wD</sub>	10	_	ms
DATA High to PROGRAM Low	t <sub>DHPL</sub>	1.0		μs
PROGRAM Low to SELECT Change	t <sub>PLSX</sub>	1.0	_	μs
SELECT Low (Verify) to DATA Valid	t <sub>SLDV</sub>	_	1.0	μs
DATA Hold from End of Verify	t <sub>SHDX</sub>	_	10	ns

## 8131

## PRECISION SUPERVISORY SYSTEMS MONITOR

Capable of monitoring four dc power lines, the ULN8131A and ULN8131LW are power-fault monitors for both under-voltage and over-voltage conditions. Two of the four inputs are designed to monitor positive voltages, while the other two inputs can be used to monitor positive or negative voltages. Typical examples might be a +5 V logic supply, +15 V and -15 V analog supplies, and a positive peripheral power load supply. The primary power line is monitored by an additional comparator and will provide early warning of line voltage drop-out.

During low-supply voltage operations, an under-voltage lockout, which monitors the ULN8131A/LW internal supply, prevents false outputs from occurring. The logic outputs can be used to operate LEDs or other low-voltage indicators.

The circuit configuration of the ULN8131A/LW allows easy programming of over-voltage thresholds which are referenced to a 1% trimmed 2.5 V bandgap reference. The UV FAULT (pin 10) is initiated by one or more of the four sense inputs falling below the UV trip point (the internal reference voltage). The OV FAULT (pin 8) is activated by one or more of the sense inputs rising above the externally set (pin 15) OV trip point. The LINE OK OUTPUT (pin 3) will remain high as long as the LINE SENSE input (pin 3) is above the internal voltage. The LINE SENSE will accept a positive dc voltage proportional to either the high-voltage master bus or the ac line.

Output delays can be introduced by adding capacitors from the appropriate DELAY pins to ground. The LINE FAULT DELAY capacitor value should be large enough to prevent false shutdowns due to short line transients.


The ULN8131A is supplied in a 20-pin dual in-line plastic package with a copper lead frame that gives it enhanced power dissipation ratings. The ULN8131LW is supplied in a 20-lead surface-mountable wide-body SOIC.

## **FEATURES**

- Reference Trimmed to 1%
- Monitors Four DC Supplies
- 10 to 35 Volts Operation
- Low Standby Current
- Separate Under-Voltage Comparators
- Fixed Under-Voltage Threshold
- Programmable Over-Voltage Threshold
- Line Sense Input
- Pull-Up Clamped Outputs
- Programmable Output Delays
- V<sub>S</sub> Under-Voltage Lockout

Always order by complete part number:

Part Number	Package
ULN8131A	20-Pin DIP
ULN8131LW	20-Lead SOIC




Dwg. No. W-185


#### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V <sub>CC</sub>	۷ د
Power Dissipation, P <sub>D</sub> 1.1	W
Operating Temperature Range,	
T <sub>A</sub> 0°C to +70	°C
Storage Temperature Range,	
T <sub>S</sub> 65°C to +150	°C
Junction Temperature, T., +150	°C

## 8131 PRECISION SUPERVISORY SYSTEMS MONITOR

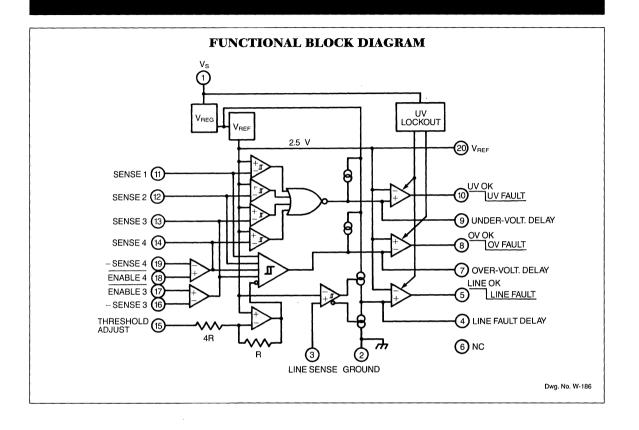

#### **ULN8131LW**



Dwg. No. A-14,372

## 8131 **PRECISION SUPERVISORY SYSTEMS MONITOR**

## ELECTRICAL CHARACTERISTICS at $T_A = +25$ °C, $V_S = 15$ V

			Limits			
Characteristic	Test Pin	Test Conditions	Min.	Max.	Units	
Functional V <sub>S</sub> Range	1		10	35	V	
Quiescent Current	1	$V_S = 35 \text{ V}, V_{17} = V_{18} = V_{20} \text{ No Fault}$	_	15	mA	
REFERENCE VOLTAGE SECT	ION					
Reference Voltage	20	No Load, T <sub>A</sub> = +25°C	2.47	2.53	V	
		No Load, Change Over Temp.	T	25	mV	
Load Regulation	20	I <sub>REF</sub> = 0 to 10 mA	T -	20	mV	
Line Regulation	20	V <sub>S</sub> = 10 to 35 V		10	mV	
Ripple Rejection	. 20	f = 120 Hz	60		dB	
Short-Circuit Current Protection	20			40	mA	
COMPARATOR SECTION						
Under-Voltage Trip Points	11-14*	T <sub>A</sub> = +25°C	2.47	2.53	V	
		Over Temperature	2.46	2.54	V	
Under-Voltage Trip Hysteresis	11-14*	Over Temperature	10	25	mV	
Over-Voltage Trip Points	11-14*	V <sub>15</sub> = 0	3.08	3.17	V	
Over-Voltage Trip Hysteresis	15	V <sub>15</sub> = 0 to 2.5 V, Over Temp.	10	25	mV	
Line Monitor Trip Threshold	3		2.40	2.54	V	
Under-Voltage Lockout Enable	1	V <sub>S</sub> Decreasing	8.5		V	
Under-Voltage Lockout Disable	1	V <sub>S</sub> Increasing	T	10.5	٧	
Input Bias Current	3, 11, 12	V <sub>IN</sub> = 2.0 V	T -	-6.0	μΑ	
		V <sub>IN</sub> = 3.0 V	_	6.0	μА	
	15	V <sub>IN</sub> = 0	T -	-50	μΑ	
	16, 19	$V_{1N} = -2.0 \text{ V}, V_{17} = V_{18} = 0 \text{ V}$	_	-2.0	μΑ	
OUTPUT DRIVERS						
Output Saturation Voltage	5, 10	I <sub>SINK</sub> = 5.0 mA	1 -	0.5	V	
	8	I <sub>SINK</sub> = 10 mA	_	0.5	٧	
	5, 8, 10	I <sub>SOURCE</sub> = 500 μA	4.0	5.25	٧	
Output Leakage current	5, 8, 10	V <sub>OUT</sub> = 35 V	_	50	μΑ	
Line Fault Delay Current Source	4	V <sub>4</sub> = 2.0 V	160	350	μА	
Line Fault Delay Current Sink	4	V <sub>4</sub> = 2.0 V	3.2	7.0	mA	

 $V_7 = 2.0 \ V$ 

 $V_9 = 2.0 \text{ V}$ 

Over-Voltage Delay Current Source

Under-Voltage Delay Current Source

μΑ

μΑ

160

35

300

75

<sup>\*</sup>All inputs connected to 2.75 V except input being tested.

## 8131

## PRECISION SUPERVISORY SYSTEMS MONITOR

#### APPLICATIONS

The basic voltage monitors are based on a 2.5 V precision bandgap reference. External resistive dividers are used to present a nominal 2.5 V level to each under-voltage comparator at the minimum allowable under-voltage condition. The over-voltage reference is set up by another resistive divider at pin 15 determined by the tightest over-voltage tolerance requirement.

#### **BASIC FORMULAS:**

 An under-voltage fault is detected, (pin 10 goes low), when the positive input voltage being monitored is less than:

$$V_{MON(LO)} = 2.5 (R_1 + R_2)/R_2$$

The internal over-voltage threshold is defined as:

$$V_{OVT} = 2.5 \left[ 1 + \frac{R_A}{4(R_A + R_B)} \right]$$

where  $R_A//R_B \ll 100 \text{ k}\Omega$ .

 An over-voltage fault is detected when the positive input voltage being monitored exceeds:

$$V_{MON(HI)} = V_{OVT} (R_1 + R_2)/R_2$$


4. Individual over-voltage thresholds can be increased by the addition of  $R_{\text{X}}$  with

$$R_X = R_1 \left[ \frac{V_{OVT} - 2.5}{V_{MON(HI)} - V_{OVT} \left( \frac{R_1 + R_2}{R_2} \right)} \right]$$

 To monitor negative supplies at SENSE 3 or SENSE 4, pin 17 or 18, respectively, is connected to ground. In this condition, an under-voltage fault indication will occur when the negative supply being monitored falls below:

$$V_{MON(LO)} = 2.5 R_3/R_4$$

Note that for monitor purposes, undervoltage means the negative supply is actually going net positive, or toward ground.

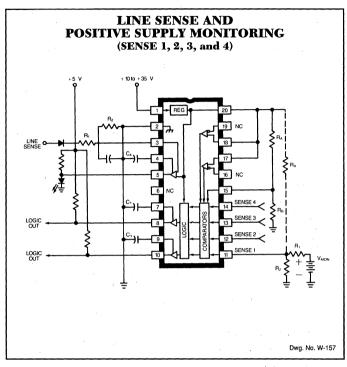

For negative supplies, an over-voltage fault indication will occur when:

$$V_{MON(HI)} = V_{OVT} R_3/R_4$$

7. Fault delay capacitor values are determined by:

$$C_4 \text{ or } C_7 = \frac{200 \times 10^{-6} \times t}{2.5}$$

$$C_9 = \frac{.55 \times 10^{-6} \times t}{2.5}$$

where t is the output delay in seconds.

## **UNUSED INPUTS**

Unused positive sense channel inputs (pins 3, 11-14) must not be left unconnected. They cannot be tied high (over-voltage fault indication), tied low (under-voltage fault indication), or tied to the internal reference (susceptible to noise and voltage offsets). Unused sense channel inputs should be connected to any operating sense channel input. For example, if channels 1, 2, and 4 are being used, the unused channel 3 sense input (pin 13) should be connected to the sense 2 or SENSE 4 input.

## 8131 PRECISION SUPERVISORY SYSTEMS MONITOR

Unused negative sense channel inputs (pins 16 and 19) can be left open-circuited *provided* the associated ENABLE inputs (pins 17 and 18) are tied high and the associated positive sense channel inputs (pins 13 and 14) are utilized to monitor positive supplies or are connected as described above.

#### **DESIGN EXAMPLE**

As an example, consider the following set of monitoring conditions:

$$V_1 = +5 \text{ V } (+10\%, -5\%)$$
  
 $V_2 = +12 \text{ V } (\pm 10\%)$   
 $V_3 = +15 \text{ V } (\pm 5\%)$   
 $V_4 = +24 \text{ V } (\pm 10\%)$ 


The required input dividers are calculated per (1) to yield the resistor divider ratios,  $R_2(R_1+R_2),$  of:  $0.5263,\,0.2315,\,0.1754$  (Note 1), and 0.1157 respectively. The over-voltage threshold,  $V_{\rm OVT},$  would be dictated by the tightest tolerance supply which gives the lowest  $V_{\rm OVT}$  from (3). Therefore,  $V_{\rm MON(HI)}=15\times1.05=15.75$  V and  $V_{\rm OVT}=15.75\times0.1754=2.763$  V¹. This is the voltage appearing at the sense terminal and is equal to the over-voltage threshold to be set via the resistor ratio at pin 15. From (2)  $R_{\rm A}/(R_{\rm A}+R_{\rm B})$  is calculated to be 0.4096. It is good practice to keep the equivalent external impedances as low as possible, in order to minimize bias current and offset errors. For the purpose of this example, all resistor dividers will be taken to have an equivalent impedance of 1000 ohms. This being the case, the final values are:  $R_{\rm A}=1.7~{\rm k}\Omega$  and  $R_{\rm B}=2.44~{\rm k}\Omega$ .

In order to provide accurate over-voltage sensing for the  $V_1,\,V_2,\,$  and  $V_4$  supplies, resistors are connected from the respective input sense nodes and returned to the 2.5 V reference. Calculation is made by first picking values for the input dividers and then calculating the required value of  $R_X$  from (4). Again, assuming 1 k $\Omega$  equivalent divider impedances and making the calculations, a summary of results is given below.

MONITORED SUPPLY	V <sub>MON(HI)</sub>	V <sub>MON(LO)</sub>	R <sub>1</sub>	R <sub>2</sub>	R <sub>X</sub>
+5 V (+10%, -5%)	5.5 V	4.75 V	1.90 kΩ	2.11 kΩ	2.0 kΩ
+12 V (±10%)	13.2 V	10.8 V	4.32 kΩ	1.30 kΩ	900 Ω
+15 V (±5%)	15.75 V	14.25 V	5.70 kΩ	1.21 kΩ	∞
+24 V (±10%)	26.4 V	21.6 V	8.64 kΩ	1.13 kΩ	900 Ω

Note that the number 0.1754 is rounded off. Due to required accuracies in the external dividers, round off numbers only after final resistor values are calculated. For the same reason, use stable high-accuracy metal film resistors. Many applications may benefit from combining the ULN8131A and functionally trimmed resistor-capacitor networks.


### NEGATIVE SENSE MONITORING SENSE 3 and 4 Only



Dwg. No. W-187

## 8181

## LOW-DROPOUT, 5 V REGULATOR — HIGH EFFICIENCY



Especially suited for hand-held, portable, battery-operated equipment such as cellular telephones, the A8181SLB low dropout voltage regulator provides high efficiency for maximum battery life in a minimum package size. Equally applicable to camcorders and portable computers, the device provides a fixed 5 V regulated continuous output at almost 200 mA of load current under worst-case conditions. Under normal operating conditions, output currents over 500 mA are permitted.

A MOSFET pass element delivers high output current with an inputoutput differential of less than 300 mV. For high efficiency, the low dropout voltage allows a longer battery discharge before output voltage regulation is lost. A low guiescent current, even during high load conditions, makes the device ideal for standby power systems. High regulator accuracy and excellent temperature characteristics are provided by a bandgap reference. An enable input gives the designer complete control over sequential power-up or emergency shutdown.

This device is supplied in a 16-lead wide-body, small-outline plastic power package (SOIC) for surface-mount applications. The copper batwing provides for maximum package power dissipation in the smallest possible construction. The A8181SLB is rated for operation over a temperature range of -20°C to +85°C.

### FEATURES AND BENEFITS

- High Efficiency Provides Extended Battery Life
- Less Than 300 mV Dropout Voltage
- Low Quiescent Current
- >200 mA Output Current
- LSTTL-Compatible ON/OFF Control For Sequential Power-up or Emergency Shutdown
- Internal Thermal Protection
- SOIC Surface-Mount Package


#### ABSOLUTE MAXIMUM RATINGS at $T_A = +25^{\circ}C$

Input Voltage, V <sub>I</sub> 10 V
Output Current, Io
(40% duty cycle) 1 A*
(75% duty cycle) 500 mA*
(continuous)
Operating Temperature Range,
T <sub>A</sub> 20°C to +85°C
Junction Temperature, T <sub>J</sub> +150°C†
Storage Temperature Range,
T <sub>S</sub> 40°C to +150°C

- Output current rating is limited by input voltage, duty cycle, and ambient temperature. Under any set of conditions, do not exceed a junction temperature of +150°C. See next page.
- † Fault conditions that produce excessive junction temperature will activate device thermal shutdown circuitry. These conditions can be tolerated but should be avoided.

Always order by complete part number: | A8181SLB | .

## 8181 LOW-DROPOUT, 5 V REGULATOR

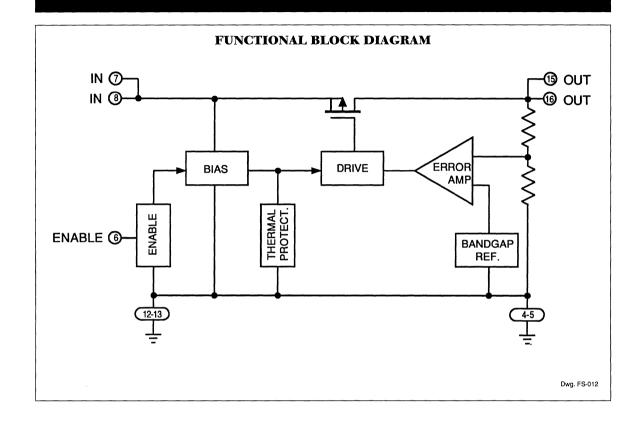

## MAXIMUM ALLOWABLE OUTPUT CURRENT with device mounted on 2.24" x 2.24" (56.9 mm x 56.9 mm) solder-coated copper-clad board in still air.

·										
		Maximum A	llowable Outp	ut Current in I	Milliamperes v	with $V_1 = 10 V$ ,	$T_J=150^{\circ}C^{\star}$			
İ		dc (Duty Cycle)								
T <sub>A</sub>	100%	90%	80%	70%	60%	50%	40%	30%	20%	
25°C	370	415	465	530	620	745	930	1000	1000	
50°C	295	330	370	425	495	595	745	995	1000	
70°C	235	265	295	340	395	475	595	795	1000	
85°C	190	215	240	275	320	385	485	645	970	

 $<sup>^{\</sup>star}$  I<sub>O</sub> = (T<sub>J</sub> - T<sub>A</sub>)/([V<sub>I</sub> - V<sub>O</sub>] R<sub>0JA</sub> • dc) = (150 - T<sub>A</sub>)/(5 • 67 • dc)

Output current rating can be increased (to 1 A maximum) by heat sinking or reducing the input voltage. With an infinite heat sink,  $R_{QJA} = R_{QJT} = 6$ °C/W. Conditions that produce excessive junction temperature will activate device thermal shutdown circuitry. These conditions can be tolerated but should be avoided.

## 8181 LOW-DROPOUT, 5 V REGULATOR

## ELECTRICAL CHARACTERISTICS at T<sub>A</sub> +25°C (unless otherwise noted).

				Limits					
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units			
Output Voltage	Vo	$T_A = 25^{\circ}C, 5.5 \text{ V} \leq V_I \leq 10 \text{ V},$ $0 \text{ mA} \leq I_O \leq 500 \text{ mA} \dagger$	4.90	5.00	5.10	٧			
		$T_{A} = 85^{\circ}C, 5.5 \text{ V} \le V_{I} \le 10 \text{ V}, \\ 0 \text{ mA} \le I_{O} \le 500 \text{ mA*} \dagger$	4.85	_	5.15	V			
Output Volt. Temp. Coeff.	$\alpha_{VO}$	I <sub>O</sub> = 0	_	±100	_	μV/°C			
Line Regulation	$\Delta V_{O(\Delta VI)}$	5.5 V ≤ V <sub>I</sub> ≤ 10 V, Output open	_	10	30	mV			
Load Regulation	$\Delta V_{O(\Delta IO)}$	$0 \text{ mA} \le I_0 \le 500 \text{ mA}$ †, $V_1 = 6 \text{ V}$	_	40	100	mV			
Dropout Voltage	V <sub>I</sub> min - V <sub>O</sub>	I <sub>O</sub> = 500 mA†	_	_	300	mV			
Quiescent Current	la	V <sub>I</sub> = 10 V, I <sub>O</sub> = 500 mA†	_	87	120	μА			
(GND terminal current)		V <sub>I</sub> = 10 V, Output open	_	86	120	μА			
	I <sub>Q(off)</sub>	V <sub>I</sub> = 10 V, Output open, V <sub>E</sub> = 0.4 V	_		20	μА			
ENABLE Input Voltage	V <sub>EH</sub>	Output ON, V <sub>I</sub> = 10 V	2.4	_		V			
	V <sub>EL</sub>	Output OFF, V <sub>I</sub> = 10 V	_	_	0.4	V			
ENABLE Input Current	ΙE	V <sub>E</sub> = V <sub>I</sub> = 10 V	_		±0.1	μА			
Thermal Shutdown Temp.	TJ		_	165		°C			
Thermal Resistance	R <sub>eJA</sub>	Mounted on 2.24" x 2.24" solder-coated copper-clad board in still air		67	_	°C/W			
	R <sub>eJT</sub>		_	6.0		°C/W			

Typical values are given for circuit design information only.

<sup>\*</sup> This parameter is tested to a lot sample plan only.

<sup>†</sup> Pulse test (<20 ms).


### TYPICAL CHARACTERISTICS

#### LOAD REGULATION


#### 5.06 5.04 = 10 V OUTPUT VOLTAGE, VO in VOLTS = 8 V 5.02 5.00 4.98 = 6 V 4.96 = 5.5 V 4.94 4.92 100 400 0 200 300 500 OUTPUT CURRENT, IO in mA

Dwg. GP-039


### LINE REGULATION



Dwg. GP-040



Dwg. GP-039-1




Dwg. GP-040-1

CAUTION: Maximum allowable duty cycle will be significantly less than 100% at high temperatures, at high input voltages, or at high output currents. See Maximum Allowable Output Current table.


### TYPICAL CHARACTERISTICS (cont'd)

### LOAD REGULATION




Dwg. GP-039-2

### LINE REGULATION




Dwg. GP-040-2

## **DROPOUT VOLTAGE**



#### Dwg. GP-041

#### **OUTPUT VOLTAGE vs TEMP.**





Dwg. GP-036

CAUTION: Maximum allowable duty cycle will be significantly less than 100% at high temperatures, at high input voltages, or at high output currents. See Maximum Allowable Output Current table.

### **TYPICAL CHARACTERISTICS (cont'd)**

## **QUIESCENT (GROUND TERMINAL) CURRENT**






Dwg. GP-038

### 90 QUIESCENT (GROUND TERMINAL) CURRENT in $\mu \text{A}$ 80 70 60 T<sub>A</sub> = 25°C 50 $l_0 = 0 \text{ mA}$ 40 30 20 3.0 4.0 6.0 9.0 10 INPUT VOLTAGE, V, in VOLTS

#### TRANSIENT PERFORMANCE

 $V_{I} = 5.5 \text{ V to } 10 \text{ V}, T_{A} = -20^{\circ}\text{C} \text{ to } +85^{\circ}\text{C}, C_{O} = 4.7 \mu\text{F}$ 



Dwg. WP-018

CAUTION: Maximum allowable duty cycle will be significantly less than 100% at high temperatures, at high input voltages, or at high output currents. See Maximum Allowable Output Current table.

Dwg. GP-042

en de la composition de la composition de la composition de la composition de la composition de la composition La composition de la composition de la composition de la composition de la composition de la composition de la

en de la companya de la companya de la companya de la companya de la companya de la companya de la companya de La companya de la companya de la companya de la companya de la companya de la companya de la companya de la co CENTALINIO HANDON PRODUCTINDOS

<u>aurgidiscus propries (1944) propries (</u>

PERIPHERAL POWER & DISPLAY DRIVER IC

HALL EFFECT SENSOR, ICA

MASS STORAGE APPLICATION IC

AUTOMOTIVE, SIGNAL-PROCESSING, & CONSUMER IC.

DISCRETE TRANSISTORS, DIODES, & ARRAYS

QUALITY & RELIABILITY INFORMATION

PACKAGE INFORMATION

## SECTION 7. TECHNICAL DATA for Discrete Transistors, Diodes, and Arrays

Quick Guide to Discrete Devices	7-1
Discrete Semiconductors Index and Cross Reference	7-2
Discrete Devices Ratings:	
NPN Bipolar Transistors	7-14
PNP Bipolar Transistors	7-18
N-Channel Junction Field-Effect Transistors	7-20
P-Channel Junction Field-Effect Transistors	7-26
General-Purpose, Low-Leakage, and Schottky Diodes	7-28
Zener Diodes	7-29
Transistor and Diode Arrays	7-31
See Also:	
High-Current Darlington Transistor Arrays	Section 3
Reliability of SOT-23 Transistors	Section 8
Discrete and Integrated Circuit Semiconductor Chips	Brochure CN-193

# **QUICK GUIDE**

## TO ALLEGRO DISCRETE DEVICES

Series 1N JEDEC-registered general-purpose and Zener diodes. See Series TMPD and TMPZ.

Series 2N JEDEC-registered general-purpose, small-signal, switching, and field-effect transistors in

TO-92/TO-226AA plastic packages. See also Series TMPF, TMPT, and TP.

Series BA Pro-Electron registered diodes in SOT-23/TO-236AB surface-mount packages.

**Series BC** Pro-Electron registered general-purpose transistors.

Series BF Pro-Electron registered general-purpose, N-channel JFETs in TO-92/TO-226AA plastic packages.

Series BZX84 Pro-Electron registered Zener diodes in SOT-23/TO-236AB surface-mount packages. Nominal voltage

ratings from 3.9 volts to 56 volts are available.

**Series J** General-purpose, JFETs in TO-92/TO-226AA plastic packages.

Series MPS General-purpose transistors in TO-92/TO-226AA plastic packages; generally with E-B-C pinning.

Series TH- Discrete semiconductors in unpackaged, chip form. See Brochure CN-193 for additional information.

Series TMPD General-purpose, Schottky, and dual diodes in SOT-23/TO-236AB surface-mount packages.

**Series TMPF** General-purpose, JFETs in SOT-23/TO-236AB surface-mount packages.

Series TMPT General-purpose, small-signal, and switching transistors in SOT-23/TO-236AB surface-mount packages.

Series TMPZ Zener diodes in SOT-23/TO-236AB surface-mount packages. Nominal voltage ratings from 4.3 volts to

33 volts are available.

Series TND Diode arrays in 14- or 16-pin dual in-line plastic packages. Eight isolated diodes or arrays of 8 to 15

diodes in common-anode or common-cathode configurations are available.

Series TP General-purpose, small-signal, switching, and field-effect transistors in TO-92/TO-226AA plastic

packages. Interchangeable with JEDEC-registered and industry-standard devices in TO-98/TO-226AD

plastic packages.

**TPP4000** Four isolated NPN Darlington transistors in a 14-pin dual in-line plastic package.

Series TPQ Four isolated transistors in 14-pin dual in-line plastic packages. Quad NPN, guad PNP, and dual

complementary pairs are available.

See also, high-current multiple Darlington arrays in Section 3.

## DISCRETE SEMICONDUCTORS

## INDEX AND CROSS REFERENCE

Industry Number	Туре	Allegro Number(s)	Allegro Package	1	Pinning 2	3	Ratings (Page)
1N914	Diode	TMPD914	TO-236AB	Α	NC	K	7-29
1N4148	Diode	TMPD4148	TO-236AB	Α	NC	K	7-29
1N4150	Diode	TMPD4150	TO-236AB	Α	NC	K	7-29
1N5229	Zener	TMPZ5229	TO-236AB	Α	NC	K	7-30
1N5230	Zener	TMPZ5230	TO-236AB	Α	NC	K	7-30
1N5231	Zener	TMPZ5231	TO-236AB	Α	NC	K	7-30
1N5232	Zener	TMPZ5232	TO-236AB	Α	NC.	K	7-30
1N5233	Zener	TMPZ5233	TO-236AB	Α	NC	K	7-30
1N5234	Zener	TMPZ5234	TO-236AB	Α	NC	K	7-30
1N5235	Zener	TMPZ5235	TO-236AB	Α	NC	K	7-30
1N5236	Zener	TMPZ5236	TO-236AB	Α	NC	K	7-30
1N5237	Zener	TMPZ5237	TO-236AB	Α	NC	K	7-30
1N5238	Zener	TMPZ5238	TO-236AB	Α	NC	K	7-30
1N5239	Zener	TMPZ5239	TO-236AB	·A	NC	K	7-30
1N5240	Zener	TMPZ5240	TO-236AB	Α	NC	K	7-30
1N5241	Zener	TMPZ5241	TO-236AB	Α	NC	К	7-30
1N5242	Zener	TMPZ5242	TO-236AB	Α	NC	K	7-30
1N5243	Zener	TMPZ5243	TO-236AB	Α	NC	K	7-30
1N5244	Zener	TMPZ5244	TO-236AB	Α	NC	K	7-30
1N5245	Zener	TMPZ5245	TO-236AB	Α	NC	K	7-30
1N5246	Zener	TMPZ5246	TO-236AB	Α	NC	K	7-30
1N5247	Zener	TMPZ5247	TO-236AB	Α	NC	K	7-30
1N5248	Zener	TMPZ5248	TO-236AB	Α	NC	K	7-30
1N5249	Zener	TMPZ5249	TO-236AB	Α	NC	K	7-30
1N5250	Zener	TMPZ5250	TO-236AB	Α	NC	K	7-30
1N5251	Zener	TMPZ5251	TO-236AB	Α	NC	K	7-30
1N5252	Zener	TMPZ5252	TO-236AB	Α	NC	K	7-30
1N5253	Zener	TMPZ5253	TO-236AB	Α	NC	K	7-30
1N5254	Zener	TMPZ5254	TO-236AB	Α	NC	K	7-30
1N5255	Zener	TMPZ5255	TO-236AB	Α	NC	K	7-30
1N5256	Zener	TMPZ5256	TO-236AB	Α	NC	К	7-30
1N5257	Zener	TMPZ5257	TO-236AB	Α	NC	K	7-30
1N5711	Schottky	TMPD5711	TO-236AB	Α	NC	K	7-29

Industry Number	Туре	Allegro Number(s)	Allegro Package	1	Pinning 2	3	Ratings (Page)
2N918	NPN	TMPT918	TO-236AB	В	E	C*	7-17
	}	TP918	TO-226AA	E	В	С	7-15
2N2221	NPN	TMPT2221	TO-236AB	В	E	C*	7-17
	1	TP2221	TO-226AA	E	В	С	7-15
2N2221A	NPN	TMPT2221A	TO-236AB	В	Ε	C*	7-17
		TP2221A	TO-226AA	E	В	С	7-15
2N2222	NPN	TMPT2222	TO-236AB	В	E	C*	7-17
		TP2222	TO-226AA	E	В	С	7-15
		TPQ6002	14-Pin DIP	Dual	Complement	ary Pair	7-38
		TPQ6502	14-Pin DIP	Dual	Complement	ary Pair	7-38
2N2222A	NPN	TMPT2222A	TO-236AB	В	E	C*	7-17
		TP2222A	TO-226AA	E	В	С	7-15
	1	TPQ2222A	14-Pin DIP	Qua	d Transistor	Array	7-38
2N2907	PNP	TMPT2907	TO-236AB	В	E	C*	7-20
		TP2907	TO-226AA	E	В	С	7-19
		TPQ6002	14-Pin DIP	Dual	Complement	ary Pair	7-38
		TPQ6502	14-Pin DIP	Dual	Complement	ary Pair	7-38
2N2907A	PNP	TMPT2907A	TO-236AB	В	E	C*	7-20
		TP2907A	TO-226AA	E	В	С	7-19
		TPQ2907A	14-Pin DIP	Quad Transistor Array			7-38
2N3414	NPN	2N3414	TO-226AA	E	С	В	7-15
2N3415	NPN	2N3415	TO-226AA	E	С	В	7-15
2N3416	NPN	2N3416	TO-226AA	E	С	В	7-15
2N3417	NPN	2N3417	TO-226AA	E	С	В	7-15
2N3819	N Channel	2N3819	TO-226AA	D	G	S†	7-21
	1	TMPF3819	TO-236AB	D	S	G	7-24
2N3820	P Channel	TMPF3820	TO-236AB	D	S	G	7-28
		2N3820	TO-226AA	D	G	S†	7-27
2N3821	N Channel	TMPF3821	TO-236AB	D	S	G	7-24
		TP3821	TO-226AA	D	S	G‡	7-21
2N3822	N Channel	TMPF3822	TO-236AB	D	S	G	7-24
		TP3822	TO-226AA	D	S	G‡	7-21
2N3823	N Channel	TMPF3823	TO-236AB	D	S	G	7-24
		TP3823	TO-226AA	D	S	G‡	7-21
2N3824	N Channel	TMPF3824	TO-236AB	D	S	G	7-24
		TP3824	TO-226AA	D	S	G‡	7-21

<sup>\*</sup> Reversed pinning (E-B-C) available on special order—add suffix letter 'R' to part number.

 $<sup>\ \, \</sup>text{† Reversed pinning (S-G-D) available on special order} \\ \text{—add suffix letter 'R' to part number}.$ 

<sup>‡</sup> Reversed pinning (S-D-G) available on special order—add suffix letter 'R' to part number.

Industry Number	Туре	Allegro Number(s)	Allegro Package	1	Pinning 2	3	Ratings (Page)
2N3904	NPN	2N3904	TO-226AA	Е	В	С	7-15
		TMPT3904	TO-236AB	В	Е	C*	7-18
		TPQ3904	14-Pin DIP	Qua	d Transistor	Array	7-38
		TPQ6700	14-Pin DIP	Dual	Dual Complementary Pair		
2N3906	PNP	2N3906	TO-226AA	E	В	С	7-19
		TMPT3906	TO-236AB	В	Е	C*	7-20
		TPQ3906	14-Pin DIP	Qua	d Transistor	Array	7-38
		TPQ6700	14-Pin DIP	Qua	d Transistor	Array	7-38
2N3993	P Channel	TMPF3993	TO-236AB	D	S	G	7-28
		TP3993	TO-226AA	D	S	G‡	7-27
2N3994	P Channel	TMPF3994	TO-236AB	D	S	G	7-28
		TP3994	TO-226AA	D	S	G‡	7-27
2N4091	N Channel	TMPF4091	TO-236AB	D	S	G	7-24
		TP4091	TO-226AA	D	S	G‡	7-21
2N4092	N Channel	TMPF4092	TO-236AB	D	S	G	7-24
,		TP4092	TO-226AA	D	S	G‡	7-21
2N4093	N Channel	TMPF4093	TO-236AB	D	S	G	7-24
		TP4093	TO-226AA	D	S	G‡	7-21
2N4117	N Channel	TMPF4117	TO-236AB	D	S	G	7-24
		TP4117	TO-226AA	D	S	G‡	7-21
2N4118	N Channel	TMPF4118	TO-236AB	D	S	G	7-24
		TP4118	TO-226AA	D	S	G‡	7-21
2N4119	N Channel	TMPF4119	TO-236AB	D	S	G	7-24
1		TP4119	TO-226AA	D	S	G‡	7-21
2N4220	N Channel	TMPF4220	TO-236AB	D	S	G	7-24
		TP4220	TO-226AA	D	S	G‡	7-21
2N4221	N Channel	TMPF4221	TO-236AB	D	S	G	7-24
		TP4221	TO-226AA	D	S	G‡	7-21
2N4222	N Channel	TMPF4222	TO-236AB	D	S	G	7-24
		TP4222	TO-226AA	D	S	G‡	7-21
2N4223	N Channel	TMPF4223	TO-236AB	D	S	G	7-24
		TP4223	TO-226AA	D	S	G‡	7-21
2N4224	N Channel	TMPF4224	TO-236AB	D	S	G	7-24
		TP4224	TO-226AA	D	S	G‡	7-21

 $<sup>^{\</sup>star}$  Reversed pinning (E-B-C) available on special order—add suffix letter 'R' to part number.

<sup>‡</sup> Reversed pinning (S-D-G) available on special order—add suffix letter 'R' to part number.

Industry Number	Туре	Allegro Number(s)	Allegro Package	1	Pinning 2	3	Ratings (Page)
2N4381	P Channel	TMPF4381	TO-236AB	D	S	G	7-28
		TP4381	TO-226AA	D	S	G‡	7-27
2N4391	N Channel	TMPF4391	TO-236AB	D	S	G	7-24
		TP4391	TO-226AA	D	S	G‡	7-21
2N4392	N Channel	TMPF4392	TO-236AB	D	S	G	7-24
		TP4392	TO-226AA	D	S	G‡	7-21
2N4393	N Channel	TMPF4393	TO-236AB	D	S	G	7-24
		TP4393	TO-226AA	D	S	G‡	7-21
2N4401	NPN	2N4401	TO-226AA	E	В	С	7-15
		TMPT4401	TO-236AB	В	Е	C*	7-18
2N4402	PNP	2N4402	TO-226AA	Е	В	С	7-19
		TMPT4402	TO-236AB	В	E	C*	7-20
2N4403	PNP	2N4403	TO-226AA	E	В	С	7-19
		TMPT4403	TO-236AB	В	E	C*	7-20
2N4413	PNP	TP4413	TO-226AA	E	В	C	7-19
2N4415	PNP	TP4415	TO-226AA	E	В	С	7-19
2N4416	N Channel	TMPF4416	TO-236AB	D	S	G	7-24
		TP4416	TO-226AA	D	S	G‡	7-21
2N4416A	N Channel	TMPF4416A	TO-236AB	D	S	G	7-24
		TP4416A	TO-226AA	D	S	G‡	7-21
2N4424	NPN	2N4424	TO-226AA	E	С	В	7-15
2N4856	N Channel	TMPF4856	TO-236AB	D	S	G	7-24
		TP4856	TO-226AA	D	S	G‡	. 7-21
2N4857	N Channel	TMPF4857	TO-236AB	D	S	G	7-24
		TP4857	TO-226AA	D	S	G‡	7-21
2N4858	N Channel	TMPF4858	TO-236AB	D	S	G	7-24
		TP4858	TO-226AA	D	S	G‡	7-21
2N4859	N Channel	TMPF4859	TO-236AB	D	S	G	7-24
		TP4859	TO-226AA	D	s	G‡	7-21
2N4860	N Channel	TMPF4860	TO-236AB	D	S	G	7-24
		TP4860	TO-226AA	D	S	G‡	7-21
2N4861	N Channel	TMPF4861	TO-236AB	D	S	G	7-24
		TP4861	TO-226AA	D	S	G‡	7-21

<sup>\*</sup> Reversed pinning (E-B-C) available on special order—add suffix letter 'R' to part number.

<sup>‡</sup> Reversed pinning (S-D-G) available on special order—add suffix letter 'R' to part number.

Industry Number	Туре	Allegro Number(s)	Allegro Package	1	Pinning 2	3	Ratings (Page)
2N5086	PNP	2N5086	TO-226AA	E	В	С	7-19
		TMPT5086	TO-236AB	В	E	C*	7-20
2N5087	PNP	2N5087	TO-226AA	E	В	С	7-19
		TMPT5087	TO-236AB	В	E	C*	7-20
2N5088	· NPN	2N5088	TO-226AA	E	В	С	7-15
		TMPT5088	TO-236AB	В	E	C*	7-18
2N5089	NPN	2N5089	TO-226AA	Е	В	С	7-15
		TMPT5089	TO-236AB	В	E	C*	7-18
2N5163	N Channel	TMPF5163	TO-236AB	D	S	G	7-24
		TP5163	TO-226AA	D	S	G‡	7-21
2N5172	NPN	2N5172	TO-226AA	E	С	В	7-15
2N5245	N Channel	TMPF5245	TO-236AB	D	S	G	7-24
		TP5245	TO-226AA	D	S	G‡	7-21
2N5246	N Channel	TMPF5246	TO-236AB	D	S	G	7-24
		TP5246	TO-226AA	D	S	G‡	7-21
2N5247	N Channel	TMPF5247	TO-236AB	D	S	G	7-24
		TP5247	TO-226AA	D	S	G‡	7-21
2N5248	N Channel	TMPF5248	TO-236AB	D	S	G	7-24
		TP5248	TO-226AA	D	S	G‡	7-21
2N5307	NPN	2N5307	TO-226AA	E	С	В	7-15
2N5308	NPN	2N5308	TO-226AA	E	С	В	7-15
2N5358	N Channel	TMPF5358	TO-236AB	D	S	G	7-24
		TP5358	TO-226AA	D	S	G‡	7-21
2N5359	N Channel	TMPF5359	TO-236AB	D	s	G	7-24
		TP5359	TO-226AA	D	S	G‡	7-21
2N5360	N Channel	TMPF5360	TO-236AB	D	S	G	7-24
		TP5360	TO-226AA	D	S	G‡	7-21
2N5361	N Channel	TMPF5361	TO-236AB	D	S	G	7-25
		TP5361	TO-226AA	D	S	G‡	7-21
2N5362	N Channel	TMPF5362	TO-236AB	D	S	G	7-25
		TP5362	TO-226AA	D	S	G‡	7-21
2N5363	N Channel	TMPF5363	TO-236AB	D	s	G	7-25
		TP5363	TO-226AA	D	s	G‡	7-21
2N5364	N Channel	TMPF5364	TO-236AB	D	s	Ġ	7-25
		TP5364	TO-226AA	D	s	G‡	7-21

<sup>\*</sup> Reversed pinning (E-B-C) available on special order—add suffix letter 'R' to part number.

<sup>‡</sup> Reversed pinning (S-D-G) available on special order—add suffix letter 'R' to part number.

Industry Number	Туре	Allegro Number(s)	Allegro Package	1	Pinning 2	3	Ratings (Page)
2N5376	NPN	TP5376	TO-226AA	Е	В	С	7-15
2N5400	PNP	2N5400	TO-226AA	E	В	С	7-19
2N5401	PNP	2N5401	TO-226AA	E	В	С	7-19
	1	TMPT5401	TO-236AB	В	E	C*	7-20
		TPQ5401	14-Pin DIP	Qua	ad Transistor	Array	7-38
2N5457	N Channel	2N5457	TO-226AA	D	S	G‡	7-21
		TMPF5457	TO-236AB	D	S	G	7-25
2N5458	N Channel	2N5458	TO-226AA	D	S	G‡	7-22
		TMPF5458	TO-236AB	D	S	G	7-25
2N5459	N Channel	2N5459	TO-226AA	D	S	G‡	7-22
		TMPF5459	TO-236AB	D	S	G	7-25
2N5460	P Channel	2N5460	TO-226AA	D	S	G‡	7-27
		TMPF5460	TO-236AB	D	S	G	7-28
2N5461	P Channel	2N5461	TO-226AA	D	S	G‡	7-27
		TMPF5461	TO-236AB	D	S	G	7-28
2N5462	P Channel	2N5462	TO-226AA	D	S	G‡	7-27
		TMPF5462	TO-236AB	D	S	G	7-28
2N5484	N Channel	2N5484	TO-226AA	D	S	G‡	7-22
		TMPF5484	TO-236AB	D	S	G	7-25
2N5485	N Channel	2N5485	TO-226AA	D	5	G‡	7-22
		TMPF5485	TO-236AB	D	S	G	7-25
2N5486	N Channel	2N5486	TO-226AA	D	S	G‡	7-22
		TMPF5486	TO-236AB	D	S	G	7-25
2N5638	N Channel	2N5638	TO-226AA	D	S	G‡	7-22
	1	TMPF5638	TO-236AB	D	S	G	7-25
2N5639	N Channel	2N5639	TO-226AA	D	S	G‡	7-22
	<b>\</b>	TMPF5639	TO-236AB	D	S	G	7-25
2N5640	N Channel	2N5640	TO-226AA	D	S	G‡	7-22
		TMPF5640	TO-236AB	D	S	G	7-25
2N5653	N Channel	2N5653	TO-226AA	D	S	G‡	7-22
	1	TMPF5653	TO-236AB	D	S	G	7-25
2N5654	N Channel	2N5654	TO-226AA	D	S	G‡	7-22
		TMPF5654	TO-236AB	D	s	Ġ	7-25
2N5668	N Channel	TMPF5668	TO-236AB	D	S	G	7-25
		TP5668	TO-226AA	D	s	G‡	7-22

<sup>\*</sup> Reversed pinning (E-B-C) available on special order—add suffix letter 'R' to part number.

<sup>‡</sup> Reversed pinning (S-D-G) available on special order—add suffix letter 'R' to part number.

Industry Number	Туре	Allegro Number(s)	Allegro Package	1	Pinning 2	3	Ratings (Page)
2N5669	N Channel	TMPF5669	TO-236AB	D	S	G	7-25
	1	TP5669	TO-226AA	D	S	G‡	7-22
2N5670	N Channel	TMPF5670	TO-236AB	D	S	G	7-25
	1	TP5670	TO-226AA	D	S	G‡	7-22
2N5949	N Channel	TMPF5949	TO-236AB	D	S	G	7-25
		TP5949	TO-266AA	D	S	G‡	7-22
2N5950	N Channel	TMPF5950	TO-236AB	D	S	G	7-25
		TP5950	TO-226AA	D	S	G‡	7-22
2N5951	N Channel	TMPF5951	TO-236AB	D	S	G	7-25
		TP5951	TO-226AA	D	S	G‡	7-22
2N5952	N Channel	TMPF5952	TO-236AB	D	S	G	7-25
		TP5952	TO-226AA	D	S	G‡	7-22
2N5953	N Channel	TMPF5953	TO-236AB	D	S	G	7-25
		TP5953	TO-226AA	D	S	G‡	7-22
2N6427	NPN	2N6427	TO-226AA	E	В	С	7-15
		TMPT6427	TO-236AB	В	E	C*	7-18
		TPQ6427	14-Pin DIP	Qua	ad Transistor	Array	7-38
A8920SLR	Schottky	A8920SLR	TO-236AB	A1	K2	KA	5-
BAR18	Schottky	BAR18	TO-236AB	Α	NC	K	7-29
BAS16	Diode	BAS16	TO-236AB	Α	NC	K	7-29
BAS19	Diode	BAS19	TO-236AB	Α	NC	K	7-29
BAS21	Diode	BAS21	TO-236AB	Α	NC	· K	7-29
BAV70	Dual Diode	BAV70	TO-236AB	A1	A2	K	7-29
BAV74	Dual Diode	BAV74	TO-236AB	A1	A2	K	7-29
BAV99	Dual Diode	BAV99	TO-236AB	A1	K2	AK	7-29
BAW56	Dual Diode	BAW56	TO-236AB	K1	K2	Α	7-29
BC264A	N Channel	TMPFBC264A	TO-236AB	D	S	G	7-25
BC264B	N Channel	TMPFBC264B	TO-236AB	D	S	G	7-25
BC264C	N Channel	TMPFBC264C	TO-236AB	D	S	G	7-25
BC264D	N Channel	TMPFBC264D	TO-236AB	D	S	G	7-25
BCW29	PNP	BCW29	TO-236AB	В	E	C*	7-20
BCW30	PNP	BCW30	TO-236AB	В	. Е	C*	7-20
BCW31	NPN	BCW31	TO-236AB	В	Е	C*	7-17
BCW32	NPN	BCW32	TO-236AB	В	Е	C*	7-17
BCW33	NPN	BCW33	TO-236AB	В	Ε	C*	7-17
BCW60A	NPN	BCW60A	TO-236AB	В	Ε	C*	7-17

 $<sup>^{\</sup>star}$  Reversed pinning (E-B-C) available on special order—add suffix letter 'R' to part number.

<sup>‡</sup> Reversed pinning (S-D-G) available on special order—add suffix letter 'R' to part number.

Industry Number	Туре	Allegro Number(s)	Allegro Package	1	Pinning 2	3	Ratings (Page)
BCW60B	NPN	BCW60B	TO-236AB	В	E	C*	7-17
BCW60C	NPN	BCW60C	TO-236AB	В	E	C*	7-17
BCW60D	NPN	BCW60D	TO-236AB	В	E	C*	7-17
BCW61A	PNP	BCW61A	TO-236AB	В	E	C*	7-20
BCW61B	PNP	BCW61B	TO-236AB	В	E	C*	7-20
BCW61C	PNP	BCW61C	TO-236AB	В	E	C*	7-20
BCW61D	PNP	BCW61D	TO-236AB	В	E	C*	7-20
BCW65A	NPN	BCW65A	TO-236AB	В	E	C*	7-17
BCW65B	NPN	BCW65B	TO-236AB	В	E	C*	7-17
BCW66F	NPN	BCW66F	TO-236AB	В	E	C*	7-17
BCW66G	NPN	BCW66G	TO-236AB	В	E	C*	7-17
BCW67A	PNP	BCW67A	TO-236AB	В	E	C*	7-20
BCW67B	PNP	BCW67B	TO-236AB	В	E	C*	7-20
BCW68F	PNP	BCW68F	TO-236AB	В	E	C*	7-20
BCW68G	PNP	BCW68G	TO-236AB	В	E	C*	7-20
BCW69	PNP	BCW69	TO-236AB	В	E	C*	7-20
BCW70	PNP	BCW70	TO-236AB	В	E	C*	7-20
BCW71	NPN	BCW71	TO-236AB	В	Е	C*	7-17
BCW72	NPN	BCW72	TO-236AB	В	E	C*	7-17
BCX17	PNP	BCX17	TO-236AB	В	E	C*	7-20
BCX18	PNP	BCX18	TO-236AB	В	E	C*	7-20
BCX19	NPN	BCX19	TO-236AB	В	Е	C*	7-17
BCX20	NPN	BCX20	TO-236AB	В	E	C*	7-17
BCX70G	NPN	BCX70G	TO-236AB	В	E	C*	7-17
BCX70H	NPN	BCX70H	TO-236AB	В	Е	C*	7-17
BCX70J	NPN	BCX70J	TO-236AB	В	E	C*	7-17
BCX70K	NPN	BCX70K	TO-236AB	В	E	C*	7-17
BCX71G	PNP	BCX71G	TO-236AB	В	E	C*	7-20
BCX71H	PNP	BCX71H	TO-236AB	В	E	C*	7-20
BCX71J	PNP	BCX71J	TO-236AB	В	E	C*	7-20
BCX71K	PNP	BCX71K	TO-236AB	В	E	C*	7-20
BF244A	N Channel	BF244A	TO-226AA	D	G	S†	7-22
		TMPFBF244A	TO-236AB	D	S	G	7-25
BF244B	N Channel	BF244B	TO-226AA	D	G	S†	7-22
		TMPFBF244B	TO-236AB	D	S	G	7-25

<sup>\*</sup> Reversed pinning (E-B-C) available on special order—add suffix letter 'R' to part number.

<sup>†</sup> Reversed pinning (S-G-D) available on special order—add suffix letter 'R' to part number.

Industry Number	Туре	Allegro Number(s)	Allegro Package	1	Pinning 2	3	Ratings (Page)
BF244C	N Channel	BF244C	TO-226AA	D	G	S†	7-22
		TMPFBF244C	TO-236AB	D	S	G	7-25
BF246A	N Channel	BF246A	TO-226AA	D	G	S†	7-22
		TMPFBF246A	TO-236AB	D	S	G	7-25
BF246B	N Channel	BF246B	TO-226AA	D	G	S†	7-22
		TMPFBF246B	TO-236AB	D	S	G	7-25
BF246C	N Channel	BF246C	TO-226AA	D	G	S†	7-22
	_	TMPFBF246C	TO-236AB	D	S	G	7-25
BF256A	N Channel	BF256A	TO-226AA	D	G	S†	7-22
		TMPFBF256A	TO-236AB	D	S	G	7-25
BF256B	N Channel	BF256B	TO-226AA	D	G	S†	7-22
		TMPFBF256B	TO-236AB	D	S	G	7-25
BF256C	N Channel	BF256C	TO-226AA	D	G	S†	7-22
		TMPFBF256C	TO-236AB	D	S	G	7-25
BFR30	N Channel	BFR30	TO-226AA	D	S	G‡	7-22
BFR31	N Channel	BFR31	TO-226AA	D	S	G‡	7-22
BZX84C4V7	Zener	BZX84C4V7	TO-236AB	Α	NC	K	7-31
BZX84C5V1	Zener	BZX84C5V1	TO-236AB	Α	NC	K	7-31
BZX84C5V6	Zener	BZX84C5V6	TO-236AB	Α	NC	K	7-31
BZX84C6V2	Zener	BZX84C6V2	TO-236AB	Α	NC	K	7-31
BZX84C6V8	Zener	BZX84C6V8	TO-236AB	Α	NC	K	7-31
BZX84C7V5	Zener	BZX84C7V5	TO-236AB	Α	NC	K	7-31
BZX84C8V2	Zener	BZX84C8V2	TO-236AB	Α	NC	K	7-31
BZX84C9V1	Zener	BZX84C9V1	TO-236AB	Α	NC	K	7-31
BZX84C10	Zener	BZX84C10	TO-236AB	Α	NC	K	7-31
BZX84C11	Zener	BZX84C11	TO-236AB	Α	NC	K	7-31
BZX84C12	Zener	BZX84C12	TO-236AB	Α	NC	K	7-31
BZX84C13	Zener	BZX84C13	TO-236AB	Α	NC	K	7-31
BZX84C15	Zener	BZX84C15	TO-236AB	Α	NC	K	7-31
BZX84C16	Zener	BZX84C16	TO-236AB	Α	NC	K	7-31
BZX84C18	Zener	BZX84C18	TO-236AB	Α	NC	K	7-31
BZX84C20	Zener	BZX84C20	TO-236AB	Α	NC	K	7-31
BZX84C22	Zener	BZX84C22	TO-236AB	Α	NC	K	7-31
BZX84C24	Zener	BZX84C24	TO-236AB	Α	NC	K	7-31
BZX84C27	Zener	BZX84C27	TO-236AB	Α	NC	K	7-31
BZX84C30	Zener	BZX84C30	TO-236AB	A	NC	K	7-31
BZX84C33	Zener	BZX84C33	TO-236AB	Α	NC	K	7-31

<sup>†</sup> Reversed pinning (S-G-D) available on special order—add suffix letter 'R' to part number.

<sup>‡</sup> Reversed pinning (S-D-G) available on special order—add suffix letter 'R' to part number.

Industry Number	Туре	Allegro Number(s)	Allegro Package	1	Pinning 2	3	Ratings (Page)
J111	N Channel	J111	TO-226AA	D	S	G‡	7-22
		TMPFJ111	TO-236AB	D	S	G	7-25
J112	N Channel	J112	TO-226AA	D	S	G‡	7-22
		TMPFJ112	TO-236AB	D	S	G	7-25
J112A	N Channel	J112A	TO-226AA	D	S	G‡	7-22
		TMPFJ112A	TO-236AB	D	S	G	7-25
J113	N Channel	J113	TO-226AA	D	S	G‡	7-22
		TMPFJ113	TO-236AB	D	S	G	7-25
J113A	N Channel	J113A	TO-226AA	D	S	G‡	7-22
		TMPFJ113A	TO-236AB	D	S	G	7-26
J174	P Channel	J174	TO-226AA	D	G	S†	7-27
		TMPFJ174	TO-236AB	D	S	G	7-28
J175	P Channel	J175	TO-226AA	D	G	S†	7-27
		TMPFJ175	TO-236AB	D	S	G	7-28
J176	P Channel	J176	TO-226AA	D	G	S†	7-27
		TMPFJ176	TO-236AB	D	S	G	7-28
J177	P Channel	J177	TO-226AA	D	G	S†	7-27
		TMPFJ177	TO-236AB	D	S	G	7-28
J201	N Channel	J201	TO-226AA	D	S	G	7-22
		TMPFJ201	TO-236AB	D	S	G	7-26
J202	N Channel	J202	TO-226AA	D	S	G	7-22
		TMPFJ202	TO-236AB	D	S	G	7-26
J203	N Channel	J203	TO-226AA	D	S	G	7-22
		TMPFJ203	TO-236AB	D	S	G	7-26
J230	N Channel	J230	TO-226AA	D	S	G	7-22
		TMPFJ230	TO-236AB	D	S	G	7-26
J231	N Channel	J231	TO-226AA	D	S	G	7-22
		TMPFJ231	TO-2M36AB	D	S	G	7-26
J232	N Channel	J232	TO-226AA	D	S	G	7-22
******		TMPFJ232	TO-236AB	D	S	G	7-26
J304	N Channel	J304	TO-226AA	D	S	G	7-22
		TMPFJ304	TO-236AB	D	S	G	7-26
J305	N Channel	J305	TO-226AA	D	S	G‡	7-23
		TMPFJ305	TO-236AB	D	S	G	7-26
J308	N Channel	TMPFJ308	TO-236AB	D	S	G	7-26
		TPJ308	TO-226AA	D	S	G‡	7-23

<sup>†</sup> Reversed pinning (S-G-D) available on special order—add suffix letter 'R' to part number.

<sup>‡</sup> Reversed pinning (S-D-G) available on special order—add suffix letter 'R' to part number.

Industry Number	Туре	Allegro Number(s)	Allegro Package	1	Pinning 2	3	Ratings (Page)
J309	N Channel	TMPFJ309	TO-236AB	D	S	G	7-26
		TPJ309	TO-226AA	D	S	G‡	7-23
J310	N Channel	TMPFJ310	TO-236AB	D	S	G	7-26
		TPJ310	TO-226AA	D	S	G‡	7-23
MPS6520	NPN	MPS6520	TO-226AA	E	В	С	7-16
MPS6521	NPN	MPS6521	TO-226AA	E	В	С	7-16
MPSA05	NPN	MPSA05	TO-226AA	E	В	С	7-16
		TMPTA05	TO-236AB	В	Е	C*	7-18
MPSA06	NPN	MPSA06	TO-226AA	E	В	С	7-16
		TMPTA06	TO-236AB	В	Е	C*	7-18
		TPQA06	14-Pin DIP	Quad Transistor Array			7-38
MPSA14	NPN	MPSA14	TO-226AA	E	В	С	7-16
		TMPTA14	TO-236AB	В	Е	C*	7-18
MPSA42	NPN	MPSA42	TO-226AA	E	В	С	7-16
		TMPTA42	TO-236AB	В	Е	C*	7-18
MPSA43	NPN	MPSA43	TO-226AA	E	В	С	7-16
		TMPTA43	TO-236AB	В	E	C*	7-18
MPSA55	PNP	MPSA55	TO-226AA	E	В	С	7-19
		TMPTA55	TO-236AB	В	Е	C*	7-20
		TPQA55	14-Pin DIP	Quad Transistor Array			7-38
MPSA56	PNP	MPSA56	TO-226AA	E	В	С	7-19
		TMPTA56	TO-236AB	В	Е	C*	7-20
		TPQA56	14-Pin DIP	Quad Transistor Array			7-38
MPSA70	PNP	MPSA70	TO-226AA	E	В	С	7-19
		TMPTA70	TO-236AB	В	Е	C*	7-20
TMPD	Diode	Various	TO-236AB	Α	NC	K	7-29
TMPD6916	Schottky	TMPD6916	TO-236AB	Α	NC	K	7-29
TMPD6919	Schottky	TMPD6919	TO-236AB	Α	NC	K	7-29
TMPD6924	Schottky	TMPD6924	TO-236AB	A	NC	K	7-29
TMPF	JFET	See 2N	TO-236AB	Various			See 2N
TMPFBC	JFET	See BC	TO-236AB	Various			See BC
TMPFBF	JFET	See BF	TO-236AB		Various		See BF
TMPFJ	JFET	See J	TO-236AB		Various		See J
TMPFU	JFET	See U	TO-236AB	1	Various		See U
TMPT	Transistor	See 2N	TO-236AB		Various		See 2N

 $<sup>^{\</sup>star}$  Reversed pinning (E-B-C) available on special order—add suffix letter 'R' to part number.

<sup>‡</sup> Reversed pinning (S-D-G) available on special order—add suffix letter 'R' to part number.

Industry Number	Туре	Allegro Number(s)	Allegro Package	1	Pinning 2	3	Ratings (Page)
TMPTA	Transistor	See MPSA	TO-236AB		Various		See MPSA
TMPZ	Zener	See 1N	TO-236AB		Various		See 1N
TND	Array	TND	14 or 16-Pin DIP	6-to-15 Diode Array			7-33
TP	Transistor	See 2N	TO-226AA	Various			See 2N
TPBC	Transistor	See BC	TO-226AA	Various			See BC
TPJ	JFET	See J	TO-226AA	Various			See J
TPP4000	Array	TPP4000	14-Pin DIP	Quad Darlington Array			7-36
TPQ	Array	TPQ	14-Pin DIP	Quad Darlington Array			7-38
TPU	JFET	See U	TO-226AA	Various			See U
U304	P Channel	TMPFU304	TO-236AB	D	S	G	7-28
		TPU304	TO-226AA	D	S	G‡	7-27
U305	P Channel	TMPFU305	TO-236AB	D	S	G	7-28
		TPU305	TO-226AA	D	S	G‡	7-27
U306	P Channel	TMPFU306	TO-236AB	D	S	G	7-28
		TPU306	TO-226AA	D	S	G‡	7-27
U308	N Channel	TMPFU308	TO-236AB	D	S	G	7-26
		TPU308	TO-226AA	D	S	G‡	7-23
U309	N Channel	TMPFU309	TO-236AB	D	S	G	7-26
		TPU309	TO-226AA	D	S	G‡	7-23
U310	N Channel	TMPFU310	TO-236AB	D	S	G	7-26
	•	TPU310	TO-226AA	D	S	G‡	7-23
U1897	N Channel	TMPFU1897	TO-236AB	D	S	G	7-26
		TPU1897	TO-226AA	D	S	G‡	7-23
U1898	N Channel	TMPFU1898	TO-236AB	D	S	G	7-26
•		TPU1898	TO-226AA	D	S	G‡	7-23
U1899	N Channel	TMPFU1899	TO-236AB	D	S	G	7-26
		TPU1899	TO-226AA	D	S	G‡	7-23

<sup>‡</sup> Reversed pinning (S-D-G) available on special order—add suffix letter 'R' to part number.

## NPN TRANSISTORS



### TO-92/TO-226AA

## '2N' and 'TP' DEVICE TYPES ELECTRICAL CHARACTERISTICS at $T_A = 25$ °C

	ı					сво	D	C Cur	rent G	ain	v <sub>c</sub>	E(sat)	f	т				
Device Type	I <sub>c</sub> Max. (mA)	V <sub>(BR)CBO</sub>	V <sub>(BR)CEO</sub> (V)	V <sub>(BR)EBO</sub>	Max. (nA)	@ V <sub>CB</sub>		h <sub>FE</sub> Max.		@ V <sub>ce</sub> (V)	Max. (V)	@ I <sub>c</sub> (mA)	Min. (MHz)	@ I <sub>c</sub> (mA)	C <sub>ob</sub> ¹ (pF)	t <sub>s</sub> ¹ (ns)	NF¹ (dB)	Pinning 1, 2, 3
TP918	50	30	15	3.0	10	15	20	_	3.0	1.0	0.4	10	600	4.0	1.7	_	_	EBC
TP2221	500	60	30	5.0	10	50	40	120	150	10	0.4	150	250	20	8.0	_	_	EBC
TP2221A	500	75	40	6.0	10	60	40	120	150	10	0.3	150	250	20	8.0	225	-	EBC
TP2222	500	60	30	5.0	10	50	100	300	150	10	0.4	150	250	20	8.0	_	-	EBC
TP2222A	500	75	40	6.0	10	60	100	300	150	10	0.3	150	250	20	8.0	225	_	EBC
2N3414	500	25	25	5.0	100	25	75	225	2.0	4.5	0.3	50	_	_	_	_	_	ECB
2N3415	500	25	25	5.0	100	25	180	540	2.0	4.5	0.3	50	_	-	-	_	_	ECB
2N3416	500	50	50	5.0	100	50	75	225	2.0	4.5	0.3	50		_	<u> </u>	_	_	ECB
2N3417	500	50	50	5.0	100	50	180	540	2.0	4.5	0.3	50		_	_	-	_	ECB
2N3904	200	60	40	6.0	50	30	100	300	10	1.0	0.2	10	300	10	4.0	-	5.0	EBC
2N4401	500	60	40	6.0	100	30	100	300	150	1.0	0.4	150	250	20	6.5	225	_	EBC
2N4424	500	40	40	5.0	100	25	180	540	2.0	4.5	0.3	50	_	_	_	_	_	ECB
2N5088	100	35	30	_	50	20	300	900	0.1	5.0	0.5	10	_	_	4.0	-	3.0	EBC
2N5089	100	30	25	_	50	15	400	1200	0.1	5.0	0.5	10		_	4.0	_	2.0	EBC
2N5172	500	25	25	5.0	100	25	100	500	10	10	0.25	10	_		10	_	_	ECB
2N5307	500	40	40	12	100	40	2k	20k	2.0	5.0	1.4	200	60	2.0	10		_	ECB
2N5308	500	40	40	12	100	40	7k	70k	2.0	5.0	1.4	200	60	2.0	10	_	_	ECB
TP5376	500	60	30	5.0	10	30	120		1.0	5.0	-	-	_	_	8.0	_	_	EBC
2N6427	500	40	40	12	50	30	10k	100k	10	5.0	1.2	50	130	10	7.0		10	EBC

NOTES: 1) Maximum at typical JEDEC conditions.

- 2) uA
- 3)  $V_{(BR)CES}/I_{CES}$ , as applicable.
- mA
- 5)  $V_{(BR)CER}$  at  $R = 10\Omega$ .

### NPN TRANSISTORS TO-92/TO-226AA


## 'MPS' DEVICE TYPES ELECTRICAL CHARACTERISTICS at $T_A = 25$ °C

	l <sub>c</sub>				I,	СВО	D	C Cur	rent G	ain	V <sub>ci</sub>	E(sat)	f	т				
Device Type	Max. (mA)	V <sub>(BR)CBO</sub>	V <sub>(BR)CEO</sub>	V <sub>(BR)EBO</sub> (V)	Max. (nA)			h <sub>FE</sub> Max.		@ V <sub>ce</sub> (V)	Max. (V)	@ I <sub>c</sub> (mA)	Min. (MHz)	@ I <sub>c</sub> (mA)	C <sub>ob</sub> ¹ (pF)	t <sub>s</sub> ¹ (ns)	NF¹ (dB)	Pinning 1, 2, 3
MPS6520	200	40	25	4.0	50	30	200	400	2.0	10	0.5	50	_	_	3.5	-	3.0	EBC
MPS6521	200	40	25	4.0	50	30	300	600	2.0	10	0.5	50	_	-	3.5	_	3.0	EBC
MPSA05	800	60	60	4.0	100	60	50	_	100	1.0	0.25	100	100	10	_	_	_	EBC
MPSA06	800	80	80	4.0	100	80	50	_	100	1.0	0.25	100	100	10	_	-	_	EBC
MPSA14	500	30 <sup>3</sup>		10	100	30	20k	_	100	5.0	1.5	100	125	10	_	_	_	EBC
MPSA42	500	300	300	6.0	100	200	40		30	10	0.5	20	50	10	3.0	-	_	EBC
MPSA43	500	200	200	6.0	100	160	40	_	30	10	0.5	20	50	10	4.0	-	_	EBC

NOTES: 1) Maximum at typical JEDEC conditions.

- µA
- 3)  $V_{(BR)CES}/I_{CES}$ , as applicable.
- 4) mA.
- 5)  $V_{(BR)CER}$  at  $R = 10\Omega$ .

# NPN TRANSISTORS



### SOT-23/TO-236AB

### ELECTRICAL CHARACTERISTICS at $T_A = 25$ °C

					I,	СВО	DC	Curre	ent Ga	in	V <sub>CE(</sub>	sat)	f	т				
Device Type	Marking	V <sub>(BR)CBO</sub>	V <sub>(BR)CEO</sub>	V <sub>(BR)EBO</sub> (V)	Max. (nA)	@ V <sub>св</sub> (V)	h <sub>FE</sub> Min.	h <sub>FE</sub> Max.	@ I <sub>c</sub> ( (mA)	-	Max. (V)	@ l <sub>c</sub> (mA)	Min. (MHz)	@ I <sub>c</sub> (mA)	C₀₀¹ (pF)	t <sub>s</sub> ¹ (ns)	NF¹ (dB)	Pinning 1, 2, 3
BCW31	D1	30	20	5.0	100	20	110	220	2.0	5.0	0.25	10	_	_	4.0	-	10	BEC*
BCW32	D2	30	20	5.0	100	20	200	450	2.0	5.0	0.25	10	_		4.0	_	10	BEC*
BCW33	D3	30	20	5.0	100	20	420	800	2.0	5.0	0.25	10		'	4.0		10	BEC*
BCW60A	AA	32³	32	5.0	20	32	120	220	2.0	5.0	0.35	10	125	10	4.5	_	6.0	BEC*
BCW60B	AB	32 <sup>3</sup>	32	5.0	20	32	180	310	2.0	5.0	0.35	10	125	10	4.5	-	6.0	BEC*
BCW60C	AC	32 <sup>3</sup>	32	5.0	20	32	250	460	2.0	5.0	0.35	10	125	10	4.5		6.0	BEC*
BCW60D	AD	32 <sup>3</sup>	32	5.0	20	32	380	630	2.0	5.0	0.35	10	125	10	4.5	-	6.0	BEC*
BCW65A	EA	60 <sup>3</sup>	32	5.0	20	32	100	250	100	1.0	—	_	100	20	12	-	10	BEC*
BCW65B	EB	60³	32	5.0	20	32	160	400	100	1.0	—	_	100	20	12	-	10	BEC*
BCW66F	EF	75³	45	5.0	20	45	100	250	100	1.0	—	_	100	20	12	-	10	BEC*
BCW66G	EG	75³	45	5.0	20	45	160	400	100	1.0	_		100	20	12	_	10	BEC*
BCW71	K1	50	45	5.0	100	20	110	220	2.0	5.0	0.25	10	_	_	4.0	_	10	BEC*
BCW72	K2	50	45	5.0	100	20	200	450	2.0	5.0	0.25	10	-	-	4.0	-	10	BEC*
BCX19	U1	50 <sup>3</sup>	45	5.0	100	20	100	600	100	1.0	0.62	500	-	-	5.0	_	_	BEC*
BCX20	U2	30³	25	5.0	100	20	100	600	100	1.0	0.62	500	_	_	5.0	-	_	BEC*
BCX70G	AG	45³	45	5.0	20	45	120	220	2.0	5.0	0.35	10	125	10	4.5	_	6.0	BEC*
BCX70H	AH	45³	45	5.0	20	45	180	310	2.0	5.0	0.35	10	125	10	4.5	—	6.0	BEC*
BCX70J	AJ	45³	45	5.0	20	45	250	460	2.0	5.0	0.35	10	125	10	4.5	—	6.0	BEC*
BCX70K	AK	45³	45	5.0	20	45	380	630	2.0	5.0	0.35	10	125	10	4.5	-	6.0	BEC*
TMPT918	3B	30	15	3.0	10	15	20	_	3.0	1.0	0.4	10	600	4.0	1.7		_	BEC*
TMPT2221	N12	60	30	5.0	10	50	40	120	150	10	0.4	150	250	20	8.0	_	_	BEC*
TMPT2221A	N54	75	40	6.0	10	60	40	120	150	10	0.3	150	250	20	8.0	225	-	BEC*
TMPT2222	1B	60	30	5.0	10	50	100	300	150	10	0.4	150	250	20	8.0	l –	-	BEC*
TMPT2222A	1P	75	40	6.0	10	60	100	300	150	10	0.3	150	250	20	8.0	225	_	BEC*

NOTES: \* Reversed pinning (E-B-C) available on special order—add suffix letter 'R' to part number.

Continued next page...

- 1) Maximum at typical JEDEC conditions.
- 2) μA.
- 3)  $V_{(BR)CES}/I_{CES}$ , as applicable.
- 4) mA.
- 5)  $V_{(BR)CER}$  at  $R = 10\Omega$ .

### NPN TRANSISTORS SOT-23/TO-236AB

#### **ELECTRICAL CHARACTERISTICS continued**

					I <sub>c</sub>	во	DC	Curre	nt Gai	n	V <sub>CE</sub>	(sat)	f <sub>T</sub>					
Device Type	Marking	V <sub>(вя)сво</sub> (V)	V <sub>(ВЯ)СЕО</sub> (V)	V <sub>(BR)EBO</sub> (V)	Max.	@ V <sub>св</sub> (V)	1	h <sub>FE</sub> Max.	@ I <sub>c</sub> (		Max. (V)	@ I <sub>c</sub> (mA)	Min. (MHz)	@ I <sub>c</sub> (mA)	C <sub>ob</sub> ¹ (pF)	t <sub>s</sub> ¹ (ns)	NF¹ (dB)	Pinning 1, 2, 3
TMPT3904	1A	60	40	6.0	50	30	100	300	10	1.0	0.2	10	300	10	4.0	200	5.0	BEC*
TMPT4401	2X	60	40	6.0	100	30	100	300	150	1.0	0.4	150	250	20	6.5	225	_	BEC*
TMPT5088	1Q	35	30		50	20	300	900	0.1	5.0	0.5	10			4.0	-	3.0	BEC*
TMPT5089	1R	30	25		50	15	400	1200	0.1	5.0	0.5	10	_	_	4.0	—	2.0	BEC*
TMPT6427	1V	40	40	12	50	30	10k	100k	10	5.0	1.2	50	130	10	7	<u> </u>	10	BEC*
TMPTA05	1H	60	60	4.0	100	60	50	_	100	1.0	0.25	100	100	10	_	_	_	BEC*
TMPTA06	1G	80	80	4.0	100	80	50	_	100	1.0	0.25	100	100	10	_	_	_	BEC*
TMPTA14	1N	30 <sup>3</sup>	_	10	100	30	20k		100	5.0	1.5	100	125	10	_		_	BEC*
TMPTA42	1D	300	300	6.0	100	200	40	_	30	10	0.5	20	50	10	3.0	_	-	BEC*
TMPTA43	1E	200	200	6.0	100	160	40	_	30	10	0.5	20	50	10	4.0	<u> </u>	_	BEC*

NOTES: \* Reversed pinning (E-B-C) available on special order—add suffix letter 'R' to part number.

- 1) Maximum at typical JEDEC conditions.
- 2) μA.
- 3)  $V_{(BR)CES}/I_{CES}$ , as applicable.
- 4) mA.
- 5)  $V_{(BR)CER}$  at  $R = 10\Omega$ .

## PNP TRANSISTORS



### TO-92/TO-226AA


## '2N' and 'TP' DEVICE TYPES ELECTRICAL CHARACTERISTICS at $T_A = 25$ °C

					ı	СВО	D	C Cur	rent G	ain	V <sub>c</sub>	E(sat)	f	т				
Device Type	I <sub>c</sub> Max. (mA)	V <sub>(BR)CBO</sub>	V <sub>(BR)CEO</sub>	V <sub>(BR)EBO</sub>	Max. (nA)	@ V <sub>CB</sub>		h <sub>FE</sub> Max.	@ I <sub>c</sub> (mA)	@ V <sub>ce</sub> (V)	Max. (V)	@ I <sub>c</sub> (mA)	Min. (MHz)	@ I <sub>c</sub> (mA)	C <sub>ob</sub> 1 (pF)	t <sub>s</sub> ¹ (ns)	NF¹ (dB)	Pinning 1, 2, 3
TP2907	500 500	60 60	40 60	5.0 5.0	20 10	50 50	100 100	300 300	150	10 10	0.4	150 150	200 200	50 50	8.0 8.0	100 100	_	EBC EBC
TP2907A 2N3906	200	40	40	5.0		<del></del>	100	300	150 10	1.0	0.4	10	250	10	4.5	225	4.0	EBC
2N4402 2N4403	500 500	40 40	40 40	5.0 5.0	_	_	50 100	150 300	150 150	2.0 2.0	0.4	150 150	150 200	20 20	10 10	225 225	_	EBC EBC
TP4413	500	40	30	5.0	10	30	120		1.0	5.0	0.2	1.0	20		8.0	_	_	EBC
TP4415	500	40	20	5.0	10	30	100	_	1.0	5.0	0.2	1.0	20	_	8.0	-	_	EBC
2N5086 2N5087	100 100	50 50	50 50	_	50 50	35 35	150 250	500 800	0.1 0.1	5.0 5.0	0.3	10 10	40 40	0.5 0.5	4.0 4.0		3.0 2.0	EBC EBC
2N5400	300	130	120	5.0	50	100	40	180	10	5.0	0.2	10	100	10	6.0	_	8.0	EBC
2N5401	300	160	150	5.0	50	120	60	240	10	5.0	0.2	10	100	10	6.0	-	8.0	EBC
MPSA55	800 800	60 80	60 80	4.0 4.0	100 100	60 80	50 50		100 100	1.0	0.25	100 100	50 50	100 100	_	_	-	EBC EBC
MPSA56 MPSA70	100	- 80	40	4.0	100		40	100	5.0	10	0.25	100	125	5.0	4.0	_	_	EBC

NOTES: 1) Maximum at typical JEDEC conditions.

- 2) μA
- 3)  $V_{(BR)CES}/I_{CES}$ , as applicable.
- 4) mA
- 5)  $V_{(BR)CER}$  at  $R = 10\Omega$ .

# PNP TRANSISTORS



### **SOT-23/TO-236AB**

### ELECTRICAL CHARACTERISTICS at $T_A = 25^{\circ}C$

					ı	сво	DC	Curr	ent Ga	ain	V <sub>CE</sub>	(sat)	f	т				
Device Type	Marking	V <sub>(BR)CBO</sub>	V <sub>(BR)CEO</sub>	V <sub>(BR)EBO</sub> (V)	Max. (nA)	@ V <sub>CB</sub> (V)	h <sub>FE</sub> Min.	h <sub>FE</sub> Max.	-	@ V <sub>ce</sub> (V)	Max. (V)	@ I <sub>c</sub> (mA)	Min. (MHz)	@ I <sub>c</sub> (mA)	С <sub>оь</sub> ¹ (рF)	t <sub>s</sub> ¹ (ns)	NF¹ (dB)	Pinning 1, 2, 3
BCW29 BCW30 BCW61A BCW61B BCW61C	C1 C2 BA BB	30 <sup>3</sup> 30 <sup>3</sup> 32 <sup>3</sup> 32 <sup>3</sup> 32 <sup>3</sup>	32 32 32 32 32	5.0 5.0 5.0 5.0 5.0	100 100 20 20 20	20 20 32 32 32	120 215 120 180 250	260 500 220 310 460	2.0 2.0 2.0 2.0 2.0	5.0 5.0 5.0 5.0 5.0	0.3 0.3 0.25 0.25 0.25	10 10 10 10 10	-   -   -   -		7.0 7.0 6.0 6.0 6.0	 800 800 800	10 10 6.0 6.0 6.0	BEC* BEC* BEC* BEC* BEC*
BCW61D BCW67A BCW67B BCW68F BCW68G	BD DA DB DF DG	32 <sup>3</sup> 45 <sup>3</sup> 45 <sup>3</sup> 60 <sup>3</sup> 60 <sup>3</sup>	32 32 32 45 45	5.0 5.0 5.0 5.0 5.0	20 20 20 20 20 20	32 32 32 45 45	380 100 160 100 160	630 250 400 250 400	2.0 100 100 100 100	5.0 1.0 1.0 1.0 1.0	0.25 0.7 0.7 0.7 0.7	10 500 500 500 500	 100 100 100	 20 20 20 20	6.0 18 18 18 18	800	6.0 10 10 10	BEC* BEC* BEC* BEC* BEC*
BCW69 BCW70 BCX17 BCX18 BCX71G	H1 H2 T1 T2 BG	50 <sup>3</sup> 50 <sup>3</sup> 50 <sup>3</sup> 30 <sup>3</sup> 453	45 45 45 25 45	5.0 5.0 5.0 5.0 5.0	100 100 100 100 20	20 20 20 20 20 45	120 215 100 100 120	260 500 600 600 220	2.0 2.0 100 100 2.0	5.0 5.0 1.0 1.0 5.0	0.3 0.3 0.62 0.62 0.25	10 10 500 500 10	_ _ _ _	-	7.0 7.0 8.0 8.0 6.0		10 10 —	BEC* BEC* BEC* BEC*
BCX71H BCX71J BCX71K TMPT2907 TMPT2907A	BH BJ BK 2B 2F	45 <sup>3</sup> 45 <sup>3</sup> 45 <sup>3</sup> 60 60	45 45 45 40 60	5.0 5.0 5.0 5.0 5.0	20 20 20 20 20	45 45 45 50 50	180 250 380 100 100	310 460 630 300 300	2.0 2.0 2.0 150	5.0 5.0 5.0 10	0.25 0.25 0.25 0.4 0.4	10 10 10 150 150	  200 200	— — 50	6.0 6.0 6.0 8.0	— — 100 100	11111	BEC* BEC* BEC* BEC* BEC*
TMPT3906 TMPT4402 TMPT4403 TMPT5086 TMPT5087	2A 2W 2T 2P 2Q	40 40 40 50 50	40 40 40 50 50	5.0 5.0 5.0 —	— — 50 50	— — 35 35	100 50 100 150 250	300 150 300 500 800	10 150 150 0.1 0.1	1.0 2.0 2.0 5.0 5.0	0.25 0.4 0.4 0.3 0.3	10 150 150 10 10	250 150 200 40 40	10 20 20 0.5 0.5	4.5 10 10 4.0 4.0	225 225 225 — —	4.0 — 3.0 2.0	BEC* BEC* BEC* BEC*
TMPT5401 TMPTA55 TMPTA56 TMPTA70	2L 2H 2G 2C	160 60 80 —	150 60 80 40	5.0 4.0 4.0 4.0	50 100 100 100	120 60 80 30	50 50 40	240 — — 100	10 100 100 5.0	5.0 1.0 1.0 10	0.2 0.25 0.25 0.25	10 100 100 10	100 50 50 125	10 100 100 5.0	6.0 — — 4.0		8.0 — — —	BEC* BEC* BEC*

NOTES: \* Reversed pinning (E-B-C) available on special order—add suffix letter 'R' to part number.

Continued next page...

4)mA.

<sup>1)</sup> Maximum at typical JEDEC conditions.

<sup>3)</sup>  $V_{(BR)CES}/I_{CES}$ , as applicable.

<sup>5)</sup> $V_{(BR)CER}$  at R = 10 $\Omega$ .

<sup>2)</sup> μA.

# N-CHANNEL JEETS



### TO-92/TO-226AA

### ELECTRICAL CHARACTERISTICS at $T_A = 25^{\circ}C$

Device   Type							V <sub>GS</sub>	S(off)													
No.   Property   No.   No.   Property   Property   No.   Property   No.   Property   No.   Property   No.   Property   No.		ν <sub>(Β</sub>	R)GSS		l <sub>GSS</sub>	Li			ditions		I <sub>DSS</sub>			g <sub>fs</sub>		C,	1 ISS	C,	1	r <sub>ns</sub>	
No.   No.	Туре	1	_	ſ					_									l		Max.	ning
PB821   -50   -1.0   -1.0   -30  4.0   -10   1.0   0.5   2.5   1.5   1.5   4.5   1.5   6.0   1.5   2.0   1.5     DSGt PB822   -30   -1.0   -1.0   -30  8.0   10   1.0   2.0   -1.0   -1.0   -2.0       1.6   6.0   1.5   2.0   1.5     DSGt PB823   -30   -1.0   -1.0   -2.0       1.6   2.0   -1.0   -1.0   -2.0   DSGt PB823   -30   -1.0   -1.0   -2.0   -5.0   -1.0   -1.0   -2.0   -5.0   -1.0   -1.0   -2.0   -5.0   -1.0   -1.0   -2.0   -5.0   -1.0   -1.0   -2.0   -1.0   -1.0   -2.0   -5.0   -1.0   -1.0   -2.0   -1.0   -1.0   -1.0   -2.0   -1.0   -1.0   -1.0   -2.0   -1.0   -1.0   -1.0   -2.0   -1.0   -1.0   -1.0   -2.0   -1.0	ļ	(v)	(μ <b>A</b> )	(nA)	(V)	(V)	(V)	(v)	(nA)	(mA)	(mA)	· (V)	(mS)	(mS)	(V)	(pF)	(V)	(pF)	(V)	(22)	1, 2, 3
PRBS22   -50   -1.0   -1.0   -3.0     -6.0   -10   -1.0   -2.0   -1.0   -1.0   -2.0   -1.0   -1.0   -2.0   -1.0   -1.0   -2.0   -1.0   -1.0   -2.0   -1.0   -1.0   -2.0   -1.0   -1.0   -2.0   -1.0   -1.0   -2.0   -1.0   -1.0   -2.0   -1.0   -1.0   -2.0   -1.0   -1.0   -2.0   -1.0   -1.0   -1.0   -2.0   -1.0   -1.0   -2.0   -1.0   -1.0   -2.0   -1.0   -1.0   -1.0   -2.0   -1.0   -1.0   -1.0   -1.0   -2.0   -1.0   -1.0   -1.0   -1.0   -2.0   -1.0   -						-							1								
FP8828   30						_												1			
TP4091						_															
PAGE   PAGE	TP3824	-50	-1.0	-1.0	-30	_	-8.0	15	0.5	4.0	20	15	3.5	6.5	15	6.0	15	2.0	15	250	DSG‡
PROBERT   PROB		1									_		_	_	_						
TP4117													1								
TP4118												-	1								
TP4220																		1			
TP4221	TP4119	-40	-1.0	-0.01	-20	-2.0	-6.0	10	1.0	0.2	0.6	10	0.10	0.33	10	3.0	10	1.5	10	_	DSG‡
TP4222   30   -1.0   -10   -15     -8.0   15   1.0   5.0   15   15   2.5   6.0   15   6.0   15   2.0   15     DSG\$   TP4223   30   -1.0   -10   -20     -8.0   15   1.0   3.0   18   15   3.0   7.0   15   6.0   15   2.0   15     DSG\$   DSG\$   TP4224   30   -1.0   -1.0   -1.0   -2.0       8.0   15   1.0   2.0   2.0   15     DSG\$   TP4391   -40   -1.0   -1.0   -2.0   -4.0   -1.0   20   1.0   50   150   20         16   2.0   5.0   -1.2   30   DSG\$   TP4392   -40   -1.0   -1.0   -2.0   -2.0   -5.0   20   1.0   5.0   50   30   20         16   2.0   5.0   -1.2   30   DSG\$   TP4393   -40   -1.0   -1.0   -2.0   -2.0   -5.0   20   1.0   5.0   30   20         16   2.0   5.0   -7.0   60   DSG\$   TP4494   -40   -1.0   -1.0   -2.0   -5.5   -3.0   20   1.0   5.0   30   20         16   2.0   5.0   -7.0   60   DSG\$   TP4416   -3.0   -1.0   -1.0   -2.0   -5.0   -6.0   15   1.0   5.0   15   15   4.5   7.5   15   4.5   15   1.2   15     DSG\$   TP4856   -40   -1.0   -1.0   -2.0   -2.5   -6.0   15   1.0   5.0   15   15   4.5   7.5   15   4.5   15   1.2   15     DSG\$   TP4859   -3.0   -1.0   -1.0   -2.0   -2.0   -6.0   15   1.0   5.0   15   -1.0   5.0   -15       18   -1.0   8.0   -1.0   4.0   -1.0   -1.0   -2.0   -2.0   -6.0   15   1.0   5.0   -15       18   -1.0   8.0   -1.0   -1.0   -1.0   -1.0   -1.0   -2.0   -2.0   -6.0   15   1.0   8.0   80   15       18   -1.0   8.0   -1.0   4.0   -1.						_														-	
TP4223   -30   -1.0   -10   -20   -2.0   -8.0   15   1.0   3.0   18   15   3.0   7.0   15   6.0   15   2.0   15   -2.0   15   -2.0   DSG\$;   TP4391   -40   -1.0   -1.0   -20   -4.0   -1.0   20   1.0   50   150   20   -2.0   -2.0   -1.0   16   20   5.0   -1.0   3.0   DSG\$;   TP4393   -40   -1.0   -1.0   -20   -2.0   -5.0   20   1.0   25   100   20   -2.0   -2.0   -1.0   6.0   DSG\$;   TP4393   -40   -1.0   -1.0   -20   -2.0   -6.0   15   1.0   5.0   30   20   -2.0   -2.0   -2.0   5.0   -7.0   60   DSG\$;   TP4496   -30   -1.0   -1.0   -20   -2.5   -6.0   15   1.0   5.0   5.0   -1.0   5.0   5.0   -1.0   -1.0   -2.0   -2.0   -6.0   15   1.0   5.0   -1.0   -1.0   -2.0   -2.0   -6.0   15   1.0   5.0   -1.0   -1.0   -2.0   -2.0   -6.0   -1.0   -1.0   -2.0   -3.0   -3.0   -1.0   -1.0   -2.0   -3.	1					_															
TP4391		1				_				1											
TP4392	TP4224	-30	-1.0	-10	-20	_	-8.0	15	1.0	2.0	20	15	2.0	7.5	15	6.0	15	2.0	15	_	DSG‡
TP4393									-					_							
TP4416													١	_	_						
TP4856         -40         -1.0         -20         -4.0         -10         15         1.0         50         —         15         —         —         —         —         —         18         -10³         8.0         -10³         25         DSG‡           TP4858         -40         -1.0         -1.0         -20         -6.0         15         1.0         80         15         —         —         —         18         -10³         8.0         -10³         40         DSG‡           TP4859         -30         -1.0         -1.0         -20         -0.8         -4.0         -10         15         1.0         50         —         15         —         —         —         18         -10³         8.0         -10³         60         DSG‡           TP4860         -30         -1.0         -1.0         -15         -2.0         -6.0         15         1.0         20         100         15         —         —         18         -10³         8.0         -10³         40         DSG‡           TP4861         -30         -1.0         -1.0         -8.0         15         1.0         20         100         15         — <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>15</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>															15						
TP4857         -40         -1.0         -20         -2.0         -6.0         15         1.0         20         100         15         —         —         —         —         18         -10³         8.0         -10³         40         DSG‡           TP4858         -40         -1.0         -10         -10         -20         -0.8         -4.0         15         1.0         8.0         80         15         —         —         —         18         -10³         8.0         -10³         60         DSG‡           TP4869         -30         -1.0         -1.0         -15         -4.0         -10         15         1.0         50         —         15         —         —         18         -10³         8.0         -10³         25         DSG‡           TP4861         -30         -1.0         -1.0         -15         -0.8         -4.0         15         1.0         80         80         15         —         —         18         -10³         8.0         -10³         40         DSG‡           TP5163         -25         -1.0         -10         -50         -6.0         15         1.0         40         15	TP4416A	-35	-1.0	-1.0	-20	-2.5	-6.0	15	1.0	5.0	15	15	4.5	7.5	15	4.5	15	1.2	15	_	DSG‡
TP4858         -40         -1.0         -20         -0.8         -4.0         15         1.0         8.0         80         15         —         —         —         18         -10³         8.0         -10³         60         DSG‡           TP4859         -30         -1.0         -1.0         -15         -4.0         -10         15         1.0         50         —         15         —         —         —         18         -10³         8.0         -10³         25         DSG‡           TP4861         -30         -1.0         -1.0         -15         -2.0         -6.0         15         1.0         8.0         80         15         —         —         —         18         -10³         8.0         -10³         40         DSG‡           TP5463         -25         -1.0         -15         -0.8         -4.0         15         1.0         8.0         80         15         —         —         —         18         -10³         8.0         -10³         60         DSG‡           TP5245         -30         -1.0         -10         -6.0         15         1.0         5.0         15         15         4.0         —													-	_	_						
TP4859         -30         -1.0         -1.0         -15         -4.0         -10         15         1.0         50         —         15         —         —         —         18         -10³         8.0         -10³         25         DSG‡           TP4860         -30         -1.0         -1.0         -15         -2.0         -6.0         15         1.0         20         100         15         —         —         —         18         -10³         8.0         -10³         40         DSG‡           TP4861         -30         -1.0         -1.0         -15         -0.8         -4.0         15         1.0         8.0         80         15         —         —         —         18         -10³         8.0         -10³         60         DSG‡           TP5163         -25         -1.0         -10         -9.0         15         12         15         3.0         15         —         DSG‡           TP5246         -30         -1.0         -1.0         -6.0         15         10         5.0         15         15         4.0         —         15         4.5         15         1.5         1.5         —         DSG‡				1				-						_	_						
TP4861         -30         -1.0         -1.0         -15         -0.8         -4.0         15         1.0         8.0         80         15         -         -         -         -         18         -10³         8.0         -10³         60         DSG‡           TP5163         -25         -1.0         -10         -15         -0.4         -8.0         15         -1.0²         1.0         40         15         2.0         9.0         15         12         15         3.0         15         -         DSG‡           TP5245         -30         -1.0         -1.0         -20         -0.5         -4.0         15         10         5.0         15         15         4.0         -         15         4.5         15         1.5         15         -         DSG‡           TP5247         -30         -1.0         -1.0         -20         -1.5         -8.0         15         10         8.0         24         15         4.0          15         4.5         15         1.5         15          DSG‡           TP5247         -30         -1.0         -5.0         -20         -1.0         -8.0         15				1		ľ					-		_	_	_						
TP5163         -25         -1.0         -10         -15         -0.4         -8.0         15         -1.0²         1.0         40         15         2.0         9.0         15         12         15         3.0         15         —         DSG‡           TP5245         -30         -1.0         -1.0         -20         -1.0         -6.0         15         10         5.0         15         4.0         —         15         4.5         15         1.5         15         —         DSG‡           TP5246         -30         -1.0         -1.0         -20         -0.5         -4.0         15         10         1.5         7.0         15         2.5         —         15         4.5         15         1.5         1.5         —         DSG‡           TP5248         -30         -1.0         -5.0         -20         -1.0         -8.0         15         10         4.0         20         15         3.0         —         15         4.5         15         1.5         1.5         —         DSG‡           TP5248         -30         -1.0         -20         -1.0         -8.0         15         10         4.0         20	TP4860	-30	-1.0	-1.0	-15	-2.0	-6.0	15	1.0	20	100	15	_		_	18	-10³	8.0	-10³	40	DSG‡
TP5245 -30 -1.0 -1.0 -20 -0.5 -4.0 15 10 5.0 15 15 4.5 15 1.5 15 1.5 15 — DSG‡ TP5247 -30 -1.0 -1.0 -20 -1.5 -8.0 15 10 8.0 24 15 4.0 — 15 4.5 15 1.5 15 1.5 15 — DSG‡ TP5248 -30 -1.0 -1.0 -20 -1.5 -8.0 15 10 8.0 24 15 4.0 — 15 4.5 15 1.5 15 1.5 15 — DSG‡ TP5248 -30 -1.0 -5.0 -20 -1.0 -8.0 15 10 4.0 20 15 3.0 — 15 6.0 15 2.0 15 — DSG‡ TP5358 -40 -1.0 -1.0 -20 -0.5 -3.0 15 100 0.5 1.0 15 1.0 3.0 15 6.0 15 2.0 15 — DSG‡ TP5360 -40 -1.0 -1.0 -20 -0.8 -4.0 15 100 0.6 1.6 15 1.2 3.6 15 6.0 15 2.0 15 — DSG‡ TP5361 -40 -1.0 -1.0 -20 -0.8 -4.0 15 100 1.5 3.0 15 1.4 4.2 15 6.0 15 2.0 15 — DSG‡ TP5361 -40 -1.0 -1.0 -20 -0.8 -4.0 15 100 2.5 5.0 15 1.4 4.2 15 6.0 15 2.0 15 — DSG‡ TP5362 -40 -1.0 -1.0 -20 -2.0 -7.0 15 100 2.5 5.0 15 1.5 4.5 15 6.0 15 2.0 15 — DSG‡ TP5363 -40 -1.0 -1.0 -20 -2.5 -8.0 15 100 7.0 14 15 2.5 5.0 15 6.0 15 2.0 15 — DSG‡ TP5364 -40 -1.0 -1.0 -20 -2.5 -8.0 15 100 9.0 18 15 2.5 6.0 15 2.0 15 2.0 15 — DSG‡ TP5364 -40 -1.0 -1.0 -20 -2.5 -8.0 15 100 9.0 18 15 2.7 6.5 15 6.0 15 2.0 15 — DSG‡														_	_						
TP5246         -30         -1.0         -20         -0.5         -4.0         15         10         1.5         7.0         15         2.5         —         15         4.5         15         1.5         15         —         DSG‡           TP5247         -30         -1.0         -1.0         -20         -1.5         -8.0         15         10         8.0         24         15         4.0         —         15         1.5         15         —         DSG‡           TP5248         -30         -1.0         -5.0         -20         -1.0         -8.0         15         10         4.0         20         15         3.0         —         15         6.0         15         2.0         15         —         DSG‡           TP5358         -40         -1.0         -20         -0.5         -3.0         15         100         0.5         1.0         15         1.0         3.0         15         6.0         15         2.0         15         —         DSG‡           TP5360         -40         -1.0         -20         -0.8         -4.0         15         100         1.5         3.0         15         1.4         4.2 <t< td=""><td></td><td></td><td></td><td>1</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>1</td><td></td><td></td><td></td></t<>				1														1			
TP5248         -30         -1.0         -5.0         -20         -1.0         -8.0         15         10         4.0         20         15         3.0         —         15         6.0         15         2.0         15         —         DSG‡           TP5358         -40         -1.0         -1.0         -20         -0.5         -3.0         15         100         0.5         1.0         15         1.0         3.0         15         6.0         15         2.0         15         —         DSG‡           TP5360         -40         -1.0         -1.0         -20         -0.8         -4.0         15         100         1.5         3.0         15         1.2         3.6         15         2.0         15         —         DSG‡           TP5360         -40         -1.0         -20         -0.8         -4.0         15         100         1.5         3.0         15         1.4         4.2         15         6.0         15         2.0         15         —         DSG‡           TP5361         -40         -1.0         -1.0         -6.0         15         100         2.5         5.0         15         1.5         4.5				1																	
TP5358         -40         -1.0         -20         -0.5         -3.0         15         100         0.5         1.0         15         1.0         3.0         15         6.0         15         2.0         15         —         DSG‡           TP5359         -40         -1.0         -20         -0.8         -4.0         15         100         0.6         1.6         15         1.2         3.6         15         6.0         15         2.0         15         —         DSG‡           TP5360         -40         -1.0         -20         -0.8         -4.0         15         100         1.5         3.0         15         1.4         4.2         15         6.0         15         2.0         15         —         DSG‡           TP5361         -40         -1.0         -20         -6.0         15         100         1.5         5.0         15         1.5         4.5         15         6.0         15         2.0         15         —         DSG‡           TP5362         -40         -1.0         -20         -2.0         -7.0         15         100         4.0         8.0         15         2.0         5.5         15		-30							-			15			15	4.5	15	1.5	15	_	DSG‡
TP5359         -40         -1.0         -20         -0.8         -4.0         15         100         0.6         1.6         15         1.2         3.6         15         6.0         15         2.0         15         —         DSG‡           TP5360         -40         -1.0         -20         -0.8         -4.0         15         100         1.5         3.0         15         1.4         4.2         15         6.0         15         2.0         15         —         DSG‡           TP5361         -40         -1.0         -2.0         -1.0         -6.0         15         100         2.5         5.0         15         1.5         4.5         15         6.0         15         2.0         15         —         DSG‡           TP5362         -40         -1.0         -1.0         -20         -2.0         -7.0         15         100         4.0         8.0         15         2.0         5.0         15         2.0         15         —         DSG‡           TP5363         -40         -1.0         -1.0         -20         -2.5         -8.0         15         100         9.0         14         15         2.5         6.0																					
TP5360         -40         -1.0         -20         -0.8         -4.0         15         100         1.5         3.0         15         1.4         4.2         15         6.0         15         2.0         15         —         DSG‡           TP5361         -40         -1.0         -1.0         -20         -1.0         -6.0         15         100         2.5         5.0         15         1.5         4.5         15         6.0         15         2.0         15         —         DSG‡           TP5362         -40         -1.0         -20         -2.0         -7.0         15         100         4.0         8.0         15         2.0         5.5         15         6.0         15         2.0         15         —         DSG‡           TP5362         -40         -1.0         -20         -2.5         -8.0         15         100         7.0         14         15         2.0         5.5         15         6.0         15         2.0         15         —         DSG‡           TP5364         -40         -1.0         -1.0         -20         -2.5         -8.0         15         100         9.0         18         15				1	-	****		-				-									
TP5362       -40       -1.0       -1.0       -20       -2.0       -7.0       15       100       4.0       8.0       15       2.0       5.5       15       6.0       15       2.0       15       —       DSG‡         TP5363       -40       -1.0       -20       -2.5       -8.0       15       100       7.0       14       15       2.5       6.0       15       2.0       15       —       DSG‡         TP5364       -40       -1.0       -20       -2.5       -8.0       15       100       9.0       18       15       2.7       6.5       15       6.0       15       2.0       15       —       DSG‡												-									
TP5363 -40 -1.0   -1.0 -20   -2.5 -8.0   15 100   7.0 14 15   2.5 6.0 15   6.0 15   2.0 15   — DSG‡ TP5364 -40 -1.0   -1.0 -20   -2.5 -8.0   15 100   9.0 18 15   2.7 6.5 15   6.0 15   2.0 15   — DSG‡	TP5361	-40	-1.0	-1.0	-20	-1.0	-6.0	15	100	2.5	5.0	15	1.5	4.5	15	6.0	15	2.0	15	_	DSG‡
TP5364 -40 -1.0 -1.0 -20 -2.5 -8.0   15 100   9.0 18 15   2.7 6.5 15   6.0 15   2.0 15   — DSG‡																					
	2N5457	-25	-1.0	-1.0	-15	-0.5	-6.0	15	10	1.0	5.0	15	1.0	5.0	15	7.0	15	3.0	15		DSG‡

NOTES: † Reversed pinning (S-G-D) available on special order—add suffix letter 'R' to part number.

‡ Reversed pinning (S-D-G) available on special order—add suffix letter 'R' to part number.

Continued next page...

1)  $V_{GS} = 0 V$ .

3)  $V_{DS} = 0 \text{ V}, V_{GS} \text{ in volts}.$ 

5)  $I_D = 5.0 \text{ mA}.$ 

7)  $I_D = 500 \, \mu A$ .

2) Ι<sub>D</sub> in μA.

4)  $I_D = 10 \text{ mA}.$ 

6)  $I_D = 1.0 \text{ mA}.$ 

8)  $I_D = 200 \, \mu A$ .

## N-CHANNEL JFETS TO-92/TO-226AA

#### **ELECTRICAL CHARACTERISTICS continued**

						V <sub>GS</sub>														
Device	V <sub>(BR)</sub>	GSS		GSS	Li	mits	Conc	litions		DSS			g <sub>fs</sub>		C <sub>I</sub>	SS .	C,	iss	r <sub>DS</sub>	Pin-
Туре	Min. (V)	@Ι <sub>G</sub> (μ <b>Α</b> )	Max. (nA)	@ V <sub>DS</sub> (V)	Min. (V)	Max. (V)	V <sub>DS</sub> (V)	I <sub>D</sub> (nA)	Min. (mA)	Max. (mA)	@ V <sub>DS</sub> (V)	Min. (mS)	Max. (mS)	@ V <sub>DS</sub> (V)	Max. (pF)	@ V <sub>DS</sub> (V)	Max. (pF)	@ V <sub>DS</sub> (V)	Max. (Ω)	ning 1, 2, 3
2N5458 2N5459 2N5484 2N5485 2N5486	-25 -25 -25 -25 -25	-10 -10 -1.0 -1.0 -1.0	-1.0 -1.0 -1.0 -1.0 -1.0	-15 -15 -20 -20 -20	-1.0 -2.0 -0.3 -0.5 -2.0	-7.0 -8.0 -3.0 -4.0 -6.0	15 15 15 15 15	10 10 10 10 10	2.0 4.0 1.0 4.0 8.0	9.0 16 5.0 10 20	15 15 15 15	1.5 2.0 3.0 3.5 4.0	5.5 6.0 6.0 7.0 8.0	15 15 15 15 15	7.0 7.0 5.0 5.0 5.0	15 15 15 15 15	3.0 3.0 1.2 1.2 1.2	15 15 15 15	1111	DSG‡ DSG‡ DSG‡ DSG‡ DSG‡
2N5638 2N5639 2N5640 2N5653 2N5654	-30 -30 -30 -30 -25	-1.0 -1.0 -1.0 -1.0 -1.0	-10 -10 -10 -10 -10	-15 -15 -15 -15 -15		-12 -8.0 -6.0 -12 -8.0	15 15 15 15 15	1.0 1.0 1.0 1.0 1.0	50 25 5.0 40 15		20 20 20 20 20 20	1	_ _ _ _		10 10 10 10 10	-12 <sup>3</sup> -12 <sup>3</sup> -12 <sup>3</sup> -12 <sup>3</sup> -12 <sup>3</sup> -8.0 <sup>3</sup>	4.0 4.0 4.0 3.5 3.5	-12 <sup>3</sup> -12 <sup>3</sup> -12 <sup>3</sup> -12 <sup>3</sup> -12 <sup>3</sup>	30 60 100 50 100	DSG‡ DSG‡ DSG‡ DSG‡ DSG‡
TP5668 TP5669 TP5670 TP5949 TPS950	-25 -25 -25 -30 -30	-10 -10 -10 -1.0 -1.0	-1.0 -1.0 -1.0 -1.0 -1.0	-15 -15 -15 -15 -15	-0.2 -1.0 -2.0 -3.0 -2.5	-4.0 -6.0 -8.0 -7.0 -6.0	15 15 15 15 15	10 10 10 100 100	1.0 4.0 8.0 12 10	5.0 10 20 18 15	15 15 15 15 15	1.0 1.6 2.0 3.0 3.0	=	15 15 15 15 15	7.0 7.0 7.0 6.0 6.0	15 15 15 15 15	3.0 3.0 3.0 2.0 2.0	15 15 15 15 15		DSG‡ DSG‡ DSG‡ DSG‡ DSG‡
TP5951 TP5952 TP5953 BF244A BF244B	-30 -30 -30 -30 -30	-1.0 -1.0 -1.0 -1.0 -1.0	-1.0 -1.0 -1.0 -5 -5	-15 -15 -15 -20 -20	-2.0 -1.3 -0.8 -0.5 -0.5	-5.0 -3.5 -3.0 -8.0 -8.0	15 -15 15 15 15	100 100 100 10 10	7.0 4.0 2.5 2.0 6.0	13 8.0 5.0 6.5 15	15 15 15 15	3.0 1.0 1.0 3.0 3.0	6.5 6.5	15 15 15 15 15	6.0 6.0 6.0 —	15 15 15 —	2.0 2.0 2.0 —	15 15 15 —		DSG‡ DSG‡ DSG‡ DGS† DGS†
BF244C BF246A BF246B BF246C BF256A	-30 -25 -25 -25 -30	-1.0 -1.0 -1.0 -1.0 -1.0	-5 -5 -5 -5	-20 -15 -15 -15 -20	-0.6	-8.0 -14.5 -14.5 -14.5 -7.5	15 15 15 15 15	10 10 10 10 10	12 30 60 110 3.0	25 80 140 250 7.0	15 15 15 15 15	3.0 — — — 4.5	6.5 — — —	15 — — — 15	   4.5		- - - 1.2	    15	65 50 35	DGS† DGS† DGS† DGS† DGS†
BF256B BF256C BFR30 BFR31 J111	-30 -30 -25 -25 -35	-1.0 -1.0 -1.0 -1.0 -1.0	-5 -5 -0.2 -0.2 -1.0	-20 -20 -10 -10 -15	-0.5 -0.5 — — -3.0	-7.5 -7.5 -5.0 -2.5 -10	15 15 10 10 5.0	10 10 0.5 0.5 1.0 <sup>2</sup>	6.0 11 4.0 1.0 20	13 18 10 5.0	15 15 10 10 15	4.5 4.5 1.0 1.5	 4.0 4.5 	15 15 10 <sup>6</sup> 10 <sup>6</sup> —	4.5 4.5 5.0 5.0 16	15 15 10 <sup>6</sup> 10 <sup>6</sup>	1.2 1.2 1.5 1.5 5	15 15 10 <sup>6</sup> 10 <sup>6</sup> -10 <sup>3</sup>		DGS† DGS† DSG‡ DSG‡ DSG‡
J112 J112A J113 J113A J201	-35 -40 -35 -40 -40	-1.0 -1.0 -1.0 -1.0 -1.0	-1.0 -0.2 -1.0 -0.2 -0.1	-15 -15 -15 -15 -20	-1.0 -2.0  -1.0 -0.3	-5.0 -7.0 -3.0 -5.0 -1.5	5.0 5.0 5.0 5.0 20	1.0 <sup>2</sup> 1.0 <sup>2</sup> 1.0 <sup>2</sup> 1.0 <sup>2</sup> 10	5.0 15 2.0 8.0 0.2	_ _ _ _ 1.0	15 15 15 15 20	   0.5	- - - -	   20	16 16 16 16 4.0	15 15 15 15 20	5 5 5 1.0	-10 <sup>3</sup> -10 <sup>3</sup> -10 <sup>3</sup> -10 <sup>3</sup> 20	50 50 100 80	DSG‡ DSG‡ DSG‡ DSG‡ DSG
J202 J203 J230 J231 J232 J304	-40 -40 -40 -40 -40 -30	-1.0 -1.0 -1.0 -1.0 -1.0 -1.0	-0.1 -0.1 -0.2 -0.2 -0.2 -0.1	-20 -20 -30 -30 -30 -20	-0.8 -2.0 -0.5 -1.5 -3.0 -2.0	-4.0 -10 -3.0 -5.0 -6.0	20 20 20 20 20 20	10 10 1.0 <sup>2</sup> 1.0 <sup>2</sup> 1.0 <sup>2</sup>	0.9 4.0 0.7 2.0 5.0 5.0	4.5 20 3.0 6.0 10	20 20 20 20 20 20	1.0 1.5 1.0 1.5 2.5 4.5	3.5 4.0 5.0 7.5	20 20 20 20 20 20	4.0 6.0 — — —	20 20 — — —	1.0 1.2 — — —	20 20 — — —	11111	DSG DSG DSG DSG DSG DSG

NOTES: † Reversed pinning (S-G-D) available on special order—add suffix letter 'R' to part number.

Continued next page...

- ‡ Reversed pinning (S-D-G) available on special order—add suffix letter 'R' to part number.
- § Reversed pinning (G-S-D) available on special order—add suffix letter 'R' to part number.
- 1) V<sub>GS</sub> = 0 V.
- 5)  $I_D = 5.0 \text{ mA}.$
- 2) Ι<sub>D</sub> in μA.
- I<sub>D</sub> = 1.0 mA.
- 3)  $V_{DS} = 0 \text{ V}$ ,  $V_{GS}$  in volts. 7)  $I_D = 500 \text{ }\mu\text{A}$ .
- 4)  $I_D = 10 \text{ mA}.$
- 8)  $I_D = 200 \mu A$ .

## N-CHANNEL JFETS TO-92/TO-226AA

#### **ELECTRICAL CHARACTERISTICS continued**

						V <sub>G</sub>	S(off)													
Device	V <sub>(BR</sub>	)GSS	I <sub>c</sub>	ass	Liı	mits	Cond	litions		I <sub>DSS</sub>			g <sub>fs</sub>		C <sub>I</sub>	ss	C,	1 ISS	r <sub>os</sub>	
Туре	Min. (V)	@l <sub>G</sub> (μ <b>A</b> )	Max. (nA)	@ V <sub>DS</sub> (V)	Min. (V)	Max. (V)	V <sub>DS</sub> (V)	I <sub>D</sub> (nA)	Min. (mA)	Max. (mA)	@ V <sub>DS</sub> (V)		Max. (mS)	@ V <sub>DS</sub> (V)	Max. (pF)	@ V <sub>DS</sub> (V)	Max. (pF)	@ V <sub>DS</sub> (V)	Max. (Ω)	Pin- ning 1, 2, 3
J305	-30	-1.0	-0.1	-20	-0.5	-3.0	15	1.0	1.0	8.0	15	3.0	_	15	-	_	_	_		DSG‡
TPJ308	-25	-1.0	-1.0	-15	-1.0	-6.5	10	1.0	12	60	10	8.0	_	10⁴	7.5	$-10^{3}$	3.5	-10³	l —	DSG‡
TPJ309	-25	-1.0	-1.0	-15	-1.0	-4.0	10	1.0	12	30	10	10	-	10⁴	7.5	-10³	7.5	-10³	l —	DSG‡
TPJ310	-25	-1.0	-1.0	-15	-2.0	-6.5	10	1.0	24	60	10	8.0	_	10⁴	7.5	-10³	7.5	-10³	_	DSG‡
TPU308	-25	-1.0	-1.0	-15	-1.0	-6.0	10	1.0	12	60	10	_			7.5	-10³	3.5	-10³	-	DSG‡
TPU309	-25	-1.0	-1.0	-15	-1.0	-4.0	10	1.0	12	30	10	_	_	_	7.5	-10³	3.5	-10³	_	DSG‡
TPU310	-25	-1.0	-1.0	-15	-2.5	-6.0	10	1.0	24	60	10	l —	_	_	7.5	-10³	3.5	-10³	l —	DSG‡
TPU1897	-40	-1.0	-0.4	-20	-5.0	-10	20	1.0	30		20	l —		_	16	20	3.5	20	30	DSG‡
TPU1898	-40	-1.0	-0.4	-20	-2.0	-7.0	20	1.0	15		20	<b>—</b>	_	-	16	20	3.5	20	50	DSG‡
TPU1899	-40	-1.0	-0.4	-20	-1.0	-5.0	20	1.0	8.0		20			_	16	20	3.5	- 20	80	DSG‡

NOTES: † Reversed pinning (S-G-D) available on special order—add suffix letter 'R' to part number.

‡ Reversed pinning (S-D-G) available on special order—add suffix letter 'R' to part number.

§ Reversed pinning (G-S-D) available on special order—add suffix letter 'R' to part number.

1)  $V_{GS} = 0 V$ .

5)  $I_D = 5.0 \text{ mA}.$ 

2) I<sub>D</sub> in μA.


6)  $I_D = 1.0 \text{ mA}.$ 

3)  $V_{DS} = 0 \text{ V}$ ,  $V_{GS}$  in volts. 7)  $I_D = 500 \mu\text{A}$ .

4)  $I_D = 10 \text{ mA}.$ 

8)  $I_D = 200 \, \mu A$ .

# N-CHANNEL JEETS



### **SOT-23/TO-236AB**

### ELECTRICAL CHARACTERISTICS at $T_A = 25$ °C

						V <sub>G</sub>	G(off)			*******										
	V <sub>(I</sub>	BR)GSS	16	iss	Limi	ts	Cond	ditions	Ì	DSS			$\mathbf{g}_{fs}$		C,	1 ISS	C	ass <sup>1</sup>	r <sub>DS</sub>	
Device	Min.	@l <sub>G</sub>	Max.	@ V <sub>DS</sub>	Min.	Max.	V <sub>DS</sub>	I <sub>D</sub>	Min.	Max.	@ V <sub>DS</sub>	Min.	Max.	@ V <sub>DS</sub>	Max.	@ V <sub>DS</sub>	Max.	@ V <sub>DS</sub>	Max.	Pin- ning
Туре	(V)	(μ <b>Α</b> )	(nA)	(V)	(V)	(V)	(V)	(nA)	(mA)	(mA)	(V)	(mS)	(mS)	(V)	(pF)	(V)	(pF)	(V)	(Ω)	1, 2, 3
TMPF3819 TMPF3821 TMPF3822 TMPF3823 TMPF3824	-25 -50 -50 -30 -50	-1.0 -1.0 -1.0 -1.0 -1.0	-2.0 -1.0 -1.0 -1.0 -1.0	-15 -30 -30 -20 -30	_ _ _ _	-8.0 -4.0 -6.0 -8.0 -8.0	15 10 10 10 15	2.0 1.0 1.0 1.0 0.5	2.0 0.5 2.0 4.0 4.0	20 2.5 10 20 20	15 15 15 15 15	2.0 1.5 3.0 3.5 3.5	6.5 4.5 6.5 6.5 6.5	15 15 15 15	8.0 6.0 6.0 6.0 6.0	15 15 15 15	4.0 2.0 2.0 2.0 2.0	15 15 15 15 15	_ _ _ _ 250	DSG DSG DSG DSG DSG
TMPF4091 TMPF4092 TMPF4093 TMPF4117 TMPF4118	-40 -40 -40 -40 -40	-1.0 -1.0 -1.0 -1.0 -1.0	-1.0 -1.0 -1.0 -0.01 -0.01	-20 -20 -20 -20 -20	-5.0 -2.0 -1.0 -0.6 -1.0	-10 -7.0 -5.0 -1.8 -3.0	20 20 20 10 10	1.0 1.0 1.0 1.0 1.0	30 15 8.0 0.03 0.08	  0.09 0.24	20 20 20 10 10	— — 0.07 0.08	  0.21 0.25	  10 10	16 16 16 3.0 3.0	20 20 20 10 10	5.0 5.0 5.0 1.5 1.5	-20 <sup>3</sup> -20 <sup>3</sup> -20 <sup>3</sup> -10 10	30 50 80 —	DSG DSG DSG DSG DSG
TMPF4119 TMPF4220 TMPF4221 TMPF4222 TMPF4223	-40 -30 -30 -30 -30	-1.0 -10 -10 -10 -10	-0.01 -1.0 -1.0 -1.0 -1.0	-20 -15 -15 -15 -20	-2.0 — — —	-6.0 -4.0 -6.0 -8.0 -8.0	10 15 15 15 15	1.0 1.0 1.0 1.0 1.0	0.2 0.5 2.0 5.0 3.0	0.6 3.0 6.0 15 18	10 15 15 15 15	0.10 1.0 2.0 2.5 3.0	0.33 4.0 5.0 6.0 7.0	10 15 15 15 15	3.0 6.0 6.0 6.0 6.0	10 15 15 15 15	1.5 2.0 2.0 2.0 2.0	10 15 15 15 15	_ _ _	DSG DSG DSG DSG DSG
TMPF4224 TMPF4391 TMPF4392 TMPF4393 TMPF4416	-30 -40 -40 -40 -30	-10 -1.0 -1.0 -1.0 -1.0	-1.0 -1.0 -1.0 -1.0 -1.0	-20 -20 -20 -20 -20	-4.0 -2.0 -0.5	-8.0 -10 -5.0 -3.0 -6.0	15 20 20 20 20 15	1.0 1.0 1.0 1.0	2.0 50 25 5.0 5.0	20 150 100 30 15	15 20 20 20 20 15	2.0 — — — 4.5	7.5 — — — 7.5	15 — — — 15	6.0 16 16 16 4.5	15 20 20 20 15	2.0 5.0 5.0 5.0 1.2	15 -12 <sup>3</sup> -7.0 <sup>3</sup> -5.0 <sup>3</sup> 15	30 60 100	DSG DSG DSG DSG DSG
TMPF4416A TMPF4856 TMPF4857 TMPF4858 TMPF4859	-35 -40 -40 -40 -30	-1.0 -1.0 -1.0 -1.0 -1.0	-1.0 -1.0 -1.0 -1.0 -1.0	-20 -20 -20 -20 -15	-2.5 -4.0 -2.0 -0.8 -4.0	-6.0 -10 -6.0 -4.0 -10	15 15 15 15 15	1.0 1.0 1.0 1.0	5.0 50 20 8.0 50	15 — 100 80 —	15 15 15 15 15	4.5 — — — —	7.5 — — — —	15 — — —	4.5 18 18 18 18	15 -10 <sup>3</sup> -10 <sup>3</sup> -10 <sup>3</sup>	1.2 8.0 8.0 8.0 8.0	15 -10 <sup>3</sup> -10 <sup>3</sup> -10 <sup>3</sup> -10 <sup>3</sup>	25 40 60 25	DSG DSG DSG DSG DSG
TMPF4860 TMPF4861 TMPF5163 TMPF5245 TMPF5246	-30 -30 -25 -30 -30	-1.0 -1.0 -1.0 -1.0 -1.0	-1.0 -1.0 -10 -1.0 -1.0	-15 -15 -15 -20 -20	-2.0 -0.8 0.4 -1.0 -0.5	-6.0 -4.0 8.0 -6.0 -4.0	15 15 15 15 15	1.0 1.0 1.0 <sup>2</sup> 10 10	20 8.0 1.0 5.0 1.5	100 80 40 15 7.0	15 15 15 15 15	2.0 4.0 2.5	9.0 —	— 15 15 15	18 18 12 4.5 4.5	-10 <sup>3</sup> -10 <sup>3</sup> 15 15	8.0 8.0 3.0 1.5 1.5	-10 <sup>3</sup> -10 <sup>3</sup> 15 15	40 60 — —	DSG DSG DSG DSG DSG
TMPF5247 TMPF5248 TMPF5358 TMPF5359 TMPF5360	-30 -30 -40 -40 -40	-1.0 -1.0 -1.0 -1.0 -1.0	-1.0 -5.0 -1.0 -1.0 -1.0	-20 -20 -20 -20 -20	-1.5 -1.0 -0.5 -0.8 -0.8	-8.0 -8.0 -3.0 -4.0 -4.0	15 15 15 15 15	10 10 100 100 100	8.0 4.0 0.5 0.6 1.5	24 20 1.0 1.6 3.0	15 15 15 15 15	4.0 3.0 1.0 1.2 1.4	3.0 3.6 4.2	15 15 15 15 15	4.5 6.0 6.0 6.0 6.0	15 15 15 15 15	1.5 2.0 2.0 2.0 2.0	15 15 15 15 15	=	DSG DSG DSG DSG DSG

NOTES: 1)  $V_{GS} = 0 \text{ V}.$ 

2) I<sub>D</sub> in μA.

3)  $V_{DS} = 0 \text{ V}$ ,  $V_{GS}$  in volts.

4)  $I_D = 10 \mu A$ .

5)  $I_D = 5.0 \, \mu A$ .

6)  $I_D = 1.0 \text{ mA}.$ 

7)  $I_D = 500 \, \mu A$ .

8)  $I_D = 200 \, \mu A$ .

Continued next page...

### N-CHANNEL JFETs SOT-23/TO-236AB

#### **ELECTRICAL CHARACTERISTICS continued**

	v				Lim	V <sub>GS</sub>		litions		I <sub>DSS</sub>			g <sub>fs</sub>		C,	1	c	ass 1		
Device Type	V <sub>(BF</sub> Min. (V)	@I <sub>G</sub> (μ <b>A</b> )	Max. (nA)	@ V <sub>DS</sub>	Min. (V)	Max.	V <sub>DS</sub>		Min. (mA)	Max. (mA)	@ V <sub>DS</sub>	Min. (mS)	Max. (mS)	@ V <sub>DS</sub> (V)	Max. (pF)	@ V <sub>DS</sub> (V)		@ V <sub>DS</sub> (V)	r <sub>DS</sub> Max. (Ω)	Pin- ning 1, 2, 3
TMPF5361 TMPF5362 TMPF5363 TMPF5364 TMPF5457	-40 -40 -40 -40 -25	-1.0 -1.0 -1.0 -1.0 -10	-1.0 -1.0 -1.0 -1.0 -1.0	-20 -20 -20 -20 -15	-1.0 -2.0 -2.5 -2.5 -0.5	-6.0 -7.0 -8.0 -8.0 -6.0	15 15 15 15 15	100 100 100 100 100	2.5 4.0 7.0 9.0 1.0	5.0 8.0 14 18 5.0	15 15 15 15 15	1.5 2.0 2.5 2.7 1.0	4.5 5.5 6.0 6.5 5.0	15 15 15 15 15	6.0 6.0 6.0 6.0 7.0	15 15 15 15 15	2.0 2.0 2.0 2.0 3.0	15 15 15 15 15	- - - -	DSG DSG DSG DSG DSG
TMPF5458 TMPF5459 TMPF5484 TMPF5485 TMPF5486	-25 -25 -25 -25 -25	-10 -10 -1.0 -1.0 -1.0	-1.0 -1.0 -1.0 -1.0 -1.0	-15 -15 -20 -20 -20	-1.0 -2.0 -0.3 -0.5 -2.0	-7.0 -8.0 -3.0 -4.0 -6.0	15 15 15 15 15	10 10 10 10 10	2.0 4.0 1.0 4.0 8.0	9.0 16 5.0 10 20	15 15 15 15 15	1.5 2.0 3.0 3.5 4.0	5.5 6.0 6.0 7.0 8.0	15 15 15 15 15	7.0 7.0 5.0 5.0 5.0	15 15 15 15 15	3.0 3.0 1.0 1.0 1.2	15 15 15 15 15	1111	DSG DSG DSG DSG DSG
TMPF5638 TMPF5639 TMPF5640 TMPF5653 TMPF5654	-30 -30 -30 -30 -25	-10 -10 -10 -10 -10	-1.0 -1.0 -1.0 -1.0 -1.0	-15 -15 -15 -15 -15	1111	-12 -8.0 -6.0 -12 -8.0	15 15 15 15 15	1.0 1.0 1.0 1.0	50 25 5.0 40 15	=	20 20 20 20 20 20		= = = = = = = = = = = = = = = = = = = =		10 10 10 10 10	-12 <sup>3</sup> -12 <sup>3</sup> -12 <sup>3</sup> -12 <sup>3</sup> -12 <sup>3</sup> -8.0 <sup>3</sup>	4.0 4.0 4.0 3.5 3.5	-12 <sup>3</sup> -12 <sup>3</sup> -12 <sup>3</sup> -12 <sup>3</sup> -12 <sup>3</sup> -8.0 <sup>3</sup>	30 60 100 50 100	DSG DSG DSG DSG DSG
TMPF5668 TMPF5669 TMPF5670 TMPF5949 TMPF5950	-25 -25 -25 -30 -30	-10 -10 -10 -1.0 -1.0	-1.0 -1.0 -1.0 -1.0 -1.0	-15 -15 -15 -15 -15	-0.2 -1.0 -2.0 -3.0 -2.5	-4.0 -6.0 -8.0 -7.0 -6.0	15 15 15 15 15	10 10 10 100 100	1.0 4.0 8.0 12 10	5.0 10 20 18 15	15 15 15 15 15	1.0 1.6 2.0 3.0 3.0		15 15 15 15 15	7.0 7.0 7.0 6.0 6.0	15 15 15 15 15	3.0 3.0 3.0 2.0 2.0	15 15 15 15 15	1 1 1 1	DSG DSG DSG DSG DSG
TMPF5951 TMPF5952 TMPF5953 TMPFBC264A TMPFBC264B	-30 -30 -30 -30 -30	-1.0 -1.0 -1.0 -1.0 -1.0	-1.0 -1.0 -1.0 -10 -10	-15 -15 -15 -20 -20	-2.0 -1.3 -0.8 -0.5 -0.5	-5.0 -3.5 -3.0 —	15 15 15 15 15	100 100 100 10 10	7.0 4.0 2.5 2.0 3.5	13 8.0 5.0 4.5 6.5	15 15 15 15 15	3.0 1.0 1.0 2.5 3.0		15 15 15 15 15	6.0 6.0 6.0 4.0 4.0	15 15 15 15 15	2.0 2.0 2.0 1.2 1.2	15 15 15 15 15		DSG DSG DSG DSG DSG
TMPFBC264C TMPFBC264D TMPFBF244A TMPFBF244B TMPFBF244C	-30 -30 -30 -30 -30	-1.0 -1.0 -1.0 -1.0 -1.0	-10 -10 -5.0 -5.0 -5.0	-20 -20 -20 -20 -20	-0.5 -0.5 -0.5 -0.5 -0.5	-8.0 -8.0 -8.0	15 15 15 15 15	10 10 10 10 10	5.0 7.0 2.0 6.0 12	8.0 12 6.5 15 25	15 15 15 15	3.5 4.0 3.0 3.0 3.0	 6.5 6.5 6.5	15 15 15 15 15	4.0 4.0 — —	15 15 —	1.2 1.2 — —	15 15 —	-	DSG DSG DSG DSG DSG
TMPFBF246A TMPFBF246B TMPFBF246C TMPFBF256A TMPFBF256B	-25 -25 -25 -30 -30	-1.0 -1.0 -1.0 -1.0 -1.0	-5.0 -5.0 -5.0 -5.0 -5.0	-15 -15 -15 -20 -20	-0.6	-14.5 -14.5 -14.5 -7.5 -7.5	15 15 15 15 15	10 10 10 10 10	30 60 110 3.0 6.0	80 140 250 7.0 13	15 15 15 15 15	  4.5 4.5	_ _ _ _	  15	  4.5 4.5	  15 15	1.2 1.2	— — 15 15	65 50 35 —	DSG DSG DSG DSG DSG
TMPFBF256C TMPFJ111 TMPFJ112 TMPFJ112A TMPFJ113	-30 -35 -35 -40 -35	-1.0 -1.0 -1.0 -1.0 -1.0	-5.0 -1.0 -1.0 -0.2 -1.0	-20 -15 -15 -1.0 -15	-0.5 -3.0 -1.0 -2.0	-7.5 -10 -5.0 -7.0 -3.0	15 5.0 5.0 5.0 5.0	10 1.0 1.0 1.0 1.0	11 20 5.0 15 2.0	18 — — — —	15 15 15 15 15	4.5 — — — —	-	15 — — —	4.5 16 16 16 16	15 15 15 15 15	1.2 5 5 5 5	15 -10 <sup>3</sup> -10 <sup>3</sup> -10 <sup>3</sup>	30 50 50 100	DSG DSG DSG DSG DSG

NOTES: 1)  $V_{GS} = 0 \text{ V}$ .

2) I<sub>D</sub> in μA.

3)  $V_{DS} = 0 \text{ V}$ ,  $V_{GS}$  in volts.

4)  $I_D = 10 \, \mu A$ .

5)  $I_D = 5.0 \,\mu\text{A}$ .

6) I<sub>D</sub> = 1.0 mA.

7)  $I_D = 500 \, \mu A$ .

8)  $I_D = 200 \,\mu\text{A}$ .

Continued next page...

### N-CHANNEL JFETs SOT-23/TO-236AB

#### **ELECTRICAL CHARACTERISTICS continued**

						V <sub>GS</sub>	G(off)									!				
	V <sub>(BF</sub>	R)GSS	10	iss	Lim	its	Cond	litions	}	I <sub>DSS</sub>			g <sub>ts</sub>		C,	ss <sup>1</sup>	c,	ass <sup>1</sup>	r <sub>os</sub>	_
Device	Min.	@l <sub>G</sub>	Max.	@ V <sub>DS</sub>	Min.	Max.	V <sub>DS</sub>	I <sub>D</sub>	Min.	Max.	@ V <sub>DS</sub>			@ V <sub>DS</sub>	Max.	@ V <sub>DS</sub>		@ V <sub>DS</sub>	Max.	Pin- ning
Туре	(V)	(μ <b>A</b> )	(nA)	(V)	(V)	(V)	(V)	(nA)	(mA)	(mA)	(V)	(mS)	(mS)	(V)	(pF)	(V)	(pF)	(V)	(Ω)	1, 2, 3
TMPFJ113A	-40	-1.0	-0.2	-1.0	-1.0	-5.0	5.0	1.0	8.0	_	15	_	_	_	16	15	5	-10 <sup>3</sup>	80	DSG
TMPFJ201	-40	-1.0	-1.0	-20	-0.3	-1.5	20	10	0.2	1.0	20	0.5		20	4.0	20	1.0	20	_	DSG
TMPFJ202	-40	-1.0	-1.0	-20	-0.8	-4.0	20	10	0.9	4.5	20	1.0	_	20	4.0	20	1.0	20	_	DSG
TMPFJ203 TMPFJ230	-40 -40	-1.0 -1.0	-1.0 -1.0	-20 -30	-2.0 -0.5	-10 -3.0	20 20	10 1 <sup>2</sup>	4.0 0.7	20 3.0	20 20	1.5	3.5	20 20	6.0	20	1.2	20	_	DSG DSG
			<u> </u>																	-
TMPFJ231 TMPFJ232	-40 -40	-1.0 -1.0	-1.0 -1.0	-30 -30	-1.5 -3.0	-5.0 -6.0	20 20	1 <sup>2</sup> 1 <sup>2</sup>	2.0 5.0	6.0 10	20 20	1.5	4.0 5.0	20 20	_	_	_	_	_	DSG DSG
TMPFJ232	-40	-1.0	-1.0	-30 20	-3.0	-6.0	15	1.0	5.0	15	20 15	2.5 4.5	5.0 7.5	15	_	_		_	_	DSG
TMPFJ305	-30	-1.0	-1.0	-20	-0.5	-3.0	15	1.0	1.0	8.0	15	3.0	7.5	15		_	_	_	_	DSG
TMPFJ308	-25	-1.0	-1.0	-15	-1.0	-6.5	10	1.0	12	60	10	8.0	_	10 <sup>4</sup>	7.5	-10 <sup>3</sup>	3.5	-10 <sup>3</sup>	_	DSG
TMPFJ309	-25	-1.0	-1.0	-15	-1.0	-4.0	10	1.0	12	30	10	10		10 <sup>4</sup>	7.5	-10 <sup>3</sup>	3.5	-10 <sup>3</sup>		DSG
TMPFJ310	-25	-1.0	-1.0	-15	-2.0	-6.5	10	1.0	24	60	10	8.0	_	10 <sup>4</sup>	7.5	-10 <sup>3</sup>	3.5	-10 <sup>3</sup>	_	DSG
TMPFU308	-25	-1.0	-1.0	-15	-1.0	-6.0	10	1.0	12	60	10	_	_		7.5	-10 <sup>3</sup>	3.5	-10 <sup>3</sup>	_	DSG
TMPFU309	-25	-1.0	-1.0	-15	-1.0	-4.0	10	1.0	12	30	10	_	_		7.5	-10 <sup>3</sup>	3.5	-10 <sup>3</sup>	_	DSG
TMPFU310	-25	-1.0	-1.0	-15	-2.5	-6.0	10	1.0	24	60	10	_		_	7.5	-10 <sup>3</sup>	3.5	-10 <sup>3</sup>	-	DSG
TMPFU1897	-40	-1.0	-1.0	-20	-5.0	-10	20	1.0	30	_	20	_	_	_	16	20	3.5	20	30	DSG
TMPFU1898	-40	-1.0	-1.0	-20	-2.0	-7.0	20	1.0	15		20	_	_	- 1	16	20	3.5	20	50	DSG
TMPFU1899	-40	-1.0	-1.0	-20	-1.0	-5.0	20	1.0	8.0		20			_	16	20	3.5	20	80	DSG

NOTES: 1)  $V_{GS} = 0 \text{ V}$ .

2)  $I_D$  in  $\mu A$ .

3)  $V_{DS} = 0 \text{ V}$ ,  $V_{GS}$  in volts.

4)  $I_D = 10 \, \mu A$ 

5)  $l_D^- = 5.0 \, \mu A$ 

6)  $I_D = 1.0 \text{ mA}$ 

7)  $I_D = 500 \mu A$ 

8)  $I_D = 200 \,\mu\text{A}$ 

# P-CHANNEL JFETS



### TO-92/TO-226AA

### ELECTRICAL CHARACTERISTICS at $T_A = 25$ °C


						V <sub>GS</sub>	V <sub>GS(off)</sub>													
Device	V <sub>(B</sub>	R)GSS		GSS	Li	mits	Con	ditions		l <sub>DSS</sub>			g <sub>fs</sub>		C,	ss .	C,	iss	r <sub>DS</sub>	
Туре	Min. (V)	@Ι <sub>G</sub> (μ <b>Α</b> )	Max. (nA)	@ V <sub>DS</sub> (V)	Min. (V)	Max. (V)	V <sub>DS</sub> (V)	I <sub>D</sub> (nA)	Min. (mA)	Max. (mA)	@ V <sub>DS</sub> (V)	Min. (mS)		@ V <sub>DS</sub> (V)	Max. (pF)	@ V <sub>DS</sub> (V)	Max. (pF)	@ V <sub>DS</sub> (V)	Max. (Ω)	Pin- ning 1, 2, 3
2N3820 TP3993 TP3994 TP4381 2N5460	20 25 25 25 25 40	10 1.0 1.0 1.0	20 1.0 1.0 1.0 5.0	10 15 15 15 20	4.0 1.0 1.0 0.75	8.0 9.5 5.5 5.0 6.0	-10 -10 -10 -15 -15	-10 <sup>2</sup> -1 <sup>2</sup> -1 <sup>2</sup> -1.0 <sup>2</sup> -1.0	-0.3 -10 -2.0 -3.0 -1.0	-15 — — -12 -5.0	-10 -10 -10 -15 -15	0.8 6.0 4.0 2.0 1.0	5.0 12 10 6.0 5.0	-10 -10 -10 -15 -15	32 16 16 20 7.0	-10 -10 -10 -15 -15	16 5.5 5.5 5.0 3.0	-10 10 <sup>3</sup> 10 <sup>3</sup> -15 -15	150 300 —	DGS† DSG‡ DSG‡ DSG‡ DSG‡
2N5461 2N5462 J174 J175 J176	40 40 30 30 30	10 10 1.0 1.0	5.0 5.0 1.0 1.0 1.0	20 20 20 20 20	1.0 1.8 5.0 3.0 1.0	7.5 9.0 10 6.0 4.0	-15 -15 -15 -15 -15	-1.0 -1.0 -10 -10 -10	-2.0 -4.0 -20 -7.0 -2.0	-9.0 -16 -135 -70 -35	-15 -15 -15 -15 -15	1.5 2.0 — —	5.5 6.0 — —	-15 -15 —	7.0 7.0 — —	-15 -15 — —	3.0 3.0 — —	-15 -15 — —	 85 125 250	DSG‡ DSG‡ DSG† DSG† DSG†
J177 TPU304 TPU305 TPU306	30 30 30 30	1.0 1.0 1.0 1.0	1.0 1.0 1.0 1.0	20 20 20 20	0.8 5.0 3.0 1.0	2.25 10 6.0 4.0	-15 -15 -15 -15	-10 -1 <sup>2</sup> -1 <sup>2</sup> -1 <sup>2</sup>	-1.5 -30 -15 -5.0	-20 -90 -60 -25	-15 -15 -15 -15	_ _ _	_ _ _	_ _ _	27 27 27 27	-15 -15 -15	7.0 7.0 7.0	12 <sup>3</sup> 7.0 <sup>3</sup> 5.0 <sup>3</sup>	300 85 110 175	DSG† DSG‡ DSG‡ DSG‡

NOTES: † Reversed pinning (S-G-D) available on special order—add suffix letter 'R' to part number.

- 1)  $V_{GS} = 0 \text{ V}.$
- 2) Ι<sub>D</sub> in μA.
- 3)  $V_{DS} = 0 \text{ V}, V_{GS} \text{ in volts}.$
- 4)  $V_{GS} = 1.0 \text{ V}.$

<sup>‡</sup> Reversed pinning (S-D-G) available on special order—add suffix letter 'R' to part number.

# P-CHANNEL JFETs



### SOT-23/TO-236AB

### ELECTRICAL CHARACTERISTICS at $T_A = 25$ °C

						V <sub>GS</sub>	S(off)													
	٧,	BR)GSS	l <sub>G</sub>	ss	Lim	its	Con	ditions		I <sub>DSS</sub>			$\mathbf{g}_{\mathrm{fs}}$		c,	ss 1	CF	3SS	r <sub>DS</sub>	
Device Type	Min. (V)	@I <sub>G</sub> (μ <b>A</b> )	Max. (nA)	@ V <sub>DS</sub> (V)	Min. (V)	Max. (V)	V <sub>DS</sub> (V)	I <sub>D</sub> (nA)	Min. (mA)	Max. (mA)	@ V <sub>DS</sub> (V)	Min. (mS)	Max. (mS)	@ V <sub>DS</sub> (V)	Max. (pF)	@ V <sub>DS</sub> (V)	Max. (pF)	@ V <sub>DS</sub> (V)	Max. (Ω)	Pin- ning 1, 2, 3
TMPF3820 TMPF3993 TMPF3994 TMPF4381 TMPF5460	20 25 25 25 25 40	10 1.0 1.0 1.0 1.0	20 1.0 1.0 1.0 5.0	10 15 15 15 15 20	4.0 1.0 1.0 0.75	8.0 9.5 5.5 5.0 6.0	-10 -10 -10 -15 -15	-10 <sup>2</sup> -1.0 <sup>2</sup> -1.0 <sup>2</sup> -1.0 <sup>2</sup> -1.0	-0.3 -10 -2.0 -3.0 -1.0	-15 — — -12 -5.0	-10 -10 -10 -15 -15	0.8 6.0 4.0 2.0 1.0	5.0 12 10 6.0 5.0	-10 -10 -10 -15 -15	32 20 20 20 20 7.0	-10 -10 -10 -15 -15	16 4.5 4.5 5.0 3.0	-10 10 <sup>3</sup> 10 <sup>3</sup> -15 -15	150 300 —	DSG DSG DSG DSG DSG
TMPF5461 TMPF5462 TMPFJ174 TMPFJ175 TMPFJ176	40 40 30 30 30	10 10 1.0 1.0 1.0	5.0 5.0 1.0 1.0	20 20 20 20 20 20	1.0 1.8 5.0 3.0 1.0	7.5 9.0 10 6.0 4.0	-15 -15 -15 -15 -15	-1.0 -1.0 -10 -10 -10	-2.0 -4.0 -20 -7.0 -2.0	-9.0 -16 -135 -70 -35	-15 -15 -15 -15 -15	1.5 2.0 — —	5.5 6.0 — —	-15 -15 —	7.0 7.0 — —	-15 -15 —	3.0 3.0 — —	-15 -15 —	85 125 250	DSG DSG DSG DSG DSG
TMPFJ177 TMPFU304 TMPFU305 TMPFU306	30 30 30 30	1.0 1.0 1.0 1.0	1.0 1.0 1.0 1.0	20 20 20 20	0.8 5.0 3.0 1.0	2.25 10 6.0 4.0	-15 -15 -15 -15	-10 -1.0 <sup>2</sup> -1.0 <sup>2</sup> -1.0 <sup>2</sup>	-1.5 -30 -15 -5.0	-20 -90 -60 -25	-15 -15 -15 -15	= =	=	-	 27 27 27	-15 -15 -15	7.0 7.0 7.0 7.0	12 <sup>3</sup> 7.0 <sup>3</sup> 5.0 <sup>3</sup>	300 85 110 175	DSG DSG DSG DSG


NOTES: 1)  $V_{GS} = 0 \text{ V}.$ 

<sup>2)</sup>  $I_D$  in  $\mu A$ .

<sup>3)</sup>  $V_{DS} = 0 \text{ V}, V_{GS} \text{ in volts}.$ 

<sup>4)</sup> V<sub>GS</sub> = 1.0 V.

# DIODES



### SOT-23/TO-236AB (see also A8920SLR)

## 'TMPD' GENERAL-PURPOSE ELECTRICAL CHARACTERISTICS at $T_A = 25$ °C

					,	V <sub>F</sub>		_		
Device Type	Description	Marking	I <sub>F</sub> Max. (mA)	V <sub>BR</sub> Min. (V)	Max. (V)	@I <sub>F</sub> (mA)	I <sub>R</sub> Max. (nA)	t <sub>rr</sub> Max. (ns)	C <sub>o</sub> Max. (pF)	Pinning 1, 2, 3
TMPD459	Low-Leakage	459	500	200	1.0	3.0	25		6.0	A NC K
TMPD914	General-Purpose	5D	600	100	1.0	10	25	4.0	6.0	ANCK
TMPD4148	General-Purpose	5D	600	100	1.0	10	25	4.0	4.0	ANCK
TMPD4150	General-Purpose	ABA	600	75	0.62	1.0	100	4.0	2.5	A NC K
TMPD4153	General-Purpose	AAR	600	75	0.67	1.0	50	4.0	4.0	ANCK
TMPD4154	General-Purpose	ABC	600	35	1.0	30	100	4.0	4.0	A NC K
TMPD4448	General-Purpose	AAD	600	100	1.0	100	25	4.0	4.0	ANCK


## 'TMPD' SCHOTTKY DIODES ELECTRICAL CHARACTERISTICS at $T_A = 25$ °C

	V	V <sub>F</sub>	Max.		I <sub>R</sub> Max.			
Device Type	V <sub>BR</sub> Min. (V)	i <sub>F</sub> = 1 mA (V)	I <sub>F</sub> = 10 mA (mA)	V <sub>R</sub> = 1 V (nA)	V <sub>R</sub> = 20 V (nA)	V <sub>R</sub> = 50 V (nA)	C <sub>o</sub> Max. (pF)	Pinning 1, 2, 3
TMPD5711	70	0.41	0.75	_	50	200	2.0	A NC K
TMPD6916	40	0.34	0.47	100	200		5.0	ANCK
TMPD6919	50	0.45	0.80		200	_	1.2	A NC K
TMPD6924	70	0.41	0.75	_		200	2.0	ANCK

## PRO-ELECTRON DEVICE TYPES ELECTRICAL CHARACTERISTICS at $T_A = 25$ °C

				v	'	/ <sub>F</sub>				
Device Type	Description	Marking	I <sub>F</sub> Max. (mA)	V <sub>BR</sub> Min. (V)	Max. (V)	@l <sub>F</sub> (mA)	I <sub>R</sub> Max. (nA)	ι <sub>rr</sub> Max. (ns)	C <sub>o</sub> Max. (pF)	Pinning 1, 2, 3
BAR18	Schottky	D76		70	0.41	1.0	200	_	1.7	A NC K
BAS16	General-Purpose	A6	600	75	0.72	1.0	1000	6.0	2.0	ANCK
BAS19	General-Purpose	A8	200	100	1.25	200	100	50	5.0	ANCK
BAS21	General-Purpose	A82	200	200	1.0	100	100	50	5.0	ANCK
BAV70	Common Cathode	A4	100	70	0.86	10	5000	6.0	1.5	A1 A2 K
BAV74	Common Cathode	JA	70	50	1.0	100	100	4.0	2.0	A1 A2 K
BAV99	Dual In-Series	A7	70	70	1.1	50	2500	6.0	2.0	A1 K2 A/K
BAW56	Common Anode	A1	70	70	1.1	50	2500	6.0	2.0	K1 K2 A

# ZENER DIODES



### SOT-23/TO-236AB

# 'TMPZ' ZENER DIODES ELECTRICAL CHARACTERISTICS at $T_A = 25$ °C

			Zener '	Voltage		Leakage	Current	Zener Imp	edance	
Device Type	Marking	Min. (V)	Nom. (V)	Max. (V)	@l <sub>ZT</sub> (mA)	Max (μA)	@V <sub>R</sub> (V)	Max. Z <sub>ZT</sub> (Ω)	@l <sub>ZT</sub> (m <b>A</b> )	Pinning 1, 2, 3
TMPZ5229	8D	4.08	4.3	4.52	20	5.0	1.0	22	20	A NC K
TMPZ5230	8E	4.47	4.7	4.94	20	5.0	2.0	19	20	ANCK
TMPZ5231	8F	4.85	5.1	5.36	20	5.0	2.0	17	20	ANCK
TMPZ5232	8G	5.32	5.6	5.88	20	5.0	3.0	11	20	ANCK
TMPZ5233	8H	5.70	6.0	6.30	20	5.0	3.5	7.0	20	A NC K
TMPZ5234	8J	5.98	6.2	6.51	20	3.0	4.0	7.0	20	A NC K
TMPZ5235	8K	6.46	6.8	7.14	20	3.0	5.0	5.0	20	ANCK
TMPZ5236	8L	7.13	7.5	7.88	20	3.0	6.0	6.0	20	ANCK
TMPZ5237	8M	7.79	8.2	8.61	20	3.0	6.5	8.0	20	A NC K
TMPZ5238	8N	8.26	8.7	9.14	20	3.0	6.5	8.0	20	A NC K
TMPZ5239	8P	8.65	9.1	9.56	20	3.0	7.0	10	20	A NC K
TMPZ5240	8Q	9.50	10	10.5	20	3.0	8.0	17	20	A NC K
TMPZ5241	8R	10.5	11	11.6	20	2.0	8.4	22	20	A NC K
TMPZ5242	8S	11.4	12	12.6	20	1.0	9.1	30	20	A NC K
TMPZ5243	8T	12.4	13	13.7	9.5	0.5	9.9	13	9.5	A NC K
TMPZ5244	8U	13.3	14	14.7	9.0	0.1	10.0	15	9.0	A NC K
TMPZ5245	8V	14.3	15	15.8	8.5	0.1	11.0	16	8.5	ANCK
TMPZ5246	8W	15.2	16	16.8	7.8	0.1	12.0	17	7.8	ANCK
TMPZ5247	8X	16.2	17	17.9	7.4	0.1	13.0	19	7.4	ANCK
TMPZ5248	8Y	17.1	18	18.9	7.0	0.1	14.0	21	7.0	A NC K
TMPZ5249	8Z	18.1	19	20.0	6.6	0.1	14.0	23	6.6	A NC K
TMPZ5250	81A	19.0	20	21.0	6.2	0.1	15.0	25	6.2	ANCK
TMPZ5251	81B	20.9	22	23.1	5.5	0.1	17.0	29	5.5	A NC K
TMPZ5252	81C	22.8	24	25.2	5.2	0.1	18.0	33	5.2	A NC K
TMPZ5253	81D	23.8	25	26.3	5.0	0.1	19.0	35	5.0	A NC K
TMPZ5254	81E	25.7	27	28.4	4.6	0.1	21.0	41	4.6	A NC K
TMPZ5455	81F	26.6	28	29.4	4.5	0.1	21.0	44	4.5	A NC K
TMPZ5256	81G	28.5	30	31.5	4.2	0.1	23.0	49	4.2	ANCK
TMPZ5457	81H	31.4	33	34.7	3.8	0.1	25.0	58	3.8	A NC K


### ZENER DIODES SOT-23/TO-236AB

'BZX84' ZENER DIODES ELECTRICAL CHARACTERISTICS at  $T_A = 25$ °C

			Zener \	/oltage		Leakage	Current	Zener Imp	pedance	
Device Type	Marking	Min. (V)	Nom. (V)	Max. (V)	@l <sub>zT</sub> (mA)	Max (μA)	@V <sub>R</sub> (V)	Max. Z <sub>zτ</sub> (Ω)	@l <sub>ZT</sub> (mA)	Pinning 1, 2, 3
BZX84C4V7	Z1	4.4	4.7	5.0	5.0	3.0	2.0	80	5.0	ANCK
BZX84C5V1	Z2	4.8	5.1	5.4	5.0	2.0	2.0	60	5.0	ANCK
BZX84C5V6	Z3	5.2	5.6	6.0	5.0	1.0	2.0	40	5.0	ANCK
BZX84C6V2	Z4	5.8	6.2	6.6	5.0	3.0	4.0	10	5.0	ANCK
BZX84C6V8	Z5	6.4	6.8	7.2	5.0	2.0	4.0	15	5.0	ANCK
BZX84C7V5	Z6	7.0	7.5	7.9	5.0	1.0	5.0	15	5.0	ANCK
BZX84C8V2	<b>Z</b> 7	7.7	8.2	8.7	5.0	0.7	5.0	15	5.0	ANCK
BZX84C9V1	Z8	8.5	9.1	9.6	5.0	0.5	6.0	15	5.0	ANCK
BZX84C10	<b>Z</b> 9	9.4	10.0	10.6	5.0	0.2	7.0	20	5.0	ANCK
BZX84C11	Y1	10.4	11.0	11.6	5.0	0.1	8.0	20	5.0	ANCK
BZX84C12	Y2	11.4	12.0	12.7	5.0	0.1	8.0	25	5.0	ANCK
BZX84C13	Y3	12.4	13.0	14.1	5.0	0.1	8.0	30	5.0	ANCK
BZX84C15	Y4	13.8	15.0	15.6	5.0	0.05	10.5	30	5.0	ANCK
BZX84C16	Y5	15.3	16.0	17.1	5.0	0.05	11.2	40	5.0	ANCK
BZX84C18	Y6	16.8	18.0	19.1	5.0	0.05	12.6	45	5.0	ANCK
BZX84C20	Y7	18.8	20.0	21.2	5.0	0.05	14.0	55	5.0	ANCK
BZX84C22	Y8	20.8	22.0	23.3	5.0	0.05	15.4	55	5.0	ANCK
BZX84C24	Y9	22.8	24.0	25.6	5.0	0.05	16.8	70	5.0	ANCK
BZX84C27	Y10	25.1	27.0	28.9	2.0	0.05	21.0	80	2.0	ANCK
BZX84C30	Y11	28.0	30.0	32.0	2.0	0.05	18.9	80	2.0	ANCK
BZX84C33	Y12	31.0	33.0	35.0	2.0	0.05	23.1	80	2.0	ANCK


## SERIES TND

### **DIODE ARRAYS**




The TND series consists of diode arrays packaged in 14-pin and 16-pin dual in-line plastic packages for easy automatic insertion and better printed circuit board density.

In addition to the diode characteristics for standard products shown here, arrays consisting of diodes with 1N3070, 1N3595, 1N3600, 1N4153, or 1N4447 characteristics can be furnished on request. Other package configurations are available on special order.





**TND933** 

**TND940** 



9 7 7 8 8 8 8 TND938 TND939






ELECTRICAL CHARACTERISTICS at  $T_A = +25$ °C

	V <sub>BR</sub>	V	F	ı	R		V <sub>BR</sub>	•	V <sub>F</sub>		l <sub>R</sub>
Device Type	Min. (V)	Max. (V)	@I <sub>F</sub> (mA)	Max. (nA)	@ V <sub>R</sub> (V)	Device Type	Min. (V)	Max. (V)	@I <sub>F</sub> (mA)	Max (nA)	@ V <sub>v</sub> (V)
TND903	75	1.0	100	_	_	TND933	60	1.0	100	100	40
TND905	100	1.0	10	_	-	TND938	60	1.0	100	100	40
TND907	120	1.0	100	10	50	TND939	40	1.0	100	100	25
TND908	100	1.0	10	_		TND940	40	1.0	100	100	25
TND918	75	1.0	50	_		TND942	75	1.0	100	100	25
TND921	75	1.0*	10	_	_						


<sup>\*</sup> All diodes matched to within  $\pm 15$  mV at  $I_F = 10$  mA.

## **TPP4000**

### MEDIUM-POWER DARLINGTON ARRAY



The standard molded dual in-line package is identical to the type used for many integrated circuits. It offers superior mechanical protection for circuit elements during automatic insertion into printed wiring boards.



Dwg. No. A-10,782A

#### ABSOLUTE MAXIMUM RATINGS

Collector Current, I <sub>C</sub> 4.0 A
Power Dissipation,
P <sub>D</sub> (total package) 2 W*
Operating Temperature Range,
T <sub>A</sub> 55°C to +150°C
Storage Temperature Range,
T <sub>S</sub> 65°C to +150°C
* Derate at the rate of 16 mW/ $^{\circ}$ C above $T_{A} = +25 ^{\circ}$ C

### TPP4000 DARLINGTON ARRAY

### **ELECTRICAL CHARACTERISTICS** at $T_A = +25^{\circ}C$


				Limits           Min.         Typ.         Max.           40         50         —           50         60         —           12         14         —           —         10         100           —         1.0         1.5           —         1.6         2.0           2000         —         —           2000         —         —		
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Collector-Emitter Breakdown Voltage	V <sub>(BR)CES</sub>	I <sub>C</sub> = 100 μA	40	50	_	V
Collector-Base Breakdown Voltage	V <sub>(BR)CBO</sub>	I <sub>C</sub> = 100 μA	50	60	_	V
Emitter-Base Breakdown Voltage	V <sub>(BR)EBO</sub>	I <sub>E</sub> = 100 μA	12	14	_	V
Collector-Cutoff Current	I <sub>CBO</sub>	V <sub>CB</sub> = 30 V	_	10	100	nA
Emitter-Cutoff Current	I <sub>EBO</sub>	V <sub>EB</sub> = 10 V		10	100	nA
Collector-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>B</sub> = 1.0 mA, I <sub>C</sub> = 1.0 A	_	1.0	1.5	V
Base-Emitter Saturation Voltage	V <sub>BE(SAT)</sub>	$I_B = 1.0 \text{ mA}, I_C = 1.0 \text{ A}$	_	1.6	2.0	V
Static Forward	h <sub>FE</sub>	$V_{CE} = 5.0 \text{ V}, I_{C} = 500 \text{ mA}$	2000		_	_
Current-Transfer Ratio		V <sub>CE</sub> = 5.0 V, I <sub>C</sub> = 1.0 A	2000		_	_
		$V_{CE} = 5.0 \text{ V}, I_{C} = 2.0 \text{ A}$	2000	_		

# SERIES TPQ

### **QUAD TRANSISTOR ARRAYS**

Series TPQ quad transistor arrays are general-purpose silicon transistor arrays consisting of four independent devices.

All of these devices are furnished in a 14-pin dual in-line plastic package. The molded package is identical to that used with most consumer integrated circuits and offers superior mechanical protection during insertion into printed wiring boards.



Dwg. No. A-10,050A

Dwg. No. A-10,051A

TPQ2222A TPQ3904 TPQ6427 TPQA06


TPQ2907A TPQ3906 TPQA55 TPQ5401 TPQA56



\* Derate at the rate of 16 mW/°C above  $T_{\Delta} = +25$ °C

Dwg. No. A-10,052A

**TPQ6002** 



Dwg. No. A-10,053A

TPQ6502 TPQ6700

### SERIES TPQ QUAD TRANSISTOR ARRAYS

### **ELECTRICAL CHARACTERISTICS** at $T_A = +25^{\circ}C$

						DC Current Gain		Satur	ation Vo	ltage					
				ı	СВО		Cond	itions	V <sub>CE</sub>	V <sub>BE</sub>			f <sub>T</sub>	Сор	
Part	V <sub>(BR)CBO</sub>	V <sub>(BR)CEO</sub>	V <sub>(BR)EBO</sub>	Мах	@ V <sub>CB</sub>	h <sub>FE</sub>	l <sub>c</sub>	V <sub>CE</sub>	Max.	Max.	@ I <sub>c</sub>	Min.	@ I <sub>c</sub>	Max.	Similar Discrete
Number	(V)	(V)	(V)	(nA)	(V)	Min.	(mA)	(V)	· (V)	(V)	(mA)	(MHz)	(mA)	(pF)	Devices
Four NPN D	evices														
TPQ2222A	75	40	6.0	50	50	75	10	10	0.40	1.30	150	200	20	8.0	2N2222A
						100	150	10	1.60	2.60	300				
						30	300	10							
TPQ3904	60	40	6.0	50	40	30	0.1	1.0	0.20	0.85	10	250	10	4.0	2N3904
1						50	1.0	1.0						İ	
						75	10	1.0							
TPQ6427	50	40	12	100	30	5k	10	5.0	1.5	2.0	100	125	10	8.0	2N6427
						10k	100	5.0							
TPQA06	80	80	4.0	100	(Note 3)	50	10	1.0	0.25	_	100			10	MPSA06
					_	50	100	2.0							

NOTE: 1. Base-emitter voltage shown is  $V_{BE(ON)}$  at indicated  $I_C$ ,  $V_{CE}$  = 5.0 V.

<sup>2.</sup>  $I_{CES}$  at  $V_{CE}$  = 50 V,  $V_{BE}$  = 0

<sup>3.</sup>  $I_{CES}$  at  $V_{CE}$  = 60 V,  $V_{BE}$  = 0

### SERIES TPQ QUAD TRANSISTOR ARRAYS

### **ELECTRICAL CHARACTERISTICS at T<sub>A</sub> = +25°C**

						DC C	urrent	Gain	Satura	ation Vo	oltage				
				I,	СВО		Cond	itions	V <sub>CE</sub>	V <sub>BE</sub>			f <sub>T</sub>	С°Р	
Part Number	V <sub>(BR)CBO</sub>		V <sub>(BR)EBO</sub>	l	@V <sub>CB</sub>	h <sub>FE</sub> Min.	I <sub>C</sub> (mA)	V <sub>CE</sub>	Max.	Max.	@I <sub>C</sub>	Min. (MHz)	@l <sub>c</sub>	Max.	Similar Discrete Devices
Four PNP D	(V)	(V)	(V)	(nA)	(V)	I WIIII.	(IIIA)	(V)	(V)	(V)	(mA)	(IVITIZ)	(mA)	(pF)	Devides
		T 00	T = 0			l	1.0	40	0.40		1.50				
TPQ2907A	-60	-60	-5.0	50	-30	75 100	10 150	-10 -10	-0.40	-1.30 -2.60	150 300	200	50	8.0	2N2907A
		ļ				50	300	-10	-1.00	-2.00	300				
TPQ3906	-40	-40	-5.0	50	-30	40	0.1	-1.0	-0.25	-0.85	10	200	10	4.5	2N3906
				**		60	1.0	-1.0	0.20		'			"	2.10000
						75	10	-1.0							
TP:Q5401	-160	-150	-5.0	100	(Note 4)	50	1.0	-5.0	-0.20	1.00	10	100	10	6.0	2N5401
						60	10	-5.0	-0.50	1.00	50				
						50	50	-5.0							
TPQA55	-60	-60	-4.0	100	(Note 5)	50	10	-1.0	-0.25	_	100		_	15	MPSA55
		ļ				50	100	-2.0							
TPQA56	-80	-80	-4.0	100	(Note 6)	50	10	-1.0	-0.25	_	100	<u> </u>	_	15	MPSA56
						50	100	-2.0							-
Two NPN/T	wo PNP E	Pevices (I	Note 7)			1					г				
TPQ6002	60	30	5.0	30	50	50	1.0	10	0.40	1.30	150	200	50	8.0	2N2222
						75	10	10	1.40	2.00	300				and
						100 30	150 300	10 10							2N2907
TPQ6502	60	30	5.0	30	50	50	1.0	10	0.40	1.30	150	200	50	8.0	2N2222
1FQ6502	60	30	3.0	30	50	75	1.0	10	1.40	2.00	300	200	50	0.0	and
						100	150	10		2.00					2N2907
						30	300	10							
TPQ6700	40	40	5.0	50	30	30	0.1	1.0	0.25	0.90	10	200	10	4.5	2N3904
						50	1.0	1.0							and
						70	. 10	1.0							2N3906

NOTE: 4.  $I_{CES}$  at  $V_{CE}$  = 120 V,  $V_{BE}$  = 0.

<sup>5.</sup>  $I_{CES}$  at  $V_{CE} = 50 \text{ V}$ ,  $V_{BE} = 0$ .

<sup>6.</sup>  $\rm I_{CES}$  at  $\rm V_{CE}$  = 60 V,  $\rm V_{BE}$  = 0.

<sup>7.</sup> Complimentary pairs. Polarity shown is for NPN devices.

ÉPRISBATINEORWATION & PRODUCTINDEX

THE CONTRACTORS OF THE SECOND PROSE

PERIPHERAL POWERS DISPLAY DRIVER IC.

HALL PEFECT SENSOR ICS

MASS STORAGE APPLICATION IC

5

AUTOMOTIVE, SIGNAE-PROCESSING, & CONSUMER ICS

6

DISCRETE TRANSISTORS, DIODES, & ARRAYS

**QUALITY & RELIABILITY INFORMATION** 

PACKAGE INFORMATION

### SECTION 8. QUALITY & RELIABILITY INFORMATION

Reliability	8-1
Quality Assurance Flow Chart	8-2
PACE Primer	8-3
Reliability Reports:	
Series 2000 and 2800 Darlington Drivers	8-9
Series 5800 BiMOS Drivers	8-14
Series 6100 High-Voltage Display Drivers	8-19
SOT-23 Transistors	8-23

## RECLABILITY

#### **BACKGROUND INFORMATION**


CMOS, bipolar, and BiMOS integrated circuits exhibit the same reliability characteristics as other electronic devices in that the failure rate has three distinct phases:

- Within a relatively short time after manufacture, certain failure mechanisms appear under moderate levels of stress. The failure during this period is termed "infant mortality."
- 2) After the period of infant mortality, failure rate falls dramatically and, for a long period, only infrequent random failures occur.
- 3) Finally, device packages can actually wear out and the failure rate will increase again.

When the failure rate for electronic components is plotted as a function of time, the result is a characteristic bathtub curve. While the bathtub shape is universal throughout the industry, actual values for a single component type can vary greatly from one manufacturer to another. Through many years of experience in the manufacture of integrated circuits, design rules and processing techniques have been developed to:


- 1) Minimize the infant mortality failure mechanisms.
- 2) Detect potential failures before they reach the customer.
- Control wear-out so that operating life far exceeds the lifetime required by the customer.

### RELIABILITY LIFE CYCLE TYPICAL CURVE

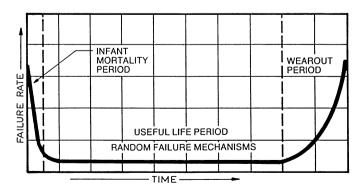

Dwg. No. A-14,410

## QUALITY ASSURANCE FLOW CHART

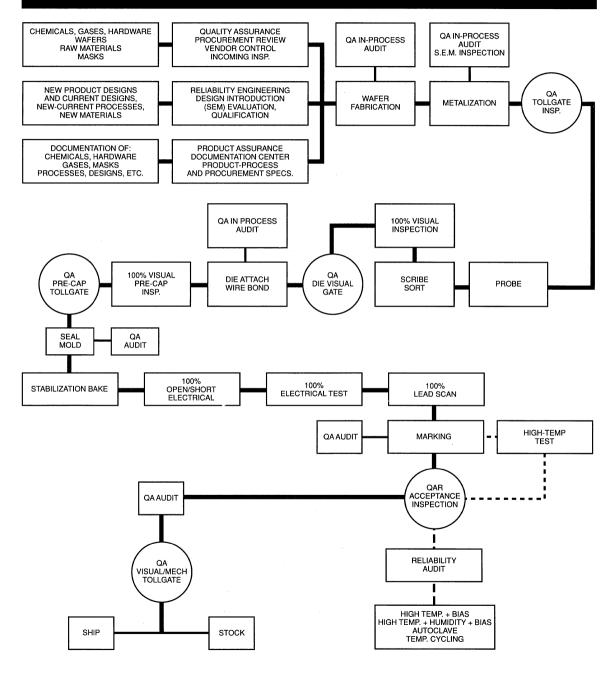

### METHODOLOGY AND APPROACH FOR DEVELOPMENT

New products inherently require several functional groups working closely, and in parallel, to accomplish all the tasks necessary to complete a product development effort successfully and on schedule. These programs are typically small in number, high in impact, and require a detailed level of attention and focus in order to ensure their success. The methodologies and approaches for developing new products are referred to at Allegro as the PACE (Product And Cycle-time Excellence) Process.


Major product development efforts are undertaken by cross-functional teams of key individuals who have full responsibility for the product's success. With increasing levels of product complexity, many disciplines are required

to contribute to a given development effort in order for it to succeed. Communication and coordination of these efforts can be as difficult as the execution of any of the many tasks involved.

The PACE process is based upon seven key concepts:

- The structured development process
- 2. The phase review process.
- 3. The Product/Project Approval Committee (PAC)
- 4. The development organization
- 5. The planning process
- 6. The technical requirements
- 7. The documentation requirements

# EXHIBIT I PRODUCT DEVELOPMENT PROCESS REVIEW Phases, Steps, and Tasks

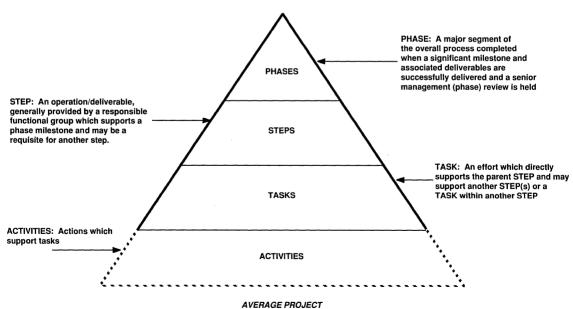

Dwg. OA-009

#### THE STRUCTURED DEVELOPMENT PROCESS

Structuring the development process establishes a framework for continuity and comparison between programs. This structure establishes specific phases, steps, tasks, and expectations for each product or process

development program. This structure assures that each program proceeds through similar checkpoints, and that at each checkpoint, specific tasks have been completed.

#### THE PHASE REVIEW PROCESS

The structure of the Allegro phase review process contains four phases and their associated steps. This phase review process is the most important element of the development process. The four phases for a product development program are:

Phase 0 Product Inception

Phase 1 Product Development Planning

Phase 2 Product Development

Product Finalization, Phase 3

Qualification, and Release

to Production

There are three types of programs within Allegro's development process:

PACE

These programs adhere rigidly to the phase

review process

Mini-PACE These programs adhere to all of the

PACE requirements but are not obligated to hold reviews with the PAC beyond the Phase 1 approval

Action Plan

These programs utilize the PACE guidelines and process but do not require phase reviews with

the PAC


The key point of the phase review process is that it allows the team, the PAC, and any other pertinent members of the organization to assess the merits of each program on a continuous basis. The output of these reviews and assessments may be to continue, to redirect, or to cancel. This process allows Allegro to continuously refine its development process and assure that its priorities and resource allocations are consistent with Allegro's strategic mission and vision. The phase review process empowers the organization to focus intensely on the correct programs and to clearly discontinue those programs that may no longer be appropriate.

### **EXHIBIT 2** ALLEGRO RECOMMENDED PHASE REVIEW PROCESS

	PHASE 0 INCEPTION	PHASE 1 PROCESS DEVELOPMENT / PRODUCT PLANNING	PHASE 2 PRODUCT DEVELOPMENT	PHASE 3 PRODUCT FINALIZATION, QUALIFICATION, & RTP	
OBJECTIVES	Evaluate Product Opportunity & Fit	Plan Development Program	Execute Development Program	Qualify & Evaluate Product     Ship to Customers	
RESOURCE ESTIMATES:					
• NUMBER OF PEOPLE	2 - 6	4 - 8	4 - 15	4 - 8	
• % OF DEVEL. COST	2% - 5%	5% - 20%	40% - 70%	10% - 20%	
ORGANIZATION	Strategic Mkting + as needed	Core Team	Core Team & Support Team	Core Team & Support Team	
DELIVERABLES AND ACCOMPLISHMENTS	Product Proposal Spreadsheet	Product Development Objectives and Methodology Plan, including: Functional Specification Preliminary Process Data New Package Evaluation	Working Samples Detailed Designs	Qualified Product Production Capability	
REVIEW POINTS	Inception Phase 0 Review	Phase 1 Review	Detailed Technical Reviews Phase 2 Review	Detailed Technical Reviews Phase 3 Review	
APPROVAL RATE EXPECTED	40% - 70%	70% - 90%	>95%	>95%	
CYCLE TIME (ROUGH EST.):					
SIMPLE PRODUCT	2 - 4 Weeks	4 - 6 Weeks	3 - 6 Months	1 - 3 Months	
·COMPLEX	8 - 12 Weeks	12 - 52 Weeks	7 - 12 Months	3 - 4 Months	

Dwg. OA-010

**EXHIBIT 3 PACE, Mini-PACE, AND ACTION PLAN BASED PROJECTS** 

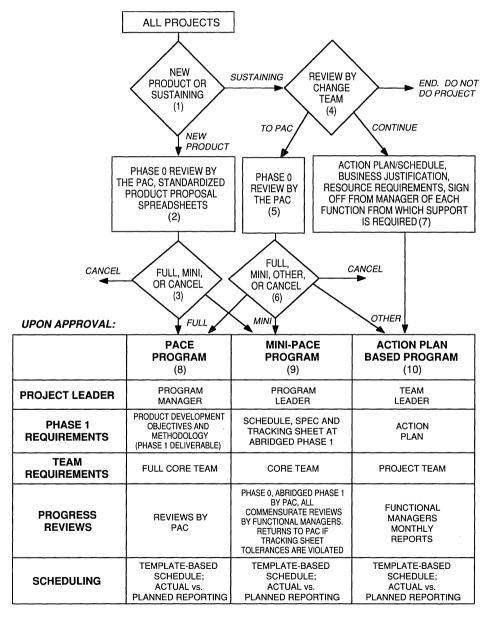

Dwg. OA-011

#### THE PRODUCT/PROJECT APPROVAL COMMITTEE (PAC)

This group of senior associates assesses the merits of each program through the PACE process for its continued business viability and strategic fit. They will focus on the five major purposes of the phase review process:

- The creation of a clear and consistent environment for making decisions
- The empowerment of development teams to execute a project plan

- The linkage between product strategy and product development
- The measurement of clear checkpoints towards the original objective
- The support of milestones that emphasize commitment equal to the urgency

#### THE DEVELOPMENT ORGANIZATION


The primary outcome of a Phase 0 review is the appointment of a program manager/leader. The program manager/leader is chosen by the PAC and may be the sponsor or any other appropriate person within the organization. The PAC also allocates the necessary resources from required functional areas to create a "core team" and the support team necessary to complete the project. The lead customer may also be a participant on a development team as a member of the support team. See Exhibit 4.

The roles and responsibilities of the Product Approval Committee are to:

- Provide a clear and consistent process for making major decisions on new products and enhancements.
- Empower Core Teams to execute product development efforts,
- Link product development efforts with overall corporate strategy and communicate linkage to organization,
- Determine disposition of product development efforts at Phase Reviews.
- Communicate decisions within one work day of each Phase Review.
- Serve as the gate for all new product development efforts entering the product development pipeline,
- · Make resource allocation decisions,
- Establish priorities among new product development efforts,
- Contribute to the continuous improvement of the Allegro PACE Process,
- Ensure that the organization adheres to the policies and procedures set forth by the Allegro PACE Process, and
- Support customer requirements.

The PAC is the senior group of managers who set and monitor the overall strategic direction of the company. The PAC members attend all Phase Reviews, and are responsible for ensuring that products allowed into the product development pipeline are consistent with the overall strategic direction of the company. In addition, the PAC must allocate the appropriate resources to each product development effort, and make changes to these resources as appropriate. The PAC also has the responsibility of providing advice, guidance, and support to the Core Teams when asked.

### EXHIBIT 4 EXAMPLE OF A DEVELOPMENT TEAM



All team members are equally responsible for assuring the success of the program. Their roles and responsibilities are as follows:

The responsibilities of the Program Manager or Program Leader are to:

- · Act as product champion,
- · Act as team leader, builder, and motivator,
- Be responsible for monitoring overall cost and schedule of the program,
- Be responsible for assuring that overall product quality and technical performance goals are achieved.
- Negotiate with functional management for initial resources on the Core Team and any necessary changes to the Core Team membership,
- Coordinate and authorize project activities and information.
- Provide status to all levels of management, the customer, Core Team, and Support Team on a regular basis,
- · Review all deliverables.
- Chair the regularly scheduled Core Team meetings and ensures timely distribution of the meeting minutes,
- Coordinate scheduling of and preparation for Phase Reviews,
- Be responsible for encouraging information exchange within the Core Team,
- Be responsible for problem resolution within the Core Team,
- Be responsible for coordinating any scenario analyses required by the PAC,
- Maintain project history (Product Development Notebook), and
- · Support customer requirements.

The role of the Program Manager/Leader is to lead, manage, and drive the entire development project. He or she is the leader of the Development Team, which is responsible for the overall success of the product development effort, and must do everything possible to ensure this success. In this leadership role, the Program Manager/ Leader must work with other members of the organization (including Core Team members) to ensure that appropriate resources are applied to the project in a timely fashion.

The responsibilities of the Core Team Members are to:

- · Act as product champions.
- · Work with Development Team members,
- Prepare and manage functional area schedule and contribute to overall schedule,
- · Actively participate in Core Team meetings,
- · Represent the Core Team to functional group,
- Work with other Core Team members to ensure that members' functional objectives are integrated into overall project design,
- Prepare and present appropriate sections of Phase Review presentations (this is done at the Program Manager/Leader's request),
- Report problem areas and potential schedule slips to the Core Team and/or Program Manager/Leader before they become critical,
- Ensure that all functional area rules and guidelines are adhered to (such as design rules, testing standards, customer commitment policies, etc.),
- Ensure overall product quality and performance.
- Support Program Manager/Leader in maintaining project history for Product Development Notebook,
- · Support customer requirements, and
- Complete assigned tasks.

Core Team members are responsible for the inputs and activities required by the development effort. This includes communicating the progress and requirements of the project to their functional areas, as well as directly managing Development Team members from their area. Because each Core Team member is a member of the Development Team (see Exhibit 4), he/she is responsible for the success of the product development effort.

The responsibilities of the Support Team Members are to:

- Work with the Core Team members on requirements of the product development effort,
- Attend Core Team meetings at the request of the Core Team member from their functional area or from the Program Manager/Leader,
- Contribute to the overall flow of communication regarding the product development effort,
- Participate in Technical Reviews where appropriate,
- Assist Core Team representative in developing the program schedule,

- Understand the tasks and activities that need to be accomplished in the functional area,
- Support Core Team members in maintaining project history for Product Development Notebook,
- · Support customer requirements, and
- · Complete assigned tasks.

The Support Team members are not generally active participants in Core Team meetings, but attend these meetings on an invited basis only. Working through Core Team members, these individuals are responsible for the many day-to-day activities required for the successful execution of a product development effort.

#### THE PLANNING PROCESS

A critical premise of PACE is an emphasis on the planning process during Phase 1. Dedicating time up front is essential to a program's success by assuring that all potential critical issues are considered and resolved and

that any areas of uncertainty are understood. It is expected that no detailed development work occurs during this phase. The planning phase is the preparation for Phase 2 development.

#### THE TECHNICAL REQUIREMENTS

Phase 2, the product development or execution phase, contains a series of required technical reviews to assure clear understanding and consensus among all functional areas necessary to ensure success of the project. These

reviews are typically design, layout, process, and silicon oriented. The results of these reviews form part of the program's development history and are intended to move the program toward first-pass success.

#### THE DOCUMENTATION REQUIREMENTS

Each program is fully documented by a project notebook containing the minutes of meetings, the schedule, the results of the technical reviews, and any other pertinent information and data. Checklists are provided as part of the PACE methodology for each step in the product development process to ensure that each program follows a consistent set of guidelines. The deliverables outlined by these checklists must be completed before a program can continue.

## RELIABILITY REPORT

### RELIABILITY OF SERIES ULN2000A AND ULN2800A DARLINGTON DRIVERS

This report summarizes accelerated-life tests that have been performed on Series ULN2000/2800A integrated circuits and provides information that can be used to calculate the failure rate at any junction operating temperature.

Product-reliability improvement is a continuous and evolving process. Ongoing life tests, environmental tests, and stress tests are performed to establish failure rates and monitor established process-control procedures. Failures are analyzed to determine design changes or process improvements that can be implemented to improve device reliability.

The reliability of integrated circuits can be measured by qualification tests, burn-in and accelerated-life tests:

- 1) Qualification testing is performed at an ambient temperature of +125°C, reduced so as to limit junction temperature to +150°C, for 1000 hours with an LTPD = 5 in accordance with MIL-STD-883. This testing is normally conducted in response to a specific customer request or requirement. Qualification testing highlights design problems or gross processing problems, but does not provide sufficient data to generate accurate failure-rate data in a reasonable period of time.
- 2) Burn-in is intended to remove infant-mortality rejects and is conducted at +150°C for 96 hours or at +125°C for 168 hours. An analysis of test results from the burn-in program found that most failures are due to slight parametric shifts. Catastrophic failures, which would cause user-equipment failure, are typically less than 0.1%.
- 3) Accelerated-life testing is performed at junction temperatures above +125°C and is used to generate failure-rate data.

#### ACCELERATED-LIFE TESTS

Accelerated-life tests are performed on integrated circuits at junction temperatures of +150°C or +175°C at the recommended operating voltages. The internal power dissipation on some high-power circuits requires the ambient temperature to be lower than +150°C to keep the junction temperature between +150°C and +175°C.

In these tests, failures are produced so that the statistical life distribution can be established. The distribution cannot be established without failures. High-temperature accelerated-life testing is necessary to accumulate data in reasonable time periods. It has been established that the failure mechanisms at all temperatures in these tests are identical. Temperatures above +175°C are not generally used for the following reasons:

- a) Industry-standard molding compounds degrade and release contaminants (halides) at approximately +200°C.
- b) Life-test boards constructed with materials capable of withstanding exposure to temperatures greater than +175°C have been deemed to be cost prohibitive.

### SERIES ULN2000/2800A RELIABILITY REPORT


 c) Increases in junction leakage currents may increase the power dissipation and device temperature to an indeterminate level.

Tables la and lb contain data produced by life tests that were conducted at +150°C and +175°C. The data include the number of units in each sample, and the time periods during which failures occurred. The total time-on-test varies, with priority changes influencing allocation of oven and board space, as new products are introduced. The time intervals between test readings were chosen for ease of plotting on log-normal paper.

The acceleration factor calculated using the Arrhenius equation, and a 1 eV activation energy, is approximately 5 x for each 25°C temperature rise in junction temperature and is multiplicative.¹ This allows the data to be compared to qualification life-test data by equating 200 hours at +150°C to 1000 hours at +125°C.

The data at the bottom of Table Ia and Ib were compiled by calculating the probability of success ( $P_s$ ), the cumulative probability of success, the probability of failure ( $P_t$ ) and the percentage of failed units in each time period.

#### **CUMULATIVE PERCENT FAILURES**



Dwg. No. A-12.266

#### FIGURE 1

The cumulative percent of failures is plotted on log-normal plotting paper in Figure 1. This paper has a logarithmic time-scale axis and a probability-scale axis. A log-normal distribution plots as a straight line. A line of best fit is drawn through the plotted points and extended to determine the median life-time at the 50% fail-point. The median life at a junction temperature of +150°C is, in this case, 1.6 x 10<sup>5</sup> hours. At +175°C, the median lifetime is 3.0 x 10<sup>4</sup> hours.

The log-normal distribution is commonly used because most semiconductor device data fit such a distribution.<sup>2</sup> When the median life has been found at the elevated temperature, it can be converted to the lower temperature of the actual application. The Arrhenius equation, which relates the reaction rate to temperature, is used to make this conversion.<sup>1</sup>

### SERIES ULN2000/2800A RELIABILITY REPORT

TABLE Ia
TEST RESULTS at T, = +150°C

		HOURS ON TEST								
TEST	_	90	150	300	600	1200	1800	2400	3000	5000
NUMBER	QTY.	NUMBER OF FAILURES								
1	12	0	0	0	0	2	0		_	_
2	22	0	0	0	0	0	0	0	0	
3	22	0	0	0	0	0	0	0	0	
4	22	0	0	2	0	0	3	0	0	
5	22	0	0	0	0	0	0	0	0	_
6	22	0	0	0	0	0	1	0	0	_
7	12	0	0	0	0	0	0	_	_	_
8	12	0	0	0	0	0	0	_	_	_
9	90	0	0	0	2	0	0	_	_	_
10	12	0	0	0	0	0	0			
11	12	0	0	0	0	0	0			
12	12	0	0	0	0	0	0	0	0	_
13	12	0	0	0	0	0	0	0	0	_
14	35	0	0	0	0	0	0	1		
15	12	0	0	0	1	1	0	0	0	0
16	25	0	0	0	0	0	_			
17	25	0	0	0	0	0	_			
TOTAL ON TEST		381	381	381	379	376	323	173	138	10
TOTAL FAILURES		0	0	2	3	3	4	1	0	0
TOTAL GOOD		381	381	379	376	373	319	172	138	10
P <sub>s</sub>		1.00	1.00	0.995	0.992	0.992	0.988	0.994	1.00	1.00
Cumulative P <sub>s</sub>		1.00	1.00	0.995	0.987	0.979	0.967	0.961	0.961	0.961
$P_{\rm f} = 1 - P_{\rm s}$		0	0	0.005	0.013	0.021	0.033	0.039	0.039	0.039
Cumulative % Failure	es	0	0	0.5	1.3	2.1	3.3	3.9	3.9	3.9

The Arrhenius equation is:

 $V_r = V_r^0 e^{-\epsilon/kT}$ 

where V<sub>r</sub> = a constant

∈ = activation energy

k = Boltzmann's constant

T = absolute temperature in degrees Kelvin.

An activation energy of 1.0 electron-volt was established by testing Series ULN2000A, Series UDN5710M, and Series UDN2980A devices at multiple temperatures. Failure analysis of devices rejected during that testing also supports this activation energy, as failures were mainly due to increased leakages, reduced beta, and surface inversion.<sup>3</sup>

The median life-point is drawn on Arrhenius graph paper in Figure 2. The

Arrhenius plot gives a graphical solution, rather than a mathematical solution, to the problem of equivalent median lifetime at any junction temperature. A line is drawn through this point (or points when multiple temperatures are used) with a slope of  $\epsilon=1.0$  eV.

Although not as statistically accurate as the median lifetime, the 5% fail-point can be read from Figure 1 and plotted parallel to the median-life line in Figure 2.

The median life at reduced junction temperatures can now be determined using Figure 2. It must be emphasized that this is junction temperature and *not* ambient temperature. The temperature rise at the junction due to internal power dissipation must be taken into account using the formula:

$$T_J = P_D R_{\theta JA} + T_A$$
 or  $T_J = P_D R_{\theta JC} + T_C$ 

The median lifetime, or 50% fail-point, as graphically determined in Figure 2, is approximately 100 years at +125°C or 1,000 years at +100°C junction temperature.

The approximate failure rate (FR) may be determined from FR = 1/Median Life, where Median Life is taken from Figure 2 at the

## SERIES ULN2000/2800A RELIABILITY REPORT

TABLE Ib
TEST RESULTS at T, = +175°C

					НО	URS ON T	EST			
TEST		90	150	300	600	1200	1800	2400	3000	5000
NUMBER	QTY.				NUM	BER OF FA	AILURES			
1	25	0	0	0	7		_	_		
2	25	0	0	0	0	0	0	0	_	
3	25	0	0	1	2	1	0	0		_
4	24	0	1	0	1	0	0	0	0	
5	19	0	0	0	0	0	2			
6	19	0	0	0	0	0	0			
7	12	0	0	2	3	0	_	_		
8	12	0	0	0	0	0	_		_	_
9	12	0	0	0	0	0	0			_
10	18	0	0	0	0	0		_	_	
11	12	0	0	0	0	0	2	0	0	2
12	12	0	0	0	0	0	0			
13	12	1	0	0	0	0	0	0		_
14	18	0	0	1	2	0	7			
15	12	1	0	0	0	0	0		_	_
16	12	0	0	. 0	0	0	_	_	_	-
17	24	0	0	0	0	0	0			_
18	12	0	1	0	1	0	0	0	0	
19	24	0	0	0	0	0	_	_	_	
TOTAL ON TEST		329	327	325	321	287	213	99	42	10
TOTAL FAILURES		2	2	4	16	3	9	0	0	2
TOTAL GOOD		327	325	321	305	284	204	99	42	8
P <sub>s</sub>		0.994	0.994	0.988	0.950	0.990	0.958	1.00	1.00	0.800
Cumulative P <sub>s</sub>		0.994	0.988	0.976	0.927	0.917	0.879	0.879	0.879	0.703
P <sub>1</sub> = 1 - P <sub>s</sub>		0.006	0.012	0.024	0.073	0.083	0.121	0.121	0.121	0.300
Cumulative % Failure	s	0.6	1.2	2.4	7.3	8.3	12.1	12.1	12.	30.0

intersection of the junction-temperature line and median-life line. The actual instantaneous failure rate can be calculated using a Goldwaite plot.<sup>4</sup> However, this approximation is very close. At +100°C the failure rate would be:

 $FR = 1/(8.8 \times 10^6 \text{ hours})$ 

= 0.011%/1000 hours = 110 FIT

where FIT = failures per 109 unit-hours

Other failure-rate values have been calculated and appear in Table II.

#### CONCLUSION

The relationship between temperature and failure rate is well documented and is an

important factor in all designs. Load currents, duty cycle, and ambient temperature must be considered by the design engineer to establish a junction-temperature limit that provides a failure rate within design objectives.

Figure 2 shows that a design with a continuous operating junction temperature of  $+100^{\circ}$ C (internal power dissipation plus external ambient temperature) would reach the 5% failure point in 10 years. Lowering the junction temperature to  $+70^{\circ}$ C increases the time to the 5% failure point to 300 years.

A complete sequence of environmental tests, including temperature cycle, pressure cooker, and biased humidity tests, are continuously monitored to ensure that assembly and package technology remain within established units.


The environmental tests and accelerated-life tests establish a base line for comparisons of new processes and materials.

## SERIES ULN2000/2800A RELIABILITY REPORT

#### REFERENCES

- 1) Manchester, K. E., and Bird, D. W., "Thermal Resistance: A Reliability Consideration," *IEEE Transactions*, Vol. CHMT-3, No. 4, 1980, pp. 580-587.
- 2) Peck, D. S., and Trapp, O. D., *Accelerated Testing Handbook*, Technology Associates, 1978, pp. 2-1 through 2-6.
- 3) ibid., p. 6-7.
- 4) Goldwaite, L. R., "Failure Rate Study for the Log-Normal Lifetime Model," *Proceedings of the 7th Symposium on Reliability and Quality Control*, 1961, pp. 208-213.

#### **MEDIAN LIFE**



Dwg. No. A-12,267

FIGURE 2

TABLE II SERIES ULN2000/2800A FAILURE RATE

T <sub>J</sub> (°C)	Median Life (h)	Failure Rate (%/1000 h)	Failures In Time (No./10 <sup>9</sup> unit-hours)
125	1.0 x 10 <sup>6</sup>	0.10	1000
100	$8.8 \times 10^6$	0.011	110
75	1.0 x 10 <sup>8</sup>	0.0010	10
50	8.8 x 10 <sup>8</sup>	0.00011	1.1

# RELIABILITY REPORT

## RELIABILITY OF SERIES UCN5800A Bimos DRIVERS

This report summarizes accelerated-life tests that have been performed on Series UCN5800A BiMOS integrated circuits and provides information that can be used to calculate the failure rate at any junction operating temperature.

Product-reliability improvement is a continuous and evolving process. Ongoing life tests, environmental tests, and stress tests are performed to establish failure rates and monitor established process-control procedures. Failures are analyzed to determine design changes or process improvements that can be implemented to improve device reliability.

The reliability of integrated circuits can be measured by qualification tests, burn-in and accelerated-life tests:

- 1) Qualification testing is performed at an ambient temperature of +125°C, reduced so as to limit junction temperature to +150°C, for 1000 hours with an LTPD = 5 in accordance with MIL-STD-883. This testing is normally conducted in response to a specific customer request or requirement. Qualification testing highlights design problems or gross processing problems, but does not provide sufficient data to generate accurate failure-rate data in a reasonable period of time.
- 2) Burn-in is intended to remove infant-mortality rejects and is conducted at +150°C for 96 hours or at +125°C for 168 hours. An analysis of test results from the burn-in program found that most failures are due to slight parametric shifts. Catastrophic failures, which would cause user-equipment failure, are typically less than 0.1%.
- 3) Accelerated-life testing is performed at junction temperatures above +125°C and is used to generate failure-rate data.

#### ACCELERATED-LIFE TESTS

Accelerated-life tests are performed on integrated circuits at junction temperatures of +150°C or +175°C at the recommended operating voltages. The internal power dissipation on some high-power circuits requires the ambient temperature to be lower than +150°C to keep the junction temperature between +150°C and +175°C.

In these tests, failures are produced so that the statistical life distribution can be established. The distribution cannot be established without failures. High-temperature accelerated-life testing is necessary to accumulate data in reasonable time periods. It has been established that failure mechanisms at all temperatures in these tests are identical. Temperatures above +175°C are not generally used for the following reasons:

- a) Industry-standard molding compounds degrade and release contaminants (halides) at approximately +200°C).
- b) Life-test boards constructed with materials capable of withstanding exposure to temperatures greater than +175°C have been deemed to be cost prohibitive.


c) Increases in junction leakage currents may increase the power dissipation and device temperature to an indeterminate level.

Table I contains data produced by life tests that were conducted at +150°C. The data includes the number of units in each sample, and the time periods during which failures occurred. The total time-on-test varies, with priority changes influencing allocation of oven and board space, as new products are introduced. The time intervals between test readings were chosen for ease of plotting on log-normal paper.

The acceleration factor calculated using the Arrhenius equation, and a 1 eV activation energy, is approximately 5 x for each 25°C temperature rise in junction temperature and is multiplicative.¹ This allows the data to be compared to qualification life-test data by equating 200 hours at +150°C to 1000 hours at +125°C.

The data at the bottom of Table I are compiled by calculating the probability of success ( $P_s$ ), the cumulative probability of success, the probability of failure ( $P_l$ ) and the percentage of failed units in each time period.

#### CUMULATIVE PERCENT FAILURES

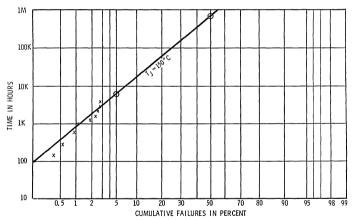

Dwg. GP-029

FIGURE 1

The cumulative percent of failures is plotted on log-normal plotting paper in Figure 1. This paper has a logarithmic time-scale axis and a probability-scale axis. A log-normal distribution plots as a straight line. A line of best fit is drawn through the plotted points and extended to determine the median life-time at the 50% fail-point. The median life at a junction temperature of +150°C is, in this case, 682,000 hours.

The log-normal distribution is commonly used because most semiconductor device data fit such a distribution.<sup>2</sup> When the median life has been found at the elevated temperature, it can be converted to the lower temperature of the actual application. The Arrhenius equation, which relates the reaction rate to temperature, is used to make this conversion.<sup>1</sup>

## SERIES 5800 RELIABILITY REPORT

TABLE I

TEST RESULTS at  $T_I = +150$ °C

		J			HOURS C	N TEST					
TEST		48	150	300	600	1000	1200	1800	2400	3000	4000
NUMBER	QTY.					F FAILURE					
1	40	0	0	0	0	0	0				_
2	224	0	2	0	2	0	2	0	0		
3	95	0	0	0			_		_		·
4	99	0	0	0	1	1	0	3			_
5	700		3	_	_	5	_	_	_		_
6	50	0	1	0	0	0	3	0	_	_	_
7	50	0	0	0	1	0	0	0	0	_	_
8	50	0	1	0	0	0	0	0	0	0	_
9	40	0	0	0	0	0	0	1			
10	240	0	0	0							
11	1000		3	_		1		_			
12	27	0	0	0	0	0	0		· —		·
13	27	0	0	1	0	0	0	0	0	0	_
14	42	0	0	0	0	0	0	_	_		
15	30	0	0	0	_	_		_	_	_	_
16	100	0	0	0	0	0	0	0	0	0	
17	980		1	_		0		_		_	_
18	100		0	0	0		0	1	0	1	_
19	77	0	0	2	2	_	-	_	_	_	_
20	120	0	0	0	1	0	0	1	_	_	_
21	68	0	2	0 .	0	0	1	0	0	_	
22	32	0	0	0	0	0	0	0	0	0	
23	400		0	_	_	0	_	_	_	_	_
24	100	_	0	·	_		_	_	_	_	_
25	190	_	0	_	_	1		_			_
26	55	0	0	0	0	0	0	0	0		
27	30	0	0	0	0	0	2	0	1	0	
28	50	0	0	0	0	0	0	0	_	_	-
29	100	0	0	0	0	0		_	_	_	_
30	25	0	0	0	0	0	0	0	0		
31	36	0	0	1	0	0	0	0			
32	34	0	0	0	0	0	0	0	0	_	_
33	100	_	3	3	0		0	0			_
34	20	0	0	0					_	_	_
35	18	0	0	0	0	0	0	0	_	_	_
36	18	0	0	0	0	0	0	_		_	_
37	36	0	0	0	0	0	0	0	1	0	_
38	48	0	1	0	1	0	0				

Continued next page...

## SERIES UCN5800A RELIABILITY REPORT

## TEST RESULTS at $T_J = +150$ °C continued

					HOURS C	N TEST					
TEST		48	150	300	600	1000	1200	1800	2400	3000	4000
NUMBER	QTY.			N	IUMBER O	F FAILURE	S				
39	48	0	0	0	0	0	0		_		
40	48	0	0	0	0	0	7	_	_		_
41	45	0	0	0	0	_	_	_	_		_
42	100	0	0	0	0	0	0	1	0	0	0
43	100	0	0	0	0	_	_	_	_		_
44	50	0	0	0	0	0	0	_	_	_	
45	580	1	4	0	_	_	_	_	_		_
46	90	0	1	0	0	0	0		_	_	
47	37	0	0	0	0	0	0		_	_	
48	26	0	0	0	0	0	0	0	0	0	_
49	25	0	1				_	_			_
TOTAL O	NTEST	3030	6629	3189	2222	5065	1895	1442	943	493	99
TOTAL FA	AILURES	1	23	7	8	8	15	7	2	1	0
TOTAL G	OOD	3029	6606	3182	2214	5057	1880	1435	941	492	99
P <sub>s</sub>		1.00	.997	.998	.996	.998	.992	.995	.998	.998	1.00
Cumulativ	re P <sub>s</sub>	1.00	.996	.994	.990	.989	.981	.976	.974	.972	.972
P <sub>f</sub> = 1-P <sub>s</sub>		.000	.004	.006	.010	.011	.019	.024	.026	.028	.028
Failures		0.03	0.38	0.60	0.96	1.11	1.90	2.37	2.58	2.78	2.78

The Arrhenius equation is:

 $V_r = V_r^0 e^{-\epsilon/kT}$ 

where V<sub>r</sub> = a constant

∈ = activation energy

k = Boltzmann's constant

T = absolute temperature in degrees Kelvin.

An activation energy of 1.0 electron-volt was established by testing Series ULN2000A, Series UDN5710M, and Series UDN2980A devices at multiple temperatures. Failure analysis of devices rejected during that test-ing also supports this activation energy, as failures were mainly due to increased leakages, reduced beta, and surface inversion.<sup>3</sup>

The median life-point is drawn on Arrhenius graph paper in Figure 2. The Arrhenius plot gives a graphical solution, rather than a mathematical solution, to the problem of equi-valent median lifetime at any junction tempe-rature. A line is drawn through this point (or points when multiple temperatures are used) with a slope of e = 1.0 eV.

Although not as statistically accurate as the median lifetime, the 5% fail-point can be read from Figure 1 and plotted parallel to the median-life line in Figure 2.

## SERIES 5800 RELIABILITY REPORT

The median life at reduced junction temperatures can now be determined using Figure 2. It must be emphasized that this is junction temperature and *not* ambient temperature. The temperature rise at the junction due to internal power dissipation must be taken into account using the formula:

$$T_J = P_D R_{\theta JA} + T_A$$
 or  $T_J = P_D R_{\theta JC} + T_C$ 

The median lifetime, or 50% fail-point, as graphically determined in Figure 2, is approximately 22 years at +125°C or 190 years at +100°C junction temperature.

The approximate failure rate (FR) may be determined from FR = 1/Median Life, where Median Life is taken from Figure 2 at the intersection of the junction-temperature line and median-life line. The actual instantaneous failure rate can be calculated using a Goldwaite plot.<sup>4</sup> However, this approximation is very close. At +100°C the failure rate would be:

$$FR = 1/(2.7 \times 10^7 \text{ hours})$$

= 0.0037%/1000 hours = 37 FIT

where FIT = failures per 109 unit-hours

Other failure-rate values have been calculated and appear in Table II.

#### CONCLUSION


The relationship between temperature and failure rate is well documented and is an important factor in all designs. Load currents, duty cycle, and ambient temperature must be considered by the design engineer to establish a junction-temperature limit that provides a failure rate within design objectives.

Figure 2 shows that a design with a continuous operating junction temperature of +125°C (internal power dissipation plus external ambient temperature) would reach the 5% failure point in 4.5 years. Lowering the junction temperature to +100°C increases the time to the 5% failure point to 38 years.

A complete sequence of environmental tests, including temperature cycle, pressure cooker, and biased humidity tests, are continuously monitored to ensure that assembly and package technology remain within established units.

The environmental tests and acceleratedlife tests establish a base line for comparisons of new processes and materials.

#### **MEDIAN LIFE**



Dwg. GP-030

FIGURE 2

TABLE II SERIES UCN5800A FAILURE RATE

T <sub>J</sub> (°C)	Median Life (h)	Failure Rate (%/1000 h)	Failures In Time (No./10 <sup>9</sup> unit-hours)
150	6.8 x 10 <sup>5</sup>	0.15	1466
125	$3.8 \times 10^6$	0.026	263
100	$2.7 \times 10^7$	0.0037	37
75	2.5 x 10 <sup>8</sup>	0.0004	4.0
50	3.3 x 10 <sup>9</sup>	0.000033	0.33

#### REFERENCES

- Manchester, K. E., and Bird, D. W., "Thermal Resistance: A Reliability Consideration," *IEEE Transactions*, Vol. CHMT-3, No. 4, 1980, pp. 580-587.
- 2) Peck, D. S., and Trapp, O. D., *Accelerated Testing Handbook*, Technology Associates, 1978, pp. 2-1 through 2-6.
- **3)** *ibid.*, p. 6-7.
- Goldwaite, L. R., "Failure Rate Study for the Log-Normal Lifetime Model," *Proceedings of the 7th Symposium on Reliability* and Quality Control, 1961, pp. 208-213.

# RELIABILITY REPORT

## RELIABILITY OF SERIES UDN6100A HIGH-VOLTAGE DISPLAY DRIVERS

This report summarizes accelerated-life tests that have been performed on Series UDN6100A integrated circuits and provides information that can be used to calculate the failure rate at any junction operating temperature.

Product-reliability improvement is a continuous and evolving process. Ongoing life tests, environmental tests, and stress tests are performed to establish failure rates and monitor established process-control procedures. Failures are analyzed to determine design changes or process improvements that can be implemented to improve device reliability.

The reliability of integrated circuits can be measured by qualification tests, accelerated tests, and burn-in:

- 1) Qualification testing is performed at an ambient temperature of +125°C for 1000 hours with an LTPD = 5 in accordance with MIL-STD-883. This testing is normally conducted in response to a specific customer request or requirement. Qualification testing highlights design problems or gross processing problems, but does not provide sufficient data to generate accurate failure rates in a reasonable period of time.
- 2) Accelerated testing is performed at junction temperatures above +125°C and is used to generate failure-rate data.
- 3) Burn-in is intended to remove infant-mortality rejects and is conducted at +150°C for 96 hours or at +125°C for 168 hours. An analysis of test results from the burn-in program found 1.27% failures in more than 325,000 pieces tested in a recent time period. Most failures were due to slight parametric shifts. Catastrophic failures, which would cause user-equipment failure, were less than 0.1%.

#### ACCELERATED-LIFE TESTS

Accelerated-life tests are performed on integrated circuits at junction temperatures of  $+150^{\circ}\text{C}$  or  $+175^{\circ}\text{C}$  at the recommended operating voltages. The internal power dissipation on some high-power circuits requires the ambient temperature to be lower than  $+150^{\circ}\text{C}$  to keep the junction temperature between  $+150^{\circ}\text{C}$  and  $+175^{\circ}\text{C}$ .

In these tests, failures are produced so that the statistical life distribution may be established. The distribution cannot be established without failures. High-temperature accelerated-life testing is necessary to accumulate data in reasonable time periods. It has been established that the failure mechanisms at all temperatures in these tests are identical. Temperatures above +175°C are not generally used for the following reasons:

 a) Industry-standard molding compounds degrade and release contaminants (halides) at approximately +200°C.

## SERIES 6100 RELIABILITY REPORT

TABLE I

### TEST RESULTS at $T_I = +150$ °C

						но	URS ON T	EST			
TEST	BIAS		90	150	300	600	1200	1800	2000	5000	6000
NUMBER	VOLTS	QTY.				NUM	BER OF F	AILURES			
1	80	24	0	0	2	_	_	_	_	_	_
2	80	24	0	0	0	0	0	0	1	0	_
3	80	12	0	0	0	0	0		_	_	_
4	80	12	0	0	0	0	2	1	1	0	0
5	110	24	0	0	0	0	0	0	1	_	_
6	80	12	0	0	0						
TOTAL ON	TEST		108	108	108	72	72	58	57	31	8
TOTAL FAIL	.URES		0	0	2	0	2	1	3	0	0
TOTAL GOO	)D		108	108	106	72	70	57	54	31	8
P <sub>s</sub>			1.00	1.00	0.981	1.00	0.972	0.983	0.947	1.00	1.00
Cumulative	P <sub>s</sub>		1.00	1.00	0.981	0.981	0.954	0.938	0.888	0.888	0.888
P <sub>f</sub> = 1 - P <sub>s</sub>			0	0	0.019	<u>0</u> .019	0.046	0.062	0.112	0.112	0.112
Cumulative	% Failures		0	0	1.9	1.9	4.6	6.2	11.2	11.2	11.2

- b) Life-test boards constructed with materials capable of withstanding exposure to temperatures greater than +175°C have been deemed to be cost prohibitive.
- c) Increases in junction leakage currents may increase the power dissipation and device temperature to an indeterminant level.

Table I contains Series UDN6100A data produced by life tests that were conducted at +150°C. The data include the number of test samples, number of units in each sample, and the time periods during which failures occurred. The total time-on-test varies, with priority changes influencing allocation of oven and board space, as new products are introduced. The time intervals between test readings were chosen for ease of plotting on log-normal paper.

The acceleration factor calculated using the Arrhenius equation, and a 1 eV activation energy, is approximately 5x for each 25°C temperature rise in junction temperature and is multiplicative.¹ This allows the data to be compared to qualification life-test data by equating 200 hours at +150°C to 1000 hours at +125°C. If these tests had been qualification tests, they would have ended at 200 hours at +150°C or 40 hours at +175°C.

The data at the bottom of Table I is compiled by calculating the probability of success ( $P_s$ ), the cumulative probability of success, the probability of failure ( $P_i$ ) and the percentage of failed units in each time period.

## SERIES 6100 RELIABILITY REPORT

The cumulative percent of failures is plotted on log-normal plotting paper in Figure 1. This paper has a logarithmic time-scale axis and a probability-scale axis. A log-normal distribution plots a straight line. A line of best fit is drawn through the plotted points and extended to determine the median lifetime at the 50% fail-point. The median life at a junction temperature of +150°C is 100,000 hours, in this case.

The log-normal distribution is commonly and widely used because most semiconductor device data fit such a distribution.2 When the median life has been found at the elevated temperature, it can be converted to the lower temperature of the actual application. The Arrhenius equation, which relates the reaction rate to temperature, is used to make this conversion.1 The Arrhenius equation is:

$$V_r = V_r^o e^{-\epsilon/kT}$$

where Vo = a constant

 $\epsilon$  = activation energy

k = Boltzmann's constant

T = absolute temperature in degrees Kelvin


An activation energy of 1.0 electron-volt was established by testing Series ULN2000A, Series UDN5710M, and Series UDN2980A devices at multiple temperatures. Failure analysis of devices rejected during this testing also supports this activation energy, as failures were mainly due to increased leakages, reduced beta, and surface inversion.3

The median life-point is drawn on Arrhenius graph paper in Figure 2. Arrhenius plotting paper gives a graphical solution. rather than a mathematical solution, to the problem of equivalent median lifetime at any junction temperature. A line is drawn through this point (or points when multiple temperatures are used) with a slope of E = 1.0 eV.

Although not as statistically accurate as the median lifetime, the 5% fail-point can be read from Figure 1 and plotted parallel to the median-life line in Figure 2.

The median life with lower junction temperatures may now be determined by using Figure 2. It must be emphasized that this is junction temperature and not ambient temperature. The temperature rise at the junction due to internal power dissipation

#### **CUMULATIVE PERCENT OF FAILURES**



Dwg. No. A-11,865

FIGURE 1

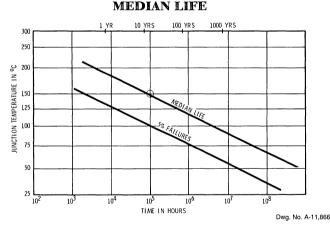


FIGURE 2

must be taken into account using the formula:

$$T_J = P_D R_{\theta JA} + T_A$$
 or  $T_J = P_D R_{\theta JC} + T_C$ 

The median lifetime, or 50% fail-point, as determined in Figure 2, is approximately 100 years at +125°C or 1,000 years at +90°C junction temperature.

The approximate failure rate (FR) can be determined from FR = 1/Median Life, where Median Life is taken from Figure 2 at the intersection of the junction-temperature line and median-life plot. The

## SERIES 6100 RELIABILITY REPORT

actual instantaneous failure rate may be calculated using a Goldwaite plot.<sup>4</sup> However, this approximation is very close. At +100°C the failure rate would be:

 $FR = 1/(4 \times 10^6 \text{ hours})$ 

= 0.025%/1000 hours

Other failure rate values have been calculated in Table II.

TABLE II SERIES ULN6100A FAILURE RATES

T」 (°C)	Median Life (h)	Failure Rate (%/1000 h)	Failures In Time (No./10º unit-hours)
125	6 x 10⁵	0.167	1670
100	4 x 10 <sup>6</sup>	0.025	250
75	$4 \times 10^7$	0.0025	25
50	5 x 10 <sup>8</sup>	0.0002	2

#### CONCLUSION

The relationship between temperature and failure rate is well documented and is an important factor in all designs. Load currents, duty cycle, and ambient temperature must be considered by the design engineer to establish a junction-temperature limit that provides failure rates within design objectives.

Figure 2 shows that a design with a junction temperature of  $+100^{\circ}$ C, calculated from internal power dissipation and external ambient temperature, would not reach the 5% fail-point in 10 years. Lowering the junction temperature to  $+70^{\circ}$ C increases the time to 100 years.

A complete sequence of environmental tests on Series UDN6100A, including temperature cycle, pressure cooker, and biased humidity tests are continuously monitored to ensure that assembly and package technology remain within established limits.

These environmental tests and accelerated-life tests establish a base line for comparisons of new processes and materials.

#### REFERENCES

- Manchester, K. E., and Bird, D. W., "Thermal Resistance: A Reliability Consideration," *IEEE Transactions*, Vol. CHMT-3, No. 4, 1980, pp. 580-587.
- 2) Peck, D. S., and Trapp, O. D., *Accelerated Testing Handbook*, Technology Associates, 1978, pp. 2-1 through 2-6.
- 3) ibid., p. 6-7.
- Goldwaite, L. R., "Failure Rate Study for the Log-Normal Lifetime Model," Proceedings of the 7th Symposium on Reliability and Quality Control, 1961, pp. 208-213.

# RELIABILITY DATA

## **SOT-23 TRANSISTORS**

All transistor and diode device types are constantly monitored through ongoing mechanical and moisture tests. The reliability chart below shows typical data from moisture tests (pressure cooker and humidity life tests) and mechanical tests, including those for intermittent operating life and thermal shock. Solderability testing is performed on a regular sample basis. Individual process data is available on request.

Test	MIL-S-750 Method	Test Conditions	Unit Hours	Number of Failures	Failure Rate in FITs <sup>1, 2</sup>	MTBF <sup>1, 2</sup> (hours)
High-Temperature Storage	1031.4	$T_A = +150^{\circ}C$ 1000 hours	4.42 x 10 <sup>6</sup>	4	1187	8.42 x 10 <sup>5</sup>
Steady-State Operating Life	1026.3	$T_A = +25^{\circ}\text{C}$ 1000 hours $P_D = 350 \text{ mW}$ $V_{CB} = 0.8 \text{ V}_{(BR)CEO}$	5.23 x 10 <sup>6</sup>	5	1205	8.30 x 10 <sup>5</sup>
High-Temperature Reverse Bias		$T_A = +125$ °C 1000 hours $V_{CB} = 0.8 V_{(BR)CEO}$	8.10 x 10 <sup>6</sup>	12	1680	5.95 x 10 <sup>5</sup>
Pressure Cooker		15 psig T <sub>A</sub> = +115°C 96 hours	5.57 x 10 <sup>5</sup>	3	7511	1.33 x 10 <sup>5</sup>
Humidity Life Test		T <sub>A</sub> = +85°C Rel. Hmd. = 85%	5.03 x 10 <sup>6</sup>	3	831	1.20 x 10 <sup>6</sup>
Intermittent Operating Life	1036	$T_A = +25^{\circ}C$ 1000 hours $P_D = 350 \text{ mW}$ $V_{CB} = 0.8 \text{ V}_{(BR)CEO}$ $t_{on} = 120 \text{ s}$ $t_{off} = 120 \text{ s}$	3.81 x 10 <sup>6</sup>	2	817	1.22 x 10 <sup>6</sup>

NOTES: 1. For confidence level of 60%.

<sup>2.</sup> Cumulative rate (includes infant mortalities).



TESTRICIONES SE LES ESPACIONES DE LA CONTRACTION DE LA CONTRACTION DE LA CONTRACTION DE LA CONTRACTION DE LA C

TENTONICE ESTE DECIMENTOS ACTUAÇÃOS.

PERIPRETAL PARPITA DISPLAY DIREVER 16

n var iptiliteer sansoneres

MASS STORAGE APPRICATION TO

AL PROPERTY ALEXAL PROPERSING, A CONSTRUCTOR

DISCRETE TRANSISTORS, DIODES: 8-ARRAYS

QUALITY & RELIABILITY INFORMÁTION

**PACKAGE INFORMATION** 

## **SECTION 9. PACKAGE INFORMATION**

Thermal Design for Plastic Integrated Circuits	. 9-3
High-Performance Power Package for Power-Integrated Circuit Devices	. 9-7
Applications Information:	
Electrostatic Protection for Semiconductor Products	9-19
Operating and Handling Practices for MOS Integrated Circuits	9-21
Mounting Power Tab Devices	9-21
Surface-Mount Integrated Circuits	9-22
Computing IC Temperature Rise	9-25
Thermal Resistance — A Reliability Consideration	9-30
Package Outline Drawings	9-39
A, B, & M Plastic DIPs	9-39
EA, EB, & EP Square Plastic Leaded Chip Carriers	9-45
EQ Rectangular Plastic Leaded Chip Carrier	9-47
JT Thin Quad Flatpack	9-49
K Plastic SIP	9-51
KA Plastic SIP	9-52
L Plastic SOICs	9-53
LB & LW Wide-Body Plastic SOICs	9-55
LL Long-Leaded Plastic SOT	9-57
LR Plastic Small-Outline Transistor	9-68
LT Plastic SOT	9-58
U Plastic SIP	9-59
UA Plastic SIP	9-60
W Plastic Power-Tab SIP	9-61
WH Plastic Power-Tab SIP for Horizontal Mounting	9-62
WV Plastic Power-Tab SIP for Vertical Mounting	9-62
Z Plastic Power-Tab SIP	9-66
Plastic Transistor	9-67
Plastic Small-Outline Transistor	9-68
Tape and Reel Information for Discrete Devices	9-69
SALES OFFICES & REPRESENTATIVES	
World-WideBack of l	3ook

# PACKAGE INFORMATION

## PACKAGE THERMAL CHARACTERISTICS

Allegro Package Code	Package Type (Common Package Designators)	Qty-Type of Terminals	R <sub>eJA</sub> (°C/W)	R <sub>θJC</sub> (°C/W)
A	Plastic Dual In-Line (DIP or PDIP)	14-Pin 16-Pin 18-Pin 20-Pin 22-Pin 28-Pin 40-Pin	60 60 55 55 50 45 36	38 38 25 25 21 16
В	Semi-Tab Plastic Dual In-Line (DIP or PDIP)	8-Pin 14-Pin 16-Pin 22-Pin 24-Pin	60 45 43 40 40	6.0* 6.0* 6.0* 6.0*
EA	Semi-Tab Plastic Leaded Chip Carrier (PLCC or PQCC)	28-J Lead 44-J Lead	50 —	6.0* 6.0*
EB	Semi-Tab Plastic Leaded Chip Carrier (PLCC or PQCC)	28-J Lead 44-J Lead	42 30	6.0* 6.0*
EP	Square Plastic Leaded Chip Carrier (PLCC or PQCC)	20-J Lead 28-J Lead 44-J Lead	70 55 46	35 30 25
К	Plastic Single In-Line (SIP or PSIP)	4-Lead	177	_
KA	Plastic Single In-Line (SIP or PSIP)	5-Lead	164	_
L	Plastic Small-Outline Transistor (SO or SOT)	3-Gull Wing	575	_
	Plastic Small-Outline IC (SO, SOIC, or SOL)	8-Gull Wing 14-Gull Wing 16-Gull Wing	108 95 90	45 33 32
LB	Semi-Tab Plastic Small-Outline IC (SO, SOIC, or SOL)	20-Gull Wing 24-Gull Wing	60 50	6.0* 6.0*
LL	Plastic Long-Leaded Small Outline Transistor (SO or SOT)	3-Lead	258	_
LW	Wide-Body Plastic Small-Outline IC (SO, SOIC, or SOL)	16-Gull Wing 18-Gull Wing 20-Gull Wing 28-Gull Wing	80 80 70 66	  17 

The data given is intended as a general reference only and is based on certain simplifications such as constant chip size and standard bonding methods. Where differences exist, the detail specification takes precedence.

<sup>\*</sup> R<sub>eJT</sub>

## PACKAGE THERMAL CHARACTERISTICS

Allegro Package Code	Package Type (Common Package Designators)	Qty-Type of Terminals	R <sub>θJA</sub> (°C/W)	R <sub>θJC</sub> (°C/W)
М	Mini Plastic Dual In-Line (DIP or PDIP)	8-Pin	87	55
U	Plastic Mini Single In-Line (SIP)	3-Lead	196	_
UA	Plastic Ultra-Mini Single In-Line (SIP)	3-Lead	206	<u> </u>
W	Power-Tab Plastic Single In-Line (SIP)	12-Lead	36	2.0*
Υ	Plastic Transistor	3-Lead	200	_
Z	Power-Tab Plastic Single In-Line (SIP)	3-Lead 5-Lead	67 65	3.0* 3.0*

The data given is intended as a general reference only and is based on certain simplifications such as constant chip size and standard bonding methods. Where differences exist, the detail specification takes precedence.

<sup>\*</sup> R<sub>eJT</sub>

# PACKAGE INFORMATION

## THERMAL DESIGN FOR PLASTIC INTEGRATED CIRCUITS

Proper thermal design is essential for reliable operation of many electronic circuits. Under severe thermal stress, leakage currents increase, materials decompose, and components drift in value or fail. Present-day linear integrated circuits are capable of delivering 5 to 10 watts of continuous power. Previously, such power levels came only with discrete metal can power transistors. It was relatively easy to determine the thermal resistance of these devices and attach a massive heat sink. However, in many markets, economic factors now dictate the use of molded dual in-line plastic packaged monolithic circuits. The guidelines to be discussed will provide the circuit design engineer with information on maintaining junction temperature below a safe limit under worst case conditions.

#### **DESIGN CONSIDERATIONS**

Four factors must be considered before the required heat-sinking can be determined. These are:

- 1. Maximum ambient temperature
- 2. Maximum allowable chip temperature
- 3. Junction-to-ambient thermal resistance
- 4. Continuous chip power dissipation

Maximum ambient temperature for the integrated circuit is normally between +70°C and +85°C and is usually dependent on the case material. In most applications, however, the limiting factor is the associated discrete components and a limit of about +50°C is specified. The maximum allowable chip temperature is usually +150°C for silicon.

Thermal resistance is the all-important design factor. It is composed of several individual elements, some of which are determined by the integrated circuits manufacturer, and some by the user.

#### CHIP POWER DISSIPATION

The chip power dissipation should be obtainable from the manufacturer's specifications. In most applications it is a variable and determined by the user when he specifies the circuit variables.

#### **HEAT DISSIPATION**

In any circuit involving power, a major design objective is to reduce the temperature of the components in order to improve reliability, reduce cost, or improve operation. The logical place to start is with the heat-producing component itself. First, keep the amount of heat generated to a minimum. Second, get rid of the heat that must be generated.

Heat generation can be minimized through proper circuit design. Heat dissipation is a function of thermal resistance.

With the typical discrete component, heat dissipation can be accomplished by fastening it directly to the chassis. Dual in-line plastic packaged integrated circuits, however, are quite a bit different. Their shape is not conducive to fastening directly to the chassis, they are

## THERMAL DESIGN FOR PLASTIC ICS

normally installed in a plastic socket or on a printed wiring board, and the heat producing chip is not readily accessible.

Some users specify unusual packages so as to get the heat sink as close as possible to the chip and/or provide an attachment point for an external heat sink. A common factor in many of these special designs is that the lead frame is an integral part of the heat sink.

Since the plastic package may have a thermal resistance of between 50 and 100°C/W and the lead frame a thermal resistance of only 10 to 20°C/W, this would seem like the best route to go.

#### STANDARD PACKAGES

The most common lead frame material has been Kovar (an iron-nickel-cobalt alloy). Its coefficient of expansion is close to that of silicon thereby minimizing mechanical stresses. However, Kovar has a relatively high thermal resistance and consequently is not suitable for standard lead frames in high power dissipation circuits. For these applications, copper or copper-alloy lead frames should be used. Additionally, some type of added heat sinking may be necessary. Thus lead frame configurations are being altered from the standard 14-pin or 16-pin designs.

Rapidly becoming an industry standard is the "bat-wing" package. This package is the same size as a dual in-line package, but the center portion of the frame is left as tabs. These tabs can be soldered to a heat sink or inserted directly into a socket. The worst case thermal resistance of various lead frames  $(R_{\rm auc})$  is given below.

Lead Frame	Thermal Resistance
14-pin Kovar	47°C/W
14-pin copper	38°C/W
"Bat-wing"	13°C/W

#### WHICH HEAT SINK?

If the integrated circuit manufacturer has done his job well, the chip-to-ambient thermal resistance wil be minimized for maximum chip power dissipation. It would appear that even the Kovar lead frame would be adequate for most applications. However, the total thermal resistance  $(R_{\text{B,J}})$  is also dependent on a stagnant layer of air at the lead frame-ambient interface which will suport a temperature

gradient. The total thermal resistance of a non-heat sinked dual in-line plastic package is therefore much higher. Since air is a natural thermal insulator, maximum heat transfer is through convection and the total thermal resistance will decrease some at high power levels.

Lead Frame	Total Thermal Resistance	Max. Power Diss. (W) at 50°C T <sub>A</sub> , 150°C T <sub>J</sub>
14-Pin Kovar	120°C/W	0.83
14-Pin Copper	60°C/W	1.67
"Bat-Wing"	45°C/W	2.22


Ignoring any safety margin and device performance, even the "bat-wing" is now only barely adequate for many power driver applications. The obvious solution is the use of an external heat sink.

Actual performance in a specific situation depends on factors such as the proximity of objects interfering with air flow, heat radiated or convected from other components, atmospheric pressure, and humidity. A good safety factor is therefore in order.

Heat sinks for plastic dual in-line packages can be of almost unlimited variety in design, material, and finish. Economics will normally play a very important role in the selection of any heat sink.

The least expensive and easiest to fabricate heat sink is the plain copper sheet. It is also very effective in reducing the total thermal resistance. The necessary dimensions can be obtained from Figure 1. These heat sinks are square in geometry, 0.015 inches thick, mounted vertically on each side of the lead frame, and with a dull or painted surface (Figure 2). The heat sinks should be soldered directly to the lead frame (approximately 0.3°C/W interface thermal resistance)

The plain copper sheet heat sink is also available commercially and may be less expensive than in-house manufacture. Two standard types are the Staver V7 and V8.

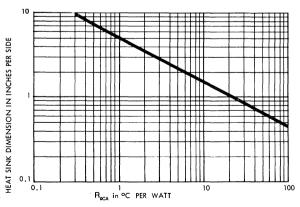

Dwg. No. A-11,434

FIGURE 1

## THERMAL DESIGN FOR PLASTIC ICS

#### HEAT SINK FINISHES

The most common finish is probably black anodizing. It is economical and offers a good appearance. The black finish will also increase the performance of the heat sink, due to radiation, by as much as 25%. However, since anodizing is an electrical and thermal insulator, the heat sink should have an area free of anodize where the heat-generating device is attached.

Other popular finishes for heat sinks are irridite and chromic acid dips. They are economical and have negligible thermal and electrical resistances. These finishes, however, do not enjoy the 25% increase in performance that a dull black finish has.

#### FORCED AIR COOLING


The performance of many heat sinks can be increased by as much as 100% by forcing air over the fins. Where space is a problem, the cost of a small fan can often be justified. If a fan is required for other purposes, it is advantageous to place the semiconductor heat source in the air flow. A rule-of-thumb is that semiconductor failure rate is halved for each 10°C reduction in junction operating temperature.

#### CHIP DESIGN

Proper thermal design by the integrated circuit user can reduce the operating temperature of the semiconductor junction. However, the minimum chip temperature at any power level is determined solely by the device manufacturer. For this reason, care must be taken in choosing the manufacturer. "Exact equivalent" integrated circuits are not necessarily identical. Electrically and mechanically they may be the same, but thermal differences can mean that "identical" audio power amplifiers will not put out the same power without exceeding the rated junction temperature.


The circuit manufacturer must optimize his chip design so that component drift is minimized and/or equalized so that rated performance can actually be obtained under maximum thermal stress.

Note in Figures 3 and 4 that the Darlington input differential pairs are cross-connected so as to minimize differences in gain as a function of output transistor power dissipation. Transistor Q<sub>4</sub>, being closest to

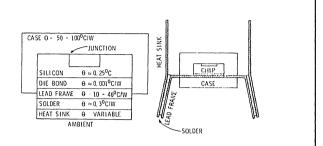

Dwg. No. A-11,435

FIGURE 2



Dwg. No. A-11,436

FIGURE 3





FIGURE 4

## THERMAL DESIGN FOR PLASTIC ICS

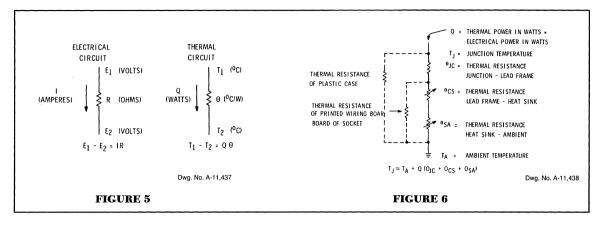

Material	Relative Thermal Resistance
Silver	0.09
Copper, Annealed	0.10
Gold	0.12
Beryllia Ceramic	0.20
Aluminum	0.20
Brass (66 Cu, 34 Zn)	0.40
Silicon	0.50
Germanium	0.70
Steel, SAE 1045	0.80
Solder (60 Sn, 40 Pb)	1.5
Alumina Ceramic	2.0
Kovar (54 Fe, 29 Ni, 17 0	Co) 3.0
Glass	40
Ероху	40
Mica	50
Teflon PTFE	200
Air	2000

the output power transistors, is naturally the hottest;  $Q_3$  is a degree or two cooler;  $Q_1$  and  $Q_2$  are about equal and midway between  $Q_3$  and  $Q_4$ . The gain of the  $Q_1$ - $Q_2$  Darlington pair is about equal to the gain of  $Q_3$ - $Q_4$  at all output power levels because of careful thermal design.

In certain specialized applications, thermal coupling can be used to a distinct advantage. Experimentally, thermal coupling has been used to provide a low-pass feedback network which otherwise could be obtained only with very large values of capacitance.

The foregoing discussion has covered the average thermal characteristics of dual in-line plastic integrated circuits. The specific devices will vary with the different packages and bonding techniques employed, but the concepts will remain the same.

#### APPENDIX

The following is intended to review terminology and compare thermal circuits with the more familiar electrical quantities.

The first law of thermodynamics states that energy cannot be created or destroyed but can be converted from one form to another. The second law of thermodynamics states that energy transfer will occur only in the direction of lower energy. In the semiconductor junction, the electrical energy is converted to thermal energy. Since no heat will be stored at the junction, the heat will flow to a lower temperature medium, air. The rate of heat flow is dependent on the resistance to that flow and the temperature difference between the source and the sink.

This thermal electrical analogy is convenient only for conduction problems where heat flow and temperature obey linear equations. The analogy becomes much more complex for situations involving heat flow by convection and radiation. Where these two modes are not negligible, they can be approximated by an equivalent thermal resistance. If ignored, the error introduced will only improve the device reliability.

A simplified thermal flow diagram of a molded dual in-line package and heat sink is shown. The thermal resistance of the lead frame-heat sink-ambient is shown as a variable resistor, because this is under the control of the user and may be varied over a considerable range.

# APPLICATIONS INFORMATION

# HIGH-PERFORMANCE POWER PACKAGE FOR POWER-INTEGRATED CIRCUIT DEVICES

#### ABSTRACT

A new, high-performance version of a Plastic Dual-In-Line package with improved reliability levels has been developed for high-power integrated circuit industrial and automotive applications. Superior thermal capability and reliability performances have been achieved with no increase in manufacturing cost or change in package outline.

The development of this package is based on a package optimization approach. Development methodology and package characterization results will be outlined. Data for production lots of the package show a thermal performance improvement of up to 35 percent compared with currently available packages, without the aid of an external heat sink. Furthermore. qualification test results indicate that this new package has an excellent reliability performance and its longterm survival exceeds the industry standard requirements. An improvement by a factor of 4 in the resistance to device metal deformation and a factor of 7 in wire-bond thermal fatigue has been achieved as a result of reducing the shear and normal stresses inside the package by proper selection of a state-of-the-art low modulus molding compound and optimizing the leadframe design. In addition, new design fundamentals will be briefly discussed.

This paper was presented at the 39th Electronic Components Conference, Houston, TX, May 22-24, 1989. Copyright, © 1989, IEEE, reprinted with permission.

#### INTRODUCTION

As the maturation of power integrated circuit technologies continues to promise more miniaturization of power electronic systems, the role of package thermal management is becoming critical. Since the present power packaging technology lags sharply behind the chip technology, the device performance and its reliable operation can be described to a great extent as limited by the package thermal capability. This paper presents the results of a package design study, which employs a "package optimization approach." The package chosen for this study is the 16-lead web-DIP, class of Plastic Dual-In-Line-Package (PDIP), which was specifically developed for medium- to high-power applications. An important practical feature of the web-DIP is that it costs no more to produce than a conventional DIP.

The initial phase of this program is a comparative analysis, based on package thermal and physical evaluations. Five variations of power DIP packages from major power integrated circuit manufacturers were evaluated. The evaluation results indicate that packages presently available are still far from optimum, thus making further improvements a feasible goal. In parallel to the comparative analysis, three-dimensional finite-element models are constructed to simulate and analyze the expected thermal performance of the design under study. The projected configuration is also analyzed thermostructurally to examine the mechanical behavior of the new packaging system, prior to implementation. The reliability improvement of the new package is based on optimization of the leadframe design, and the proper selection of materials. The package reliability design is aimed at improving wire fatigue life and device metal deformation resistance during temperature cycling. In addition, the study provides a new insight into this type of package and new design principles which can be extended to packages of similar internal configuration, such as power surface-mount packages.


#### **OPTIMIZATION STRATEGY**

PDIP's are still the most common package option for high-volume IC production, due to their established manufacturing and handling, and their low cost. However, there are two different types of PDIP's. The first is the standard type in which the chip pad is not attached to any of the internal leads (Fig. 1(a)), and which is mainly used for low-power applications. The second is a modified form of the standard type in which the central leads are tied in pairs and connected with the paddle, forming one piece (Fig. 1(b)). This unconventional configuration has been employed to improve the package thermal performance, mainly by enhancing the conduction heat transfer mechanisms by allowing the chip to be cooled directly by means of these four leads which are soldered to a board. This design format has made such a package suitable for medium-power applications up to 2.5 W in natural convection. Also, if the chip pad is extended to the outside of the package forming a web shape (Figure 1(c)), a miniature heat sink can be soldered to the web for even higher power dissipation.

#### WEB-DIP DESIGN

Although there are several extensive studies concerning thermal performance and reliability of standard PDIP's [1]-[4], there have been no similar efforts directed towards its web version. However, we felt that a new insight should be gained and established for the web-type package for the following reasons:

- (1) The power dissipation capability of the package is greatly influenced by the web concept, which dramatically changes the temperature fields inside the package. Consequently, all of the previously identified thermal paths for standard packages are affected, and their relative thermal contributions are altered.
- (2) It has been demonstrated that converting from the standard package to the web-type package has led to an improvement of the package power handling capability by 70 percent. For example, a 1-W standard package can dissipate 1.7 W instead by tying its four central leads to the chip pad. However, our observations, as will be described later, indicate that some package designers have conflicting views about the thermal merits of the concept compared with other paths. This limited understanding as to the precise relationship between the web and other leadframe parameters has cost some manufacturers a great thermal penalty, as will be explained in the next section.
- (3) The mechanical configuration of the leadframe and its physical behavior within the package during assembly, testing, and operation has introduced a considerable amount of uncertainty involving the package component structural responses and longterm reliability.
- (4) Since this concept is being extended to new package families, notably PLCC's and SOIC's, to improve their thermal performance, new safe design limits are required, particularly when these packages have not been completely perfected.



#### FIGURE 1

16-Lead PDIP leadframes (a) standard (b) unconventional (c) unconventional-web




FIGURE 2

Leadframe designs for five different PDIP manufacturers

#### **COMPARATIVE ANALYSIS**

The primary purpose of this analysis was to assess the thermal performance of the industry state-of-the-art power DIP packages made by leading IC manufacturers. This performance evaluation enabled us to gain knowledge about the range of the thermal capabilities of existing packages and to establish an optimization target. Figure 2 shows the leadframe design of the examined packages.

Representative packages from five major companies including our targeted package were chosen for this study based on device performance equivalents and similarity of package outlines.

Steady-state thermal resistance of the packages was measured in still air under the same conditions at different power levels, using the Temperature Sensitive Parameters (TSP) method. During the measurements, packages were mounted individually by soldering to a printed circuit board which was oriented vertically and housed in a 1-ft.<sup>3</sup> plexiglas sealed enclosure. Measurements were taken with the aid of a


Manufacturer	R <sub>eJA</sub> (°C/W) at 150°C T <sub>J</sub>			
Α	47			
В	51.5			
С	52			
D	55			
E	59			

Sage model Theta 400A thermal resistance tester. Results of the measurements of the thermal resistance from junction to ambient, R<sub>BJA</sub> are presented in Table I. The manufacturers are listed in ascending rank, based on their package performances.

The next step of the analysis was to correlate these thermal resistances to their packaging systems. For this purpose, a construction analysis was performed. The results of the construction examination are summarized in Table II. The material analysis has been performed with the aid of a SEM equipped with an EDAX analyzer. Although it is not the intent of this study to critique these packages, the following discussion is in order.

#### WORST PERFORMANCE

Manufacturer E, whose package shows the highest thermal resistance, uses a very high thermal conductivity leadframe material which is identified as "silver-bearing copper." Its conductivity is 35 percent higher than that of Copper Alloy C194, used by other manufacturers. One might therefore expect that the



package thermal resistance, R<sub>a.i.a.</sub>, would be lower than that of other packages employing C194 leadframes. However, as is indicated in Table I, this is not the case. The main reason is that the leadframe design has left out the tie bar. As a result, a dramatic increase in R<sub>a, A</sub> occurs, which is not compensated for by the higher conductivity leadframe. To verify this, an experiment was run with packages assembled using copper alloy C151 leadframes, whose conductivity is 25 percent higher than that of C194 leadframes. The tie bar was removed from some of these packages. Thermal resistance measurements showed that in natural convection cooling the leadframe material and the tie bar make separate contributions to  $\check{R}_{\text{e,JA}}$ . First, despite the substitution of C194 material by C151, only about a 2.5°C/W improvement in  $R_{\scriptscriptstyle \theta JA}$  is gained. The reason for this is that the package external resistance, R<sub>ecA</sub> (where C refers to both the package and lead surfaces) is the pre-dominant resistance, and is more than 75 percent of the package total resistance in still air. This R<sub>eca</sub> has less dependency on the leadframe material [4], and is mainly a function of the motion and temperature of the boundary layers that exist on the package and the external lead surfaces. Second, packages with tie bar show a 6°C/W improvement in R<sub>eJA</sub> over packages assembled without a tie bar. Therefore, we conclude that the leadframe thermal conductivity has a minor effect on R<sub>aia</sub>, while the tie bar has a greater influence. This is due to its multiplying effect on heat distribution within the package to the adjacent leads as well as heat spreading to both the top and bottom surfaces of the packages, resulting in an additive thermal enhancement by conduction and convection. The same effect was also verified analytically, as will be discussed later.

#### BEST PERFORMANCE

Manufacturer A, whose package exhibits the lowest thermal resistance shown in Table I, employed the same high-conductivity leadframe material used by manufacturer E, but did not remove the tie bar. In addition, manufacturer A increased the leadframe thickness to 15 mils from the standard 10 mils. To evaluate the impact of the leadframe thickness on the package power handling capability, packages assembled with C194 and C151 leadframes with 10-, 12-, and 15-mil thickness were evaluated. Results of thermal resistance measurements in still air are summarized as follows:

- (1)  $R_{oJA}$  for packages assembled with 10-mil C151 leadframes was 2.5°C/W lower than those assembled with 10-mil C194 leadframes.
- (2) Packages assembled with 12- and 15-mil C151 leadframes showed an improvement in their  $R_{_{\theta JA}}$  by 3.5 and 7°C/W respectively over packages with 10-mil C151 leadframes.

Thus it is concluded that a thicker leadframe reduces the package heat spreading resistance and enhances the package surface thermal properties that result in improved thermal exchange between the package surfaces and their immediate surrounding air layers. As a result,  $\mathsf{R}_{\mathsf{BCA}}$  is also reduced.

TABLE II
16-Lead DIP CONSTRUCTION ANALYSIS

Manufacturer	Leadframe Material	Leadframe Thickness (mm)	Chip Thickness (mm)	Die-Attach Material	Gold Wire Diameter (mm)	Leadframe Design (Refer to Fig. 1)
А	Silver-Bearing Copper	0.375	0.250	Solder	0.0375	(b)
В	Copper Alloy C-194	0.250	0.350	Silver Epoxy	0.0375	(c)
С	Copper Alloy C-194	0.250	0.450	Silver Epoxy	0.0375	(c)
D	Copper Alloy C-194	0.250	0.250	Silver Epoxy	0.375	(c)
E	Silver-Bearing Copper	0.250	0.350	Silver Epoxy	0.325	(b)

#### THERMAL MODELING

#### FINITE ELEMENT PROGRAM

In parallel to the comparative analysis, numerical solutions for a steady-state thermal model were obtained by using the finite element program, ANSYS. A three-dimensional (3-D) model for a typical web-16-lead package was first constructed as a reference model to simulate the thermal performance of a standard web-16-lead DIP for a typical package system. Parametric changes were then applied to the model to determine the best variable combinations which can be implemented to optimize the package power dissipation, while maintaining a constant junction temperature of 150°C. Major variables investigated in this study were:

- 1 leadframe material
- 2 leadframe thickness
- 3 tie bar size and layout
- 4 lead lock hole size
- 5 leadframe design, (web design versus internal termination), see Figures 1(b) and (c)
- 6 die attach material
- 7 die pad area

#### MODELING PROCEDURES

A typical web-DIP is shown schematically in Figure 3. Due to symmetry, only half of the package was modeled, with an adiabatic boundary condition at the symmetry plane. The model consists of 3032 nodes and 2270 elements. A 3-D view of the model is shown in Figure 4. A steady-state thermal analysis with free convection cooling is assumed. For half of the package, a 1.2-W dissipated power was used to simulate a 150°C junction temperature. The power was assumed to be uniformly generated in a 0.025-mm-thick active layer at the top of the silicon chip. For half of the chip (1.5 mm x 3.38 mm), the power was specified as heat generation per unit volume (9.49 W/mm³). The surfaces of the package and the external leads were assumed to have a convective heat transfer coefficient of 0.00001 W/mm²°C. Table III shows the materials properties that were used in the analysis.

#### MODELING RESULTS AND DISCUSSION

Reference Model: The temperature distribution across the chip active layer is shown in Figure 5. The individual roles of the web and the tie bar in the package thermal performance are illustrated in Figure 6. It can be seen from Figure 6 that the web represents the primary thermal path in the transverse direction to the chip, where heat is directly conducted down through the chip pad out of the package to the connected protruding leads and dissipated into the board by conduction and to the air by convection and radiation. Also, it can be seen that the major remaining thermal barrier inside the package is the plastic layer between the chip edge and the lead tips, while the tie bar has a multiplying effect in dissipating and spreading heat to the adjacent leads and top and bottom surfaces of the package, as illustrated in Figures 6 and 7. Therefore, to achieve an effective thermal design, the plastic layer should be minimized and a massive tie bar utilized.






FIGURE 4



#### FIGURE 5

Temperature distribution on the die surface



#### FIGURE 6

Temperature distribution across the leadframe surface




FIGURE 7

Temperature distribution on the package top surface

Parametric Study: For this analysis, the power generated in the active layer is held fixed and the junction temperature allowed to vary, while variables are applied. The results and conclusions of this parametric study are summarized as follows: (i) In natural convection cooling, for high-conductivity leadframe material, R<sub>BJA</sub> has a minor dependency on the material thermal conductivity. An increase in thermal conductivity of 25 percent yields an 8 percent decrease in  $R_{\text{\tiny BJA}}$ . The leadframe thickness is of somewhat greater influence, yielding a 10 percent decrease in  $R_{\rm e,IA}$  for only a 20 percent increase in thickness. Both  $R_{\rm e,IC}$  and  $R_{\rm e,CA}$ are decreased, due to the massive size of the thicker frame and its effect of reducing the package internal resistance and improving the convection mechanism. (ii) The tie bar is critical to the package thermal performance even in the presence of the web feature because of its contribution in directing the heat flow throughout the package and disseminating heat to the package surfaces. Therefore, the package designer should not be tempted to remove it from the leadframe. (iii) Extending the chip pad outside the package has a thermal contribution. A 1.6°C/W increase in R<sub>a la</sub> was found when the web had been removed and the paddle was terminated inside the package as in the case of package type in Figure 1 (b). (iv) Lead lock holes of 0.2 mm<sup>2</sup> each have no effect on the package thermal performance if they are placed on all the leads except the four central leads. (v) An improvement in R<sub>a to</sub> of only 1.2°C/W was achieved by changing the die-attach material from epoxy to solder, despite the large difference in their conductivities. This is attributed to the very small thickness of this layer. (vi) For a given chip, R<sub>a la</sub> is insensitive to the increase in the die pad area beyond a critical dimension, since any increase in the paddle area in the longitudinal direction is accompanied by moving the lead tips away from the chip edge which results in increasing the plastic thickness between the chip and the leads, thus, increasing lead resistance. Complete numerical data are summarized in Figure 8. The accuracy of these data is within 10 percent of the experimental results.

Based on these data, we have predicted that a potential improvement in the package thermal performance of 25 percent could be achieved over our targeted package. It is also estimated that the proposed package could achieve a 40 percent increase in power dissipation capability over the worst case. Consequently, we decided to develop a new leadframe to meet the absolute targeted thermal improvement with the following characteristics: (i) optimum configuration, (ii) higher thermal conductivity copper C151, and (iii) increased thickness, 0.375 mm compared to the standard 0.25 mm thickness. The reliability aspects of the new package are detailed in the reliability improvement and in the thermostructural modeling sections.

#### RELIABILITY IMPROVEMENT

Although the package thermal enhancement seems to be the principal driving force for this program, package reliability improvement has been an intrinsic part of the package optimization strategy. For example, two separate studies recommended the use of (i) a new epoxy die-attach adhesive for its effectiveness in reducing the amount of voids and improving the die shear resistance, and (ii) a new state-of-the-art low modulus molding compound which has proven its contribution in reducing the shear force on the die surface. Experimental results with the low-modulus molding compound showed a reduction in device

TABLE III

MATERIAL PROPERTIES OF 16 LEAD-PDIP PACKAGE COMPONENTS

Material	Thermal Conductivity (W/mm • °C)	Thermal Expansion Coefficient (10 <sup>-6</sup> /°C)	Poisson's Ratio	Young's Modulus (kg/mm²)
Molding compound	0.75 x 10 <sup>-3</sup>	19	0.30	1500
Leadframe, C194	0.263	. 17	0.30	12 300
Silicon	0.140	2.4	0.28	17 000
Epoxy adhesive	0.004	20	0.30	6000
Leadframe, C151	0.331	17	0.30	12 300
Solder die attach	0.025	29	0.35	1800

metal deformation by a factor of 4, after temperature cycling from -65°C to 150°C. The low stress characteristics of this new molding compound result from lowering its Young's modulus, without sacrificing the glass transition temperature for the finished product. [5], [6].

#### MECHANISM OF GROUND WIRE BOND FATIGUE AND RELIEF

A novel leadframe design change has extended the fatigue life of grounding wires during temperature cycling by a factor of 7. Earlier temperature cycling tests had indicated the occurrence of a wedge bond (heel). failure of the grounding wire that is used for a large number of devices. The failure mode was identified as a rupture or fracture occurring at the heel of the bond located on the leadframe, particularly on the die pad periphery, as seen in Figure 9. Experimental observations indicated that the mechanism of the bond fatigue failure is plastic flow and rupture in the heel area induced by cumulative cyclic strain during thermal fluctuations. The identified failure mechanism can briefly be described as follows: (i) An excessive reduction in the heel cross-sectional area. accompanied by plastic deformation, is caused by the edge of the bonding tool. (ii) The bond knee, which represents the junction between the heel and the wire span, sustains high localized stress by virtue of stress concentration effects. (iii) This stress will be intensified by the superimposed molding stress. (iv) As the package undergoes temperature changes under temperature cycling conditions the heel is displaced. The displacement has both a horizontal and a vertical component. The horizontal component results from the shear force which is due to thermal coefficient mismatch between the molding compound and the leadframe, while the vertical component results from the molding compound normal stress. (v) Due to very low yield strength and high ductility of the gold wire, the displacement will produce a large amount of plastic strain, i.e., permanent deformation, at the knee for each temperature cycle. This plastic strain will accumulate during the course of the temperature cycling. (vi) In addition, during the high-temperature part of the cycle, a significant reduction in the gold yield strength could occur and the wire can behave as a perfectly plastic material [7] which will yield a very large cyclic strain at the knee and the molding compound interface. (vii) As the plastic straining continues and the cumulative magnitude of cyclic plastic strain reaches critical value (gold fracture strength), the heel will rupture at the knee and a fatigue crack can initiate, marking the beginning of the bond failure.

Analysis of experimental data suggested that the bond failure during temperature cycling is a function of heel strain. As a result, it was inferred that the bond fatigue life or number of cycles to failure can be expressed by the Coffin Law [8]

$$\Delta \epsilon_{D} = C/\sqrt{N}$$


where


 $\Delta \epsilon_p$  = cumulative plastic strain

N = number of cycles to failure

C = constant.

Consequently, to improve the bond fatigue life, the heel cumulative plastic strain should be minimized during temperature cycling. Based on the discussion outlined above, the leadframe was designed to satisfy the plastic strain-number of cycles to failure criterion. The new leadframe design concept for reducing the cyclic strain, and in turn improving the bond fatigue life, is based on the following mechanical approaches which have been substantiated by reliability data and experimental verifications.

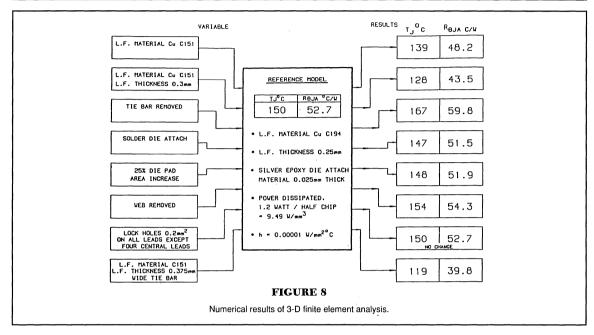




- (1) Decreasing the area of the heel supportive, underlying pad of the leadframe would reduce the plastic strain amplitude. This is due to the reduced effect of the thermal coefficient mismatch between the leadframe and the molding compound.
- (2) Reduction in the heel displacement can be achieved by minimizing the heel pad movement. Therefore, an improvement of the interfacial adhesion between the heel and the surrounding will reduce the pad displacement. Consequently, stresses transmitted to the heel-molding compound interface will be reduced.
- (3) The fatigue damage accumulation of the heel is not only dependent on pre-mold stress [9], but mostly on the plastic straining effects resulting from mechanical interaction between the molding compound and the configuration of the underlying pad.

#### THERMOSTRUCTURAL ANALYSIS

Although the proposed leadframe posed an attractive option to augment the package power dissipation capability, its mechanical compatibility with other package components was considered to be the key factor for its final utilization for long-term reliable performance. Therefore, a thermostructural analysis study was performed to compare the structural behavior of the new package system, with the thicker C151 leadframe, versus the standard package, whose leadframe thickness is only 0.25 mm. Since the new leadframe material, C151, and the standard leadframe, C194, have the same elastic moduli and coefficients of thermal expansion, the only variable considered in the analysis is the thickness (see Table III).


# CORNER OF DIE WEB WEB HIN. STRESS AT CENTER OF DIE

FIGURE 10
Die surface tensile stress distribution after die attach.



#### FIGURE 11

Die surface compressive stress distribution after die molding.



#### FIGURE 12

Die surface shear stress distribution after molding.


#### 3-D FINITE ELEMENT MODELING

As the state of the shear and normal stresses on the die surface are of prime reliability concern, due to their role in device passivation cracking and metal deformation [10)-(12], they were analytically investigated after the die attach and molding processes. Only the web feature is considered, since the tie bar and other leads do not significantly affect the package system during these two processes. The following assumptions are made: (1) linear elastic analysis, (2) isotropic materials, (3) zero stress at or above the glass transition temperature of die attach adhesive and molding compound.

Die Attach Process: The modeling results show that for both assemblies, with two different leadframe thicknesses, the maximum normal stress on the die surface is tensile and occurs at the center of the chip. Figure 10 shows the tensile stress distribution on the die surface. It can be seen that the stresses gradually decrease towards the chip edges. Though the stress distributions on the die surface are identical in shape for both assemblies, they are different in magnitude. Assembly with the 0.25 mm thick leadframe produced 11.5 Kg/mm<sup>2</sup> while assembly with the 0.375 mm thick leadframe produced 10.0 Kg/mm<sup>2.</sup> The model shows no shear stress on the die surface, which is expected since the surface is in pure bending. However, the chip maximum deflection at the center was 0.92 x 10<sup>-2</sup> mm and 0.80 x 10<sup>-2</sup>mm for thinner and thicker leadframes, respectively. This particular finding suggests that using a thicker leadframe in the assembly will produce lower die deflection which, in turn, can lead to a higher resistance to thermal cyclic fatigue during temperature changes that will be elaborated on later in reference to the thermal cyclic model.

Molding Process: Figure 11 shows the stress contours on the die surface at the end of the molding and cure process. Zero stress conditions were assumed at  $T_g = 155^{\circ}C$ . The whole surface is seen to be under compressive stress, with maximum stress concentrated on the die edges parallel to the longitudinal axis and on the corners. The compressive stress distributions are similar for both assemblies but different in magnitude. Assembly with the 0.25 mm thick leadframe yielded 19.5 kg/mm<sup>2</sup> stress on the chip corners, while assembly with the 0.375 mm thick leadframe yielded only 16.5 kg/mm<sup>2</sup>. A 15 percent reduction in stress on the chip corners is achieved by using a thicker leadframe in the package. In addition, the die surface shear stress is 12 percent lower for 0.375 mm thick leadframe. The shear stress distribution on the chip surface is the same for both assemblies. As shown in Figure 12, the maximum shear is concentrated on the chip corners and exponentially decreases to zero at the center of the die. [13]

In summary, these comparative results show that the 0.375 mm thick leadframe could be better than the 0.25 mm thick leadframe because (i) the permanent *in-situ* normal and shear stresses produced on the chip surface as a result of either the die attach or the molding processes are lower, (ii) the temperature dependence of the die surface stress is lower, and (iii) the maximum die deflection is also lower. These theoretical findings highlight the potential contribution that the leadframe thickness would have in reducing thermal-fatigue damage and vulnerability of the die to stress caused by temperature changes. To explain this, the following model is postulated.



#### DIE THERMAL FATIGUE MODEL

At the beginning of the molding process, the die surface is completely under tensile stress, as depicted in Figure 13. At the end of the molding process, at room temperature, the stress reverses to a compressive stress If the package system is heated again to a higher temperature the compressive stress will reverse to a tensile stress. This reversible process is repeated whenever the package is exposed to temperature excursions, causing the die to deflect in a butterfly-like movement. [14] The reversible deflection is further aggravated by the effects of the superimposed shear force which eventually will lead to a combined vertical and horizontal thermal cyclic strain, particularly on the edges and corners of the die. Ultimately, microcracks will start to grow in the passivation layer. Subsequently, the device metal deformation will initiate.

Based on the analysis of the experimental and analytical results and the model proposed above, we inferred that a lower failure rate should be expected for package systems with thicker leadframes, since the cyclic die deflection and level of stresses will be lower during thermal stress transition. Therefore, less thermal fatigue effects will be induced on the surface of a die that is mounted on this thicker leadframe.

# NEW PACKAGE EVOLUTION AND PERFORMANCE EVALUATION

Based upon the modeling predictions and the experimental evidence of thermal and reliability enhancement, the new package system was designed and placed into production. The features of the optimized package are described in Figure 14. Production lot samples of the newly developed package system were thermally characterized and exposed to an extensive reliability qualification study.

#### THERMAL CHARACTERIZATION

Production samples were thermally characterized under different ambient and cooling conditions. Results are summarized in Table IV. As shown in the table, two modes of cooling at room temperature were used during thermal characterization of the new package: natural convection, and moving air, both with and without a miniature heat sink. In still air at room temperature, the basic power dissipation capability of the new package without a heat sink is 3 W at T<sub>1</sub> = 150°C. This represents a 25 and 35 percent improvement over the average and worst performances, respectively (see Table I). The comparison can be seen in Figure 15, which demonstrates the relationship between the thermal resistance and package power dissipation for the new package compared to packages discussed earlier. The boundary line in Figure 15 relates maximum power dissipation of the packages at T = 150°C, which is normally specified as the junction temperature safe limit for BiMOS silicon technology. The best absolute thermal improvement with the new package can be achieved in moving air with a heat sink mounted on its web. The maximum steady-state power capability then is 9.1 W.

TABLE IV

NEW PACKAGE SYSTEM THERMAL PERFORMANCE
AT T<sub>1</sub> = 150°C

No.	Test Conditions	R <sub>eJA</sub> (°C/W)	Power Dissipated (W)
1	Still air (room temp.)     No heat sink	41.6	3.05
2	Still air (room temp.)     Heat sink (staver type)	24.8	5.1
3	Moving air (200 LFM)     Room temperature     No heat sink	25.8	4.9
4	Moving air (200 LFM)     Room temperature     Heat sink	13.9	9.10

#### **QUALIFICATION TEST PROGRAM**

The following were the qualification tests conducted:

- 1 High-temperature reverse bias life test—150°C ambient at 50 V applied.
- 2 Biased 85°C/85 percent RH test at 50 V applied.
- 3 Pressure cooker-121°C, 100 percent RH.
- 4 Extended temperature cycle, (-65°C + 150°C).
- 5 Thermal resistance, R<sub>eJA</sub> after each interval of 500 temperature cycles.

No failures have been reported to date in any of the tests. Results are summarized in Table V.


#### SUMMARY AND CONCLUSIONS

A high-performance, unconventional 16-lead Plastic Dual-In-Line Package has been developed. The new package power dissipation capability is 25 percent higher than the average measured for available packages and 35 percent higher than the worst package. The long-term reliability performance of the new package exceeds present industry standard reliability requirements. Reliability data also show that the chip surface metal deformation resistance to temperature cycling is improved by a factor of 4, and the ground wire propensity for thermal cyclic fatigue damage has been reduced by a factor of 7.

The superiority of the package is due to a combination of an optimum leadframe design and proper choice of materials, such as a low-modulus molding compound. The development strategy was based on a package optimization approach, in which a comparative analysis indicated that existing packages are not fully optimized. Extensive thermal and thermostructural studies have been performed. The finite element results have provided an insight into both the thermal and structural performance of the package.

TABLE V
RELIABILITY QUALIFICATION RESULTS FOR NEW 16-LEAD DIP

No.	Test	No. of Hours or Cycles Completed	Sample Size	Number of Failures
1	150°C HTRB	6000 h	100	0
2	85°C/85 percent RH/Bias	6000 h	50	0
3	Temp. cycle - 65°C + 150°C "Electrical"	10 000 C	50	0
4	Temperature cycling, "Thermal resistance"	9000 C	12	0
5	Temperature cycling (ground wire fatigue life)	9000 C	50	0

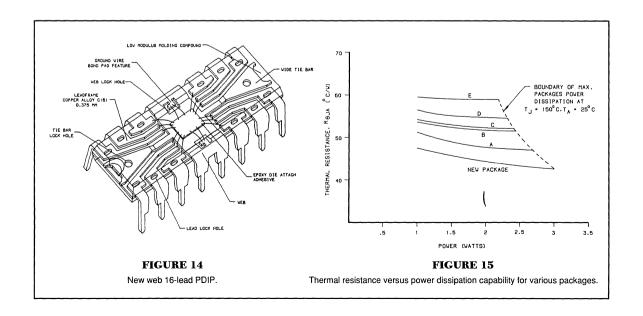

#### REFERENCES

- [1] C. Mitchell and H. Berg, "Thermal Studies of Plastic Dual-In-Line Package," IEEE Transactions on Components, Hybrids, and Manufacturing Technology, Vol. CHMT-2, pp. 500-511, December 1979.
- [2] J. A. Andrews et al., "Thermal Characteristics of 16 and 40 Pin Plastic DIP Packages," IEEE Transactions on Components, Hybrids, and Manufacturing Technology, Vol. CHMT-4, pp. 455-461, December 1981.
- [3] W. H. Schroen et al., "Reliability Tests and Stress in Plastic Integrated Circuits," in Proceedings 19th Annual Reliability Physics Symposium, pp. 81-87, 1981.
- [4] M. Aghazadeh and B. Natarajan, "Parametric Study of Heatspreader Thermal Performance in 48 Lead Plastic DIPs and 68 Lead Plastic Leaded Chip Carriers," in Proceedings 36th Electronic Components Conference, pp.143-149, 1986.
- [5] K. Kuwata, K. Iko, and T. Tabata, "Low Stress Resin Encapsulants for Semiconductor Devices," in Proceedings 35th Electronic Components Conference, pp.18-23, 1985.
- [6] S. Ito et al., "Special Properties of Molding Compounds for Large Surface-Mounting Devices". in Proceedings 38th Electronics Components Conference, pp. 486-492, 1988.
- [7] J. Dais and F. Howland, "Fatigue Failure of Encapsulated Gold-Beam lead and TAB devices," IEEE Transactions on Components, Hybrids, and Manufacturing Technology, Vol. CHMT-1, pp.158-166, June 1978.

- [8] J. H. Faupel and F. E. Fisher, Engineering Design, New York, N.Y.: Wiley-Interscience Publication, CH.15, pp. 973-977, 1981.
- [9] K. R. Kinsman, "The Mechanics of Molded Plastic Packages," Journal of Metals, pp. 23-29, June 1988.
- [10] M. Isagawa et al., "Deformation of Al Metallization in Plastic Encapsulated Semiconductor Devices Caused by Thermal Shock," in Proceedings 18th Annual Reliability Physics Symposium, pp. 171-177, 1980.
- [11] R. E. Thomas, "Stress-Induced Deformation of Aluminum Metallization in Plastic Molded Semiconductor Devices," in Proceedings 35th Electronic Components Conference, pp. 37-45, 1985.
- [12] R. J. Usell and S. A. Smiley, "Experimental and Mathematical Determination of Mechanical Strains Within Plastic IC Packages and Their Effect on Devices During Environmental Tests", in Proceedings 19th Annual Reliability Physics Symposium, pp. 65-73, 1981.
- [13] S. Okikawa et al., "Stress Analysis of Passivation Film Cracks for Plastic Molded LSI Caused by Thermal Stress," in Proceedings International Symposium for Testing and Failure Analysis, pp. 275-280, 1983.
- [14] S. Sasaki et al., "The Development of Mini Plastic IC Packaging for DIP Soldering," in Proceedings 34th Electronic Components Conference, pp. 383-387, 1984.

# APPLICATIONS INFORMATION

# ELECTROSTATIC PROTECTION FOR SEMICONDUCTOR PRODUCTS

Users should be aware of certain problems not often associated with the use and handling of semiconductor devices. Common problems relative to ESD (electrostatic discharge) and the role it can play in the manufacturing of systems using microelectronic devices are described here.

A common misconception is that only metal-oxide semiconductors, such as used in CMOS technology, are susceptible to ESD damage. This has been shown, in numerous studies and testing, not to be the case. Bipolar products also can be susceptible and, in some cases, even have lower thresholds of failure or parametric degradation than MOS product. All semiconductor devices should be treated as though they are sensitive to static discharge. This approach will save the handler considerable costs both in manufacturing and field reliability.

Electrostatic potentials are pervasive in that they exist virtually everywhere that electrical insulators are present. The insulator does not necessarily have to be a solid since even liquids and gasses may possess insulating properties. High electric fields may be built up in these insulating materials and discharge themselves easily into a semiconductor device without the slightest indication that a field even existed. Everyone should be familiar with the effect of hair standing on end during the cold and dry winter months. This phenomenon is a result of static charge. It is important to note that the threshold at which a human can detect, by sense of feel, a static charge is roughly 4 kilovolts. This means an operator, assembler, technician, or engineer may be inducing static and never be aware that the event occurred.

There exists a group of materials known as the "Triboelectric Series". Simply put, this is a group of materials that have a high propensity to generate static charge and thus create problems for semiconductor manufacturers as well as equipment manufacturers. Some of these materials are common in many workplaces and in manufacturing environments. The list includes such materials as acetate, glass, nylon, polyester, cotton, acrylics, polyurethane foam, Teplon (PTFE), PVC (vinyl), and numerous others. These materials should be kept from coming in direct contact with any semiconductor device no matter what its ESD sensitivity because they can generate static fields in the tens of kilovolts.

Static charge carries very limited energy, but damage to a semiconductor junction or gate dielectric in MOS devices does not require high energy to fail or be degraded. The simple discharge of static into a device is enough to rupture catastrophically an MOS gate oxide or create a damaged junction on a bipolar device. These effects can be subtle in that they are difficult to recognize visually on a device even under extreme magnification (>500X). Often a SEM (scanning electron microscope) is required to identify the damage location and confirm that an ESD event in fact had occurred.

## ELECTROSTATIC PROTECTION FOR SEMICONDUCTOR PRODUCTS

#### INPUT PROTECTION NETWORKS

Many semiconductor devices incorporate input protection networks directly onto the die to improve static sensitivity. Their purpose is to protect the device while in its application with ground and power applied and not meant to provide protection in any environment that does not have power and ground connections applied. Even in the case of a free-standing board populated with semiconductors, the input protection networks will be of little value since a PC board edge connector will simply act as an extension of the device's leads and any discharge into the card may ultimately wind up at a device terminal. For this reason, an assembly or PC board should be handled with the same care relative to ESD as a free-standing device. If a board is transported, it should be placed in a conductive container designed to protect static sensitive components. In addition, it always is prudent to use a shorting bar on any PC board edge connector to assure that static discharge does not reach any device through the edge connections.

#### STATIC PROTECTIVE MATERIALS

There are many brands of static protection materials that may be procured. The user should be aware that the efficacy of all these materials is not the same when it comes to static charge dissipation. Some materials, such as "static bags" and "static protective tubes", are coated simply with a conductive spray that will degrade over time and repetitive use. These systems are more appropriate for a one-time use and should not be considered for repeated use. The best ESD protection comes from materials that are "volumetrically" conductive. That is, their entire bulk is conductive and not just their surface. These materials can be used repetitively without the concern for degradation with time and use. Conductive sprays also are materials that one should be wary of since many degrade in their efficiency rapidly and their ability to reduce static levels varies greatly from vendor to vendor.

The best course of action for any user of semiconductor devices and systems that employ semiconductors is to assume that all product is susceptible and thus protect their devices as well as their systems throughout the entire manufacturing process.

# APPLICATIONS INFORMATION

## OPERATING AND HANDLING PRACTICES FOR MOS INTEGRATED CIRCUITS

# MOUNTING POWER TAB DEVICES

Power-tab packages are efficient thermal dissipators when properly utilized. In application, the following precautions should be taken:

- Always fasten the tab to the heat sink before the leads are soldered to fixed terminals.
- Strain relief must be provided if there is any probability of axial stress to the leads.
- Thermal grease (Dow Corning 340 or equivalent) should always be used. Thermal compounds are better heat conductors than air but not a good substitute for flat mating surfaces.
- The mounting surface should be flat to within 0.002 inch/inch (0.05 mm/mm).
- "Brute Force" mounting to poorly finished heat sinks can cause internal stresses which damage silicon chips and insulation parts. Mounting torque should be between 4 and 8 inch pounds (0.45 to 0.90 Nm.)
- The mounting holes should be as clean as possible with no burrs or ridges.
- Use appropriate hardware including a lock washer or torque washer.
- If insulating bushings are used, they should be of dialylphthalate, fiberglass-filled polycarbonate, or fiberglass-filled nylon. Unfilled nylon should be avoided.

#### HANDLING PRACTICES—PACKAGED DEVICES

Input protection diodes are incorporated in all MOS/CMOS devices. However, because of the very high input resistance in MOS devices, the following practices should be observed for protection against high static electrical charges:

- 1. Device leads should be in contact with a conductive material except when being tested or in actual operation.
- Conductive parts of tools, fixtures, soldering irons and handling equipment should be grounded.
- 3. Devices should not be inserted into or removed from test stations unless the power is off.
- Neither should signals be applied to the inputs while the device power supply is in an off condition.
- 5. Unused input leads should be committed to either  $V_{\rm SS}, V_{\rm DD},$  or ground

#### HANDLING PRACTICES—DIE

A conductive carrier should be used in order to avoid differences in voltage potential.

#### **AUTOMATIC HANDLING EQUIPMENT**

Grounding alone may not be sufficient and feed mechanisms should be insulated from the devices under test at the point where the devices are connected to the test equipment. Ionized air blowers can be of aid here and are available commercially. This method is very effective in eliminating static electricity problems.

#### AMRIENT CONDITIONS

Dry weather with accompanying low humidity tends to intensify the accumulation of static charges on any surface. In this atmosphere, proper handling procedures take on added importance. If necessary, steam injectors can be procured commercially.

#### ALERT FAILURE MODES

The common failure modes that appear when static energy exists and when proper handling practices are not used are:

- Shorted input protection diodes.
- 2. Shorted or 'blown' open gates.
- 3. Open metal runs.

Simple diagnostic checks with curve tracers or similar equipment readily identifies the above failure modes.

# APPLICATIONS INFORMATION

### SURFACE-MOUNT IC PACKAGES

Significant benefits can be achieved through the use of surface-mounted devices (SMDs) and general surface-mount technology as it applies to all components, both active and passive. The major benefits are reduced size and weight, and improved system reliability through reduction of printed wiring board holes. Improved quality and lower assembly cost are obtained through the adaptability of SMD to high-speed, pick-and-place assembly automation.

Prior dense circuit packing methods for active components used chip-and-wire hybrids or flatpacks. Hybrids have the disadvantages of yield limitations, specialized assembly requirements, and the difficulty of rework, burn-in, and testing at temperature or under operating conditions. The demand for flatpacks is decreasing with attendant increases in price. They are also prone to user damage in assembly.

Surface-mountable small-outline ICs and leaded or leadless chip carriers (SOIC, PLCC, and LCC, respectively) answer many of the limitations of flatpacks and chip-and-wire hybrids. In addition to the obvious benefits already described, due to the low mass of SMD, their ability to withstand shock and vibration is superior to conventional dual in-line packages (DIPs) and flatpack assemblies. SMD can also provide an improvement in electrical parameters (reduced wiring resistance, capacitance, and inductance) due to shorter signal paths and very dramatic improvements in the application of industry-standard DIPs.

Three types of surface-mount technology have been defined by the industry.

**Type I:** single- or double-sided board using only surface-mounted components. Space savings of 40% to 75% are achievable; lowest possible cost.

**Type II or Mixed Technology:** single- or double-sided board using a mixture of surface-mount and through-hole on the top side and possibly surface-mount on the bottom side. Space savings of 20% to 60% are typical; difficult to build with a single soldering process and typically requires two technologies; testing can be difficult and fixturing costly.

**Type III:** through-hole components on top side, surface-mount on bottom side. Space savings of 10% to 40% are typical; allows the use of existing equipment and technology for phasing in SMDs.

Another approach that facilitates phasing SMD into existing products is to design small Type I assemblies similar to ceramic hybrids. With small boards and few components, testing is easily accomplished using the interconnect pins. This construction is especially effective in utilizing the usually wasted vertical space of most printed wiring board assemblies.

Most SOICs feature gull-wing leads on two sides of the package, similar to the DIP configuration. Lead row spacing is 0.150" (part number suffix "L") for 8, 14, and 16-lead packages; 0.300" row spacing (suffix "LW") for 16, 18, and 20-lead packages. Wide body SOICs with

### SURFACE-MOUNT IC PACKAGES

heat sink contact tabs (suffix "LB") are used for increased package power dissipation requirements.

PLCCs (part number suffix "EP") are currently supplied in 20, 24, 28, and 44-lead square packages with J-formed leads.

#### THERMAL CHARACTERISTICS


The thermal characteristics of power integrated circuit packages are often the limiting factor in circuit performance. IC packages for surface-mount application may be smaller, lighter, and more economical because of improved reliability and lower assembly cost, but they must still address the thermal problems in order to meet the circuit design requirements.


Regardless of package style (through-hole or surface-mount), the device junction temperature should be limited to +150°C.


The thermal resistance of surface-mounted ICs is increased due to the concentration of heat that results from the reduced package size. For packages with higher lead counts, this increase is minimized.

The printed wiring board on which SMDs are mounted is also very important in thermal management. Thermal resistance is affected less by convection or radiation and more by conduction into the mounting surface. Especially for LCCs, the application of a thermally conductive compound between the package bottom and the mounting surface will further reduce the thermal resistance.

For each surface-mount package type, worst-case thermal resistance is shown in the table on the next page. However, as shown in the curves here, thermal resistance is determined by both package style and chip dimensions. Differences in the data shown here and other industry data are due to the fact that the thermal resistance of these power packages is measured at worst-case junction temperatures at maximum power, making maximum use of convection, radiation, and conduction thermal paths.





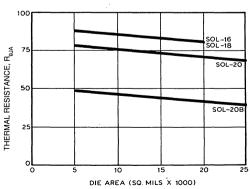

Dwg. A-14,373

Note: R<sub>BLA</sub> Measurements made with 2.24" x 2.24" solder-coated copper-clad board in still air.

### SURFACE-MOUNT IC PACKAGES


	Package	Package	Industry Package		ermal stance	Tape and Reel Width x Pitch
Leads	Style	Suffix	Outline	R <sub>eJC</sub> ¹	R <sub>θJA</sub> ²	(mm)
8	SO-8	L	MS-012AA	45°C/W	108°C/W	12 x 8
14	SO-14	L	MS-012AB	33°C/W	95°C/W	16 x 8
16	SO-16	L	MS-012AC	32°C/W	90°C/W	16 x 8
	SOL-16	LW	MS-013AA	_	80°C/W	16 x 12
18	SOL-18	LW	MS-013AB		80°C/W	24 x 16
20	SOL-20	LW	MS-013AC	17°C/W	70°C/W	24 x 12
	SOL-20B	LB	MS-013AC	6°C/W*	60°C/W	24 x 12
	PLCC-20	EP	MO-047AA	35°C/W	70°C/W	16 x 12
28	PLCC-28	EP	MS-007AA	30°C/W	55°C/W	24 x 16
	PLCC-28B	EB	MS-007AA	6°C/W*	42°C/W	24 x 16
44	PLCC-44	EP	MS-007AB	25°C/W	46°C/W	32 x 44
	PLCC-44B	EB	MS-007AB	6°C/W*	30°C/W	32 x 44

SO = Small Outline IC, 0.15" Gull Wing.

PLCC = Plastic Leaded Chip Carrier.


SOL = Small Outline IC, 0.30" Gull Wing.

\*B<sub>N.T.</sub> The SOL-20B package is a miniature "batwing" package (12 active connections plus eight tab/ground connections). The PLCC-28B is a batwing with 14 active connections; the PLCC-44B has 22 active connections. These unique power packages are compatible with other SMD packages and allow the easy attachment of external heat sinks for highest package power dissipation.




**SO-14** 

Dwg. OA-005-14



Dwg. OA-005-17



PLCC-44

Dwg. OA-007-44




Dwg. OA-005-21

<sup>&</sup>lt;sup>2</sup>Mounted on 2.24" x 2.24" solder-coated copper-clad board in still-air.

# APPLICATIONS INFORMATION

### COMPUTING IC TEMPERATURE RISE



IC temperature  $T_{_{J}}$  is determined by ambient temperature  $T_{_{A}},$  heat dissipated  $P_{_{D}},$  and total thermal resistance  $R_{_{\theta}}.$  This total thermal resistance is comprised of three individual component resistances: chip  $R_{_{C}}$ , lead frame  $R_{_{1}}$ , and heat sink  $R_{_{S}}.$ 

#### WHY IC TEMPERATURES RISE

Heat is the enemy of integrated circuits—particularly power devices. Here's how to use thermal ratings to determine safe IC operation.

Excessive heat shortens the life of an IC and reduces its operating capability. Until recently, ICs were capable of operating only in low-power applications requiring perhaps a few milliwatts of power. But now, new ICs handle several amperes and drive devices such as relays, solenoids, stepping motors, and incandescent lamps. These nigh power levels may increase IC temperatures substantially and are capable of destroying devices unless appropriate precautions are taken.

#### THERMAL CHARACTERISTICS

The thermal characteristics of any IC are determined by four parameters. Maximum allowable IC chip junction temperature  $T_J$  and thermal resistance  $R_B$  are specified by the IC manufacturer. Ambient temperature  $T_A$  and the power dissipation  $P_D$  are determined by the user. Equation 1 expresses the relation of these parameters.

$$T_{\perp} = T_{\Delta} + P_{D}R_{B} \tag{1}$$

Reprinted by permission from the June 9, 1977 issue of MACHINE DESIGN, Copyright © 1977 by Penton/IPC Inc., Cleveland, Ohio.

Junction temperature T<sub>J</sub> usually is limited to 150°C for silicon ICs. Devices may operate momentarily at slightly higher temperatures, but device life expectancy decreases exponentially for extended high temperature operation. Usually, the lower the junction operating temperature, the greater the anticipated life of the IC.

Ambient temperature T<sub>A</sub> is traditionally limited either to 70°C or 85°C for plastic dual in-line packages (DIPs) or 125°C for hermetic devices. Again, the objective is to operate at as low a junction temperature as practical.

Thermal resistance  $\rm R_{\rm e}$  is the basic thermal characteristic for ICs. It is usually expressed in terms of °C/W and represents the rise in junction temperature with a unit of power applied in still air. (The reciprocal of thermal resistance is thermal conductance, or derating factor, G<sub>a</sub> expressed as W/°C.) Thermal resistance of an IC consists of several distinct components, the sum of which is the specified thermal resistance. For a typical IC, these components of thermal resistance are 0.5°C/W per unit thickness of the silicon chip, 0.1 to 3°C/W per unit length of the lead frame, and up to 2,000°C/W per unit thickness of still air surrounding the IC. DIPs are used more than any other type of packaging for ICs and newer copper-alloy lead frames provide a superior thermal rating over the standard iron-nickel-cobalt allov (Kovar) lead frames. However, power ICs are also available in other packages such as flatpacks and TO-type cans.

The power P<sub>D</sub> that an IC can safely dissipate usually depends on the size of the IC chip and the type of packaging. Most common copper-frame DIPs can dissipate about 1.5 W, although some special-purpose types have ratings as high as 5 W.

Total IC power to be dissipated depends on input current, output current, voltage drop, and duty cycle. Thus, for many industrial digital-control ICs, logic-gate power P<sub>1</sub> (typically less than 0.1 W) and output power P<sub>0</sub> must be determined to find the total power to be dissipated. Total power dissipation for these logic devices is the sum of P<sub>1</sub> and P<sub>2</sub>.

$$P_{I} = n(V_{CC}|_{CC}) \tag{2}$$

$$P_0 = n(V_{CE/SAD}I_C) \tag{3}$$

where  $V_{\text{CC}} = \text{logic-gate}$  supply voltage,  $I_{\text{CC}} = \text{logic-gate}$  supply ON current,  $V_{\text{CE(SAT)}} = \text{output}$  saturation voltage,  $I_{\text{C}} = \text{output}$  load current, and n = number of logic gates. Manufacturers usually list typical and maximum values for these voltages and currents. For thermal considerations it is best to use the maximum values so that worst-case power dissipation is determined.

If the duty cycle of the device is longer than 0.5 s, the peak power dissipation is the sum of the logic-gate power  $P_{_{\rm I}}$  and output power  $P_{_{\rm O}}$  for the logic ON state alone. If the ON time is less than 0.5 s, however, average power dissipation must be calculated from instantaneous ON and OFF power  $P_{_{\rm ON}}$  and  $P_{_{\rm OFF}}$  from

$$P_{D} = DP_{ON} + (1-D)P_{OFF}$$


$$\tag{4}$$

#### **CORRECTIVE ACTIONS**

If the junction temperature or the required power dissipation of the IC is calculated to be greater than the maximum values specified by the manufacturer, device reliability and operating characteristics possibly will be reduced. Possible solutions are:


- Modify or partition the circuit design so the IC is not required to dissipate as much power.
- 2. Reduce the thermal resistance of the IC by using a heat sink or forced-air cooling.
- Reduce the ambient temperature by moving heat-producing components such as transformers and resistors away from the IC.
- Specify a different IC with improved thermal or electrical characteristics (if available).

#### SETTING UP THE CIRCUIT



Input power is negligible compared to output power and is therefore not measured.

#### CALIBRATING THE SENSE DIODE



#### MEASURING IC TEMPERATURE

Sometimes IC junction temperature cannot be calculated readily and instead must be measured. Measurement should be made when there is insufficient data with which to calculate, when the effects of external variables such as forced-air cooling or enclosure size must be determined, or as a check on the manufacturer's specifications regarding package thermal resistance.

The most popular technique of measuring IC temperature uses the characteristic of a diode to reduce its forward voltage with temperature. Many IC chips have some sort of accessible diode—parasitic, input protection, base-emitter junction, or output clamp. With this technique, a "sense" diode is calibrated so that forward voltage is a direct indicator of diode junction temperature. Then, current is applied to some other component on the chip to simulate operating conditions and to produce a temperature rise. Since the thermal resistance of the silicon chip is low, the temperature of the sense diode is assumed to be the same as the rest of the monolithic chip.

The sense diode should be calibrated over at least the expected junction operating temperature. Apply an accurately measured, low current of about 1 mA through the sense diode and measure the forward voltage in 25°C increments after stabilization at each temperature. This calibration provides enough data for at least six points to construct a diode-forward-voltage versus junction-temperature graph at the specified forward current. A typical 25°C forward voltage is between 600 and 750 mV and decreases 1.6 to 2.0 mV/°C.

For power levels above 2 W, it may be necessary to use more than a single transistor if only the device saturation voltage and sink current are used. When higher power is desired keep the output out of saturation.

Measuring the sense-diode forward voltage may require a considerable waiting period (10 to 15 minutes) for thermal equilibrium. In any event, at the instant of measurement, the heating power may have to be disconnected since erroneous readings may result from IR drop in circuit common leads. Various circuit connections (such as four-point Kelvin) may be arranged to reduce or eliminate this source of error.

The IC junction temperature can be determined by comparing the voltage measurement with the internal power source against the voltage measurement with the temperature chamber.

#### FINDING SAFE OPERATING LIMITS

Here's how to calculate the safe operating limits for an IC. The first two examples are simple calculations involving maximum allowable power and are straightforward. The third and fourth examples are more complex and involve logic power, output power, and duty cycle.

**Problem:** Determine the maximum allowable power dissipation that can be handled safely by a 16-lead Kovar DIP with an  $R_{\theta}$  of 125°C/W in an ambient temperature of 70°C.

**Solution:** From Equation 1, the maximum allowable power dissipation  $P_{\rm D}$  for this IC is

$$P_{D} = \frac{150^{\circ}\text{C} - 70^{\circ}\text{C}}{125^{\circ}\text{C/W}}$$
$$= 0.64 \text{ W}$$

**Problem**: Determine the maximum allowable power dissipation that can be handled by a 14-lead copper DIP with a derating factor  $G_{\theta}$  of 16.67 mW/°C in an ambient of 70°C.

**Solution:** Since the derating factor  $G_{\theta}$  is the reciprocal of thermal resistance  $R_{\theta}$  the maximum allowable power dissipation  $P_{n}$ , from Equation 1 is

$$P_D = (150^{\circ}C - 70^{\circ}C) \times (16.67 \text{ mW/}^{\circ}C)$$
  
= 1.33 W

**Problem**: Calculate the maximum junction temperature for a quad power driver with a thermal resistance of 60°C/W in an ambient of 70°C and which is controlling a 250 mA load on each of the four outputs.

**Solution:** To determine the maximum (worst case) junction temperature for this IC, the maximum total power dissipation must be determined from the data listed on the IC data sheet. The specifications are usually listed as typical and minimum or maximum values. It is important to use maximum voltage and current limits to insure an adequate design. Common maximum values for an industrial power driver are  $V_{\rm cc} = 5.25$  V,  $I_{\rm cc} = 25$  mA, and  $I_{\rm cc} = 0.7$  V, and  $I_{\rm cc} = 250$  mA. From Equations 2 and 3, worst case logic and output power dissipation are

Thus, the total worst case power dissipation  $P_{\rm p}$  is 525 mW plus 700 mW, or 1.225 W. From Equation 1, maximum junction temperature  $T_{\rm r}$  is

$$T_J = 70^{\circ}\text{C} + (1.225 \text{ W}) \times (16.67 \text{ mW/}^{\circ}\text{C})$$
  
= 143.5°C

**Problem:** Determine the acceptable duty cycle for a hermetic power driver with a thermal resistance of 100°C/W in an ambient of 85°C and which is controlling load currents of 250 mA on each of four outputs.

**Solution:** From Equation 1, the allowable average power dissipation P<sub>p</sub> for this IC is

$$P_{D} = \frac{150^{\circ}\text{C} - 85^{\circ}\text{C}}{100^{\circ}\text{C/W}}$$

This means that there is 0.65 W limit on average power, but, not instantaneous power. If the duty cycle is low enough, and the ON time is not more than about 0.5 s, the average power dissipation can be considerably lower than the peak power. The ON, or peak power, is determined from the data sheet maximum values of  $V_{\rm cc}, I_{\rm cc},$  and  $V_{\rm cc(SAT)}$  at the specified load current of 250 mA. From Equations 2 and 3, logic-gate power  $P_{\rm n}$  and output power  $P_{\rm n}$  for the ON state are

Instantaneous ON power  $P_{\text{QN}}$  is the sum of  $P_{\text{I}}$  and  $P_{\text{Q}}$  for the ON state, or 1.283 W. The OFF power is primarily the power dissipated by the logic in the OFF state, and is found by using the  $I_{\text{CC}}$  maximum rated current listed on the specification sheet. The power dissipated in the output stage can be calculated from the leakage current  $I_{\text{C}}$  and supply voltage  $V_{\text{CE}}$ . From Equations 2 and 3, logic-gate power  $P_{\text{I}}$  and output power  $P_{\text{D}}$  for the OFF state are


Instantaneous OFF power  $P_{\text{OFF}}$  is the sum of  $P_{\text{I}}$  and  $P_{\text{0}}$  for the off state, or 205 mW. From equation 4, acceptable duty cycle D is

$$D = \frac{P_D - P_{OFF}}{P_{ON} - P_{OFF}}$$
$$= \frac{0.65 \text{ W} - 0.205 \text{ W}}{1.283 \text{ W} - 0.205 \text{ W}}$$

= 41%

#### WHAT THE CURVES SHOW


The junction temperature of an IC depends on several factors, including the thermal resistance of the IC and the operating duty cycle. Graphs showing the relationship of these factors are often useful in specifying an IC.



Typical thermal-resistance ratings for ICs in still air range from  $60^{\circ}\text{C/W}$  to  $140^{\circ}\text{C/W}$ . The slope of each curve on this graph is equal to the derating factor  $G_{\theta}$ , which is the reciprocal of thermal resistance  $R_{\theta}$ . For an ambient temperature of  $50^{\circ}\text{C}$ , a typical 14-lead flatpack with an  $R_{\theta}$  of  $140^{\circ}\text{C/W}$  can dissipate about 0.7 W. A typical DIP, however, with 14 copper-alloy leads can dissipate almost 1.7 W at  $50^{\circ}\text{C}$ .

The highest allowable package power dissipation shown here is 2.5 W. Other special-purpose DIP packages are available with power dissipation ratings as high as 3.3 W at 0°C ( $R_{\rm g}$  = 45°C/W). If not for package limitations, IC chip dissipation might be greater than 9 W at an ambient temperature of up to 70°C.

Although the curve for plastic DIPs goes all the way to 150°C, they ordinarily are not used in ambients above 85°C because of traditional package limitations. Hermetic DIPs are specified to temperatures of 125°C, and at 150°C the device should be derated to 0 W. The higher specification limits for hermetic devices is the result of their design for use in rigorous, high-reliability military applications.



Duty cycle is important in calculating IC junction temperature because average power—not instantaneous power—is responsible for heating the IC. To convert from peak power to average power, multiply the peak power dissipation by the duty cycle. The average-power rating is then used with the thermal-resistance rating to calculate the IC junction temperature. Thus, short duty cycles allow peak power to be high without exceeding the 150°C junction-temperature limit. However, this consideration applies only to ON times of less than 0.5 s.

# APPLICATIONS INFORMATION

### THERMAL RESISTANCE— A RELIABILITY CONSIDERATION

More and more the semiconductor component supplier and the ultimate system user are becoming aware of the need for reliable components. Most failure mechanisms responsible for reliability failures are temperature dependent and the kinetics of the failure reaction are normally described by an Arrhenius function. This dependence, therefore, demands the capability of measuring the mean temperature which an integrated circuit die will attain during operation to realistically assess the reliability of the part.

The problem addressed by this paper is the inconsistency of the measurement techniques and the results used by manufacturers and users to determine the thermal characteristics of packaged semiconductor components. Our objective is to provide insight into the considerations which must be applied when evaluating these thermal properties of the packaged component. These considerations are materials, geometry and environment.

Furthermore, we wish to instill uniformity in the method of determining thermal properties of packaged semiconductors through understanding of the variables involved which can lead to a useable industry standard.

#### RELIABILITY—THE TEMPERATURE FUNCTION

The recognition of the problems one encounters in measuring the mean temperature of a die has been directly related to our experiences in our reliability assurance programs. The large number of device types manufactured require an equally large number of burn-in boards having different functions and geometry for the individual reliability studies. The variations in board density and thermal environment for a device under test have provided considerable junction temperature data from which we conclude that a "thermal resistance" measured in one oven with its set of conditions is not transferable to another oven with different boards, loading, etc. when the reference temperature for the measurement is the oven control temperature. Furthermore, it has become obvious that these same problems in measuring a mean die temperature exist in a system environment.

Most reactions which can cause a failure in an electrical parameter of an integrated circuit are chemical in nature and are influenced by temperature. The temperature dependence of these reactions has been described very well by S. Arrhenius in his treatment of reaction kinetics. In his treatment, the reaction velocity or rate is given by the equation

 $dlnV_{.}/dT = E/RT^{2}$ 

where  $V_i$  is the specific reaction rate, T is the absolute temperature, R is the Molar Gas Constant, and E is the energy difference between a mole of active molecules and a mole of normal molecules.

This equation integrates to

$$InV_{.} = E/RT + A$$

where A is a constant which is the value of  $InV_r$  at 1/T=0,  $(InV_r)$ . A more familiar expression is

$$lnV = lnV_r^{\circ} - \epsilon/kT$$

or

$$V_r = V_r^{\circ} e - \epsilon/kT$$

where  $\in$  is the activation energy per molecule (= E/N), N = Avagado's number and k is the gas constant per molecule (= R/N), which is generally known as the Boltzmann constant. it has the value

 $V_{\rm E}$ , the time rate of change of electrical parameters is proportional to  $V_{\rm r}$ , i.e.,  $V_{\rm E}=BV_{\rm r}$ . The amount of change in the electrical parameter necessary to cause a normal device to fail,  $\Delta P_{\rm r}$ , is  $V_{\rm E}t_{\rm r}$  where  $t_{\rm r}$  is the time of failure.

Recalling that  $V_F = BV_F$ , then

$$\Delta P_i = BV_i t_i$$

For a given device  $\Delta P_i$ , is a constant, therefore,

$$t_{i} = \Delta P_{i}B^{-1}/V_{i}$$

but

$$V_1 = V_r^o e \in /kT$$

therefore

$$t_{i} = (B^{-1} \Delta P_{i} / V_{r}^{\circ} e^{\epsilon/kT}) = 8e^{\epsilon/kT})$$

where

$$8 = B^{-1}\Delta P_f/V_r^o$$

The acceleration factor (AF) between any two temperatures is derived from this equation, when the activation energy for the failure reaction is known:

$$\overline{AF} = t_f/t_f = e^{\varepsilon/k(1T_1-1/T_2)}$$

Activation energies of most reactions responsible for random failures in a normal operating period (beyond infant mortality) are nominally

The importance of accurately determining the die temperature is now clear if one considers a not unrealistic situation where a device is thought to be operating with a die temperature of 120° and the actual temperature is 150°C. If the failure reaction has an activation energy of 0.7 eV, then the acceleration factor is 4.3 which means the device would fail in less than one quarter of the time it would have taken if the device actually operated at  $120^{\circ}C$ .

### THERMAL RESISTANCE — $R_{eva}$

Quite frequently, applications engineers have made attempts to identify the temperature attained by a die when a steady state rate of heat is being generated by the die by applying the term called "Thermal Resistance." This "constant," designated  $R_{\text{\tiny BJA}}$ , or simply  $\theta_{\text{\tiny JA}}$ , relates the temperature rise of a packaged integrated circuit die above an ambient temperature when a known constant power is generated in the die. This term is normally defined as

$$\theta_{JA} = (T_J - T_A)/P_D$$

where  $T_J$  is the mean junction or die temperature,  $T_A$  is an ambient temperature, and  $P_D$  is the power generated within the die which must be conducted from the die to the ambient. This is occasionally designated  $Q_{T^+}$  the time rate of heat generation in the die. Thermal resistance data supplied by manufacturers may be referenced to a cubic foot of free or still air, flowing air at some velocity, or simply no reference. These are some of the definitions of "ambient" from which one must determine where to measure  $T_A$ .


Thermal resistance as defined by  $\theta_{JA}$  is not constant. It is made up of a constant term (or terms) in series with a number of variable terms. The constant terms relate to the package materials and geometry, which we will designate  $\theta_{JC_i}$  and the variable terms relate to the heat paths from the package boundary to some isothermal envelope in the system which has the temperature  $T_A$ . Even if the system for measuring  $\theta_{JA}$  is defined, it is virtually impossible to reproduce that system in an application since the external thermal paths are determined by the method of mounting, the printed wiring board if used, other heat generating components on the board or in the vicinity, air flow patterns, etc. These are all variables for each application. We have measured values of  $\theta_{JA}$  for the same device which vary by a factor of two when the mounting and environmental conditions are changed. The values in the  $\theta_{JA}$  column in Tables 2 and 3 are indicative of the variation.

One is tempted to partition  $\theta_{IA}$  into two thermal terms,

$$\theta_{IA} = \theta_{IC} + \theta_{CA}$$

where  $\theta_{_{JC}}$  is defined as the thermal resistance from the source of power at  $T_{_{JC}}$  to the boundary of the package not including the external legs, and  $\theta_{_{CA}}$  is the thermal resistance from the package boundary to that isothermal envelope at  $T_{_{A}}$ . However, when one examines the thermal profile along the surface of a plastic dual-in-line package such as shown in Figure 1, it is immediately obvious that a definition of  $\theta_{_{JC}}$ 

$$\theta_{JC} = (T_J - T_C)/P_D$$



cannot be applied because  $T_{_{\rm C}}$  varies with position. Similarly, the term  $\theta_{_{\rm CA}}$  defined by

$$\theta_{CA} = (T_C - T_A)/P_D$$

suffers from the same variablility in  $T_{_{C}}.$  This being the case, it is invalid to partition  $\theta_{_{JA}}$  when operating on the *total* power to be dissipated,  $P_{_{D}}.$ 

#### THE THERMAL MODEL

When one examines a plastic package supplied by an individual manufacturer it is found that the geometry of the lead frame, its position within the package boundary, its composition, the composition of the plastic and its filler, the internal wire bonding are very carefully controlled and constant in time. This being the case one can readily build a model of the package which can be as invariant as the package material properties. If one considers all possible heat flows, a very complex model emerges. However, if the thermal conductivities of the package materials and the orders of magnitude difference in the values of these conductivities are considered, a simplified workable model can be generated by neglecting heat paths where heat flows are minimal. The simplified model shown in Figure 2 has ignored the heat flow between leads and assumes that the large difference between the thermal conductivity of the loaded plastic and the metals in the package define the specified heat paths. For example, the heat flow between leads would be a shunting resistor between heat paths in the model. The thermal conductivity of most plastics range between 1.5 and 3 x 10<sup>-3</sup> calories/cm - °C while copper based materials range between 0.5 and 0.82 calories/cm - °C and nickel based allovs are about 0.03 calories/cm - °C.

The heat paths defined by  $\theta_{\text{JC}_i}$  where i refers to a particular path, radiate from the chip to an area on the package periphery defined by the projected chip or pad area as well as the mean cross-sectional area of each of the leads within the plastic package boundary (see Figure 1). Because of package symmetry, a 16-lead isolated-pad package may have seven different heat paths which can be characterized. The thermal resistance,  $\theta_{\text{JC}_i}$ , can be calculated for each path from the geometry and material properties. For example  $\theta_{\text{JC}_i}$  is the resistance from the top of the chip to the projected area on the package surface. The value of  $\theta_{\text{JC}_i}$  is given by

$$\theta_{JC_1} = (T_J - T_{C_i})/q_1 = L/K_p A$$

where L is the length of the heat path (thickness of the plastic above the die), A is the cross-sectional area of the heat path (area of the die or the pad),  $K_p$  is the thermal conductivity of the loaded plastic and  $q_1$  is the heat/second flowing in the path defined by A and L.

 $\theta_{\text{JC}_2}$  is the thermal resistance from the top of the die through the silicon, through the pad and through the plastic to the bottom surface. The value of  $\theta_{\text{JC}_2}$  is given by

$$\theta_{JC_2} = (T_J - T_{C_2})/q_2 = [1/A] \sum_n L_n/K_n$$

n = Si, Metal, Plastic

Similar expressions can be derived for each of the leads and they have the form

$$\theta_{JC_i} = (T_J - T_{C_i})/q_i =$$

$$[1/t] [(L/K_pW_p) + (1/K_M) \sum_{n=1}^{\infty} L_n/W_n]$$

where t is the thickness of the lead frame,  $K_p$  is the thermal conductivity of the loaded plastic,  $K_M$  is the thermal conductivity of the frame metal,  $L_n$  is the mean length of each connected portion of a leg segment having a mean width,  $W_n$ . In accord with the model, each internal path characterized by a thermal resistance,  $\theta_{J_CI}$ , is in series with an external thermal resistance,  $\theta_{C_IA}$ , which completes the path to  $T_A$ . The value of  $\theta_{C_IA}$  can be calculated from the amount of heat,  $q_I$ , flowing through the internal package path and the temperature difference,  $(T_{C_I} - T_A)$ , with the equation

$$\theta_{C_iA} = (T_{C_i} - T_A)/q_i$$

Values of  $\theta_{\text{C}_{\text{i}}\text{A}}$  are variable and depend upon the specific environment.

We identify the heat paths in our calculations and data as follows: a) when i=1, the path is from die to case surface directly above, b) when i=2, the path is from die to the case surface directly below and c) when  $i=3,\,4,\,5\ldots$  the path is from die through an identified metal lead to the intersection with the plastic surface.

#### VERIFICATION OF MODEL

From the model one can derive the minimum thermal resistance which is characteristic of the package. This can be calculated for the condition when all case temperatures are equal and at TA. This is equivalent to shorting all external thermal resistances so that  $T_{c_i}$  =  $T_a$ . When all  $T_{c_i}$  are equal, the reciprocal of the sum of the reciprocals of all  $\theta_{\rm ic.}$  is the minimum thermal resistance for the package. This is realized experimentally by placing the unit in an infinite heat sink such as a rapidly stirred, low-viscosity controlled temperature bath. The case temperature is now forced to be the same over all surfaces and by definition it is  $T_{_{A}}\!.\,\theta_{_{JC}}$  is the minimum limit of  $\theta_{IA}$ . Table 1 shows the agreement between the values of  $\theta_{\text{JC}}$  calculated from the model when the case temperatures are

TABLE 1 COMPARISON OF CALCULATED AND EXPERIMENTAL VALUES OF  $[\theta_{IC}]$   $T_{C_i}$ =  $T_A$  (All measurements in °C/W)

Package	Frame	$[\theta_{JC}] T_{C} = T_{A}$				
Туре	Material	Experimental	Calculated			
16-Pin, Isolated Pad, Epoxy I	Copper	41 ± 3	43			
16-Pin, Isolated Pad, Epoxy I	Kovar	100 ± 4	93			
16-Pin Tab	Copper	8.6 ± .7	8.5			

shorted together and the values experimentally measured in a controlled temperature liquid bath. The agreement between calculated and experimental values for packages constructed from different materials enhance the validity of the model.

### APPLYING THE MODEL TO MEASURE $T_{_{\rm I}}$

Having verified the model, any one of the identified heat paths, which has a constant thermal resistance,  $\theta_{JC}$ , can now be used to determine quite accurately the die temperature,  $T_J$ . If one chooses to measure the case temperature directly above the die, the difference between die temperature and case temperature is related to the heat flow,  $q_{ij}$ , through that path by the thermal conductivity equation:

$$q_i = K_p A (T_J - T_{C_1})/L_1$$

Rearranging this equation to

$$(T_1 - T_{c_1})/q_1 = L_1/k_0A_1 = \theta_{JC_1}$$

Then

$$T_{J} = T_{C_1} + q_1 \theta_{JC_1}$$

If the fraction of total heat,  $P_{\rm D}$ , generated by the die which passes through path 1 is defined as k, then

$$q_1 = k_1 P_0$$

Substituting into the previous equation  $T_J$  is now referenced to  $T_{c_1}$  by

$$T_1 = T_{C_1} + k_i \theta_{1C_1} P_{D_1}$$

where  $T_J$ ,  $T_{C_I}$ , and  $P_D$  are experimentally measurable quantities. Values of  $k_i \theta_{JC_I}$  can be determined. This term can be used to determine  $T_J$  in any environment by measuring  $T_{C_I}$  and the total heat generated by the die. This equation applies for any path, i, i.e.

$$T_{ij} = T_{Ci} + k_i \theta_{ijCi} P_{Di}$$

Experimental results are presented in Table 2 which establish that  $k_i\theta_{_{JC_i}}$  is a constant, the magnitude of which is determined by the heat path chosen.

TABLE 2
THERMAL RESISTANCE VALUES—ISOLATED PAD—EPOXY PACKAGE (All measurements in °C/W)

Device	Condition of Measurement	θ <sub>JA</sub>	k₄θ <sub>C₄A</sub>	k <sub>1</sub> θ <sub>C1A</sub>	k₁θ <sub>JC1</sub>	k₄θ <sub>JC₄</sub>
ULN2003A 16-Pin Copper Frame	1 ft. <sup>3</sup> Still Air, Socket Mount	84.7	39.1	48.1	36.6	45.6
ULN2003A 16-Pin Copper Frame	Oven #1, 60 CFM, Pin Connectors	60.0	17.0	25.2	34.8	42.3
ULN2003A 16-Pin Copper Frame	AAVID E type 5010 Heat Sink Oven #1, 60 CFM	50.4	11.4	15.2	35.2	39
ULN2003A 16-Pin Copper Frame	Fluorocarbon Bath, Pin Connectors	41.3	3.3	2.9	38.4	38

TABLE 3
THERMAL RESISTANCE VALUES—TAB PAD—EPOXY (All measurements in °C/W)

Device	Condition of Measurement	θ <sub>JA</sub>	K₅θ <sub>C₅</sub> A	K <sub>5</sub> J <sub>C5</sub>
Test Chip "B" Package	Oven #1, T <sub>A</sub> = 50°, 60 CFM	32.8	25.0	7.8
ULN2068B	Oven #1, T <sub>A</sub> = 50°, 60 CFM	34.9	26.4	8.5
ULN2068B	Socket Mount, FC-40 Bath	23.2	13.5	9.7
ULN2068B	Socket Mounted on Board, FC-40 Bath	26.8	17.4	9.4
Test Die "B" Package	Oven #1, Soldered on Test Board, 60 CFM	31.2	22.8	8.4
Test Die "B" Package	Oven #1, Soldered in Test Board w/Staver Heat Sink	22.3	14.2	8.1

In our notation,  $k_4\theta_{_{JC_4}}$  is the thermal resistance of the path determined by measuring the temperature of pin 4 at the point of intersection with the case body. Further data are presented in Table 3 for a copper tab package where the pad on which the die is mounted extends to the outside of the package. The values of  $k_{_{S}}\theta_{_{JC_{_{S}}}}$  remain constant over a large change in environment. When i=5, the heat path is from the die through the heat tab to the intersection with the case surface.

Figure 3 shows the outline of the frame in the 16-pin isolated-pad package which is designated the "A" package. The "B" package or tab package frame outline is also shown.

### MEASUREMENT OF $k_i \theta_{JC_i}$

Although the derived equations indicate that  $k_i\theta_{JC_i}$  are determined by two temperature measurements at one power level, the values are more accurately determined from temperature versus power plots.

If one considers any one path, i, in the model, that path is described by:

$$T_{J} - T_{A} = q_{i} (\theta_{JC_{i}} + \theta_{C_{i}A})$$

Here again, if  $k_i$  is the fraction of the total heat  $(P_D)$  which traverses path i, then the previous equation can be written

$$T_{J} - T_{A} = k_{i}P_{D} (\theta_{JC_{i}} + \theta_{C_{i}A})$$

or rearranging terms

$$(T_J - T_A)/P_D = k_i \theta_{JC_i} + k_i \theta_{C_i A}$$


By definition  $(T_J - T_A)/P_D = \theta_{JA}$ , therefore by subtitution and rearrangement

$$k_i \theta_{JC_i} = \theta_{JA} - k_i \theta_{C_i A}$$

where experimentally  $\theta_{JA}$  is the slope of a plot of  $T_J$  versus  $P_D$  and  $K_I \theta_{C_i A_i}$  is the slope of the plot of  $T_{C_i}$ , versus  $P_D$ . Figures 4, 5, and 6 are representative of the experimental plots for evaluation of  $K_I \theta_{JC_i}$ .

### T. MEASUREMENT

The numerical values of  $k_i \theta_{JC_i}$ , which we have shown experimentally to be constant over a large variation in environmental conditions, are functions of the measuring system for determining the case or leg temperature, T<sub>c</sub>.: This can be shown by considering heat path 1 in the Model shown in Figure 2. In this case, q<sub>1</sub> =  $(T_J - T_A)/(\theta_{JC_1} + \theta_{C_1A})$ .  $\theta_{JC_1}$  is defined as  $L_1/k_pA_1$ , where  $A_1$  is determined by the die area. When a thermocouple is attached to the surface directly over the die. it also functions as a heat sink. This changes the effective area A of the internal heat path and also changes the external thermal resistance,  $\boldsymbol{\theta}_{\text{C}_1\text{A}}$  . The changes are functions of the thermocouple composition and size. The value of  $\theta_{JC_1}$  is now determined by the effective area of contact of the thermocouple and its value remains constant when the attached thermocouple's size is held constant. k,, (= q./Q.), also changes because q, is determined by the sum of  $\theta_{JC_1}$  and  $\theta_{C_1A}$ . The term (T, - T<sub>a</sub>) is essentially constant within experimental error because q, is small compared to Q, and the variations in q, do not measureably change the die temperature.

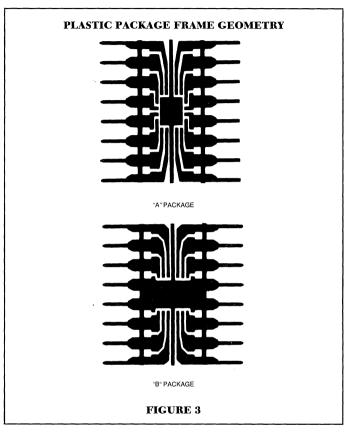


 $\theta_{c_{1A}}$  decreases as the wire size of a copper-constantan thermocouple increases and it increases as the composition is changed from copper-constantan to iron constantan. The thermal conductivities of copper, iron, and constantan are respectively 0.9, 0.16, and 0.054 cal/°C-cm.

Data in Table 4 confirm the direction and change in  $k_1\theta_{\text{JC}}$ , with change in measuring system. Data were taken in the same oven ambient.

When the physical system for T  $_{\text{C}}$  measurement and the conditions for measurement are specified and held constant, values for  $k_{_{1}}\theta_{_{\text{JC}},}$  are constants.

TABLE 4 VARIATIONS IN  $k_i\theta_{JC_i}$  WITH MEASUREMENT SYSTEM (All measurements in °C/W)

Device	Condition of Measurement	$\theta_{JA}$	k₁θ <sub>C₁A</sub>	k₁θ <sub>JC₁</sub>
Test Device	0.005" Type "J" Thermocouple	127.6	52.2	75.4
Test Device	0.012" Type "J" Thermocouple	123.5	31.5	92.0
Linear Circuit	0.005" Type "T" Thermocouple	123.3	75.0	48.3



02 03 04 05 06 07 08 09

POWER (WATTS)
FIGURE 6


### $\boldsymbol{T}_{_{\boldsymbol{I}}}$ MEASUREMENT FOR $\boldsymbol{k}_{_{\boldsymbol{I}}\boldsymbol{\theta}_{_{\mathbf{IC}}}}$ DETERMINATION

An accurate measurement of the value of  $k_{\text{O}_{\text{JC}}}$  requires a method of measuring the mean temperature of the die,  $T_{\text{J}}$ . Techniques to make this measurement have been discussed elsewhere. (See Ref. 2, 3, 4) They involve measurement of a temperature sensitive parameter of an element on the die. The forward voltage drop across a diode measured at constant current is a commonly used parameter. One must observe caution when applying the calibration data for an element in an unpowered die to the measured values of that element when the die is powered. It is rather unique if a parasitic voltage or current from the powered portion of the die does not interact with the temperature measuring element. This interaction leads to an inaccurate indication of the true temperature.


A test chip with a number of temperature sensitive elements is valuable. Figure 7 is a photo micrograph of a test chip designed to evaluate thermal resistance values for various packages as well as package surface interactions. The die contains 3 heat generators, and 6 primary temperature sensors, which are either diodes or special resistors. Parasitics normally interact differently with different elements because of location or structure variations. Agreement in the value of temperatures measured simultaneously for different elements on the chip normally indicates a correct measurement.

Figure 8 illustrates errors which can be introduced when making static steady state measurements of temperature during power application. Observe the plots of  $T_{\rm J}$  (from  $V_{\rm eb}$  calibration) versus  $P_{\rm D}$  for three different diodes on the chip. Although the slopes of the plots after initial power agree within 10%, the initial portion of the curve indicates a negative thermal resistance and the offsets of the curves indicate a varying interaction at different power levels. Although calculation of thermal resistance by the slope method would introduce a similar error for all three diodes, the single power point method for calculating  $k_i\theta_{J_{\rm C}i}$ , where  $k_i\theta_{J_{\rm C}i}=(T_{\rm J}-T_{\rm C_i})/P_{\rm D}$ , would introduce considerable and different levels of error in the calculated values for each diode measurement.

For example, if temperature measurements were made at a power level of 0.22 W, one would calculate a value of 44.6°C/W for  $k_i\theta_{JC_i}$  using  $T_J$  from diode 7-15. 57.1°C/W using  $T_J$  from diode 7-5, and 63.8°C/W using  $T_J$  from diode 7-6. The true value which was verified by pulse measurements was 97°C/W.



#### FIGURE 7




To eliminate interactions between the powered portion of a circuit and the temperature sensing element during measurement, the circuit shown in Figure 9 was developed. This circuit was designed for thermal evaluation of packages in which the function could be a linear circuit, a digital circuit, or the standard test chip which has a number of different power sources and temperature sensing elements.

In operation, the circuit applies power at a measured level to the device under test for approximately one second, interrupts power for 40 microseconds, and continues this cycle throughout the test period. At the beginning of the 40-microsecond power off interval, a 10-microsecond delay allows circuit transients to decay before the diode current is activated. A 6-microsecond delay allows the current to settle before a sample and hold circuit samples the diode voltage to determine the chip temperature. This sequence allows the package under test to come to thermal equalibrium with the environment which approaches that for continuous power input. The power down sequence and temperature measurement interval are short enough to ensure that the actual temperature drop when power is removed is less than the sensitivity of the temperature sensitive element.

The case temperature measurements,  $T_{\rm c}$ , can be made by thermocouple or by infra-red measurements. In theory, the infra-red measurements would be preferred since a conductive contact is not made to the surface which is to be measured. In practice, a number of difficulties with I.R. measurements are encountered. The emissivity of the surface to be measured must be controlled to give accurate measurements. This normally requires painting the surface with a "proprietary" film. When the emissivity is mastered, two larger difficulties must be overcome; a) physically placing the infra-red measuring instrument into the system to view a package surface when the unit may be buried in a maze of printed wiring boards and circuitry and b) the cost of available instrumentation.

The thermocouple technique to measure case temperature is a practical and reliable method when the composition of the thermocouples, its physical size, its location on the package, and the method of its attachment are defined. The method of measurement can be standardized and provides an accurate, inexpensive method for the applications engineer or the reliability engineer to determine a reference temperature to which the temperature rise across the package path,  $(k_i\theta_{JC})P_{D}$ , can be applied in order to determine a true  $T_{J}$ .

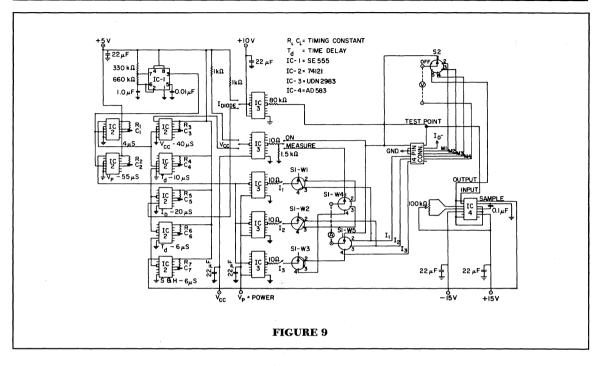


#### REFERENCES

- S. Glasstone, Textbook of Physical Chemistry, 2nd Edition, D. Van Nostrand Co. Inc., New York, 1946
- 2. P. E. Roughan, *Thermal Resistance of Integrated Circuit Packages*, Technical Paper TP72-7, Sprague Electric Co., 1972
- 3. F. R. Dewey and P. R. Emerald, *Computing IC Temperature Rise*, Machine Design, pp 98-101, June 1977
- C. A. Lidback, Scanning I. R. Microscopy Techniques for Semiconductor Thermal Analysis. 17th Annual Proceedings Reliability Physics 1979 IEEE Catalog No. 79CH1425-8 Phy.

# PLASTIC DIP (0.300" row spacing)

### PACKAGE DESIGNATORS A, B, or M Dimensions in Inches

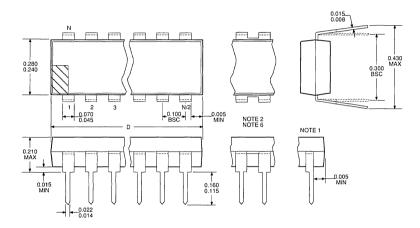

Dwg. MA-001A in


N	Number of Leads Pkg. Designator	8 M	14 A	16 A	16 B	18 A	20 A	24 B
D	Body Length	0.348/0.430	0.725/0.795	0.745/0.840	0.745/0.840	0.845/0.925	0.925/1.060	1.125/1.275
Notes	(Leads Affected)	1 (1, 4, 5, 8)	_	1 (1, 8, 9, 16)	1 (1, 8, 9, 16) 2 (4, 5, 12, 13) 3	_	_	2 (5-7, 18-20) or 2 (6, 7, 18, 19)
JEDE	Outline Designation	MS-001AB	MS-001AC	MS-001AA	_	MS-001AD	MS-001AE	MS-001AF

NOTES: 1. Leads 1, N/2, (N/2) + 1, and N may be half leads at vendor's option.

- 2. Webbed lead frame. Leads indicated are internally one piece.
- 3. Maximum lead thickness is 0.020".
- 4. Lead thickness is measured at seating plane or below.
- 5. Lead spacing tolerance is non-cumulative.
- 6. Exact body and lead configuration at vendor's option within limits shown.

# PLASTIC DIP (7.62 mm row spacing)

PACKAGE DESIGNATORS A, B, or M
Dimensions in Millimeters
(Based on 1" = 25.4 mm)

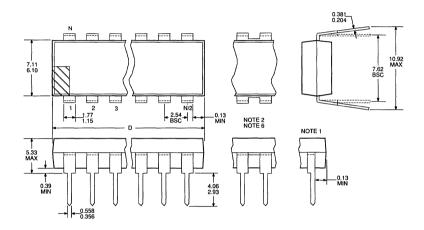

Dwg. MA-001A mm


N	Number of Leads Pkg. Designator	8 M	14 A	16 A	16 B	18 A	20 A	24 B
D	Body Length	8.84/10.92	18.42/20.19	18.93/21.33	18.93/21.33	21.47/23.49	23.5/26.9	28.6/32.3
Notes	(Leads Affected)	1 (1, 4, 5, 8)	_	1 (1, 8, 9, 16)	1 (1, 8, 9, 16) 2 (4, 5, 12, 13) 3	_	_	2 (5-7, 18-20) or 2 (6, 7, 18, 19)
JEDEC	Outline Designation	MS-001AB	MS-001AC	MS-001AA	_	MS-001AD	MS-001AE	MS-001AF


NOTES: 1. Leads 1, N/2, (N/2) + 1, and N may be half leads at vendor's option.

- 2. Webbed lead frame. Leads indicated are internally one piece.
- 3. Maximum lead thickness is 0.508 mm.
- 4. Lead thickness is measured at seating plane or below.
- 5. Lead spacing tolerance is non-cumulative.
- 6. Exact body and lead configuration at vendor's option within limits shown.

# PLASTIC DIP (0.400" row spacing)

### PACKAGE DESIGNATOR A Dimensions in Inches

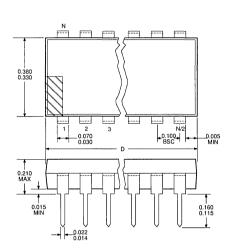



Dwg. MA-002A in

N	Number of Leads Pkg. Designator	22 A			
D	Body Length	1.050/1.120			
Notes	(Leads Affected)	_			
JEDEC	Outline Designation	MS-010AA			


NOTES: 2. Webbed lead frame. Leads indicated are internally one piece.


- 4. Lead thickness is measured at seating plane or below.
- 5. Lead spacing tolerance is non-cumulative.
- 6. Exact body and lead configuration at vendor's option within limits shown.

# PLASTIC DIP (10.16 mm row spacing)

### **PACKAGE DESIGNATOR A**

Dimensions in Millimeters (Based on 1" = 25.4 mm)

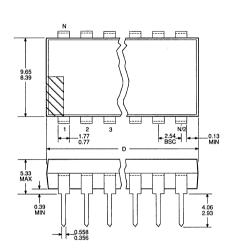



Dwg. MA-002A mm


N	Number of Leads Pkg. Designator	22 A			
D	Body Length	26.67/28.44			
Notes	(Leads Affected)	_			
JEDEC	Outline Designation	MS-010AA			


NOTES: 2. Webbed lead frame. Leads indicated are internally one piece.

- 4. Lead thickness is measured at seating plane or below.
- 5. Lead spacing tolerance is non-cumulative.
- 6. Exact body and lead configuration at vendor's option within limits shown.

# PLASTIC DIP (0.600" row spacing)

### PACKAGE DESIGNATOR A Dimensions in Inches

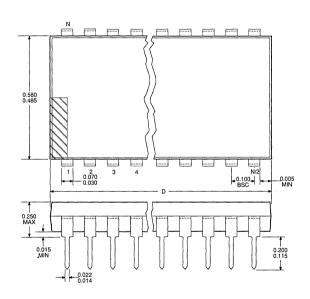



Dwg. MA-003A in

N	Number of Leads	28	40			
	Pkg. Designator	Α	Α			
D	Body Length	1.380/1.565	1.980/2.095			
Notes		-	_			
JEDEC	Outline Designation	MS-011AB	MS-011AC			


NOTES: 4. Lead thickness is measured at seating plane or below.


- 5. Lead spacing tolerance is non-cumulative.
- 6. Exact body and lead configuration at vendor's option within limits shown.

# PLASTIC DIP (15.24 mm row spacing)

### PACKAGE DESIGNATOR A

Dimensions in Millimeters (Based on 1" = 25.4 mm)

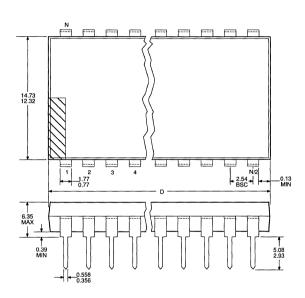



Dwg. MA-003A mm


N	Number of Leads Pkg. Designator	28 A	40 A			
D	Body Length	35.1/39.7	50.3/53.2			
Notes		_	_			
JEDEC Outline Designation		MS-011AB	MS-011AC			

NOTES: 4. Lead thickness is measured at seating plane or below.

- 5. Lead spacing tolerance is non-cumulative.
- 6. Exact body and lead configuration at vendor's option within limits shown.

# SQUARE PLASTIC LEADED CHIP CARRIER (PQCC)

### PACKAGE DESIGNATORS EA, EB, or EP Dimensions in Inches

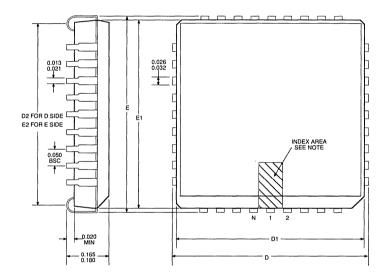

Dwg. MA-005 in

N	Number of Leads Pkg. Designator	20 EP	28 EA	28 EB	28 EP	44 EB	44 EP	
D	Overall Length	0.385/0.395	0.485/0.495	0.485/0.495	0.485/0.495	0.685/0.695	0.685/0.695	
D1	Body Length	0.350/0.356	0.450/0.456	0.450/0.456	0.450/0.456	0.650/0.656	0.650/0.656	
D2	Row Spacing	0.290/0.330	0.390/0.430	0.390/0.430	0.390/0.430	0.590/0.630	0.590/0.630	
E	Overall Width	0.385/0.395	0.485/0.495	0.485/0.495	0.485/0.495	0.685/0.695	0.685/0.695	
E1	Body Width	0.350/0.356	0.450/0.456	0.450/0.456	0.450/0.456	0.650/0.656	0.650/0.656	
E2	Row Spacing	0.290/0.330	0.390/0.430	0.390/0.430	0.390/0.430	0.590/0.630	0.590/0.630	
Notes	(Leads Affected)		2 (12-18)	2 (5-11, 19-25)	_	2 (7-17, 29-39)	_	
JEDEC	Outline Designation	MO-047AA*	MO-047AB*	MO-047AB*	MO-047AB*	MO-047AC*	MO-047AC*	

NOTES: 1. Index is centered on "D" side.


- 2. Webbed lead frame. Leads indicated are internally one piece.
- 3. Lead spacing tolerance is non-cumulative.
- 4. Exact body and lead configuration at vendor's option within limits shown.

<sup>\*</sup>Except for terminal shoulder height. Intended to meet new JEDEC Standard when that is approved.

# SQUARE PLASTIC LEADED CHIP CARRIER (PQCC)

### PACKAGE DESIGNATORS EA, EB, or EP Dimensions in Millimeters

(Based on 1" = 25.4 mm)

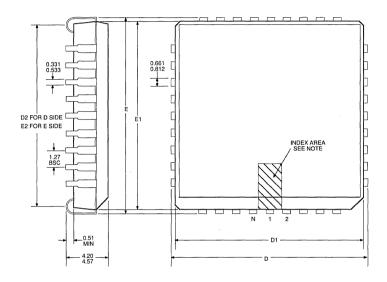

Dwg. MA-005 mm

N	Number of Leads Pkg. Designator	20 EP	28 EA	28 EB	28 EP	44 EB	44 EP	
D	Overall Length	9.78/10.03	12.32/12.57	12.32/12.57	12.32/12.57	17.40/17.65	17.40/17.65	
D1	Body Length	8.890/9.042	11.430/11.582	11.430/11.582	11.430/11.582	16.510/16.662	16.510/16.662	
D2	Row Spacing	7.37/8.38	9.91/10.92	9.91/10.92	9.91/10.92	14.99/16.00	14.99/16.00	
E	Overall Width	9.78/10.03	12.32/12.57	12.32/12.57	12.32/12.57	17.40/17.65	17.40/17.65	
E1	Body Width	8.890/9.042	11.430/11.582	11.430/11.582	11.430/11.582	16.510/16.662	16.510/16.662	
E2	Row Spacing	7.37/8.38	9.91/10.92	9.91/10.92	9.91/10.92	14.99/16.00	14.99/16.00	
Notes	(Leads Affected)		2 (12-18)	2 (5-11, 19-25)	_	2 (7-17, 29-39)	_	
JEDEC	Outline Designation	MO-047AA*	MO-047AB*	MO-047AB*	MO-047AB*	MO-047AC*	MO-047AC*	


NOTES: 1. Index is centered on "D" side.

- 2. Webbed lead frame. Leads indicated are internally one piece.
- 3. Lead spacing tolerance is non-cumulative.
- 4. Exact body and lead configuration at vendor's option within limits shown

<sup>\*</sup>Except for terminal shoulder height. Intended to meet new JEDEC Standard when that is approved.

# RECT. PLASTIC LEADED CHIP CARRIER (PQCC)

### PACKAGE DESIGNATOR EQ Dimensions in Inches

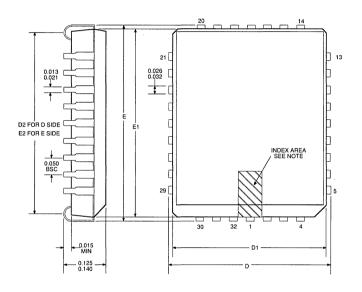

Dwg. MA-006 in

N	Number of Leads Pkg. Designator	32 (7 x 9) EQ			
D D1 D2 E	Overall Length Body Length Row Spacing Overall Width	0.485/0.495 0.447/0.453 0.376/0.446 0.585/0.595			
E1 E2 Notes	Body Width Row Spacing (Leads Affected)	0.547/0.553 0.476/0.546			
_	C Outline Designation	MS-016AE			


NOTES: 1. Index is centered on (short) "D" side.

- 3. Lead spacing tolerance is non-cumulative.
- 4. Exact body and lead configuration at vendor's option within limits shown

# RECT. PLASTIC LEADED CHIP CARRIER (PQCC)

### PACKAGE DESIGNATOR EQ

Dimensions in Millimeters (Based on 1" = 25.4 mm)

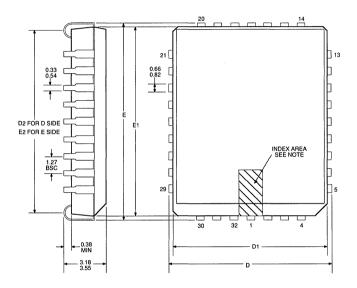

Dwg. MA-006 mm

N	Number of Leads Pkg. Designator	32 (7 x 9) EQ				
D	Overall Length	12.32/12.57				
D1	Body Length	11.36/11.50				
D2	Row Spacing	9.56/11.32				
E	Overall Width	14.86/15.11				
E1	Body Width	13.90/14.04				
E2	Row Spacing	12.10/13.86				
Notes	(Leads Affected)	_				
JEDEC	JEDEC Outline Designation MS-016					

NOTES: 1. Index is centered on (short) "D" side.


3. Lead spacing tolerance is non-cumulative.

4. Exact body and lead configuration at vendor's option within limits shown

### THIN QUAD FLATPACK

### PACKAGE DESIGNATOR JT

Dimensions in Inches (Based on 1 mm = 0.3937")

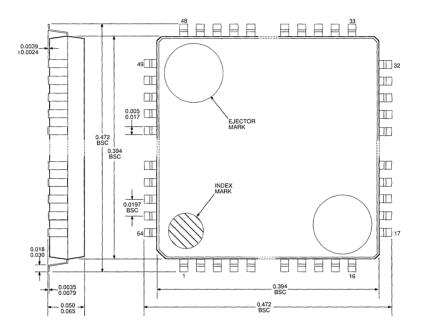


Dwg. MA-004 in

NOTES: 1. This device is similar to JEDEC registration MO-136BJ except for certain tolerances. Contact factory for detailed information.

- 2. Lead spacing tolerance is non-cumulative.
- 3. Exact body and lead configuration at vendor's option within limits shown.
- The top package body size may be smaller than the bottom package body size by as much as 0.006". Body dimensions include mold mismatch but do not include mold protrusion.

### THIN QUAD FLATPACK

### PACKAGE DESIGNATOR JT Dimensions in Millimeters

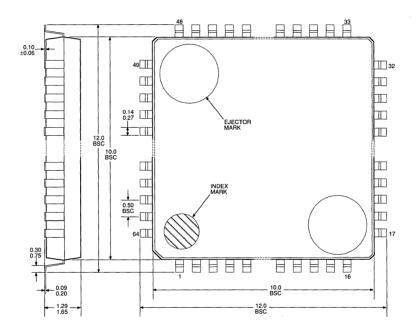

Dwg. MA-004 mm

NOTES: 1. This device is similar to JEDEC registration MO-136BJ except for certain tolerances. Contact factory for detailed information.


- 2. Lead spacing tolerance is non-cumulative.
- 3. Exact body and lead configuration at vendor's option within limits shown.
- 4. The top package body size may be smaller than the bottom package body size by as much as 0.15 mm. Body dimensions include mold mismatch but do not include mold protrusion.

### **PLASTIC SIP**


### PACKAGE DESIGNATOR K

**Dimensions in Inches** 

Dimensions in Millimeters (Based on 1" = 25.4 mm)

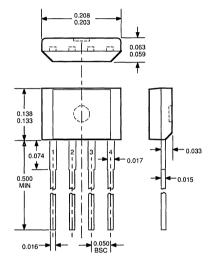

Dwg. MH-009 in

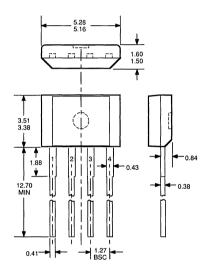

Dwg. MH-009 mm

NOTES: 1. Tolerances on package height and width represent allowable mold offsets.

Dimensions given are measured at the widest point (parting line).


2. Exact body and lead configuration at vendor's option within limits shown.

### **PLASTIC SIP**


### **PACKAGE DESIGNATOR KA**

**Dimensions in Inches** 

Dimensions in Millimeters (Based on 1" = 25.4 mm)

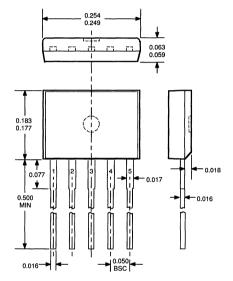

Dwg. MH-010 in

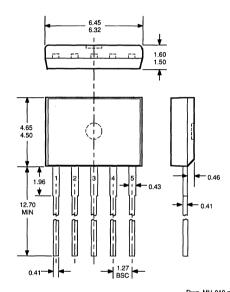

Dwg. MH-010 mm

NOTES: 1. Tolerances on package height and width represent allowable mold offsets.


Dimensions given are measured at the widest point (parting line).


2. Exact body and lead configuration at vendor's option within limits shown.

# PLASTIC SOIC (0.150" body width)

### PACKAGE DESIGNATOR L

Dimensions in Inches (Based on 1 mm = 0.3937")





Dwg. No. A-13,648 in


N	Number of Leads Pkg. Designator	8	14	16		
	Fkg. Designator				 	 
A	Seated Height	0.0532/0.0688	0.0532/0.0688	0.0532/0.0688		
C	Lead Thickness	0.0075/0.0098	0.0075/0.0098	0.0075/0.0098		
D	Body Length	0.1890/0.1968	0.3367/0.3444	0.3859/0.3937		
E	Body Width	0.1497/0.1574	0.1497/0.1574	0.1497/0.1574		
Н	Overall Width	0.2284/0.2440	0.2284/0.2440	0.2284/0.2440		
Notes	(Leads Affected)	_	_	_		
JEDEC	Outline Designation	MS-012AA	MS-012AB	MS-012AC		


NOTES: 2. Lead spacing tolerance is non-cumulative.

- 3. Exact body and lead configuration at vendor's option within limits shown.
- 4. For package designator 'LR', see plastic small-outline transistor (SOT-23/TO-236AB).

# PLASTIC SOIC (0.375 mm body width)

### PACKAGE DESIGNATOR L Dimensions in Millimeters





Dwg. No. A-13,648 mm

N	Number of Leads	8	14	16			
	Pkg. Designator	L	L	L			
Α	Seated Height	1.35/1.75	1.35/1.75	1.35/1.75			
c	Lead Thickness	0.19/0.25	0.19/0.25	0.19/0.25		٠,	
D	Body Length	4.80/5.0	8.55/8.75	9.80/10.0			
E	Body Width	3.80/4.00	3.80/4.00	3.80/4.00			
н	Overall Width	5.80/6.20	5.80/6.20	5.80/6.20	1		
Notes	(Leads Affected)	_	_	_			
JEDEC	Outline Designation	MS-012AA	MS-012AB	MS-012AC			


NOTES: 2. Lead spacing tolerance is non-cumulative.


- 3. Exact body and lead configuration at vendor's option within limits shown.
- 4. For package designator 'LR', see plastic small-outline transistor (SOT-23/TO-236AB).

# WIDE-BODY PLASTIC SOIC (0.300" body width)

#### PACKAGE DESIGNATORS LB or LW

Dimensions in Inches (Based on 1 mm = 0.3937")





Dwg. No. A-13,648 in


N	Number of Leads	16	16		18	20	24	28
	Pkg. Designator	LB	LW		LW	LB	LB	LW
Α	Seated Height	0.0926/0.1043	0.0926/0.1043	1	0.0926/0.1043	0.0926/0.1043	0.0926/0.1043	0.0926/0.1043
c	Lead Thickness	0.0091/0.0125	0.0091/0.0125		0.0091/0.0125	0.0091/0.0125	0.0091/0.0125	0.0091/0.0125
D	Body Length	0.3977/0.4133	0.3977/0.4133		0.4469/0.4625	0.4961/0.5118	0.5985/0.6141	0.6969/0.7125
E	Body Width	0.2914/0.2992	0.2914/0.2992		0.2914/0.2992	0.2914/0.2992	0.2914/0.2992	0.2914/0.2992
Н	Overall Width	0.394/0.419	0.394/0.419		0.394/0.419	0.394/0.419	0.394/0.419	0.394/0.419
Notes	(Leads Affected)	1 (4, 5, 12, 13)	_		_	1 (4-7, 14-17)	1 (6, 7, 18, 19)	_
JEDEC	Outline Designation	MS-013AA	MS-013AA		MS-013AB	MS-013AC	MS-013AD	MS-013AE


NOTES: 1. Webbed lead frame. Leads indicated are internally one piece.

- 2. Lead spacing tolerance is non-cumulative.
- 3. Exact body and lead configuration at vendor's option within limits shown.
- 4. For package designator 'LR', see plastic small-outline transistor (SOT-23/TO-236AB).

# WIDE-BODY PLASTIC SOIC (7.50 mm body width)

PACKAGE DESIGNATORS LB or LW Dimensions in Millimeters





Dwg. No. A-13,648 mm

N	Number of Leads	16	16	1	18	20	24	28
	Pkg. Designator	LB	LW		LW	LB	LB	LW
Α	Seated Height	2.35/2.65	2.35/2.65		2.35/2.65	2.35/2.65	2.35/2.65	2.35/2.65
C	Lead Thickness	0.23/0.32	0.23/0.32		0.23/0.32	0.23/0.32	0.23/0.32	0.23/0.32
D	Body Length	10.10/10.50	10.10/10.50		11.35/11.75	12.60/13.00	15.20/15.60	17.70/18.10
E	Body Width	7.40/7.60	7.40/7.60		7.40/7.60	7.40/7.60	7.40/7.60	7.40/7.60
Н	Overall Width	10.00/10.65	10.00/10.65		10.00/10.65	10.00/10.65	10.00/10.65	10.00/10.65
Notes	(Leads Affected)	1 (4, 5, 12, 13)	_		_	1 (4-7, 14-17)	1 (6, 7, 18, 19)	
JEDEC	Outline Designation	MS-013AA	MS-013AA		MS-013AB	MS-013AC	MS-013AD	MS-013AE


- NOTES: 1. Webbed lead frame. Leads indicated are internally one piece.
  - 2. Lead spacing tolerance is non-cumulative.
  - 3. Exact body and lead configuration at vendor's option within limits shown.
  - 4. For package designator 'LR', see plastic small-outline transistor (SOT-23/TO-236AB).


### LONG-LEADED PLASTIC SOT

#### PACKAGE DESIGNATOR LL

Dimensions in Inches (Based on 1 mm = 0.394")

**Dimensions in Millimeters** 

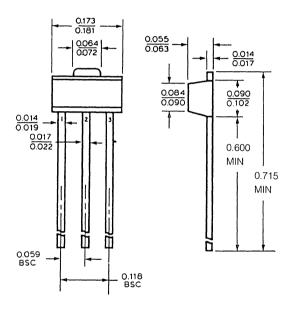

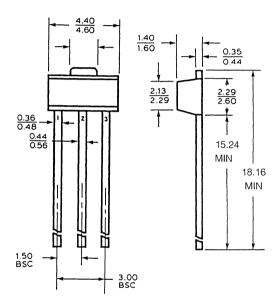


Dwg. No. A-12,657A in

Dwg. No. A-12,657A mm

### PLASTIC SOT (SOT-89/TO-243AA)


### PACKAGE DESIGNATOR LT

Dimensions in Inches (Based on 1 mm = 0.394")

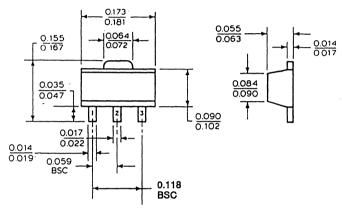

Dwg. No. A-12,608A in

#### **Dimensions in Millimeters**

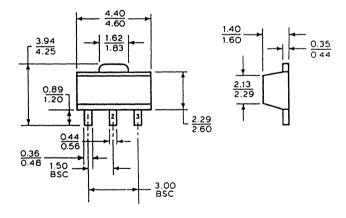


Dwg. No. A-12,608A mm


### **PLASTIC SIP**

### PACKAGE DESIGNATOR U

#### **Dimensions in Inches**

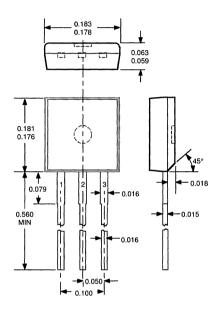

### **Dimensions in Millimeters** (Based on 1" = 2.54 mm)

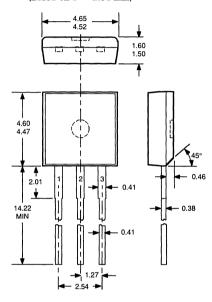

Dwg. MH-003A in

Dwg. MH-003A mm

- NOTES: 1. Tolerances on package height and width represent allowable mold offsets. Dimensions given are measured at the widest point (parting line).
  - 2. Exact body and lead configuration at vendor's option within limits shown.
  - 3. Height does not include mold gate flash.
  - 4. Minimum lead length was 0.500" (12.70 mm). If existing product to the original specifications is not acceptable, contact sales office before ordering.


### PLASTIC SIP

### PACKAGE DESIGNATOR UA

#### **Dimensions in Inches**

0.164 0.159 0.062 0.058 0.122 0.031 0.079 0.016 0.600 0.015

### **Dimensions in Millimeters** (Based on 1'' = 25.4 mm)

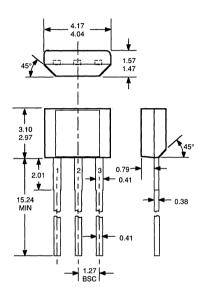

Dwg. MH-014A in


Dwg. MH-014A mm

- NOTES: 1. Tolerances on package height and width represent allowable mold offsets.
  - Dimensions given are measured at the widest point (parting line).
  - 2. Exact body and lead configuration at vendor's option within limits shown.
  - 3. Height does not include mold gate flash.
  - 4. Minimum lead length was 0.500" (12.70 mm). If existing product to the original specification is not acceptable, contact sales office before ordering.

### PLASTIC POWER-TAB SIP


### PACKAGE DESIGNATOR W

#### **Dimensions in Inches**

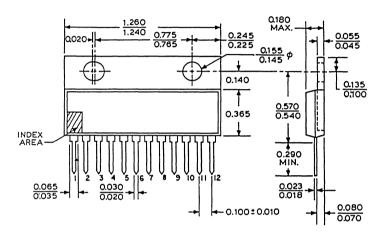

Dwg. No. A-13,652 in

## Dimensions in Millimeters (Based on 1" = 25.4 mm)

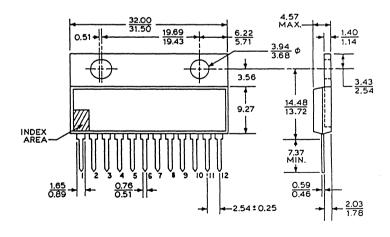

Dwg. No. A-13,652 mm


NOTES: 1. Lead thickness is measured at seating plane or below.

- 2. Lead spacing tolerance is non-cumulative.
- 3. Exact body and lead configuration at vendor's option within limits shown.
- 4. Lead gauge plane is 0.030" (0.762 mm) below seating plane.

## PLASTIC POWER-TAB SIP (with lead forming for horizontal mounting)

#### PACKAGE DESIGNATOR WH


Dimensions in Inches (Based on 1 mm = 0.3937")

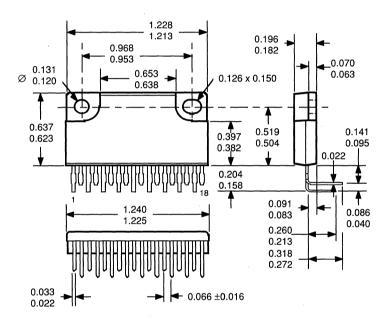

Dwg. MP-006 in

## PLASTIC POWER-TAB SIP (with lead forming for horizontal mounting)

PACKAGE DESIGNATOR WH Dimensions in Millimeters

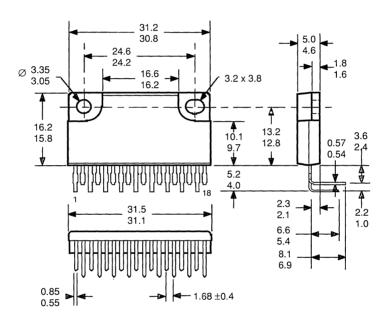


Dwg. MP-006 mm

## PLASTIC POWER-TAB SIP (with lead forming for vertical mounting)

#### PACKAGE DESIGNATOR WV


Dimensions in Inches (Based on 1 mm = 0.3937")

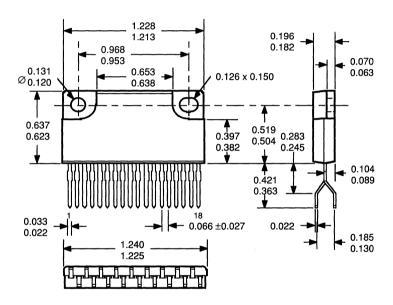

Dwg. MP-004 in

## PLASTIC POWER-TAB SIP (with lead forming for vertical mounting)

PACKAGE DESIGNATOR WV
Dimensions in Millimeters

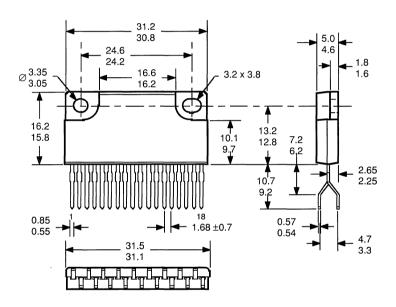


Dwg. MP-004 mm

### PLASTIC POWER-TAB SIP

### PACKAGE DESIGNATOR Z


(JEDEC outline TS-001)

#### **Dimensions in Inches**



Dwg. MP-005 in

## Dimensions in Millimeters (Based on 1" = 25.4 mm)



Dwg. MP-005 mm


### PLASTIC TRANSISTOR (TO-92/TO-226AA)

#### **Dimensions in Inches**


#### 0.210 0.170 0.205 0.135 0.175 MIN. 0.022 0.015 0.015 0.015 0.080 0.005 0.0

Dwg. No. A-13,610


### Dimensions in Millimeters (Based on 1" = 25.4 mm)

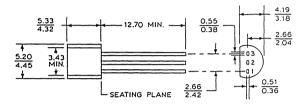

Dwg. No. A-13,611




Dwg. GD-001





## PLASTIC SMALL-OUTLINE TRANSISTOR (SOT-23/TO-236AB)

## Dimensions in Inches (Based on 1 mm = 0.3937")

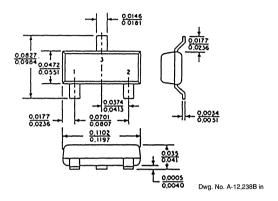

#### **Dimensions in Millimeters**

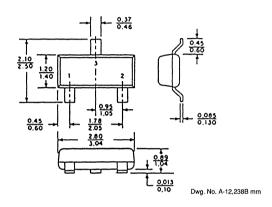



Dwg. GD-002

Die size = 0.025" by 0.025" (0.635 mm by 0.635 mm). Other factors that determine allowable package power dissipation include circuit board material, pad size, and proximity of other heat-producing circuit elements.



## PACKAGE INFORMATION


### TAPE AND REEL INFORMATION FOR DISCRETE DEVICES

### **AXIAL-TAPED TO-226AA TAPE DIMENSIONS**

Dimensions	Millimeters	Inches
D Min.	0.38	0.015
D Max.	1.78	0.070
F Тур.	6.35	0.250
K Max.	6.73	0.265
L	2.54 ± 0.38	0.100 ± 0.015
Р	6.35 ± 0.38	0.250 ± 0.015
W Min.	20.63	0.812
W Max.	22.15	0.872

NOTES: 1. Leads straight with 0.38 mm (0.015 in.)

- between body and type.
- 2. Component bodies in line within 0.38 mm (0.015 in.).
- 3. Lead length in contact with tape, each side, 1.78 mm (0.070 in.), minimum.

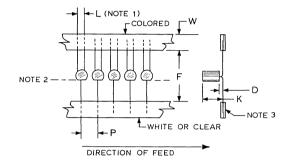


Dwg. No. A-13,626

### REEL DIMENSIONS

Dimensions	Millimeters	Inches
A Max.	355.6	14
С	14.29	0.563
N Min.	76.20	3.0

NOTES: 1. Kraft paper, minimum 0.13 mm (0.005 in.) thick, as interliner.

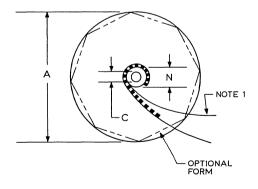

Dwg. No. A-13,627

## TAPE AND REEL INFORMATION FOR DISCRETE DEVICES

### **RADIAL-TAPED TO-226AA LEAD DIMENSIONS**


Dimensions	Millimeters	Inches
Α	1.52 ± 0.38	0.060 ± 0.015
В	3.18 ± 0.38	0.125 ± 0.015
С	2.54 ± 0.30	0.100 ± 0.012
D	5.08 ± 0.76, -0.20	0.200 + 0.030, -0.008
E Min.	12.70	0.500
E Max.	15.70	0.620

Styles A and F-Flat side down, carrier tape to left.


Styles B and E-Flat side up, carrier tape to left.

Styles C and H—Flat side down, carrier tape to right.

Styles D and G-Flat side up, carrier tape to right.




Dwg. No. A-13,628

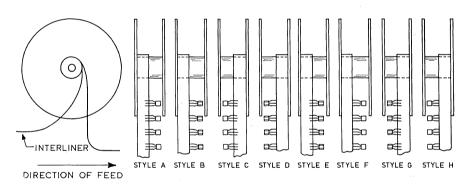

Dwg. No. A-13,629

### REEL DIMENSIONS

Dimensions	Millimeters	Inches
Α	355.6 ± 6.35	14 ± 0.250
С	21.59 ± 6.35	$0.850 \pm 0.250$
G	45.72 ± 7.62	1.800 ± 0.300
N Min.	76.20 ± 6.35	3.0 ± 0.250




Dwg. No. A-13,630

## TAPE AND REEL INFORMATION FOR DISCRETE DEVICES

### **TAPE DIMENSIONS FOR TO-236AB**


Dimensions	Millimeters	Inches
B, Max.(2)	4.2	0.165
D	1.5 (+0.10, -0.0)	0.059 (+0.004, -0.0)
D <sub>1</sub> Min.	1.0	0.039
E	1.75 (±0.10)	0.69 (±0.004)
F	3.5 (±0.05)	0.138 (±0.002)
K Max.	2.4	0.094
Р	4.0 (±0.10)	0.157 (±0.004)
P <sub>0</sub> (1)	4.0 (±0.10)	0.157 (±0.004)
P <sub>2</sub>	2.0 (±0.05)	0.079 (±0.002)
R Min.	25	0.984
t Max.	0.400	0.016
t, Max.	0.10	0.004
Ŵ	8.0 (±0.30)	0.315 (±0.012)

- (1) Cumulative tolerance over 10 pitches =  $\pm 0.2$  mm ( $\pm 0.08$  in.).
- $^{\rm (2)}$  For machine reference only, including draft and radii concentric around  ${\rm B}_{\rm n}$
- (3) A<sub>D</sub>, B<sub>D</sub>, and K<sub>D</sub> are determined by component size. Clearance between the component and the cavity must be within 0.05 mm (0.002 in.), minimum, 0.50 mm (0.020 in.), maximum, for 8 mm tape; it must be within 0.05 (0.002 in.), minimum 0.65 mm (0.026 in.), maximum, for 12 mm tape.




MINIMUM BENDING RADIUS

Dwg. No. A-13,312

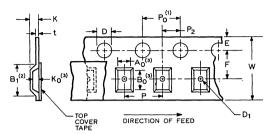


Dwg. No. A-13,310




Dwg. No. A-13,313

\*Available on request with double leads toward sprocket holes.

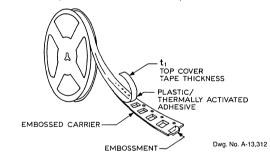

### **REEL DIMENSIONS FOR TO-236AB**

Dimensions	Millimeters	Inches
A Max.	330	12.992
B Min.	1.5	0.059
С	13.0 (±0.20)	0.512 (±0.008)
D Min.	20.2	0.795
G	8.4 (+1.5, -0.0)	0.331 (+0.059, -0.0)
H Min.	40	1.575
N Min.	50	1.973
S Min.	2.5 Wide	0.098 Wide
	10 Deep	0.394 Deep
T Max.	14.4	0.567



Dwg. No. A-13,314

## TAPE AND REEL INFORMATION FOR DISCRETE DEVICES

## TO-236 AB

Shipping options for small-outline transistors and diodes include vial pack and 8 mm tape and reel for use with automated insertion equipment.

The 8 mm tape pack puts 3000 devices on a 7-inch (178 mm) reel. Components can be placed in the tape cavity with the single lead toward the sprocket hole or with the double leads toward the sprocket hole. Tape and reel dimensions conform to EIA Standard 481 Rev. A.


#### MOUNTING

Surface-mount semiconductors can be attached to substrates by conventional techniques such as vapor-phase or wave soldering and hot-plate methods.

Recommended maximum time/temperature soldering conditions are shown in the graph. In general, attachment with a soldering iron is not recommended due to the difficulty of consistently controlling temperature and time temperature.

#### **CLEANING**

Small-outline semiconductors are compatible with most commonly used defluxing solvents. Freon-based alcohol compounds such as Du Pont TMS or TES (or equivalents) are recommended. Solutions containing methylene chloride or other known epoxy solvents should not be used.

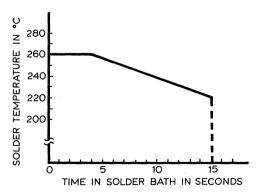

# REPRESENTATIVES AND SALES OFFICES

### **NORTH AMERICA**

Montgomery Marketing, Inc.

Huntsville, AL

Tel: (205) 830-0498 Fax: (205) 837-7049

Techni-Source Corp.

Chandler, AZ

Tel: (602) 497-0711 Fax: (602) 497-1077

Allegro MicroSystems, Inc.

Irvine, CA

Tel: (714) 509-7730 Fax: (714) 509-7034

Addem

Carlsbad, CA

Tel: (619) 729-9216 Fax: (619) 729-6408 Terr: San Diego-CA

Jones & McGeoy Sales, Inc.

Santa Ana, CA

Tel: (714) 547-6466 Fax: (714) 547-7670

Criterion Sales, Inc. Santa Clara, CA Tel: (408) 988-6300 Fax: (408) 986-9039

William J. Purdy Co. & Associates

Englewood, CO Tel: (303) 790-2211 Fax: (303) 790-2230

ConnTech Sales Cheshire, CT

Tel: (203) 272-1277 Fax: (203) 272-2790

Electramark Florida, Inc. Altamonte Springs, FL Tel: (407) 830-0845 Fax: (407) 830-0847 Electramark Florida, Inc.

Tampa, FL

Tel: (813) 962-1882 Fax: (813) 961-0664

Electramark Florida, Inc.

Plantation, FL

Tel: (407) 424-2872 Fax: (407) 452-1974

Montgomery Marketing, Inc.

Norcross, GA

Tel: (404) 447-6124 Fax: (404) 447-0422

J.R. Sales Engineering, Inc.

Cedar Rapids, IA Tel: (319) 393-2232 Fax: (319) 393-0109

Sumer, Inc.

Rolling Meadows, IL Tel: (708) 991-8500 Fax: (708) 991-0474

Allegro MicroSystems, Inc.

Kokomo, IN

Tel: (317) 459-5752 Fax: (317) 459-5883

Technology Marketing Corp.

Carmel, IN

Tel: (317) 844-8462 Fax: (317) 573-5472

Technology Marketing Corp.

Fort Wayne, IN Tel: (219) 432-5553 Fax: (219) 432-5555

Technology Marketing Corp.

Kokomo, IN

Tel: (317) 459-5152 Fax: (317) 457-3822

## REPRESENTATIVES AND SALES OFFICES NORTH AMERICA

EPI, Inc.

Westwood, KS

Tel: (913) 432-1792 Fax: (913) 432-1793

Technology Marketing Corp.

Louisville, KY

Tel: (502) 245-7411 Fax: (502) 245-4818

Procomp Associates

Tewksbury, MA

Tel: (508) 858-0100 Fax: (508) 858-0110

Allegro MicroSystems, Inc.

Ann Arbor, MI

Tel: (313) 971-7780 Fax: (313) 971-9241

Miltimore Sales, Inc.

Kentwood, MI

Tel: (616) 554-9292 Fax: (616) 554-9210

Miltimore Sales, Inc.

Novi, MI

Tel: (313) 349-0260 Fax: (313) 349-0756

Design Technology Components, Inc.

New Brighton, MN

Tel: (612) 631-3738

Fax: (612) 631-3540

EPI, Inc.

St. Louis, MO

Tel: (314) 962-1411 Fax: (314) 962-5378

Allegro MicroSystems, Inc.

Durham, NC

Tel: (919) 490-5718 Fax: (919) 490-1749 Montgomery Marketing, Inc.

Raleigh, NC

Tel: (919) 851-0010 Fax: (919) 851-6620

Montgomery Marketing, Inc.

Cary, NC

Tel: (919) 467-6319 Fax: (919) 467-1028

Trinkle Sales Inc.

Cherry Hill, NJ

Tel: (609) 795-4200

(215) 922-2080 (Phila.)

Fax: (609) 795-9364

Techni-Source, Inc. Albuquerque, NM

Tel: (505) 268-4232 Fax: (505) 268-0451

Astrorep, Inc.

Babylon, NY

Tel: (516) 422-2500 Fax: (516) 422-2504

Elcom Sales, Inc.

Pittsford, NY

Tel: (716) 385-1400 Fax: (716) 248-8531

Elcom Sales, Inc.

Skaneateles, NY Tel: (315) 685-8967

Fax: (315) 685-6273

Allegro MicroSystems, Inc.

Victor, NY

Tel: (716) 425-1750 Fax: (716) 425-1643

TMC of Ohio

Cincinnati, OH

Tel: (513) 271-3860

Fax: (513) 271-6321

## REPRESENTATIVES AND SALES OFFICES NORTH AMERICA

TMC of Ohio

Middleburg Heights, OH Tel: (216) 885-5544 Fax: (216) 885-5011

Electronic Component Sales, Inc.

Beaverton, OR Tel: (503) 245-2342

Fax: (503) 520-0767

Electronic Sales Associates

Carolina, PR

Tel: (809) 762-6459 (809) 762-6707

Fax: (809) 757-9170

Allegro MicroSystems, Inc.

Irving, TX

Tel: (214) 401-4101 Fax: (214) 869-7275

Bonser-Philhower Sales

Austin, TX

Tel: (512) 346-9186 Fax: (512) 346-2393

Bonser-Philhower Sales

Houston, TX

Tel: (713) 782-4144 Fax: (713) 789-3072

Bonser-Philhower Sales

Richardson, TX

Tel: (214) 234-8438 Fax: (214) 437-0897

Electronic Component Sales, Inc.

Mercer Island, WA

Tel: (206) 232-9301

(509) 456-0100 (Spokane) (208) 342-8072 (Boise, ID)

Fax: (206) 232-1095

Sumer, Inc. Brookfield, WI

Tel: (414) 784-6641 Fax: (414) 784-1436 Vitel Electronics, Inc.

Burnaby, BC

Tel: (604) 439-9889 Fax: (604) 439-0195

Vitel Electronics, Inc.

Kanata, ON

Tel: (613) 592-0090 Fax: (613) 592-0182

Vitel Electronics, Inc.

Missisauga, ON

Tel: (416) 564-9720 Fax: (416) 564-5719

Vitel Electronics, Inc.

Lachine, PQ

Tel: (514) 636-5951 Fax: (514) 636-1341

# REPRESENTATIVES AND SALES OFFICES

### **EUROPE AND ASIA**

Jorge M. Alberti S.C.A. Buenos Aires, ARGENTINA

Tel: (54-1) 325-6795 (54-1) 325-6956

Fax: (54-1) 112804 Tlx: (390) 9900

Analog Electronic Components P/L Mulgrave NTH, AUSTRALIA

Tel: (61-3) 562-2882 Fax: (61-3) 562-2880 Tlx: (790) 154402

#### Kolak

Bruxelles, Belgium Tel: (32-2) 2429875 Fax: (32-2) 2429029 Tix: (846) 20720 Terr: POLAND

Compelec byba Tervuren, BELGIUM

Tel: (32-2) 7671748 Fax: (32-2) 7678435

Acal Auriema Bodamer Zaventem, BELGIUM Tel: (32-2) 7205983 Fax: (32-2) 7251014

Tecelinco Tecnologia Electronica Ltda. São Paulo, BRAZIL

Tel: (55-11) 257-3645 (55-11) 258-4286

Fax: (55-11) 256-6446 Tlx: (391) 011 23600 (391) 011 25588

Beechwood International Taiwan Co.

Taipei, Taiwan, REP. of CHINA Tel: (886-2) 763-5818

(886-2) 763-5880 Fax: (886-2) 763-5252

(886-2) 746-0192

Tlx: (785) 21422 (785) 23328 Exatec A/S

Copenhagen, DENMARK Tel: (45-31) 191022 Fax: (45-31) 193120

Exatec A/S (Jutland) Farso, DENMARK Tel: (45-98) 6333311 Fax: (45-98) 633319

International Engineering Associates

Cairo, EGYPT

Tel: (20-2) 717077 (20-2) 712168 Fax: (20-2) 348-0940 Tlx: (927) 93830

Field Oy

Helsinki, FINLAND Tel: (358-0) 7571011 Fax: (358-0) 8079885

Newtek

Rungis Cedex, FRANCE Tel: (33-1) 46872200 Fax: (33-1) 46878049

SSG Halbleiter Vertriebs-GmbH

Frankfurt, GERMANY Tel: (49-69) 533432 Fax: (49-69) 532050

SSG Halbleiter Vertriebs-GmbH Hinterzarten, GERMANY

Tel: (49-7652) 1066 Fax: (49-7652) 767 Tlx: (841) 7722361

Richwood Electronics Co., Ltd.

HONG KONG

Tel: (852) 797-9893 Fax: (852) 797-9906

New World Electronics Bangalore, INDIA Tel: (91-812) 561107 Fax: (91-812) 569056

## REPRESENTATIVES AND SALES OFFICES EUROPE AND ASIA

Boran Technologies Ltd. Petah Tikva, ISRAEL

Tel: (972-3) 9345171 Fax: (972-3) 9344235 Tlx: (922) 381512

Sprague Italiana S.p.A.

Milano, ITALY

Tel: (39-2) 48012355 Fax: (39-2) 48008167

Allegro MicroSystems Japan K.K.

Tokyo, JAPAN

Tel: (81-3) 5992-3701 Fax: (81-3) 5992-3464 Tlx: (781) 23328

Richwood International Korea Co., Ltd.

Seoul, REP. of KOREA Tel: (82-2) 783-9784 (82-2) 783-9785 (82-2) 784-4508 (82-2) 784-4509

Fax: (82-2) 784-6061 Tlx: (787) 26186

Mexicana De Electronica Industries S.A. MEXICO, D.F.

Tel: (52-5) 630-4323 Tlx: (383) 1771038

Acal Auriema BV Eindhoven, NETHERLANDS

Tel: (31-40) 502602 Fax: (31-40) 510255

Odin Electronics A/S Skedsmokorset, NORWAY

Tel: (47-6) 870300 Fax: (47-6) 875430

Allegro MicroSystems Philippines, Inc. Metro Manila, PHILIPPINES

Tel: (63-2) 828-9026 Fax: (63-2) 828-4045 Tlx: (722) 22522 (742) 45829

POLAND See Kolak Bruxelles, BELGIUM Niposom - J. Nabais, Lda. Lisboa, PORTUGAL

Tel: (351-1) 89610 Fax: (351-1) 809517 Tlx: (832) 14028

Sabre Technologies Pte. Ltd.

SINGAPORE Tel: (65) 2932003 Fax: (65) 2930661

Allied Electronics Components Ltd.

Isando, SOUTH AFRICA Tel: (27-11) 3923804 Fax: (27-11) 9749683 Tlx: (757) 486134

Argos Componentes Electronicos

Barcelona, SPAIN Tel: (34-3) 217 76 55 Fax: (34-3) 217 75 56

Avnet Nortec Electronics AB

Solna, SWEDEN Tel: (46-8) 7051800 Fax: (46-8) 836918

Telion AG

Schlieren, SWITZERLAND

Tel: (41-1) 7321511 Fax: (41-1) 7301502 Tlx: (845) 829471

Kapman Komandit Istanbul, TURKEY Tel: (90-1) 2555277 Fax: (90-1) 2506013

Allegro MicroSystems Europe Ltd. Walton-on-Thames, Surrey, U.K.

Tel: (44-932) 253-355 Fax: (44-932) 246-622 Tlx: (851) 926618

Ambar Cascom Ltd. Aylesbury, Bucks, U.K. Tel: (44-296) 434141 Fax: (44-296) 29670

