

ASSP

2-CHANNEL 8-BIT D/A CONVERTER

MB40968/40968V

2-CHANNEL 8-BIT D/A CONVERTER

The Fujitsu MB40968/40968V is a 2-channel 8-bit high speed digital to analog converter for video frequency band fabricated by Fujitsu Advanced Bipolar Technology. This is suitable for YC signal processing of digital VCR.

- Resolution: 8-bits
- Linearity Error: $\pm 0.2\%$ (Max)
- Maximum Conversion Rate: 30MHz (Min)
- Analog Output Voltage Range: 3 to 5V
- Reference Voltage Output:

MB40968: Resistance-type potential divider output ($3/5 \times V_{CCA}$)


MB40968V: Band Gap Reference output ($V_{CCA} - 2$ [V])

- Digital Input Voltage: TTL level
- Single Power Supply Voltage: +5.0 [V]
- Power Dissipation: 270 [mW] (Typ)


ABSOLUTE MAXIMUM RATINGS (see NOTE.)

Ratings	Symbol	Value	Unit
Supply Voltage	V_{CCA}, V_{CCD}	-0.5 to +7.0	V
Supply Voltage Difference	$V_{CCD} - V_{CCA}$	1.5	V
Digital Input Voltage	V_{ID}	-0.5 to +7.0	V
Storage Temperature	T_{STG}	-55 to +125	°C

NOTE: Permanent device damage may occur if the above **Absolute Maximum Ratings** are exceeded. Functional operation should be restricted to the conditions as detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.




**PLASTIC PACKAGE
DIP-28P-M03**




**PLASTIC PACKAGE
FPT-28P-M01**

PIN ASSIGNMENT

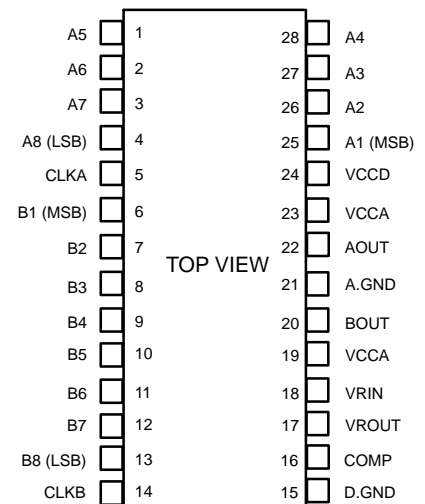

This device contains circuitry to protect the inputs against damage due to high static voltages or electric fields. However, it is advised that normal precautions be taken to avoid application of any voltage higher than maximum rated voltages to this high impedance circuit.

BLOCK DIAGRAM

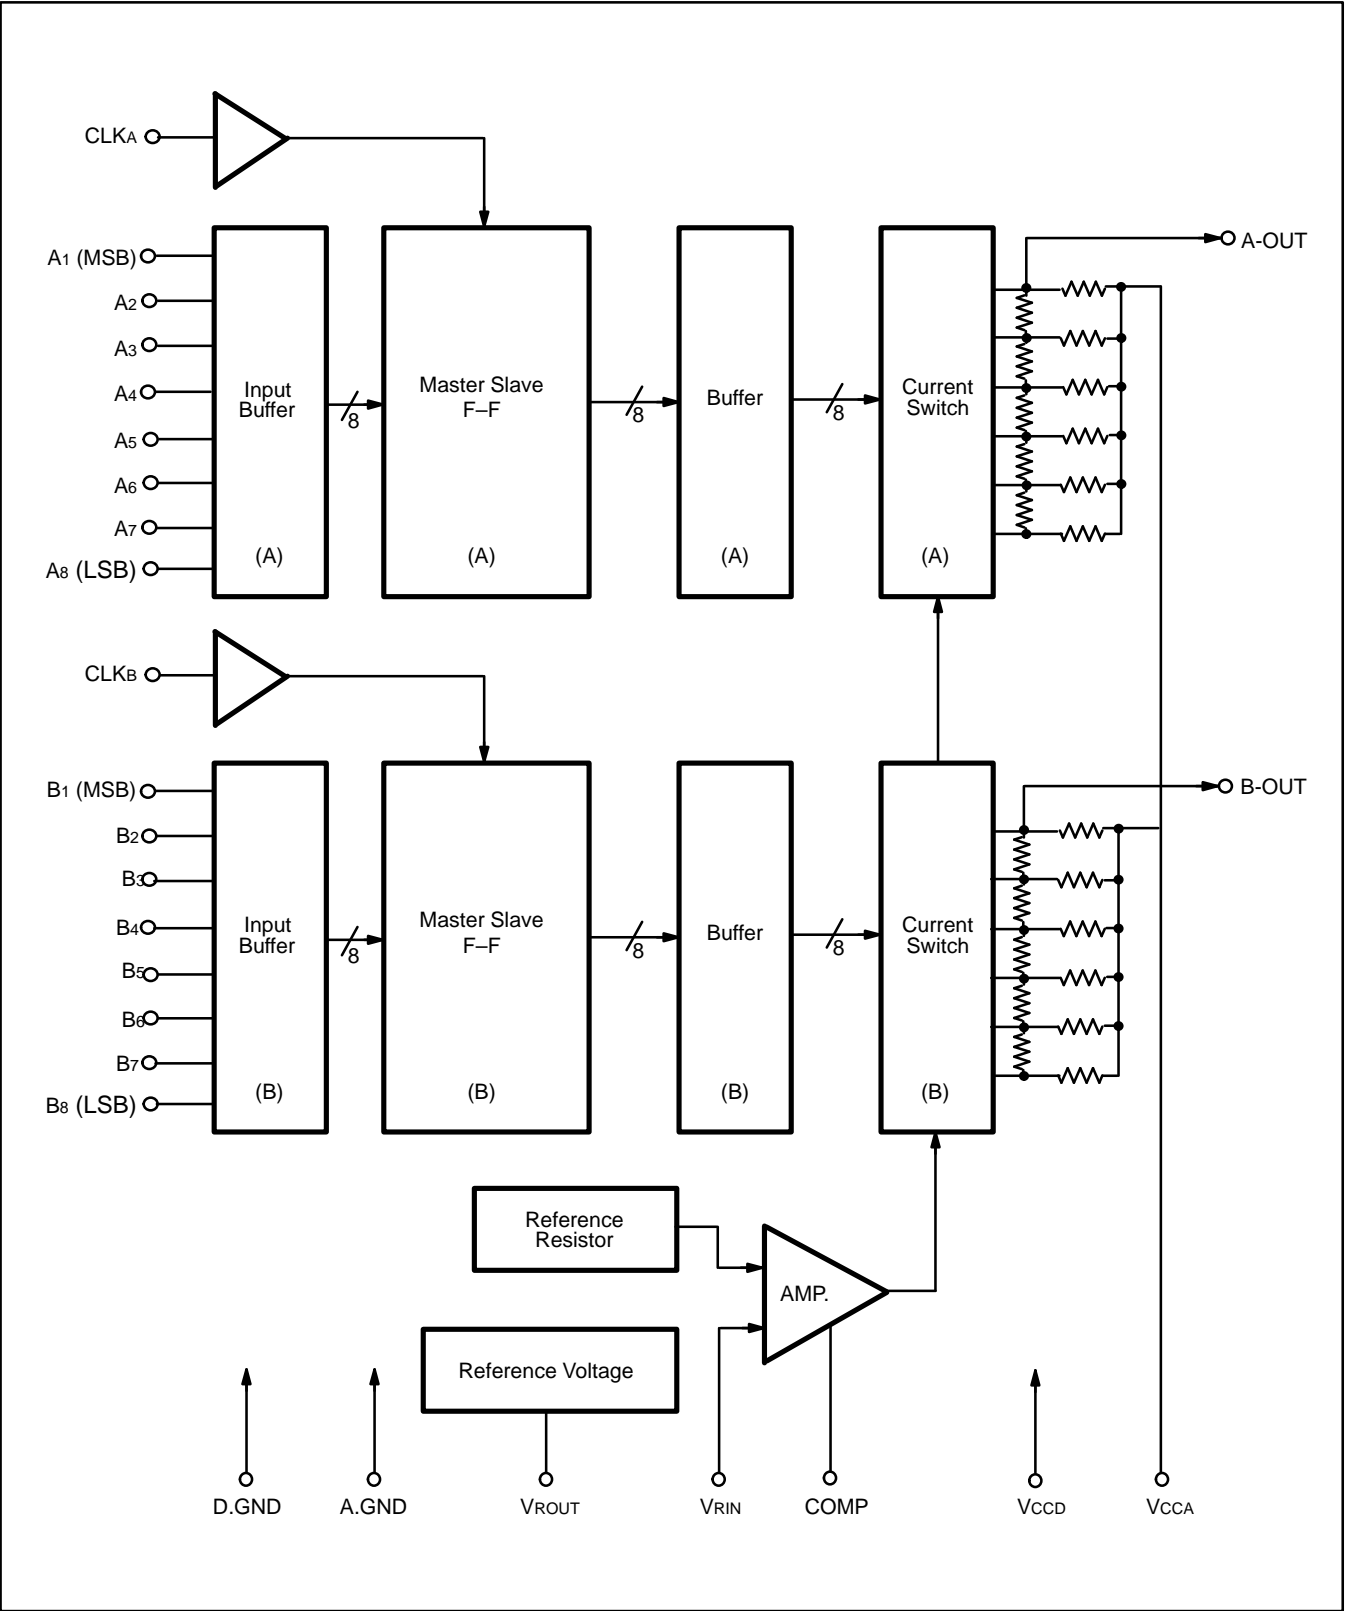

PIN DESCRIPTION

Pin Number	Symbol	I/O	Descriptions
25 to 28 1 to 4	A ₁ to A ₈	I	A-channel Digital Signal Inputs: A ₁ (MSB), A ₈ (LSB)
6 to 13	B ₁ to B ₈	I	B-channel Digital Signal Inputs: B ₁ (MSB), B ₈ (LSB)
5	CLKA	I	A-channel Clock Input
14	CLKB	I	B-channel Clock Input
24	VCCD	–	Power Supply for Digital Circuit
19, 23	VCCA	–	Power Supply for Analog Circuit, two pins (19,23) should be used
15	D-GND	–	Ground for Digital Circuit
21	A-GND	–	Ground for Analog Circuit
18	VRIN	I	Terminal for reference voltage input. Zero scale voltage of analog output is specified applying any voltage to this terminal. Input reference voltage should be 2.7 to 4.3V and, $V_{CCA} - V_{RIN} \leq 2.2V$.
17	MB40968 VROUT	O	Terminal for reference voltage output by resistance-type potential divider. Analog output of "VCCA to 3/5 x VCCA" is supplied connecting this terminal with VRIN terminal.
	MB40968V VROUT	O	Terminal for reference voltage output consists of Band Gap reference. This terminal supplies the voltage of "VCCA to VCCA – 2V". 2V output is maintained connecting this terminal with VRIN, even if the power supply fluctuates frequently.
16	COMP	–	Terminal for phase compensation capacitance; Capacitance of 1μF or more should be inserted between COMP and A-GND.
22	AOUT	O	A-channel Analog Signal Output
20	BOUT	O	B-channel Analog Signal Output

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Value			Unit
		Min	Typ	Max	
Power Supply Voltage	V_{CCA}, V_{CCD} ($V_{CCA} - V_{CCD}$)	4.75 (-0.2)	5.00	5.25 (0.2)	V
Analog Reference Voltage	$V_{CCA} - V_{RIN}$	0.70	2.00	2.20	V
	V_{RIN}	2.70	3.00	4.30	
High Level Digital Input Voltage	V_{IHD}	2.0	–	–	V
Low Level Digital Input Voltage	V_{ILD}	–	–	0.8	V
Clock Frequency	f_{CLK}	–	–	30	MHz
Data Set Up Time	t_{SU}	10.0	–	–	ns
Data Hold Time	t_H	4.0	–	–	ns
High Level Clock Pulse Width	t_{WH}	10.0	–	–	ns
Low Level Clock Pulse Width	t_{WL}	10.0	–	–	ns
Phase Compensation Capacitance	C_{COMP}	1.0	–	–	μF
Operating Temperature	T_{OP}	0	–	70	$^{\circ}C$

ELECTRICAL CHARACTERISTICS

[V_{CC} = 4.75 to 5.25 (V), T_a = 0 to 70°C]

Parameter	Symbol	Condition	Value			Unit
			Min	Typ	Max	
Resolution	–		–	–	8	Bit
Linearity Error	LE	DC	–	–	±0.2	%
Reference Input Current	I _{RIN}	V _{RIN} =3.000 (V)	–	–	10	μA
High Level Digital Input Current	I _{IND}	V _{IND} = 2.7 (V)	–	–	20	μA
Low Level Digital Input Current	I _{ILD}	V _{ILD} = 0.4 (V)	–100	–	–	μA
2-channel's Output Voltage Ratio	FSR	V _{CCA} = 5.00 (V) V _{CCD} = 5.00 (V) V _{RIN} = V _{ROUT}	0	–	4	%
Full-Scale Analog Output Voltage	V _{OFS}	V _{CCA} = 5.00 (V) V _{CCD} = 5.00 (V) V _{RIN} = V _{ROUT}	V _{CCA} –0.015	V _{CCA}	–	V
Zero-Scale Analog Output Voltage	V _{OZS}	V _{CCA} = 5.00 (V) V _{CCD} = 5.00 (V) V _{RIN} = 3.000 (V)	2.938	3.008	3.078	V
Output Resistance	R _O	T _a = 25°C	192	240	288	Ω
Power Supply Current	I _{CC}	V _{CCA} = 5.25 (V) V _{CCD} = 5.00 (V) V _{RIN} = V _{ROUT}	–	54*	80	mA

Note: *V_{CC} = 5.00 (V)

MB40968

Reference Output Voltage	V _{ROUT}	V _{CCA} = 5.00 (V) V _{CCD} = 5.00 (V)	2.900	3.000	3.100	V
--------------------------	-------------------	--	-------	-------	-------	---

MB40968V


Reference Output Voltage	V _{ROUT}		V _{CCA} –2.100	V _{CCA} –2.000	V _{CCA} –1.900	V
Reference Output Voltage Temperature Constant			–	100	–	ppm/°C

SWITCHING CHARACTERISTICS

[V_{CC} = 4.75 to 5.25 (V), T_a = 0 to 70°C]

Parameter	Symbol	Condition	Value			Unit
			Min	Typ	Max	
Minimum Conversion Rate	F _s		30	–	–	MSPS
Output Delay Time	t _{PLH} t _{PHL}	C _L = 15pF Terminated A.OUT pin with 240Ω Terminated B.OUT pin with 240Ω	–	10	–	ns
Output Rise Time	t _r		–	5	–	ns
Output Fall Time	t _f		–	5	–	ns
Settling Time	t _{setLH} t _{setHL}		–	15	–	ns

Fig. 1 – DAC OUTPUT VOLTAGE

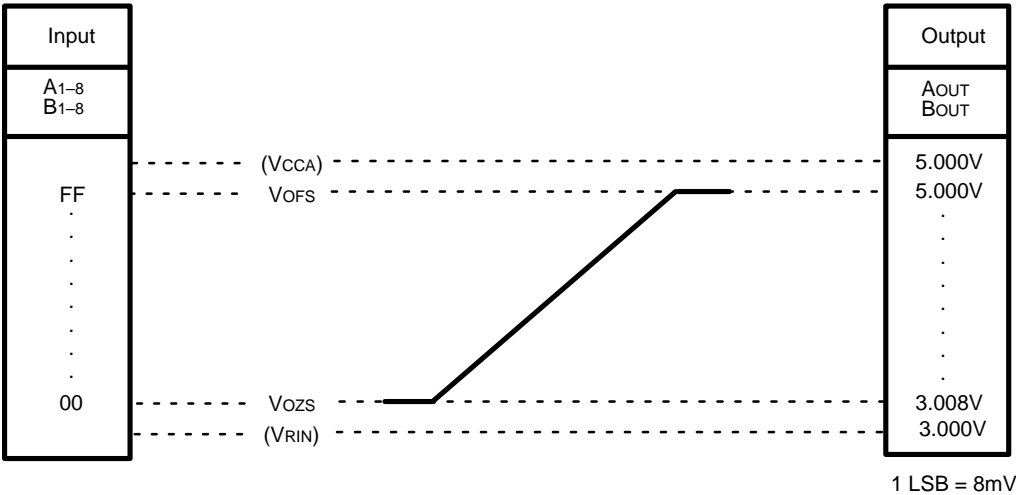

SWITCHING CHARACTERISTICS (Continued)

Fig. 2 – TIMING DIAGRAM

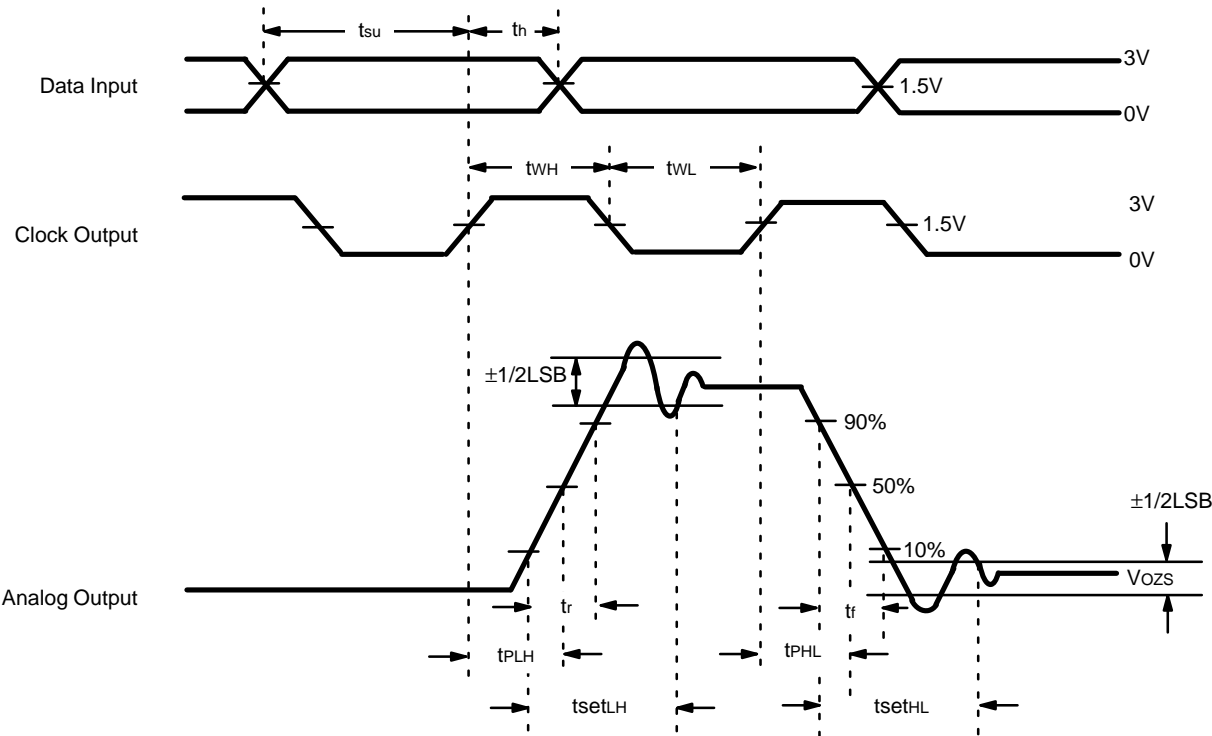


Fig. 3 – DIGITAL INPUT EQUIVALENT CIRCUIT (A1 to A8, B1 to B8, CLKA, CLKB)

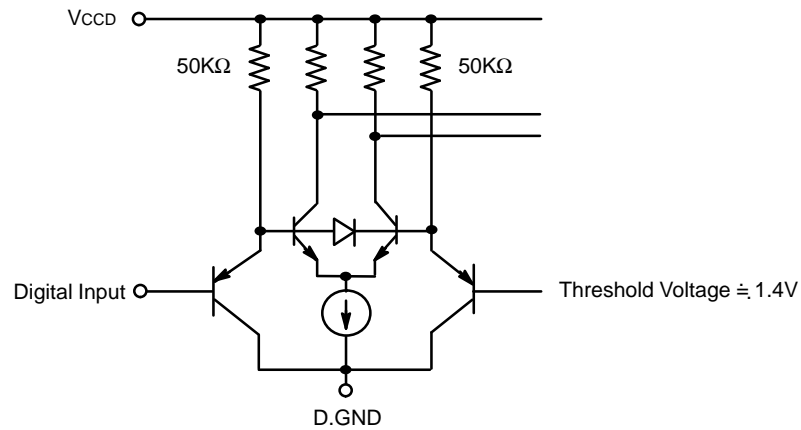


Fig. 4 – ANALOG OUTPUT EQUIVALENT CIRCUIT (AOUT, BOUT)

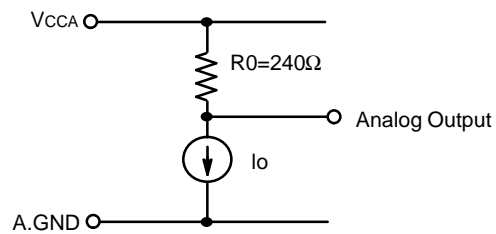


Fig. 5 – MB40968 REFERENCE OUTPUT VOLTAGE (VROUT)


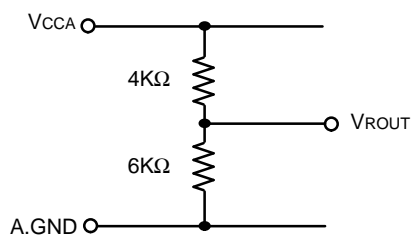


Fig. 6 – MB40968V REFERENCE OUTPUT VOLTAGE (VROUT)

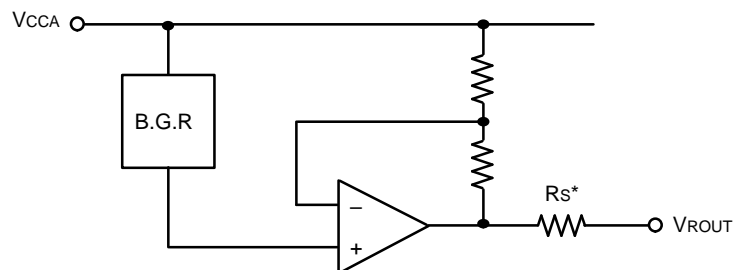

Note: *Reference for preventing over current when short circuit with GND.

The relations between Digital input code and Analog output voltage of MB40968/40968V are ideally indicated as follows.

$$AOUT_N (BOUT_N) = V_{CCA} - \frac{255 - N}{256} \times (V_{CCA} - V_{RIN}) \quad N: 0 \text{ to } 255 \text{ Digital Input Code}$$


$$VOFS = V_{CCA}$$

$$VOZS = V_{CCA} - \frac{255}{256} \times (V_{CCA} - V_{RIN})$$

Output Voltage Ratio between 2 channels is calculated as follows.

$$FSR = \left[\frac{VOFS(A) - VOZS(A)}{VOFS(B) - VOZS(B)} - 1 \right] \times 100\%$$

TYPICAL CONNECTION EXAMPLE

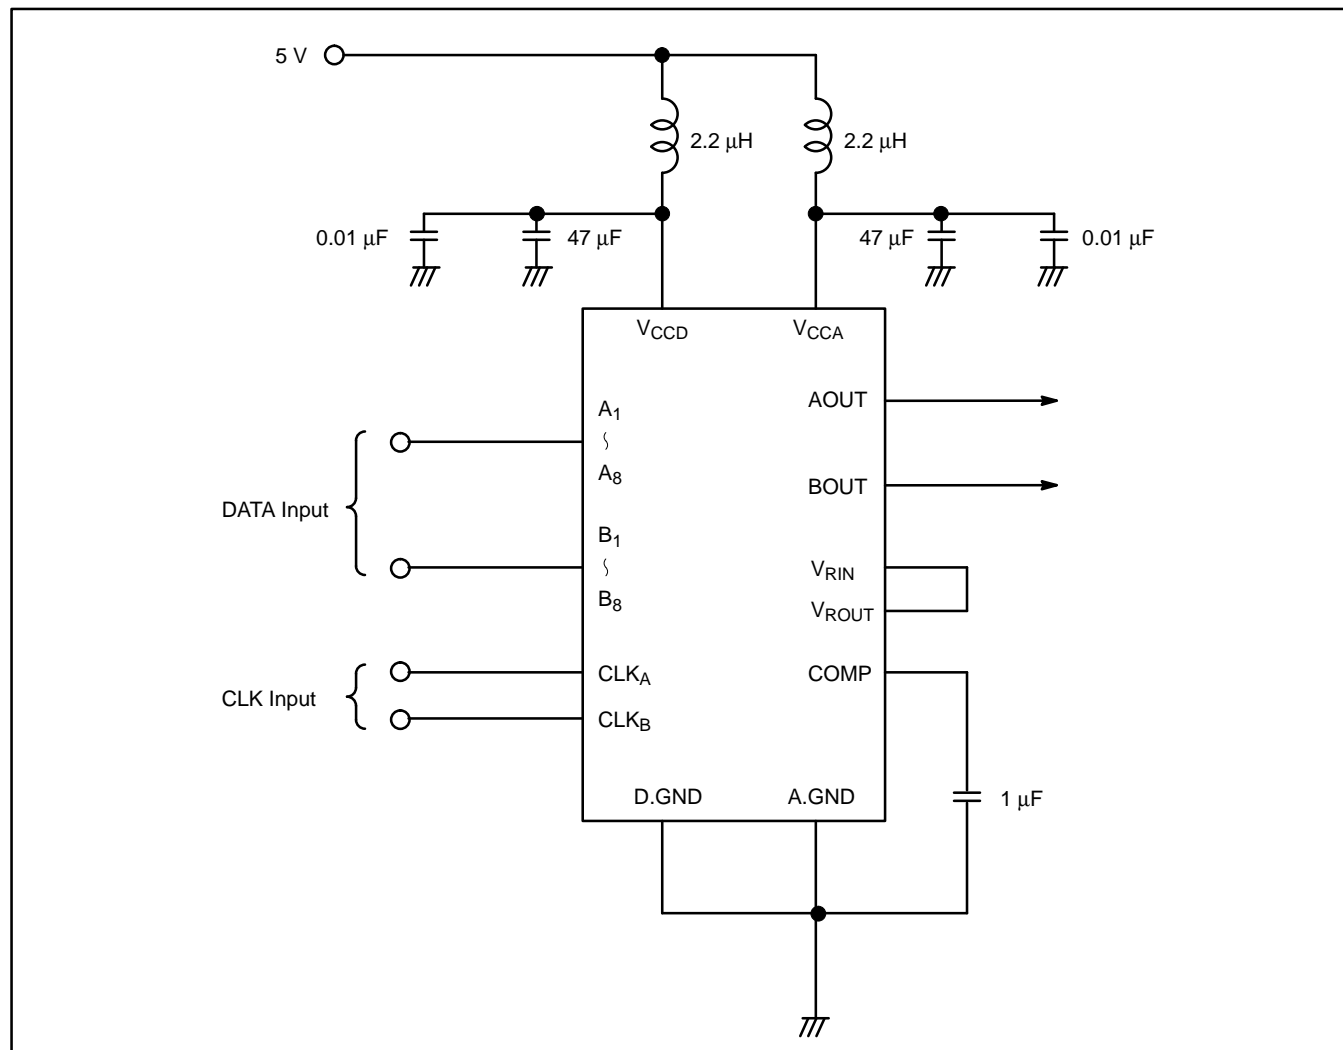

PRECAUTIONS

1. INTER-CHANNEL CROSSTALK

The MB88361 is a 2-channel D/A converter, requiring the use of special mounting methods to minimize crosstalk between analog output pins.

Specifically, it is recommended that PC board designs should emphasize the prevention of large coupling capacities between analog output lines. (See **TYPICAL CHARACTERISTIC CURVES**.)

2. PREVENTION OF SWITCHING NOISE

To reduce superimposed switching noise on the analog output signal to an absolute minimum, it is recommended that a noise limiting capacitor between the V_{CCA} and V_{CCD} pins be placed as close as possible to the pins and connected to the A.GND and D.GND pins.

3. POWER SUPPLY PATTERNS

Power supply patterns connected to the A.GND and B.GND pins should be as possible in order to reduce parasitic impedance.

TYPICAL CHARACTERISTIC CURVES

Fig. 7 – Power Supply Current vs. Operating Temperature

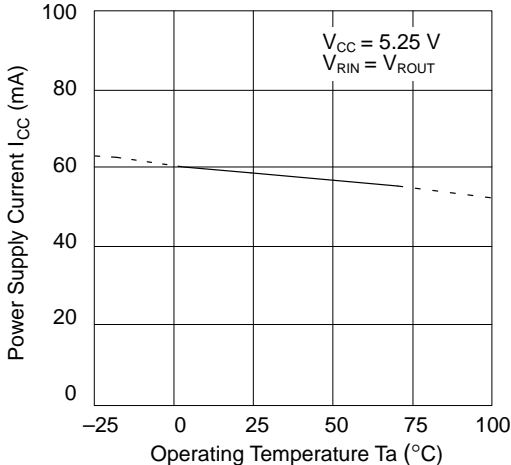


Fig. 8 – Linearity Error vs. Operating Temperature

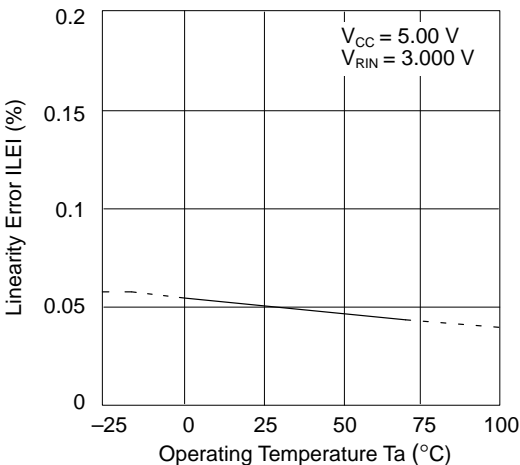


Fig. 9 – Output Resistance vs. Operating Temperature

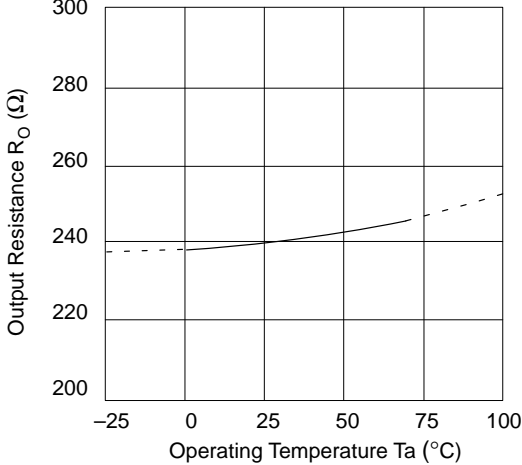


Fig. 10 – Full-Scale Analog Output Voltage vs. Operating Temperature

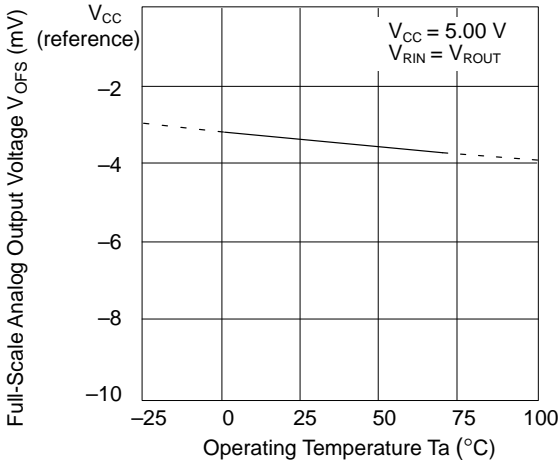


Fig. 11 – Zero-Scale Analog Output Voltage vs. Operating Temperature


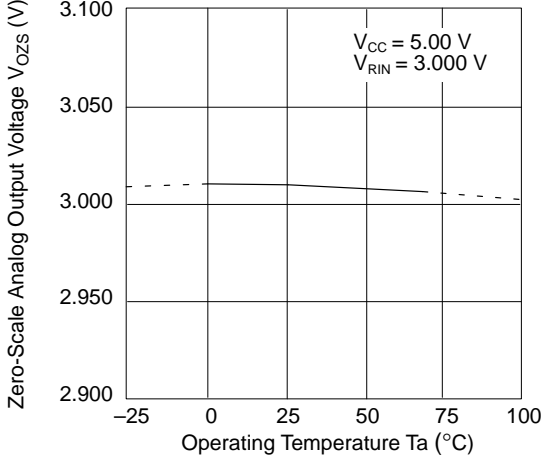


Fig. 12 – MB40968 Reference Output Voltage vs. Operating Temperature

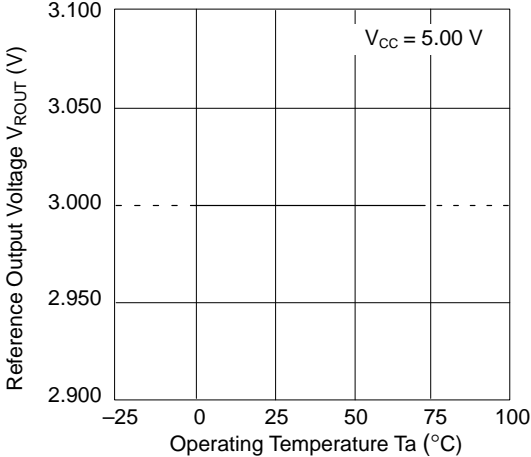

(continued)

TYPICAL CHARACTERISTIC CURVES (Continued)

Fig. 13 – MB40968V Reference Output Voltage vs. Operating Temperature

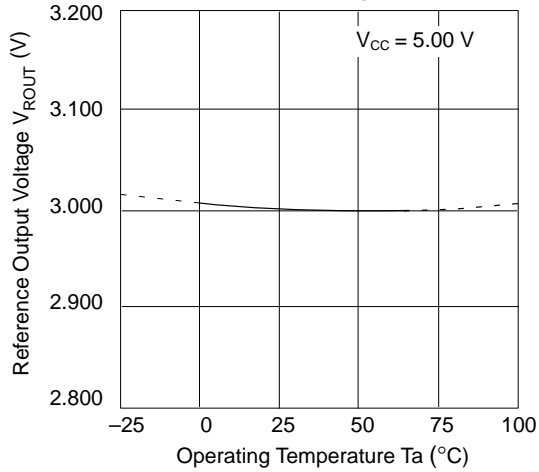


Fig. 14 – MB40968V Analog Reference Voltage vs. Power Supply Voltage

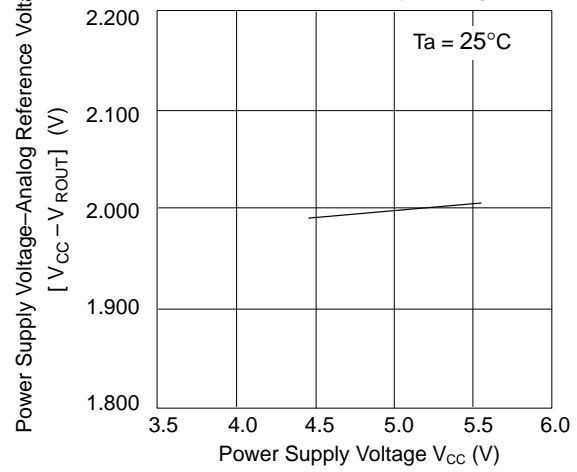


Fig. 15 – Data Set Up Time vs. Operating Temperature

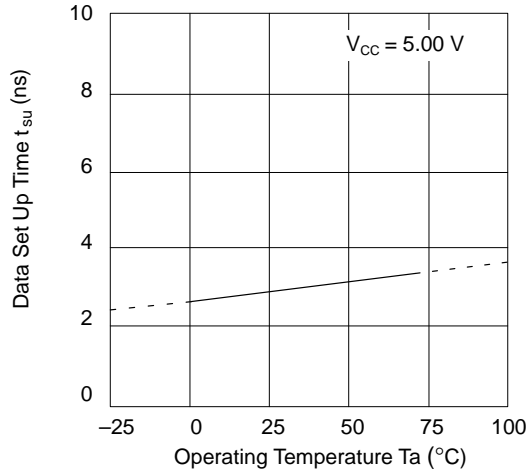


Fig. 16 – Data Set Up Time vs. Power Supply Voltage

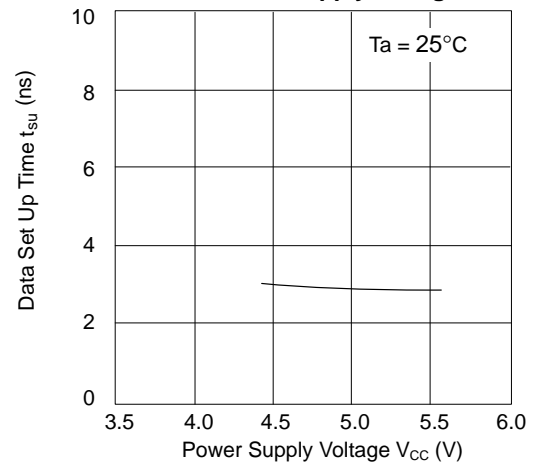


Fig. 17 – Data Hold Time vs. Operating Temperature


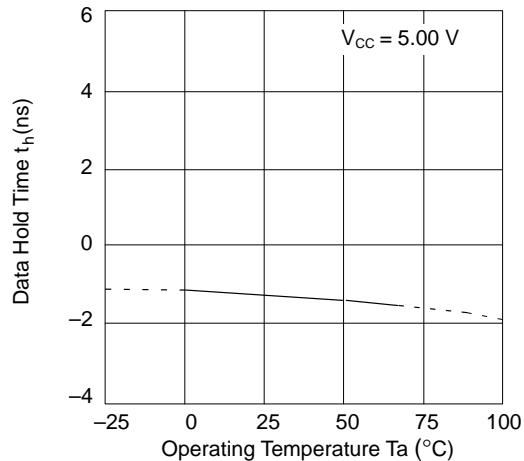


Fig. 18 – Data Hold Time vs. Power Supply Voltage

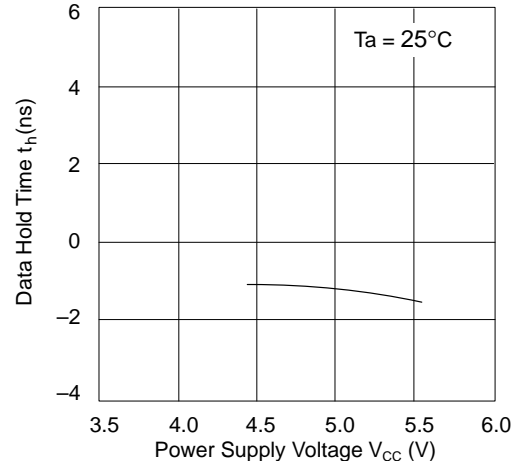

(continued)

TYPICAL CHARACTERISTIC CURVES (Continued)

Fig. 19 – Output Rise, Fall Time vs. Operating Temperature

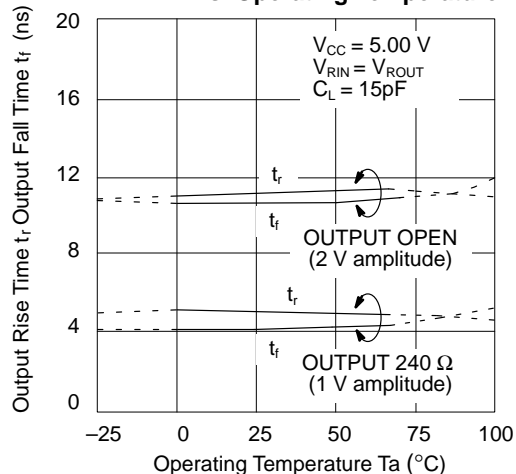


Fig. 20 – Output Rise, Fall Time vs. Power Supply Voltage

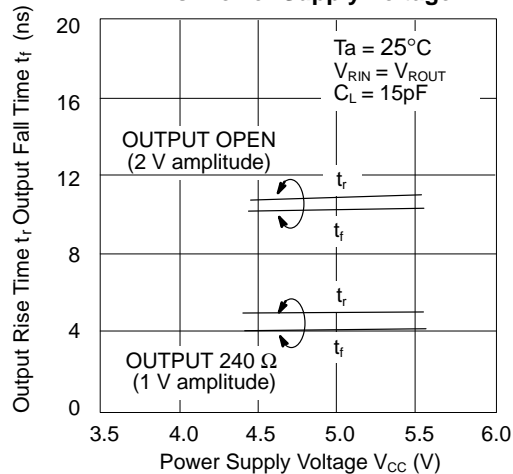


Fig. 21 – Output Delay Time vs. Operating Temperature

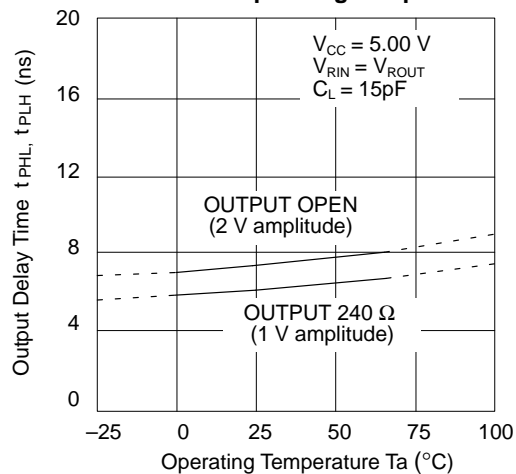


Fig. 22 – Output Delay Time vs. Power Supply Voltage

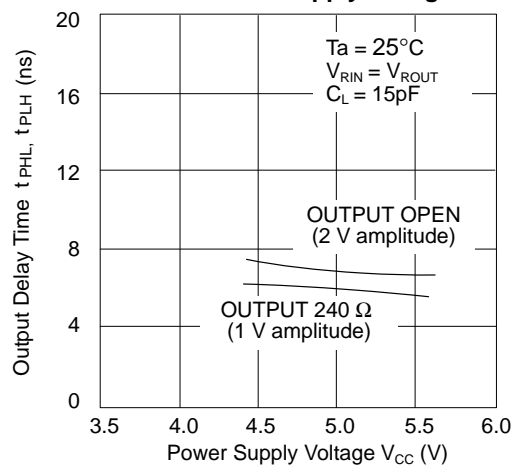


Fig. 23 – Clock Pulse Width vs. Operating Temperature



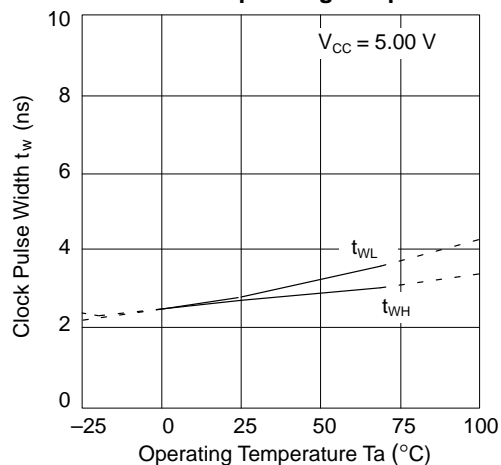


Fig. 24 – Clock Pulse Width vs. Power Supply Voltage

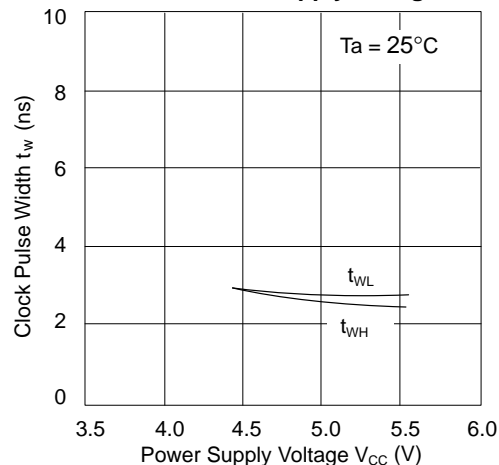

PACKAGE DIMENSIONS

28-LEAD PLASTIC DUAL IN-LINE PACKAGE
(CASE No.: DIP-28P-M03)

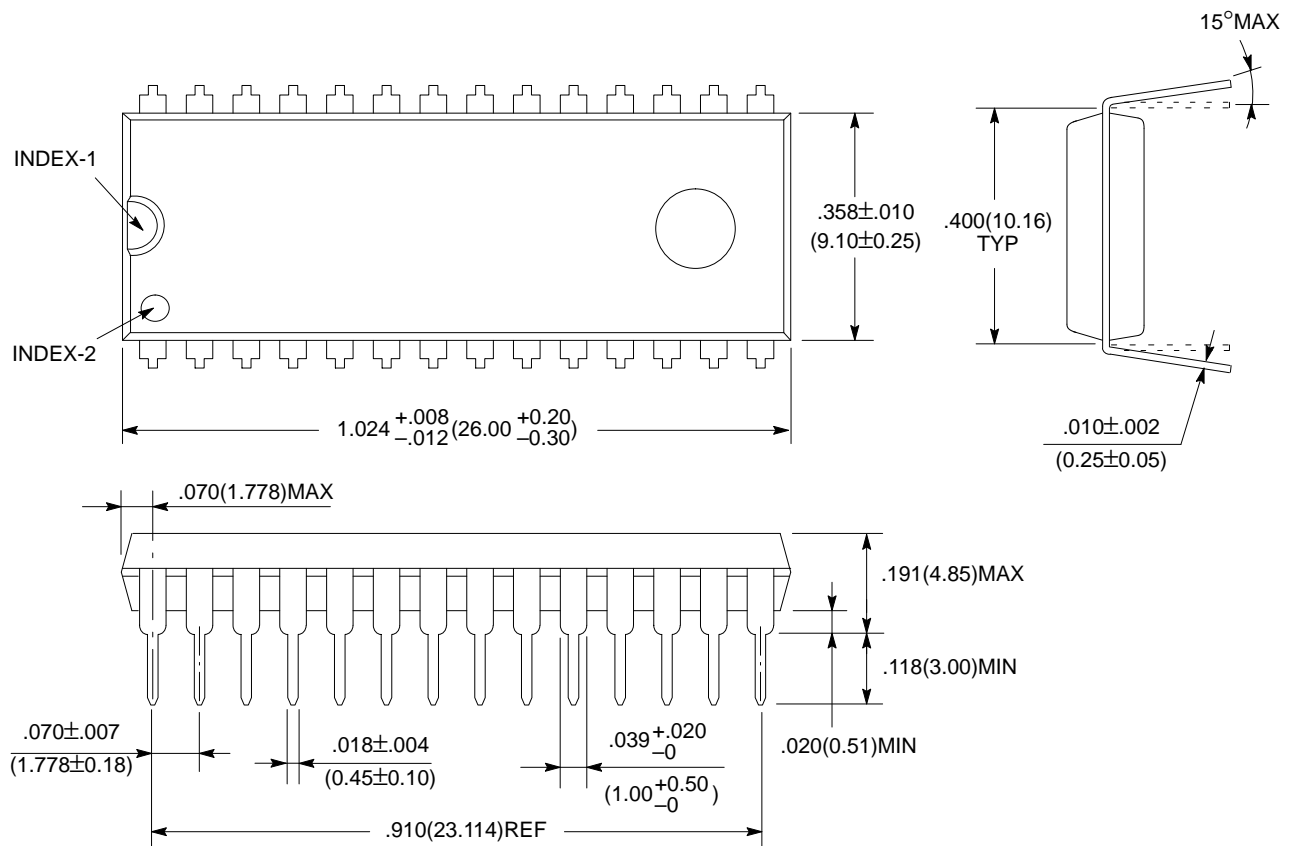

©1991 FUJITSU LIMITED D28012S-3C

Dimensions in
inches (millimeters)

PACKAGE DIMENSIONS (Continued)

