

**SIGNETICS  
DIGITAL**

**8000 SERIES  
TTL/MSI AND  
MEMORIES  
DATA BOOK**

SIGNETICS DIGITAL  
8000 SERIES  
TTL/MSI  
MEMORIES  
DATA BOOK

**DIGITAL 8000 SERIES TTL/MSI**

**Copyright 1972**

**SIGNETICS CORPORATION**

Signetics Corporation reserves the right to make changes in the products contained in this book in order to improve design or performance and to supply the best possible product.

Signetics Corporation assumes no responsibility for the use of any circuits described herein and makes no representations that they are free from patent infringement.



**25% to 50% recycled paper**

## TABLE OF CONTENTS

SECTION	TITLE	PAGE
I	<b>INTRODUCTION AND ORDER INFORMATION</b>	1
	Computer Applications for Signetics MSI and Interface Elements	2
II	<b>DIGITAL FAMILY LINES</b>	3
III	<b>DESIGN CONSIDERATIONS</b>	5
IV	<b>PACKAGE TYPES</b>	9
V	<b>PIN CONFIGURATIONS</b>	13
VI	<b>ELECTRICAL CHARACTERISTICS</b>	21
	8200/01/02/03 Buffer Registers	23
	8230/31/32 8-Input Digital Multiplexer	29
	8233/34/35 2-Input 4-Bit Digital Multiplexer	33
	8241/42 Quad Exclusive-OR/Quad Exclusive-NOR	39
	8243 8-Bit Position Scaler	43
	8250/51/52 Binary-To-Octal/BCD-To-Decimal Decoder	47
	8260 Arithmetic Logic Element	51
	8261 Fast Carry Extender	57
	8262 9-Bit Parity Generator and Checker	61
	8263/64 3-Input, 4-Bit Digital Multiplexer	65
	8266/67 2-Input, 4-Bit Digital Multiplexer	71
	8268 Gated Full Adder	75
	8269 4-Bit Comparator	79
	8270/71 4-Bit Shift Registers	81
	8273 10-Bit Serial-In, Parallel-Out Shift Registers	87
	8274 10-Bit Parallel-In, Serial-Out Shift Registers	89
	8275 Quad Bistable Latch	91
	8276 8-Bit Shift Register	95
	8277 Dual 8-Bit Shift Register	99
	8280/81 BCD Decade Counter/4-Bit Binary Counter	101
	8284/85 Binary Hexadecimal and BCD Decade, Synchronous Up/Down Counters	107
	8288 Divide-By-Twelve Counter	111
	8290/91 Presettable High Speed Decade/Binary Counter	117
	8292/93 Presettable Low Power Decade/Binary Counter	123
	8T01 Nixie Decoder/Driver	129
	8T04 Seven Segment Decoder/Driver	131
	8T05 Seven Segment Decoder/Driver	135
	8T06 Seven Segment Decoder/Driver	139
	8T09 Quad Bus Driver	143
	8T10 Quad D-Type Bus Flip-Flop	147
	8T13 Dual Line Driver	151
	8T14 Triple Line Receiver	155
	8T15 Dual Communications EIA/MIL Line Driver	159
	8T16 Dual Communications EIA/MIL Line Receiver	163
	8T20 Bidirectional One-Shot	167
	8T22 Retriggerable One-Shot	173
	8T23 Dual Line Driver	175
	8T24 Triple Line Receiver	179
	8T26 Quad Bus Driver/Receiver	183

**TABLE OF CONTENTS (Cont'd)**

<b>SECTION</b>	<b>TITLE</b>	<b>PAGE</b>
<b>VII</b>	<b>SCHOTTKY 82S MSI</b>	<b>185</b>
	82S30/31/32      8-Input Digital Multiplexer	187
	82S33/34      2-Input 4-Bit Digital Multiplexer	189
	82S41/42      Quad Exclusive-OR/Quad Exclusive-NOR	191
	82S50/52      Binary-To-Octal/BCD-To-Decimal Decoder	193
	82S62      9-Bit Parity Generator and Checker	195
	82S66/67      2-Input, 4-Bit Digital Multiplexer	197
	82S70/71      4-Bit Shift Register	199
	82S90/91      Presettable High Speed Decade/Binary Counter	201
<b>VIII</b>	<b>BIPOLAR MEMORIES</b>	<b>203</b>
	8204/05      2048 Bit Bipolar ROM (256X8)/4096 Bit Bipolar ROM (572 X 8)	205
	8220      8-Bit Content Addressable Memory (4X2 CAM)	207
	8223      256-Bit Bipolar Field-Programmable ROM (32X8 PROM)	213
	8224      256-Bit Bipolar ROM (32X8 ROM)	217
	8225      64-Bit Bipolar RAM (16X4 RAM)	221
	8228      4096-Bit Bipolar ROM (1024X4 ROM)	225
	82S06/07      256-Bit Bipolar RAM (256X1 RAM Tri-State/Open Collector)	
	82S21      High Speed Write-While-Read 64-Bit Bipolar RAM (32X2 RAM)	229
	82S26/29      1024-Bit Bipolar Field Programmable ROM (256X4 PROM Tri State/Open Collector)	233
<b>IX</b>	<b>SIGNETICS SURE 883 PROGRAM</b>	<b>237</b>
<b>X</b>	<b>BIPOLAR MEMORY CUSTOMER ORDERING INFORMATION</b>	<b>241</b>
	Sales Office Lists	262

# SECTION 1

## INTRODUCTION AND ORDER INFORMATION

### INTRODUCTION

The DCL MSI (Medium Scale Integration) Specifications Handbook comprises the second volume of the DCL Series and covers the MSI group of the DCL family.

Volume one of the DCL Series includes gates, binaries and less complex functions such as monostable multivibrators and interface elements.

The material is designed to serve as an exact guide to generate a procurement document. Section 4, "Design Considerations," provides maximum ratings and package outlines for all devices listed in this volume. Section 7, "Electrical Characteristics," contains detailed test limit and test condition information for simplified device evaluation and incoming inspection. The material is organized in a format which lends itself to generation of device specifications with a minimum of cost and time. Worst case limits are provided for most parameters.

Because of the growing complexity of new DCL/MSI products, loading and noise margin tables are not included in this volume. The numbers are easily generated for individual cases as shown below. The lower of the two numbers is the DC fan-out.

DC Noise Margin ("0" state) is obtained by subtracting the maximum "0" level output voltage for the driving gate from the minimum "0" threshold for the driven gate.

DC Noise margin ("1" state) is obtained by subtracting the maximum "1" level input threshold of the driven gate from the minimum "1" output voltage level of the driving gate.


Application ideas are provided with each product data sheet. For more complete applications information, ask for Signetics' Application Handbook.

Section 8 of this volume presents the Signetics' SURE Product Assurance and Reliability programs. Production screens, acceptance tests, qualification tests, design tests and an optional HI-REL screening program specially tailored to Signetics devices are described. The applicable SURE programs, combined with individual DCL specification sheets, are designed to constitute a complete procurement document. Use of these standard specifications will provide fast and accurate specifications and product flow.

$$\text{DC FAN OUT ("0" OUTPUT CONDITION)} = \frac{\text{"0" maximum output current of driving element}}{\text{"0" maximum input current requirement of driven element}}$$

$$\text{DC FAN OUT ("1" OUTPUT CONDITION)} = \frac{\text{"1" maximum output current of driving element}}{\text{"1" maximum input current requirement of driven element}}$$

### ORDER INFORMATION

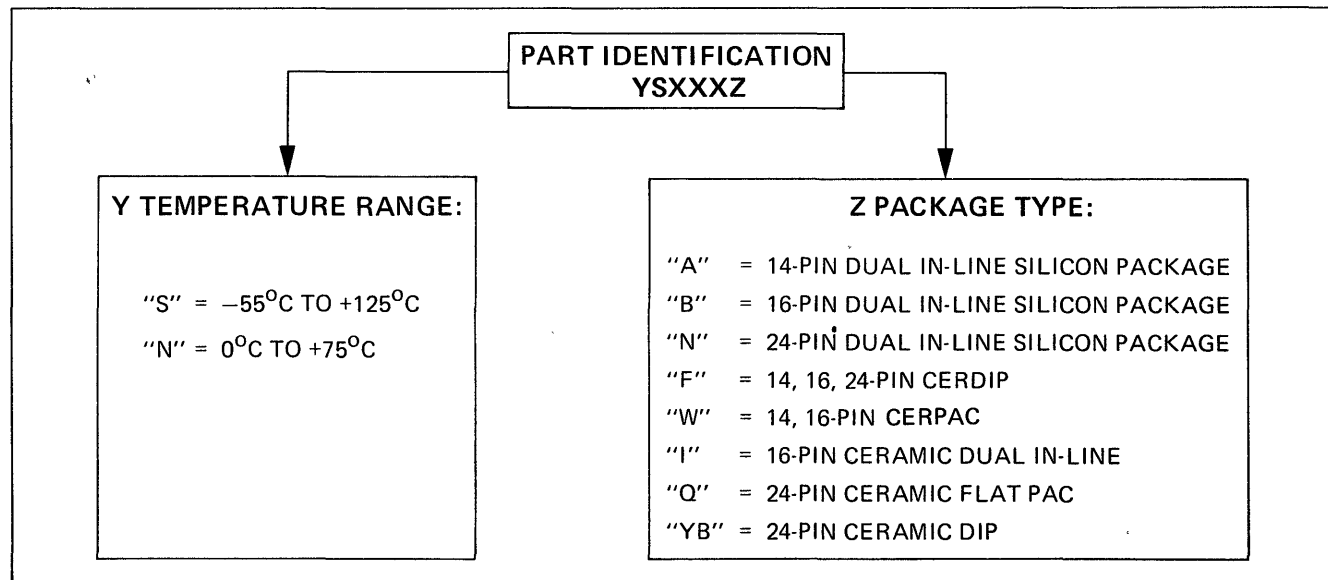

**COMPUTER**

**ARITHMETIC**

**MEMORY**

**CONTROL**

**INTERFACE**

ADDERS	MULTI- PLEXERS	SHIFT REGISTERS	COMPARE FUNCTIONS	BUFFER REGISTERS	BIPOLAR MEMORIES	DECODERS	COUNTERS	SCALERS	ONE SHOT	PARITY GEN/CHECK	LEVEL TRANSLATOR	LINE DRIVERS RECEIVERS	DECODER DRIVERS
8260 8261 8268 7480 7483 74181 74182	8230 8231 8232 8234 8235 8263 8264 8266 8267 74150 74151 74152 74153 74157 74158	8200 8201 8202 8203 8270 8271 8273 8274 8276 8277 7491 7494 7495 7496 74166 74195 74198 74199	8241 8242 8269 7486	8200 8201 8202 8203 8275 7475 7477	8220 8223 8224 8225 82S21 82S06 82S07 82S26 82S29 8204 8205 8228 82S23 82S123 74170	8250 8251 7442 7443 7444 74154	8280 8281 8284 8285 8288 8290 8291 8292 8293 7490 7492 7493 74192 74193	8243	8162 8T20 8T22 74121 74122 74123	8262 74180	8T18 8T80 8T90 7406 7407 7416 7417 7426	8T09 8T10 8T13 8T14 8T15 8T16 8T23 8T24 8T26 314 317 333 334 358 370 374 375 380 381 384 391	8T01 8T04 8T05 8T06 7441 7442 7443 7444 7445 7446 7447 7448 74141 74145

**COMPUTER APPLICATIONS FOR SIGNETICS MSI AND INTERFACE ELEMENTS**

(Contact your nearest Signetics Sales office for the latest TTL products)

# SECTION 2

## DIGITAL FAMILY LINES

The following is a parts list of Signetics Digital Product Lines, now available, as described in the UTILOGIC II, DCL, and 54/74 Handbooks.

### UTILOGIC II/SP600 LINE

#### NOR Gates

314A	Single 7-Input NOR Gate
317A	Dual 4-Input Expandable NOR Gate
370A	Triple 3-Input NOR Gate
380A	Quad 2-Input NOR Gate
381A	Quad 2-Input NOR Gate (Open-Collector)

#### OR Gates

333A	Dual 3-Input Expandable OR Gate
334A	Dual 4-Input Expandable OR Gate
374A	Triple 3-Input OR Gate
375A	Triple 2-Input OR Gate
384A	Quad 2-Input OR Gate

#### AND Gates

302A	Quad 2-Input AND Gate
304A	Dual 4-Input AND Gate (Expandable)
305A	Single 6-Input AND Gate
306A	Dual 3-Input AND Gate

#### NAND Gates

337A	Dual 4-Input Expandable NAND Gate
377A	Triple 3-Input NAND Gate
387A	Quad 2-Input NAND Gate
616A	Dual 3-Input Expandable NAND Gate
670A	Triple 3-Input NAND Gate
680A	Quad 1-Input NAND Gate

#### Gate Expanders

300A	Dual 3-Input Expander for OR and NOR Gates
301A	Quad 2-Input Diode Expander for NAND Gates

#### Buffer Drivers

352A	Dual 3-Input Expandable NAND Buffer Driver (Open Collector)
356A	Dual 4-Input Expandable NAND Buffer Driver
357A	Quad 2-Input NAND Power Driver
358A	Quad 2-Input NAND Power Driver (Open Collector)

#### Binaries

321A	Dual J-K Binary
322A	Dual J-K Binary
328A	Dual D Binary
620A	Single J-K Master Slave Binary
629A	Single RS/T Binary

#### Pulse Shapers

362A	Monostable Multivibrator
------	--------------------------

#### Zero Crossing Detector

363A	Dual Zero Crossing Detector
------	-----------------------------

#### Shift Register

3271B	4-Bit Shift Register
-------	----------------------

#### Counters

3280A	BCD Decade Counter
3281A	4-Bit Binary Counter

#### Buffer Driver

659A	Dual 4-Input Buffer/Driver (Expandable)
------	---

#### Inverter

391A	Hex Inverter (Open Collector)
690A	Hex Inverter

#### Expander

631A	Gate Expander
------	---------------

### DCL DIGITAL LINE

#### Multivibrator

8162	Monostable Multivibrator
------	--------------------------

#### Low Power Elements

8415	Dual 5-Input NAND Gate
8416	Dual 4-Input Expandable NAND Gate
8417	Dual 3-Input Expandable NAND Gate
8424	Dual RS/T Binary
8425	Dual RS/T Binary
8226	1024 BIT Field/Factory Programmable Bipolar ROM (256 x 4)
8228	4096 BIT Bipolar ROM (1024 x 4)
8440	Dual AND-OR-Invert Gate
8455	Dual 4-Input NAND Gate Driver
8470	Triple 3-Input NAND Gate
8471	Triple 3-Input NAND Gate
8480	Quad 2-Input NAND Gate
8481	Quad 2-Input NAND Gate
8490	Hex Inverter
8706	Dual 5-Input Diode Expander Element
8731	Quad 2-Input Diode Expander Element

#### Standard Performance Elements

8806	Dual 4-Input Expander Element
8808	Single 8-Input NAND Gate
8815	Dual 4-Input NOR Gate
8816	Dual 4-Input NAND Gate
8821	Dual Master-Slave J-K Binary
8822	Dual Master-Slave J-K Binary
8824	Dual Master-Slave J-K Binary
8825	DC Clocked J-K Binary
8826	Dual J-K Binary
8827	Dual J-K Binary
8828	Dual D Binary
8829	High Speed J-K Binary
8840	Dual Expandable AND-OR-Invert Gate
8848	Expandable AND-OR-Invert Gate
8855	Dual 4-Input Driver
8870	Triple 3-Input NAND Gate
8875	Triple 3-Input NOR Gate
8880	Quad 2-Input NAND Gate
8881	Quad 2-Input NAND Gate
8885	Quad 2-Input NOR Gate

#### High Speed Elements

8H16	Dual 4-Input NAND Gate
8H20	Dual J-K Binary Element
8H21	Dual J-K Binary Element
8H22	Dual J-K Binary Element
8H70	Triple 3-Input NAND Gate
8H80	Quad 2-Input NAND Gate
8H90	Hex Inverter

#### Interface Elements

8T18	Dual 2-Input NAND Interface Gate
8T80	Quad 2-Input NAND Interface Gate
8T90	Hex Inverter Interface Element



## DIGITAL FAMILY LINES (Cont'd)

### 54/74XX - 54/74HXX LINE

54/7400	Quadruple 2-Input Positive NAND Gate
54/7401	Quadruple 2-Input Positive NAND Gate (With open collector output)
54/7402	Quadruple 2-Input Positive NOR Gate
54/7403	Quadruple 2-Input Positive NAND Gate (With open collector output)
54/7404	Hex Inverter
54/7405	Hex Inverter (With open collector output)
54/7406	Hex Inverter Buffer/Driver with Open Collector High Voltage Outputs
54/7407	Hex Buffer/Driver with Open Collector High Voltage Outputs
54/7408	Quadruple 2-Input Positive AND Gates
54/7409	Quad 2-Input AND Gate with Open Collector Outputs
54/7410	Triple 3-Input Positive NAND Gate
54/7411	Triple 3-Input Positive AND Gate
54/7416	Hex Inverter Buffer/Driver with Open Collector High Voltage Outputs
54/7417	Hex Buffer/Driver with Open Collector High Voltage Outputs
54/7420	Dual 4-Input Positive NAND Gate
54/7421	Dual 4-Input AND Gate
54/7426	Quad 2-Input High Voltage NAND Gate
54/7430	8-Input Positive NAND Gate
54/7437	Quad 2-Input NAND Buffer
54/7438	Quad 2-Input NAND Buffer
54/7440	Dual 4-Input Positive NAND Buffer
54/7442	BCD - to - Decimal Decoder
54/7443	Excess 3 - to - Decimal Decoder
54/7444	Excess 3 - Gray - to - Decimal Decoder
54/7445	BCD-to-Decimal Decoder/Driver with Open Collector High Voltage Outputs
7446/47	BCD-to-Seven Segment Decoder/Driver
7448	BCD-to-Seven Segment Decoder/Driver
54/7450	Expandable Dual 2-Wide 2-Input AND-OR-Invert Gate
54/7451	Expandable Dual 2-Wide 2-Input AND-OR-Invert Gate
54/7453	4-Wide 2-Input AND-OR-Invert Gate
54/7454	4-Wide 2-Input AND-OR-Invert Gate
S5460	Dual 4-Input Expander
N7460	Dual 4-Input Expander
54/7470	J-K Flip-Flop
54/7472	J-K Master-Slave Flip-Flop
54/7473	Dual J-K Master-Slave Flip-Flop
54/7474	Dual D-Type Edge-Triggered Flip-Flop
54/7475	Quadruple Bistable Latch
54/7476	Dual J-K Master-Slave Flip-Flop with Preset and Clear
54/7477	Quadruple Bistable Latch
54/7480	Gated Full Adder
54/7483	4-Bit Binary Full Adder (Look Ahead Carry)
54/7486	Quad 2-Input Exclusive OR Gate
54/7488	256-Bit Read-Only Memory
54/7489	64-Bit Read/Write Memory (RAM)
54/7490	Decade Counter
54/7491	8-Bit Shift Register
54/7492	Divide-by-Twelve Counter (Divide-by-Two and Divide-by-Six)
54/7493	4-Bit Binary Counter
54/7494	4-Bit Shift Register (Parallel-In, Serial-Out)
54/7495	4-Bit Right-Shift Left-Shift Register
54/7496	5-Bit Shift Register
54/74107	Dual J-K Master Slave Flip-Flop
54/74121	Monostable Multivibrator
54/74122	Retriggerable Monostable Multivibrator with Clear
54/74141	BCD-to-Decimal Decoder/Driver with Blanking
54/74145	BCD-to-Decimal Decoder/Driver with Open Collector High Voltage Outputs
54/74150	16-Line to 1-Line Data Selector/Multiplexer
54/74151	8-Line to 1-Line Data Selector/Multiplexer
54/74152	8-Line to 1-Line Data Selector/Multiplexer

### 54/74XX - 54/74HXX LINE (Cont'd)

54/74154	4-Line to 16-Line Decoder/Demultiplexer
54/74180	8-Bit Odd/Even Parity Generator/Checker
54/74192	Synchronous Decade Up/Down Counter with Preset Inputs
54/74193	Synchronous 4-Bit Binary Up/Down Counter with Preset Inputs
54/74194	4-Bit Bidirectional Universal Shift Register
54/74H00	Quadruple 2-Input Positive NAND Gate
54/74H01	Quadruple 2-Input Positive NAND Gate (With open collector output)
54/74H04	Hex Inverter
54/74H05	Hex Inverter (With open collector output)
54/74H08	Quadruple 2-Input Positive AND Gate
54/74H10	Triple 3-Input Positive NAND Gate
54/74H11	Triple 3-Input Positive AND Gate
54/74H20	Dual 4-Input Positive NAND Gate
54/74H21	Dual 4-Input Positive AND Gate
54/74H22	Dual 4-Input Positive NAND Gate (With open collector output)
54/74H30	8-Input Positive NAND Gate
54/74H40	Dual 4-Input Positive NAND Buffers
54/74H50	Dual 2-Wide 2-Input AND-OR-Invert Gates
54/74H51	Dual 2-Wide 2-Input AND-OR-Invert Gates
54/74H52	4-Wide 2-2-2-3-Input AND-OR-Gate
54/74H53	Expandable 2-2-2-3-Input AND-OR-Invert Gate
54/74H54	Expandable 2-2-2-3-Input AND-OR-Invert Gate
54/74H55	Expandable 4-Input AND-OR-Invert Gate
54/74H60	Dual 4-Input Expander (For use with S54H50, S54H53, S54H55 circuits)
54/74H60	Dual 4-Input Expander (For use with N74H50, N74H53, N74H55 circuits)
54/74H61	Triple 3-Input Expanders (For use with S54H52, N74H52 circuits)
S54H62	3-2-2-3-Input AND-OR-Expander (For use with S54H50, S54H53, S54H55 circuits)
N74H62	3-2-2-3-Input AND-OR Expander (For use with N74H50, N74H53, N74H55 circuits)
54/74H72	J-K Master Slave Flip-Flops
54/74H73	Dual J-K Master-Slave Flip-Flops
54/74H74	Dual D-Type Edge-Triggered Flip-Flops
54/74H76	Dual J-K Master-Slave Flip-Flops

### NEW 54/74 PRODUCTS


54/7413	Dual NAND Schmitt Trigger
54/74123	Dual Retriggerable Monostable Multivibrator W/Clear
54/74153	Data Selector/Multiplexer Dual 4-to-1 Line
54/74157	Quadruple 2-Line to 1-Line Selector/Multiplexer
54/74158	Quadruple 2-Line to 1-Line Selector/Multiplexer
54/74160	Synchronous Counters with Direct Clear
54/74161	Synchronous Counters with Direct Clear
54/74162	Fully Synchronous Counters
54/74163	Fully Synchronous Counters
54/74166	Parallel-In, Serial-Out, Synchronous Load Shift Register
54/74170	4 x 4 Register File
54/74181	4-Bit Arithmetic Unit W/Full Look-Ahead
54/74182	Look-Ahead Carry Generator
54/74195	4-Bit Shift Register Parallel-Access J-K Inputs Mode Control
54/74198	8-Bit Shift Register Parallel-Access, Shift Right-Left
54/74199	8-Bit Shift Register Parallel-Access J-K Inputs W/Mode Control
54/74S00	Quad 2-Input NAND Schottky
54/74S112 *	Dual J-K Flip-Flop Schottky
54/74S113 *	Dual J-K Flip-Flop Schottky
54/74S114 *	Dual J-K Flip-Flop Schottky
54/74H71	J-K Master Slave Flip-Flop

\* Available Soon

### OUTPUT STRUCTURES

Certain guidelines should be observed to ensure optimum system performance. Systems incorporating TTL elements such as gates, binaries and MSI circuits have inherent  $V_{CC}$  and GROUND transients attributable to the current spike

produced by "totem pole" output structures. Figure 1 provides a synopsis of the commonly used totem pole structures which current spike. MSI designs use similar structures to buffer outputs and inputs to increase fan-out and switching speed while reducing input loading.

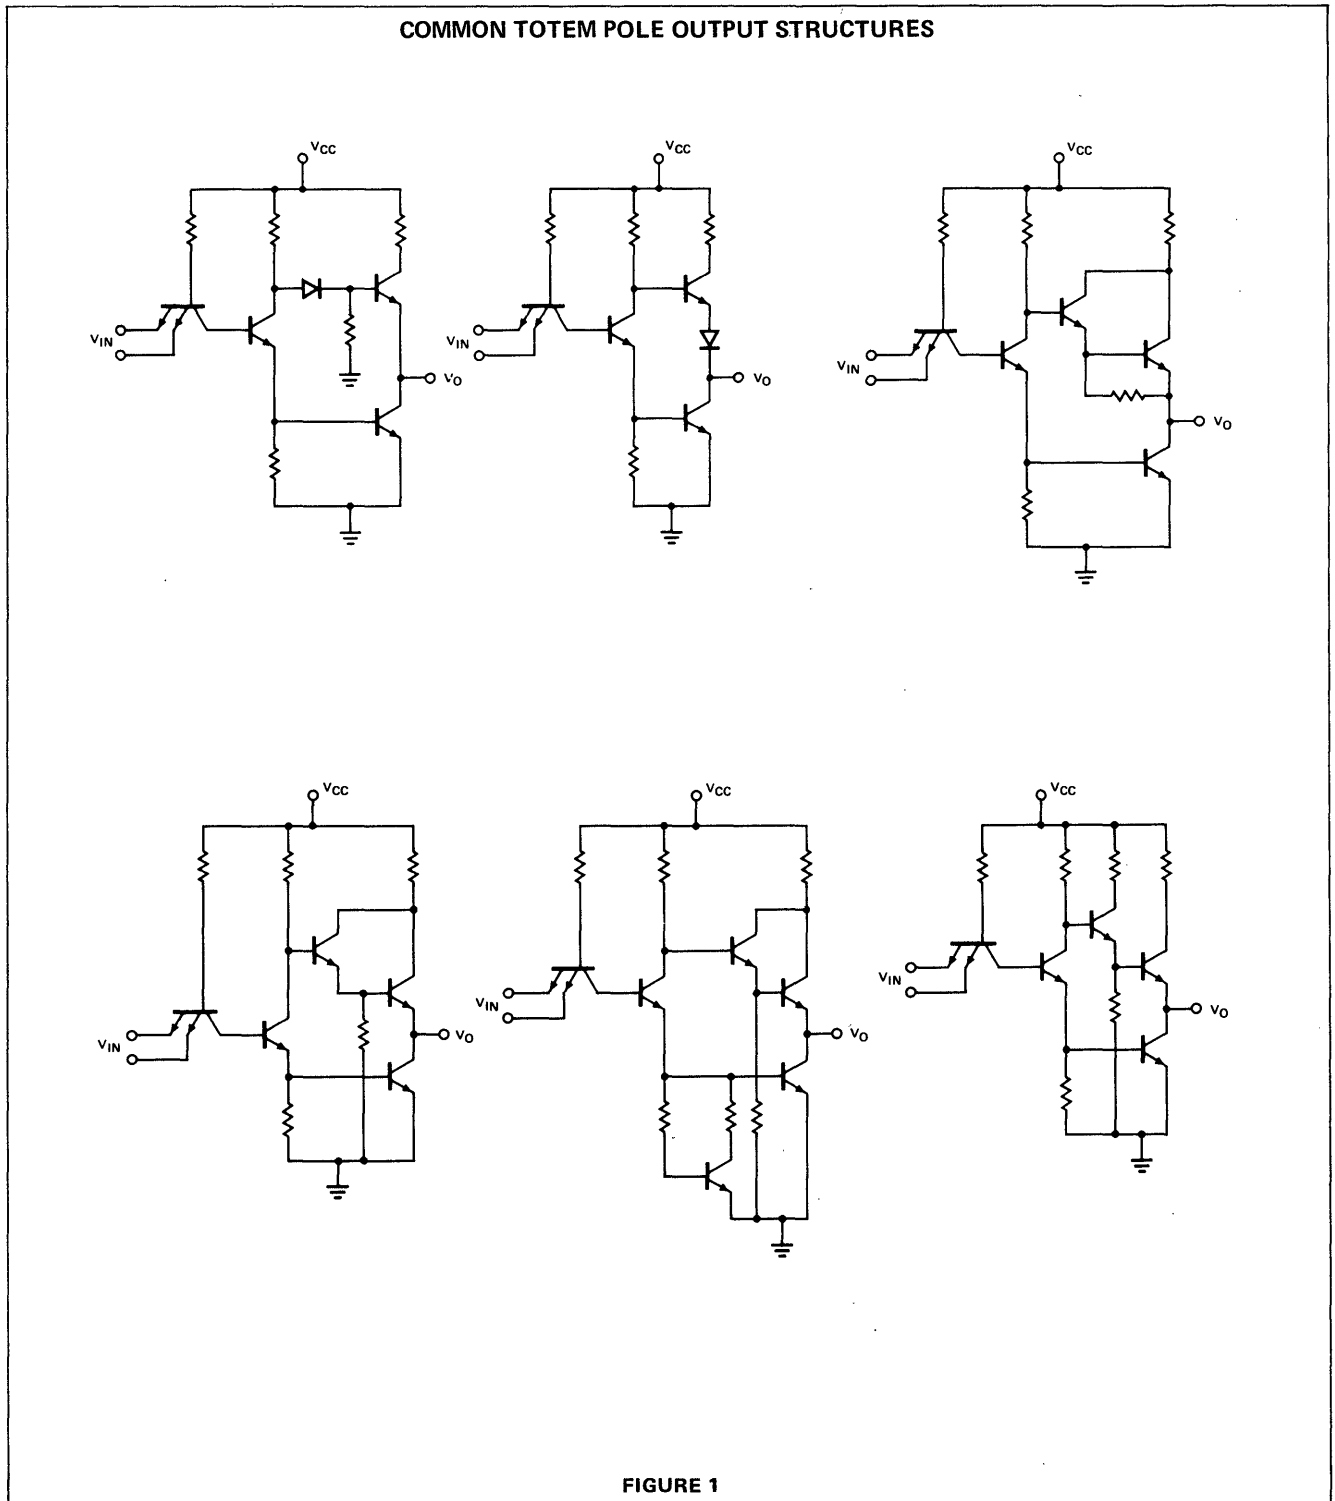

**DESIGN CONSIDERATIONS (Cont'd)**

**DECOUPLING MSI**


The current spike produced by the totem pole output structure during switching transitions can cause MSI subsystems to malfunction if  $V_{CC}$  is not adequately decoupled to GROUND. A capacitance of 2000pF or more, for each totem pole structure should be connected from  $V_{CC}$  to GROUND. The non-inductive capacitor (ceramic disc, tantalum slug, etc.) should be mounted with leads as short as possible and should be placed in close proximity to the MSI package to minimize lead length inductance. A properly designed printed circuit board should have the total required capacitance evenly distributed throughout the board. Example: A printed circuit board contains 25 packages averaging four totem pole structures per package. The total capacitance required is 25 packages x 4 totem pole structures x 2000pF or 0.2 $\mu$ F ceramic disc capacitors evenly distributed, satisfy the  $V_{CC}$  to GROUND decoupling requirements.

**POWER SUPPLY AND GROUND DISTRIBUTION SYSTEMS**

High-frequency distribution techniques should be used for  $V_{CC}$  and GROUND. These techniques should include a large ground plane to minimize DC offsets and to provide an extremely low impedance path to reduce transient voltage signals on the printed circuit board. The power supply should be +5V  $\pm$ 5% with R-F (1GHz) bypassing. Catastrophic damage can occur if  $V_{CC}$  is not properly regulated.

Power distributed from the main supply must, by necessity, come through a path which displays finite resistance ( $R_{ps}$ ), inductance ( $L_{ps}$ ) and capacitance ( $C_{ps}$ ), as illustrated in Figure 2. The resistive component of the power lines is small, producing very little DC voltage drop at the  $V_{CC}$  and GROUND inputs to the printed circuit board. However, the inductance in the power lines can cause the noise generated by current spiking to be transmitted throughout the


system on the  $V_{CC}$  and GROUND lines. If the printed circuit boards are adequately decoupled, the power line noise will be reduced significantly. In order to repel power line noise transmitted to a printed circuit board, ferrite beads may be placed on the incoming  $V_{CC}$  and GROUND lines as shown in Figure 3. A 10 $\mu$ F tantalum capacitor, per 25 packages, connected from  $V_{CC}$  to GROUND should be placed on the printed circuit board in the position shown. In conjunction with the distributed ceramic disc capacitors, this approach will prevent most system malfunctions attributable to internally generated noise.

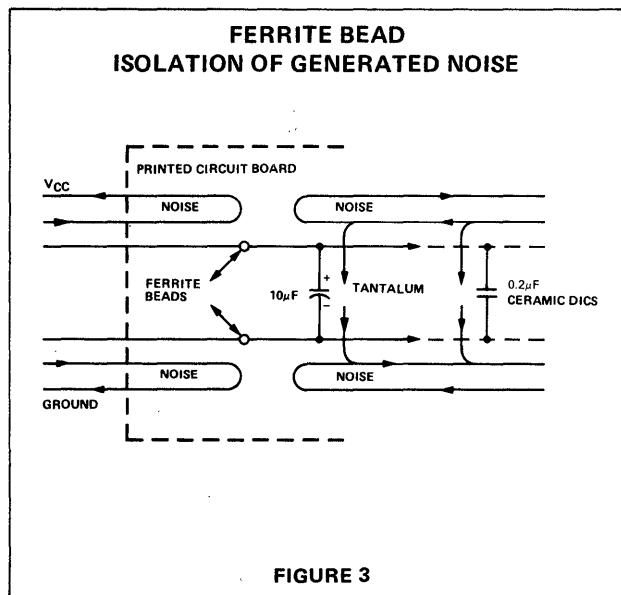

**FIGURE 3**

**ISOLATION DIODES**

NEVER REVERSE THE  $V_{CC}$  AND GROUND POTENTIALS. Catastrophic failure can occur if more than 100mA is conducted through a forward biased substrate (isolation) diode.

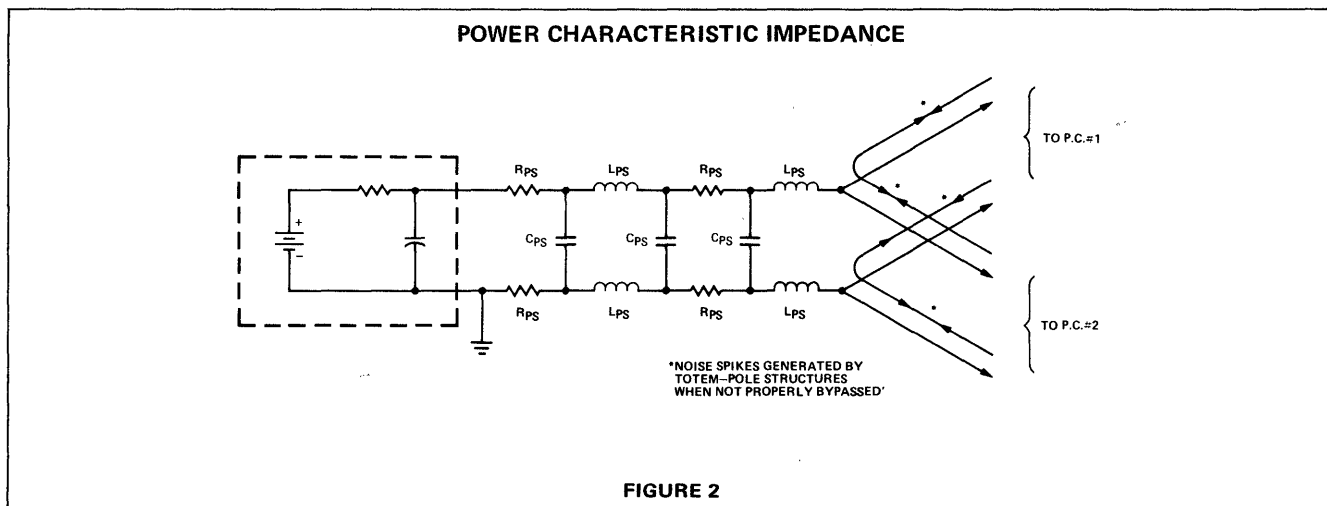

**FIGURE 2**

**DESIGN CONSIDERATIONS (Cont'd)**  
**DISPOSITION OF UNUSED INPUTS**


Electrically open inputs degrade AC noise immunity as well as the switching speed of an MSI circuit. To optimize performance, each input must be connected to a low impedance source. Unused inputs should be tied to  $V_{CC}$ , GROUND or a driving source. When paralleling an unused input with a driven input of the same multiple emitter transistor (MET), care should be taken to remain within the "1" level fan-out specifications for the driving source. The AND or NAND structures do not affect the "0" level fan-out of the driving source. When an unused input of an OR or NOR structure is commoned with a driven input, both the "1" and "0" level fan-out of the driving source are affected.

If fan-out of the driving source will be exceeded or if there is no convenient connection to an appropriate driven input, a second method of avoiding open inputs should be observed. Inputs which activate on "0" (AND and NAND) may be tied directly to  $V_{CC}$  or tied to  $V_{CC}$  through a current limiting resistor. To determine the requirements for current limiting, examine the input "latch-back" characteristics of the MET. This check is performed by grounding all but one of the emitters of the MET. Force 10mA into the ungrounded emitter and examine the "breakdown" characteristics on a curve tracer. If "breakdown" is greater than 5.5V and there is no evidence of latch-back or secondary breakdown, an unused input may be tied directly to  $V_{CC}$ . If the breakdown voltage or latch-back characteristic approaches 5.5V at 10mA, the input should be tied to  $V_{CC}$  through a current limiting resistor of 1 K $\Omega$  or more. More than one unused input can be tied to  $V_{CC}$  through a single resistor.

The 8200 series of MSI subsystems does not exhibit a latch-back characteristic. A current limiting resistor is required, however, if power supply transients can exceed 5.5V for longer than 1 $\mu$ sec. The power dissipated in the emitter junction during breakdown can destroy the junction. Current limiting provisions in accordance with the ABSOLUTE MAXIMUM RATINGS will ensure against catastrophic failure should breakdown occur.

**INPUT CLAMP DIODES**


MSI circuits contain input clamp diodes as shown in Figure 4. At the input, these diodes limit negative excursions which exceed -1V by providing a low impedance current source from GROUND through the forward biased diode clamp. The clamps are designed to minimize ringing which may be induced on interconnect wires in excess of six inches in length.

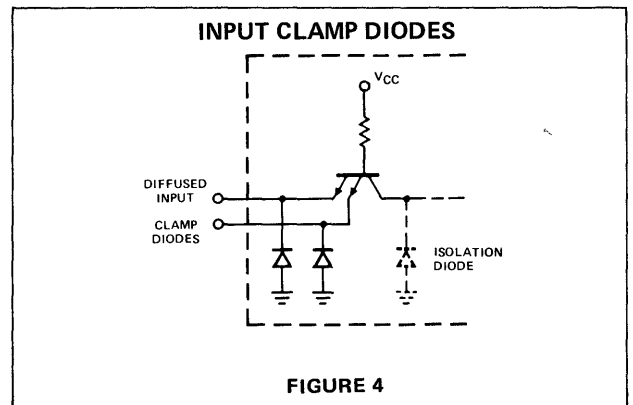

**FIGURE 4**

**SIGNAL PROCESSING**

The rise and fall times of all incoming data signals should be less than 200ns. The amplitude of incoming data signals should be 2.6V or greater. Figure 5 shows the transfer characteristic of the classic TTL gate. In the input threshold region, from point one to point two, the gate has approximately 25dB of gain. In this region, any discontinuity of the input waveform will be amplified more than 10 times at the output of the gate.


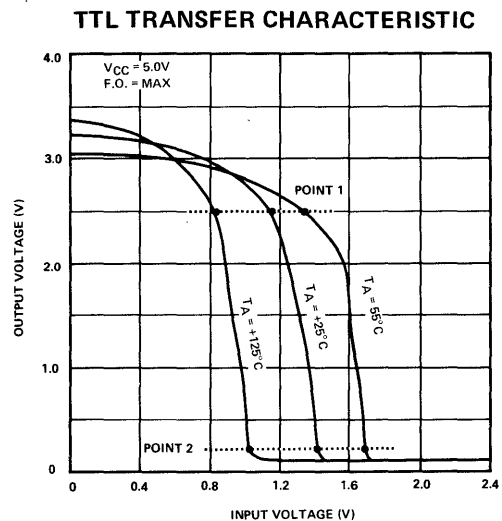


**FIGURE 5**




Should the input voltage remain in the threshold region (approximately 200mV wide) for more than 15ns, a typical TTL gate will oscillate as shown in Figure 6. The equivalent circuit in Figure 7 illustrates the potential oscillatory feed-back paths. The primary contributor to oscillation is the changing power supply voltage within the chip, caused by the current spiking which occurs during switching

**DESIGN CONSIDERATIONS (Cont'd)**

transitions. Since output voltage is directly proportional to  $V_{CC}$  and threshold voltage tends also to drop with lower supply voltage, the net effect is a positive feedback loop from output to input.

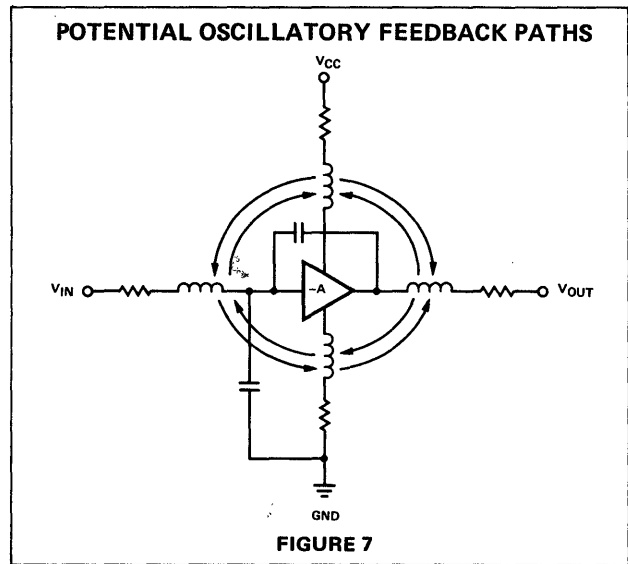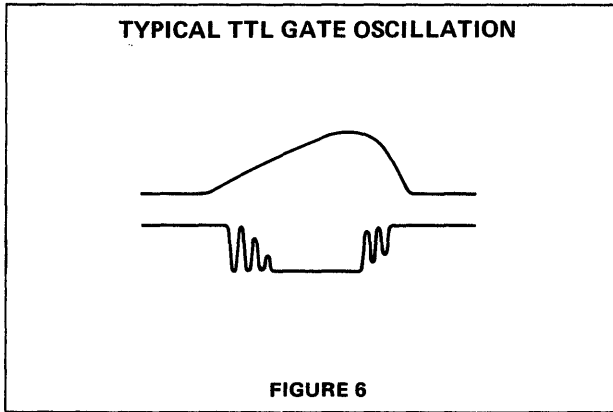


### PACKAGE INFORMATION

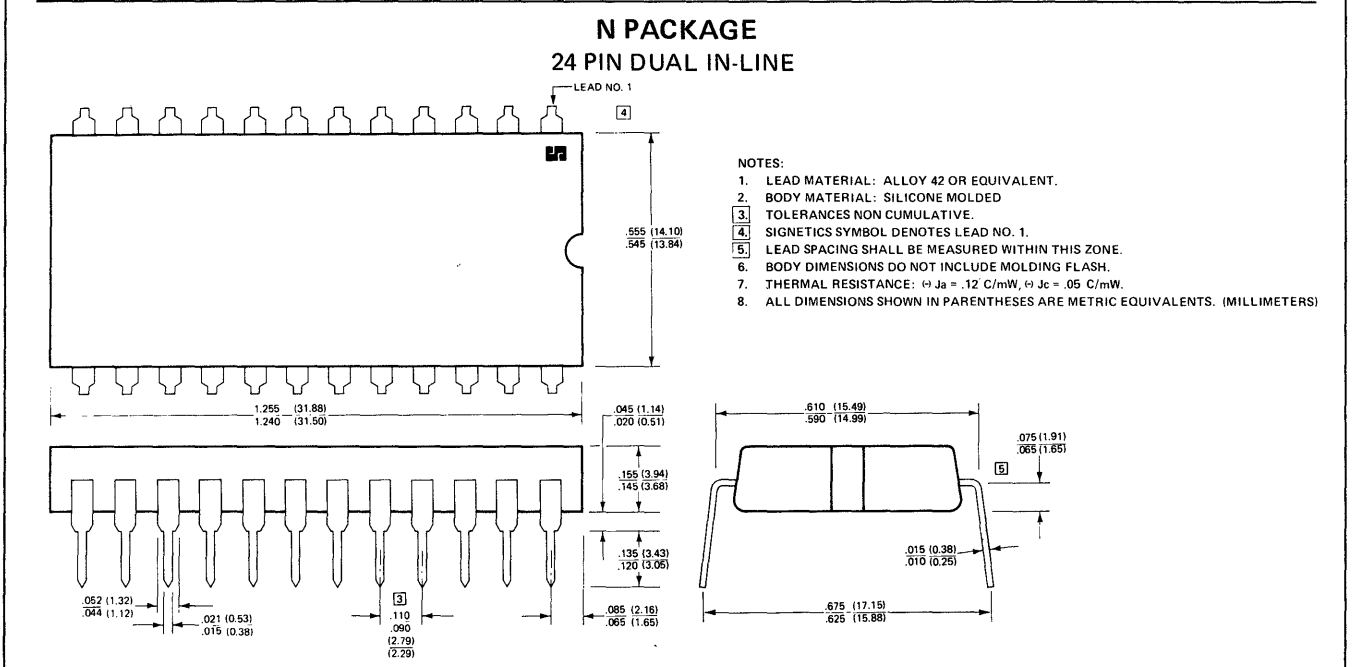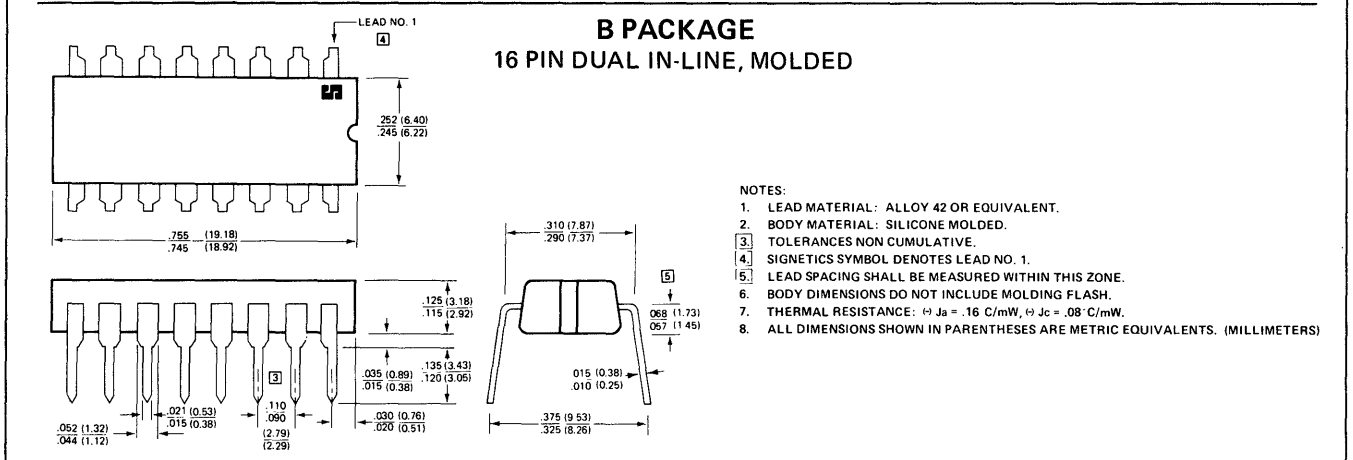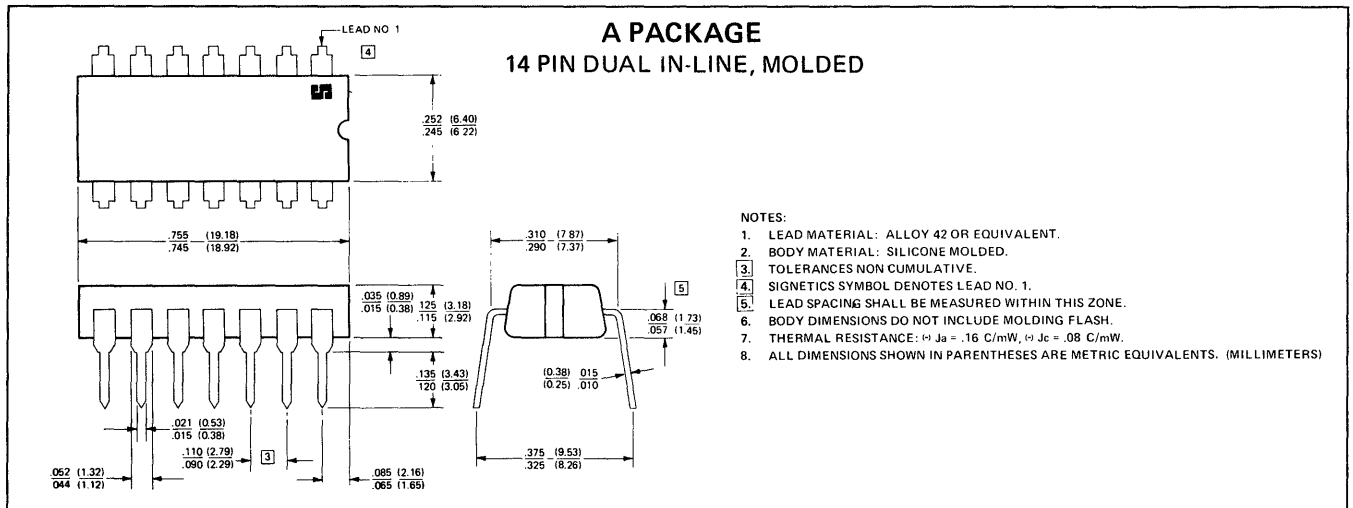

**PACKAGE INFORMATION (Cont'd)**


**F PACKAGE  
14 PIN DUAL IN-LINE CERDIP**

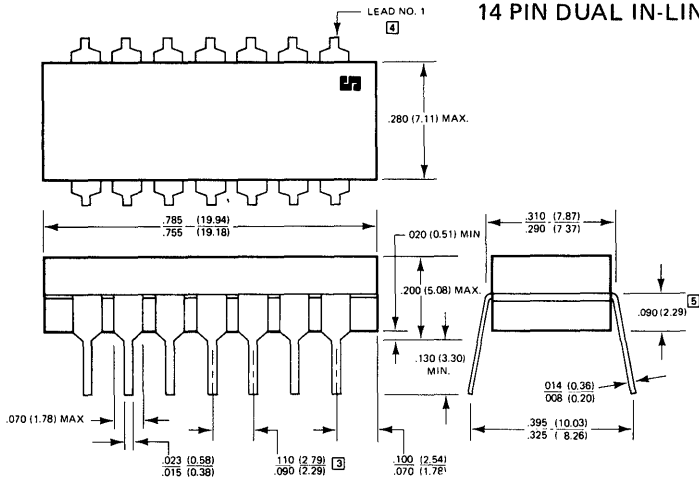

**NOTES:**

1. LEAD MATERIAL: KOVAR OR EQUIVALENT, TIN PLATED.
2. BODY MATERIAL: CERAMIC WITH GLASS SEAL.
3. TOLERANCES NON CUMULATIVE.
4. SIGNETICS SYMBOL DENOTES LEAD NO. 1.
5. LEAD SPACING SHALL BE MEASURED WITHIN THIS ZONE.
6. THERMAL RESISTANCE:  $\theta_{Ja} = .065^{\circ}\text{C/mW}$ ,  $\theta_{Jc} = .020^{\circ}\text{C/mW}$ .
7. ALL DIMENSIONS SHOWN IN PARENTHESES ARE METRIC EQUIVALENTS. (MILLIMETERS)


**F PACKAGE  
16 PIN DUAL IN-LINE CERDIP**

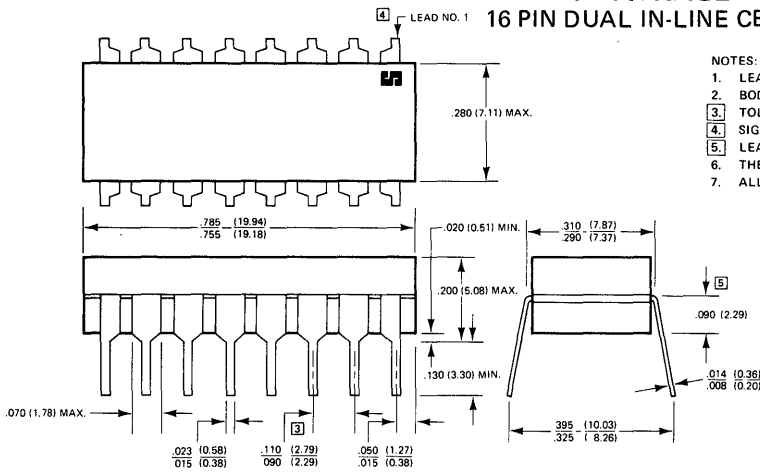

**NOTES:**

1. LEAD MATERIAL: KOVAR OR EQUIVALENT, TIN PLATED.
2. BODY MATERIAL: CERAMIC WITH GLASS SEAL.
3. TOLERANCES NON CUMULATIVE.
4. SIGNETICS SYMBOL DENOTES LEAD NO. 1.
5. LEAD SPACING SHALL BE MEASURED WITHIN THIS ZONE.
6. THERMAL RESISTANCE:  $\theta_{Ja} = .090^{\circ}\text{C/mW}$ ,  $\theta_{Jc} = .023^{\circ}\text{C/mW}$ .
7. ALL DIMENSIONS SHOWN IN PARENTHESES ARE METRIC EQUIVALENTS. (MILLIMETERS)

**F PACKAGE  
24 PIN DUAL IN-LINE CERDIP**

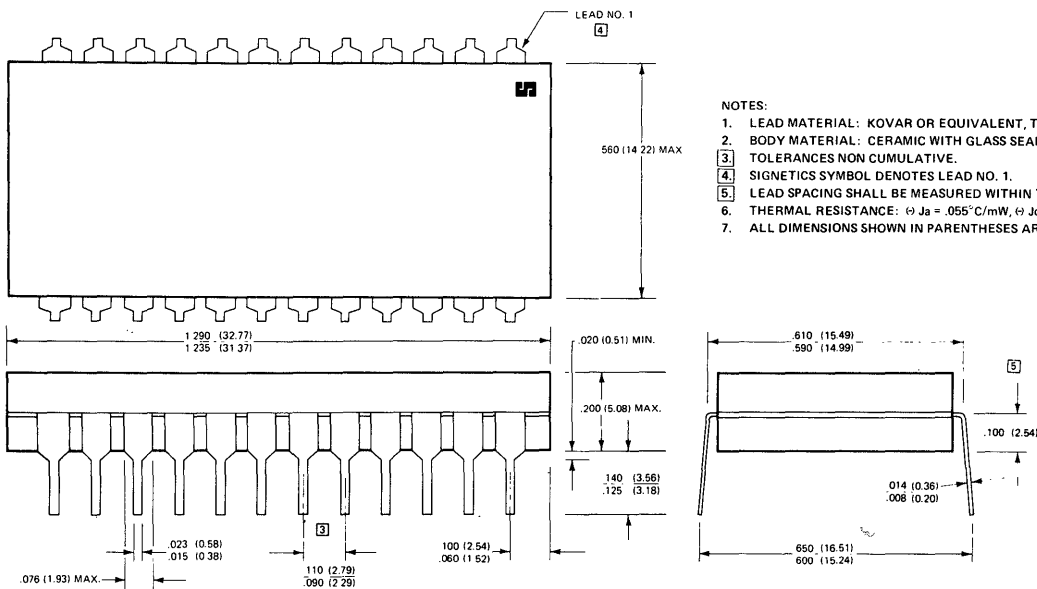


**NOTES:**

1. LEAD MATERIAL: KOVAR OR EQUIVALENT, TIN PLATED.
2. BODY MATERIAL: CERAMIC WITH GLASS SEAL.
3. TOLERANCES NON CUMULATIVE.
4. SIGNETICS SYMBOL DENOTES LEAD NO. 1.
5. LEAD SPACING SHALL BE MEASURED WITHIN THIS ZONE.
6. THERMAL RESISTANCE:  $\theta_{Ja} = .055^{\circ}\text{C/mW}$ ,  $\theta_{Jc} = .012^{\circ}\text{C/mW}$ .
7. ALL DIMENSIONS SHOWN IN PARENTHESES ARE METRIC EQUIVALENTS. (MILLIMETERS)

PACKAGE INFORMATION (Cont'd)


**W PACKAGE**  
14 PIN FLAT, CERPAC

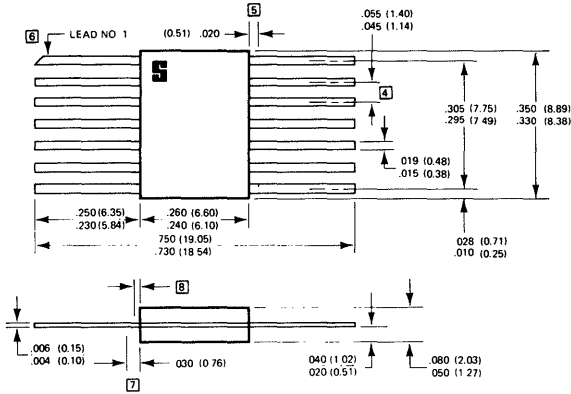

NOTES:

1. LEAD MATERIAL: ALLOY 42 OR EQUIVALENT, TIN PLATED.
2. BODY MATERIAL: CERAMIC WITH GLASS SEAL AT LEADS.
3. LID MATERIAL: CERAMIC, GLASS SEAL.
4. TOLERANCES NON CUMULATIVE.
5. LEAD SPACING SHALL BE MEASURED WITHIN THIS ZONE.
6. SIGNETICS SYMBOL OR ANGLE CUT DENOTES LEAD NO. 1.
7. RECOMMENDED MINIMUM OFFSET BEFORE LEAD BEND.
8. MAXIMUM GLASS CLIMB .010.
9. THERMAL RESISTANCE:  $\theta_{Ja} = .200^\circ\text{C/mW}$ ,  $\theta_{Jc} = .085^\circ\text{C/mW}$ .
10. ALL DIMENSIONS SHOWN IN PARENTHESES ARE METRIC EQUIVALENTS. (MILLIMETERS)


**W PACKAGE**  
16 PIN FLAT, CERPAC

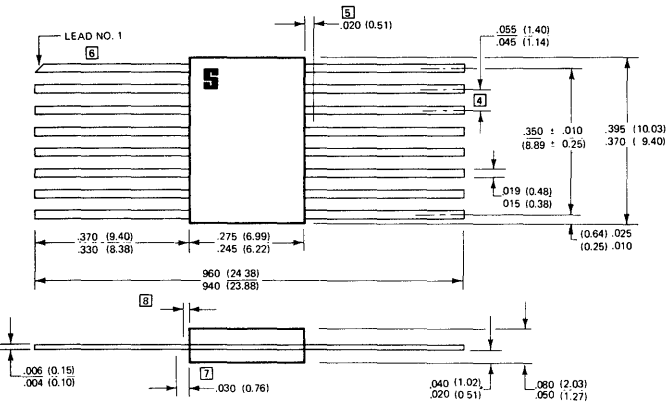

NOTES:

1. LEAD MATERIAL: ALLOY 42 OR EQUIVALENT, TIN PLATED.
2. BODY MATERIAL: CERAMIC WITH GLASS SEAL AT LEADS.
3. LID MATERIAL: CERAMIC, GLASS SEAL.
4. TOLERANCES NON CUMULATIVE.
5. LEAD SPACING SHALL BE MEASURED WITHIN THIS ZONE.
6. SIGNETICS SYMBOL OR ANGLE CUT DENOTES LEAD NO. 1.
7. RECOMMENDED MINIMUM OFFSET BEFORE LEAD BEND.
8. MAXIMUM GLASS CLIMB .010.
9. THERMAL RESISTANCE:  $\theta_{Ja} = .200^\circ\text{C/mW}$ ,  $\theta_{Jc} = .085^\circ\text{C/mW}$ .
10. ALL DIMENSIONS SHOWN IN PARENTHESES ARE METRIC EQUIVALENTS. (MILLIMETERS)

**Q PACKAGE**  
24 PIN FLAT, CERAMIC

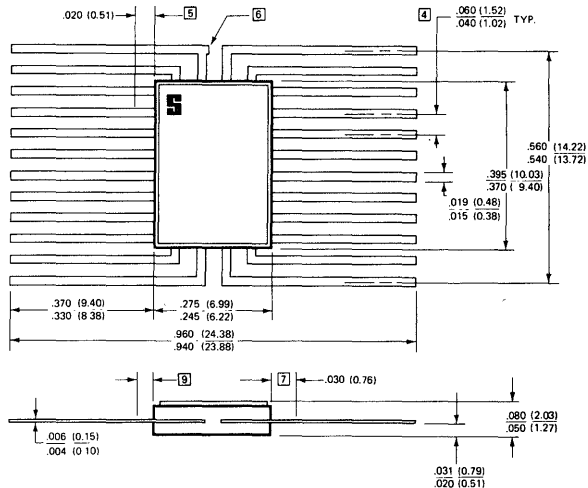


NOTES:

1. LEAD MATERIAL: KOVAR OR EQUIVALENT, GOLD PLATED.
2. BODY MATERIAL: CERAMIC WITH GLASS SEAL AT LEADS.
3. LID MATERIAL: CERAMIC, GLASS SEAL.
4. TOLERANCES NON CUMULATIVE.
5. LEAD SPACING SHALL BE MEASURED WITHIN THIS ZONE.
6. SIGNETICS SYMBOL OR ANGLE CUT DENOTES LEAD NO. 1.
7. RECOMMENDED MINIMUM OFFSET BEFORE LEAD BEND.
8. THERMAL RESISTANCE:  $\theta_{Ja} = .150^\circ\text{C/mW}$ ,  $\theta_{Jc} = .050^\circ\text{C/mW}$ .
9. MAXIMUM GLASS CLIMB, LID SKEW, OR FRIT SQUEEZE OUT IS .010.
10. ALL DIMENSIONS SHOWN IN PARENTHESES ARE METRIC EQUIVALENTS. (MILLIMETERS)



PACKAGE INFORMATION (Cont'd)

**I PACKAGE**  
16 PIN DUAL IN-LINE CERAMIC

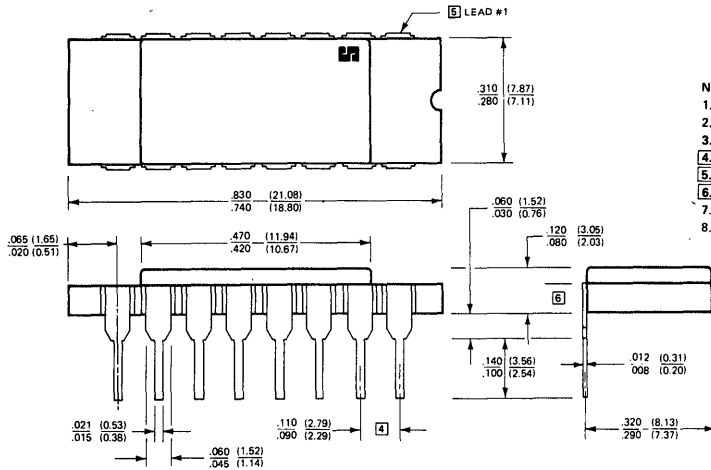


NOTES:

1. LEAD MATERIAL: KOVAR OR EQUIVALENT, GOLD PLATED.
2. BODY MATERIAL: CERAMIC WITH KOVAR OR EQUIVALENT. TOP RING GOLD PLATED.
3. LID MATERIAL: KOVAR OR EQUIVALENT, GOLD PLATED, ALLOY SEAL.
4. TOLERANCES NON CUMULATIVE.
5. SIGNETICS SYMBOL DENOTES LEAD NO. 1.
6. LEAD SPACING SHALL BE MEASURED WITHIN THIS ZONE.
7. THERMAL RESISTANCE:  $\theta_{Ja} = .062 \text{ C/mW}$ ,  $\theta_{Jc} = .018 \text{ C/mW}$ .
8. ALL DIMENSIONS SHOWN IN PARENTHESES ARE METRIC EQUIVALENTS. (MILLIMETERS)

**Y PACKAGE**

24 PIN DUAL IN-LINE, CERAMIC (.600 BEND-TOP BRAZED)

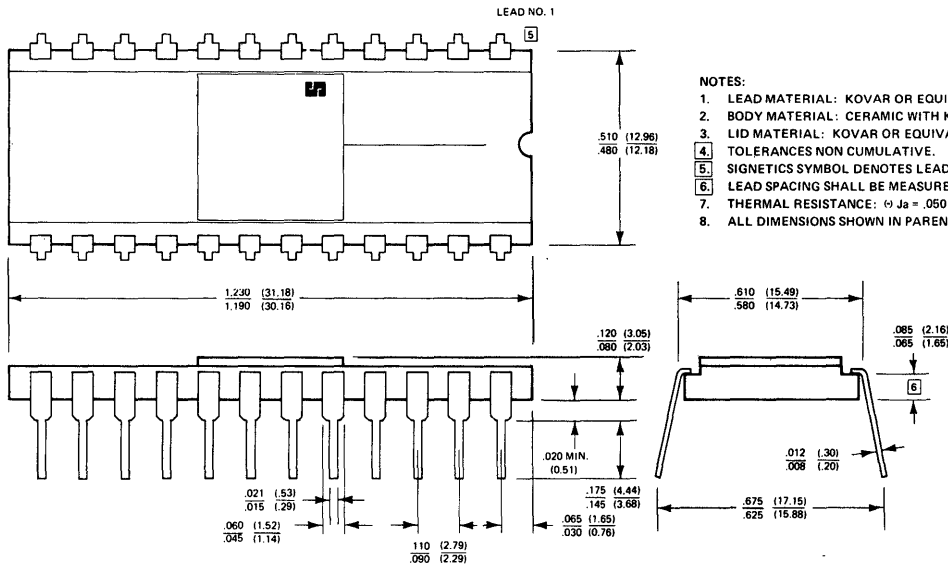


NOTES:

1. LEAD MATERIAL: KOVAR OR EQUIVALENT, GOLD PLATED.
2. BODY MATERIAL: CERAMIC WITH KOVAR OR EQUIVALENT.
3. LID MATERIAL: KOVAR OR EQUIVALENT, GOLD PLATED, ALLOY SEAL.
4. TOLERANCES NON CUMULATIVE.
5. SIGNETICS SYMBOL DENOTES LEAD NO. 1.
6. LEAD SPACING SHALL BE MEASURED WITHIN THIS ZONE.
7. THERMAL RESISTANCE:  $\theta_{Ja} = .050 \text{ C/mW}$ ,  $\theta_{Jc} = .010 \text{ C/mW}$ .
8. ALL DIMENSIONS SHOWN IN PARENTHESES ARE METRIC EQUIVALENTS. (MILLIMETERS)

# SECTION 5


## PIN CONFIGURATIONS

### PIN CONFIGURATIONS

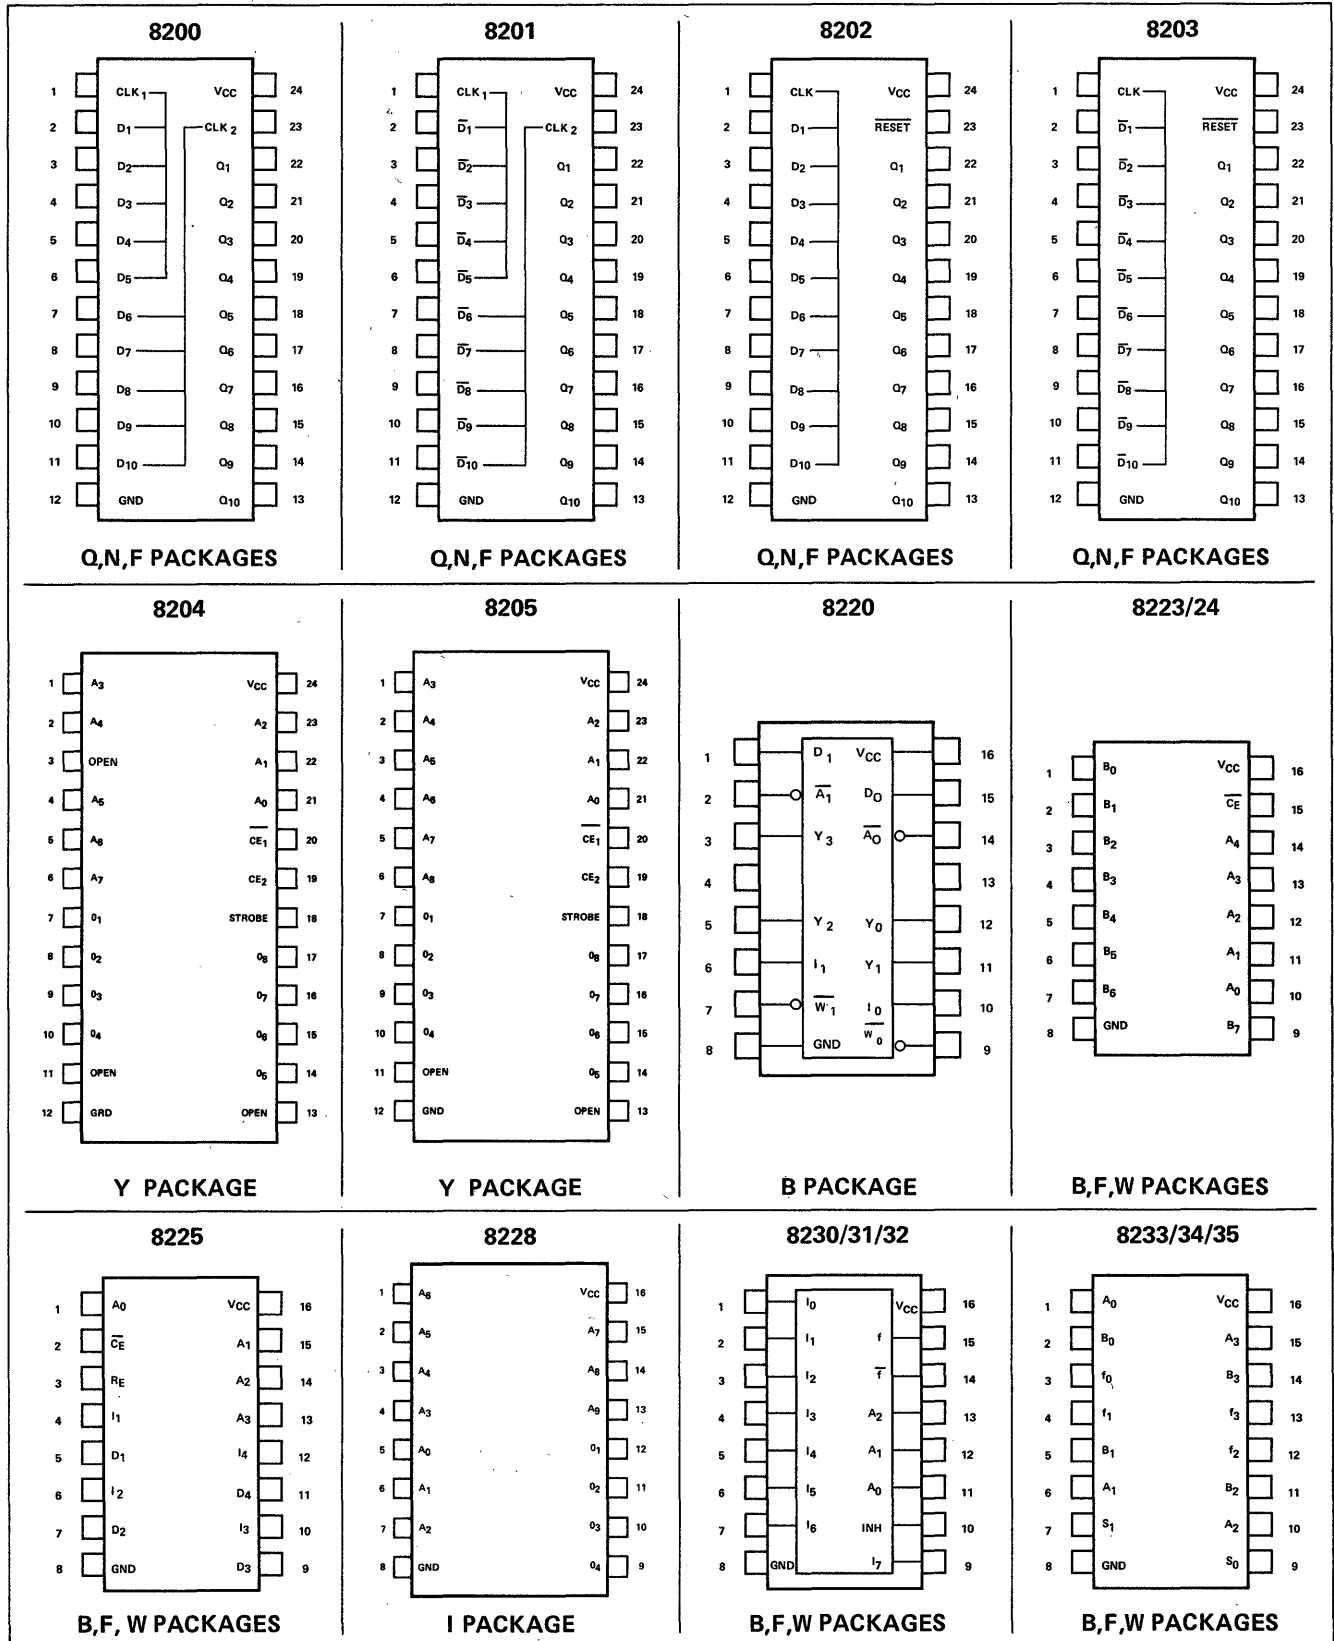


**PIN CONFIGURATIONS (Cont'd)**

**8241/42**

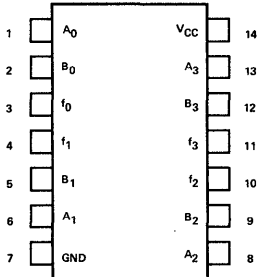


**A,F PACKAGES**

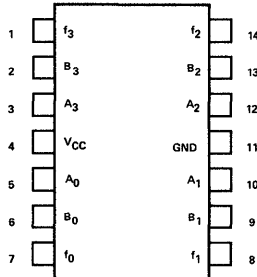


**W PACKAGE**

**8243**

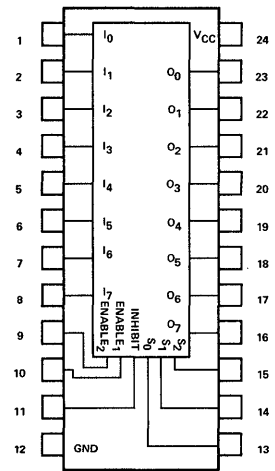


**Q,N,Y PACKAGES**

**8250**




**A,F PACKAGES**




**W PACKAGE**

**8251/52**




**B,F,W PACKAGES**

**8260**

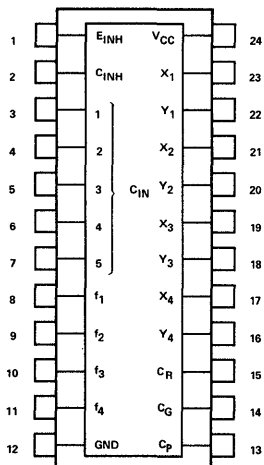


**Q,N,YB PACKAGES**

**8261**




**A,F PACKAGES**



**W PACKAGE**

**PIN CONFIGURATIONS (Cont'd)**


**8262**

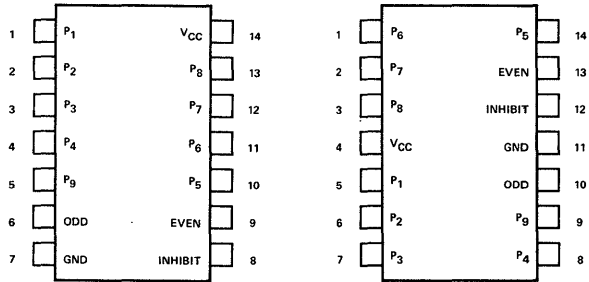

**A,F PACKAGES**


**W PACKAGE**

**8263/64**

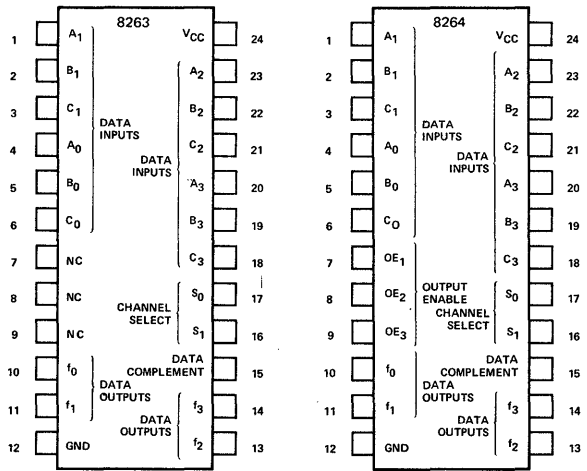


**Q,N,Y PACKAGES**

**8266/67**




**B,F,W PACKAGES**

**8268**




**A,F PACKAGES**



**W PACKAGE**


**8269**

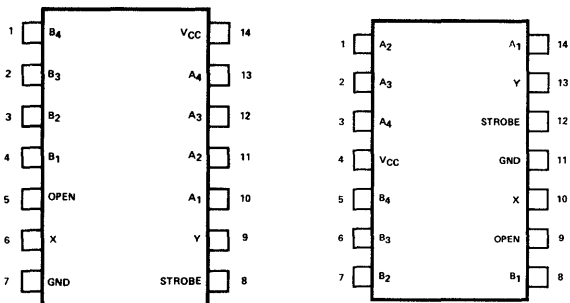

**A,F PACKAGES**

**W PACKAGE**

**8270**

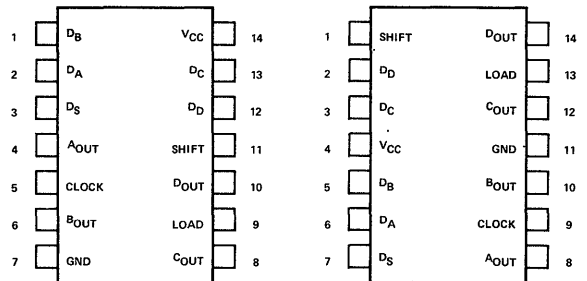


**A,F PACKAGES**

**W PACKAGE**


**PIN CONFIGURATIONS (Cont'd)**

**8271**

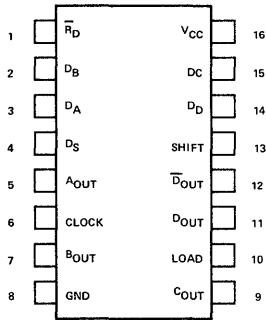


**B,F,W PACKAGES**

**8273**

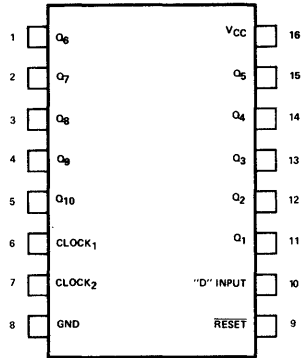


**B,F,W PACKAGES**

**8274**

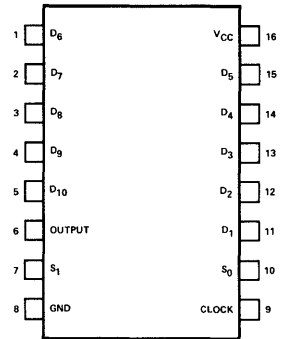


**B,F,W PACKAGES**

**8275**




**B,F,W PACKAGES**

**8276**




**A,F PACKAGES**

**8277**

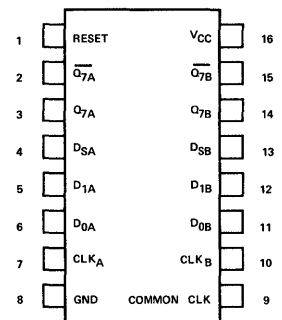


**B,F PACKAGES**

**8280/81**

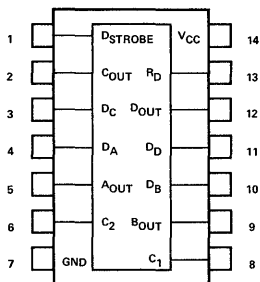


**A,F PACKAGES**

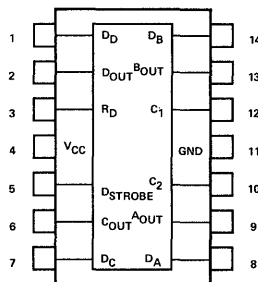


**W PACKAGE**

**8284/85**

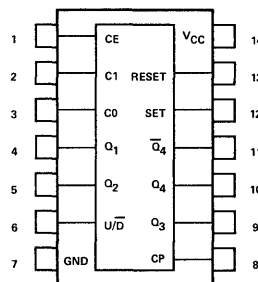


**A,F PACKAGES**



**W PACKAGE**

**PIN CONFIGURATIONS (Cont'd)**


**8288**

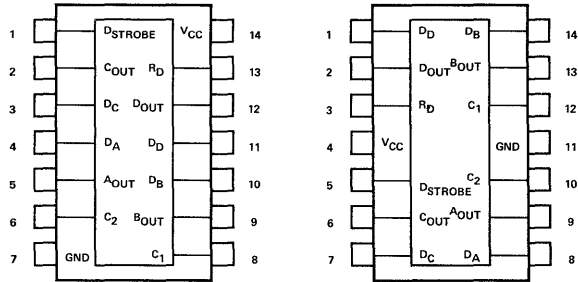

**A,F PACKAGES**

**W PACKAGE**


**8290/91**

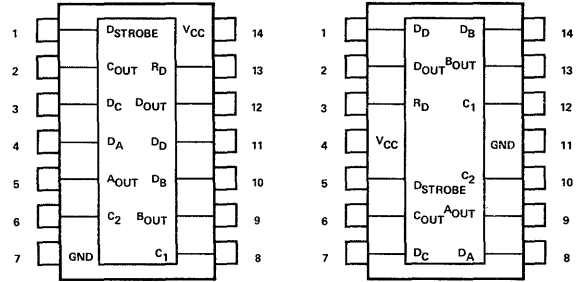


**A,F PACKAGES**

**W PACKAGE**

**8292/93**

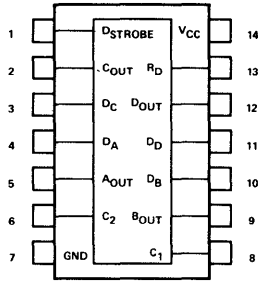


**A,F PACKAGES**



**W PACKAGE**

**82S06/07**


**AVAILABLE SOON**



**DUAL IN-LINE PIN OUT**

**82S21**


**AVAILABLE SOON**



**DUAL IN-LINE PIN OUT**

**82S26/29**


**AVAILABLE SOON**

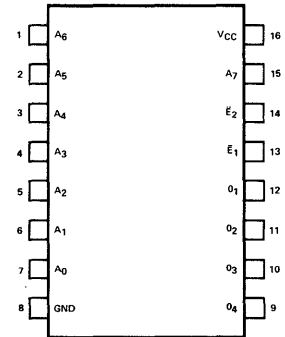

**DUAL IN-LINE PIN OUT**


**PIN CONFIGURATIONS (Cont'd)**

**82S30/31/32**




**B,F PACKAGES**

**82S33/34**




**B,F PACKAGES**

**82S41/42**

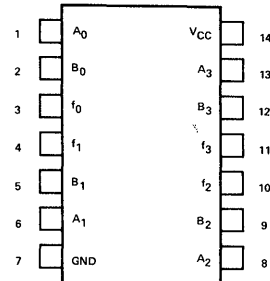


**A,F PACKAGES**

**82S50/52**




**A,F PACKAGES**




**B,F PACKAGES**

**82S62**




**A,F PACKAGES**

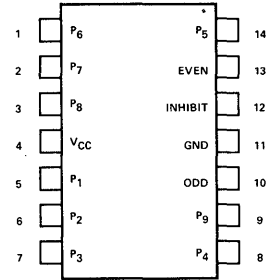


**F,W PACKAGES**

**82S66/67**




**B,I PACKAGES**

**82S70/71**

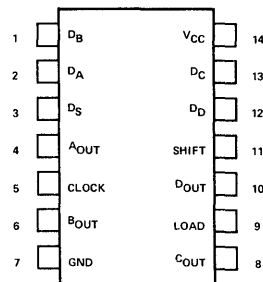


**A,F PACKAGES**

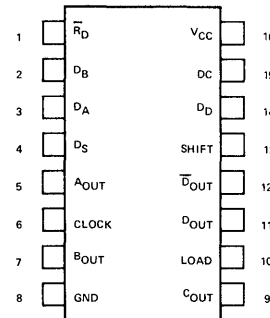


**B,F PACKAGES**

**PIN CONFIGURATIONS ( Cont'd)**

**82S90/91**

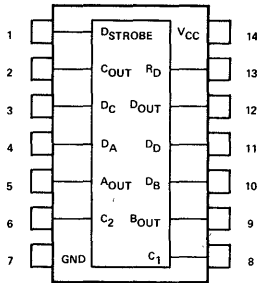


**A,F PACKAGES**




**B,F PACKAGES**

**8T01**




**B,F PACKAGES**

**8T04/05/06**




**B,F,W PACKAGES**

**8T09**




**A,F PACKAGES**




**W PACKAGE**

**8T10**




**B,F,W PACKAGE**

**8T13**



**B,F,W PACKAGES**

**8T14**




**B,F,W PACKAGES**




**PIN CONFIGURATION (Cont'd)**

**8T15**




**A,F PACKAGES**

**8T16**




**A,F PACKAGES**

**8T20**



**B,F PACKAGES**


**8T22**



\*Pins for External Timing Components


**A,F PACKAGES**

**8T23**




**B,W PACKAGES**

**8T24**



**B,W PACKAGES**

**8T26**



**B,F PACKAGES**

# SECTION 6

## ELECTRICAL CHARACTERISTICS

This section contains specific test limit and test condition information for use in device evaluation and incoming inspection for AC and DC parameters.

Product descriptions are also contained in this section to provide assistance in evaluating specific devices and total 8000 Series flexibility.

Unless otherwise specified, all devices are available in the "S" and "N" temperature ranges:

("S" =  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ , "N" =  $0^{\circ}\text{C}$  to  $+75^{\circ}\text{C}$ ).

### ABSOLUTE MAXIMUM RATINGS

The absolute maximum ratings constitute limiting values above which serviceability of the device may be impaired. Provisions should be made in system design and testing to limit voltages in accordance with Table I. These ratings apply to both 82XX and 8TXX MSI devices unless otherwise specified.

TABLE I

Input Voltage	+5.5V
Output Voltage	+7.0V
V <sub>CC</sub> (Note 2)	+7.0V
Storage Temperature Range	
A, B, N packages	$-65^{\circ}\text{C}$ to $+175^{\circ}\text{C}$
F, I, Q, W packages	$-65^{\circ}\text{C}$ to $+200^{\circ}\text{C}$

NOTES:

1. All devices must be derated at elevated temperatures based on maximum allowable junction temperature (see maximum storage temperature and the thermal resistance of the package).
2. Operating V<sub>CC</sub> for the 8200 Series is specified at  $+5\text{V}\pm 5\%$ . None of the Signetics MSI elements will be damaged by supply voltages of 7 volts or less; however, in some of the more complex functions, power dissipation at such voltages could become excessive. We recommend, therefore, that such overvoltages be limited to a maximum of 1 second duration.



# BUFFER REGISTERS

8200  
8201  
8202  
8203

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION

The 8200/8201/8202/8203 MSI Buffer Registers are arrays of ten clocked "D" flip-flops especially suited for parallel in-parallel out register applications. They are also suitable for general purpose applications as parallel in-serial out, serial in-parallel out registers.

The flip-flops are arranged as dual 5 arrays, (8200 & 8201) and single 10 arrays with reset, (8202 & 8203). The true output of each bit is made available to the user.

The 8200 and 8202 feature true "D" inputs. The logic state presented at these "D" inputs will appear at the Q outputs after a negative transition of the clock.

The 8201 and 8203 feature complementing "D" inputs (" $\bar{D}$ "). The logic state presented at these " $\bar{D}$ " inputs will invert and appear at the Q outputs after a negative going transition of the clock. This complementing input feature (" $\bar{D}$ ") permits the use of standard AND-OR-INVERT gates to achieve the AND-OR function without additional gate delays.

### LOGIC DIAGRAMS AND TRUTH TABLES

#### DUAL 5-BIT BUFFER REGISTER

$D_n$	$Q_{n+1}$
1	1
0	0

$V_{CC}$  = (24)  
GND = (12)  
( ) = Denotes Pin Numbers

**8200**

#### DUAL 5-BIT BUFFER REGISTER—INVERTED INPUTS

$\bar{D}_n$	$Q_{n+1}$
1	0
0	1

$V_{CC}$  = (24)  
GND = (12)  
( ) = Denotes Pin Numbers

**8201**

---

#### 10-BIT BUFFER REGISTER


$D_n$	RESET	$Q_{n+1}$
1	1	1
0	1	0

$RESET = 0 \Rightarrow Q = 0$   
(OVERRIDES CLOCK)  
n IS TIME PRIOR TO CLOCK  
n+1 IS TIME FOLLOWING CLOCK

$V_{CC}$  = (24)  
GND = (12)  
( ) = Denotes Pin Numbers

**8202**

LOGIC DIAGRAMS AND TRUTH TABLES (Cont'd)

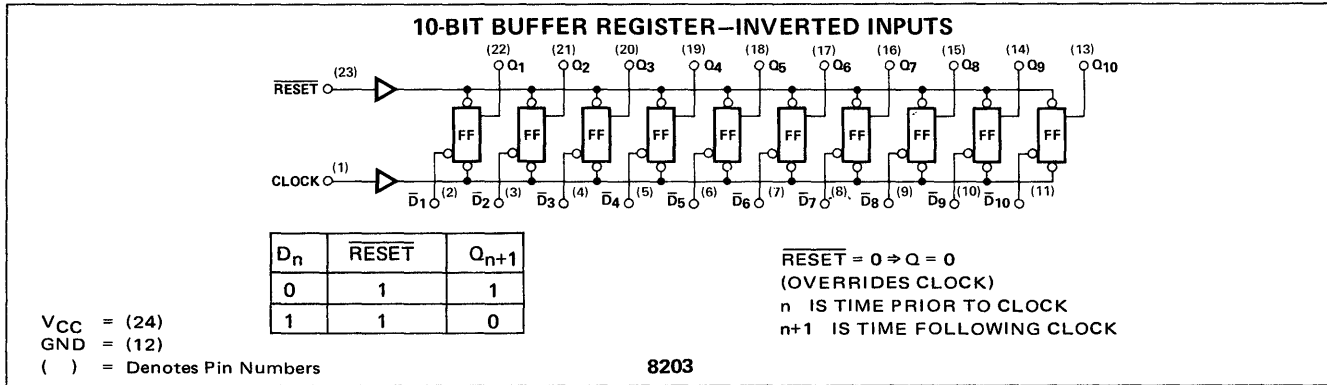

ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS					NOTES
	MIN.	TYP.	MAX.	UNITS	D <sub>n</sub> 8200 8202	$\overline{\text{D}}_n$ 8201 8203	CLOCK	$\overline{\text{RESET}}$ 8202 8203	OUTPUTS	
"1" Output Voltage	2.6	3.5		V	2.0V	0.8V	Pulse		800μA	6
"0" Output Voltage			0.4	V	0.8V	2.0V	Pulse		9.6mA	7
"0" Input Current										
D <sub>n</sub> (8200, 8202)	-0.1		-1.6	mA	0.4V					
$\overline{\text{D}}_n$ (8201, 8203)	-0.1		-1.6	mA		0.4V				
Clock	-0.1		-1.6	mA			0.4V			
Reset (8202, 8203)	-0.1		-1.6	mA				0.4V		
"1" Input Current										
D <sub>n</sub> (8200, 8202)			40	μA	4.5V					
$\overline{\text{D}}_n$ (8201, 8203)			40	μA		4.5V				
Clock			40	μA			4.5V			
Reset (8202, 8203)			40	μA				4.5V		
Input Voltage Rating (All inputs)	5.5			V	10mA	10mA	10mA	10mA		
Power/Current Consumption		409/77.7	580/110	mW/mA	0V	0V	0V			11,13

T<sub>A</sub> = 25°C and V<sub>CC</sub> = 5.0V


CHARACTERISTICS	LIMITS				TEST CONDITIONS	NOTES
	MIN.	TYP.	MAX.	UNITS		
Propagation Delay						
t <sub>on</sub> Clock to Q		30	45	ns		8
t <sub>off</sub> Clock to Q		25	40	ns		8
t <sub>on</sub> Reset to Q		30	45	ns		8
Set Up Time		6	15	ns		10
Hold Time		0	5	ns		12
Minimum Clock Width		12	17	ns		
Transfer Rate	15	35		MHz		8
Output Short Circuit Current	-20		-70	mA		

NOTES:


- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are tied to V<sub>CC</sub>.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive logic definition:  
"UP" Level = "1", "DOWN" Level = "0"
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V<sub>CC</sub>.
- Refer to AC Test Figure.
- Manufacturer reserves the right to make design and process changes and improvements.
- Set Up Time defined as data presence before clock.
- Outputs are in the low state for this test.
- Hold time defined as data presence after clock.
- V<sub>CC</sub> = 5.25 volts.

SCHEMATIC DIAGRAMS

DUAL 5-BIT BUFFER REGISTER 8200  
SINGLE 10-BIT BUFFER REGISTER 8202


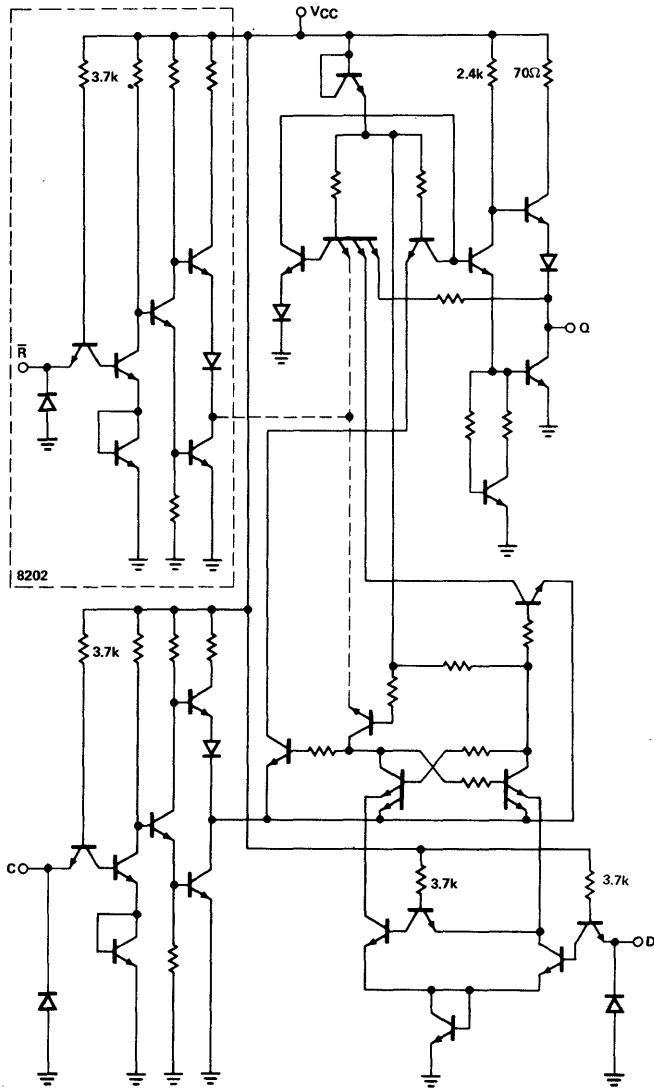


DUAL 5-BIT BUFFER REGISTER  
-INVERTED INPUTS 8201  
SINGLE 10-BIT BUFFER REGISTER  
-INVERTED INPUTS 8203

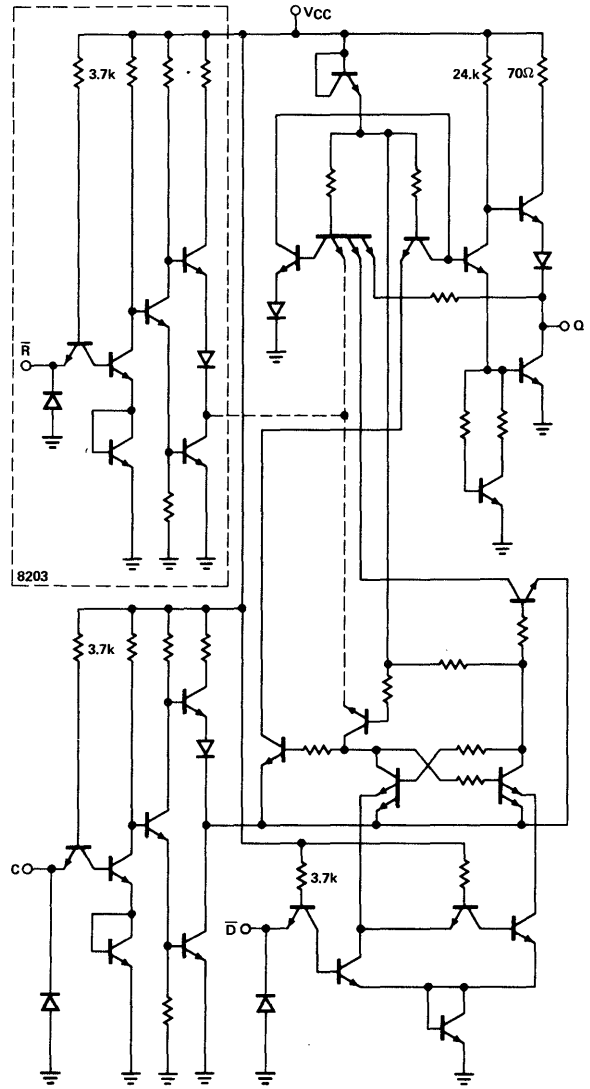

AC TEST FIGURES AND WAVEFORMS



$t_{pd}$  FROM CLOCK TO Q

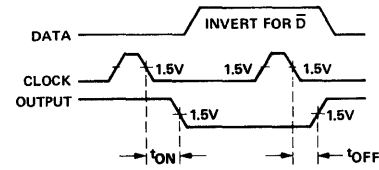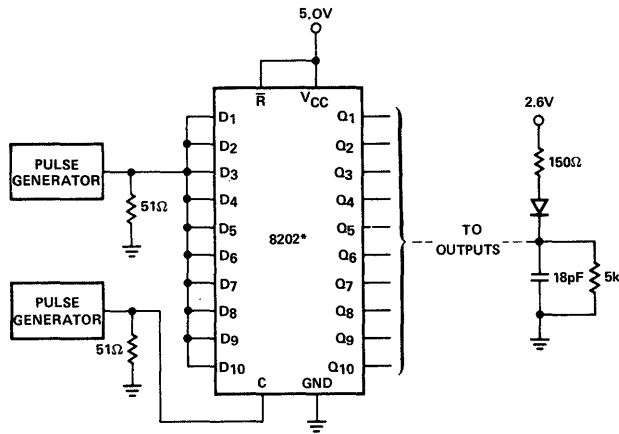

INPUT PULSE:  
 Data = P.R.R. = 7.5 MHz  
 Clock = P.R.R. = 15 MHz  
 PW = 17 ns (at 50% point)  
 $t_r = t_f = 5$  ns Max.  
 Amplitude = 2.6V.

\* Refer to the Pin-Outs for the 8200/01/03 AC Testing.

$t_{on}$  FROM  $\overline{R}$  TO Q

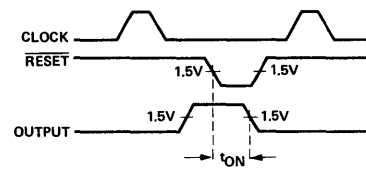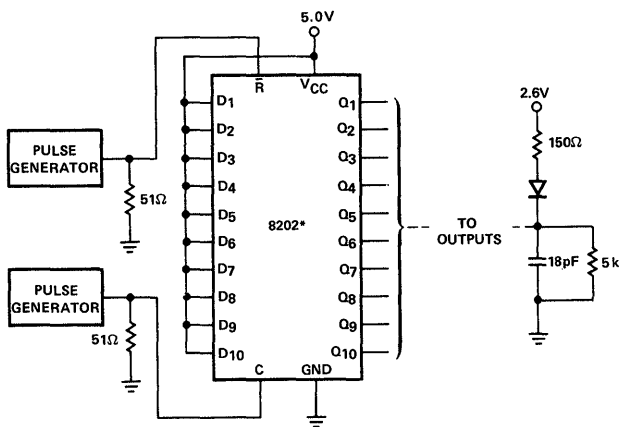


INPUT PULSE:  
 Amplitude = 2.6V  
 Clock: P.R.R. = 5 MHz  
 Reset: P.R.R. = 5 MHz  
 PW = 30 ns (at 50% point)  
 $t_r = t_f = 5$  ns

\* Refer to the Pin-Outs for the 8200/01/02/03 AC Testing.


TYPICAL APPLICATIONS

20 BIT (4 WORDS X 5 BITS EACH) MEMORY CELL

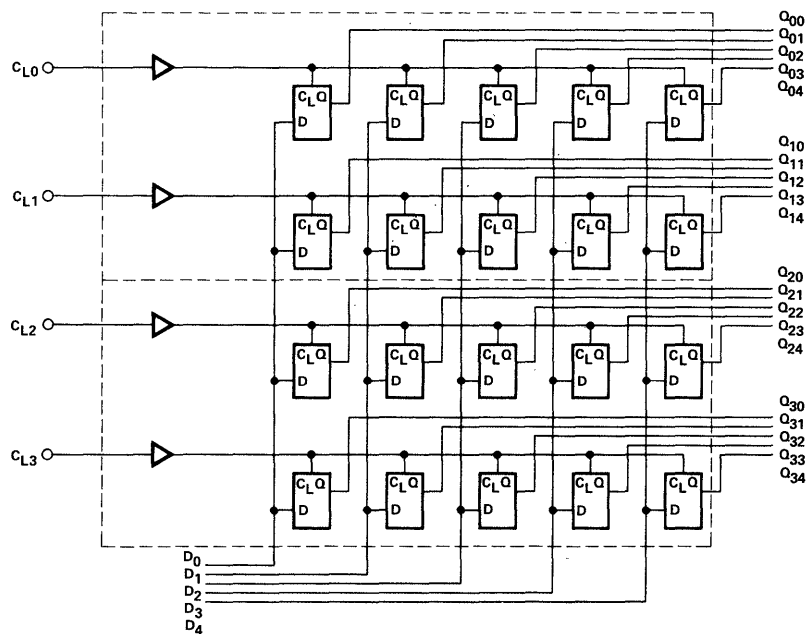

Total Package Count = 2-8200's

ONE OUT OF TEN – COUNTER/DISPLAY (SELF-CORRECTING)

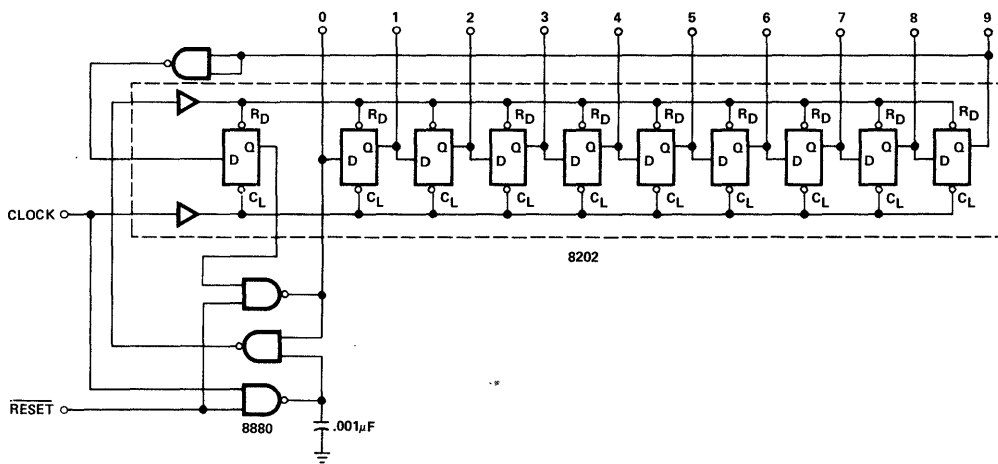


Total Package Count = 1-8202; 1-8880




TYPICAL APPLICATIONS (Cont'd)

MULTIPLICATION AT 10MHz OF A 20-BIT BINARY WORD

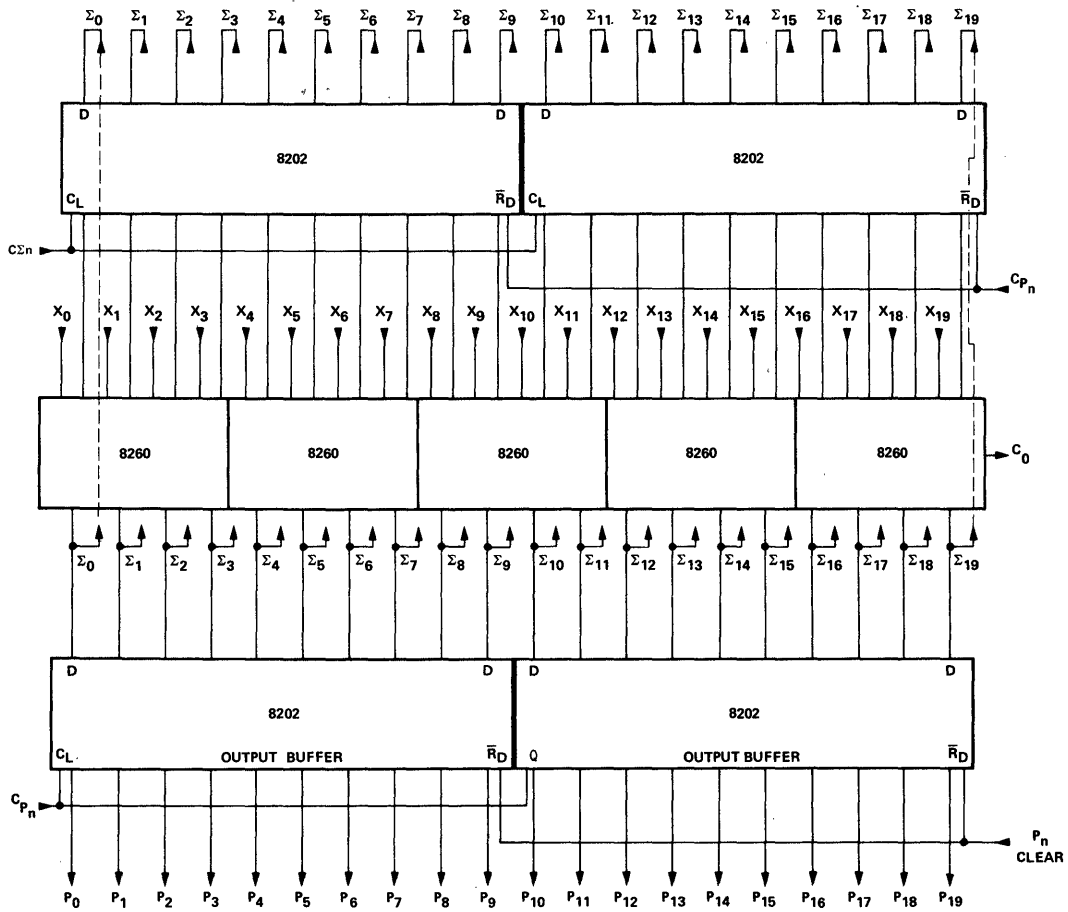

$P_n = (X_n)M$  WHERE  $X_n \equiv$  MULTIPLICAND  
 $M \equiv$  MULTIPLIER

TOTAL PACKAGE COUNT = 9 PACKAGES (4-8202'S AND 5-8260'S)



# 8-INPUT DIGITAL MULTIPLEXER

# 8230 8231 8232

DIGITAL 8000 SERIES TTL/MSI

## DESCRIPTION

The 8-Input Digital Multiplexer is the logical equivalent of a single-pole, 8 position switch whose position is specified by a 3-bit input address.

The 8230 incorporates an INHIBIT input which, when low, allows the one-of-eight inputs selected by the address to appear on the  $f$  output and, in complement, on the  $\bar{f}$  output. With the INHIBIT input high, the  $f$  output is unconditionally low and the  $\bar{f}$  output is unconditionally high. The 8230 is a functional and pin-for-pin replacement for the 9312.


The 8231 is a variation of the 8230 that provides open collector output  $\bar{f}$  for expansion of input terms. The 8232 is similar to the 8230 except in the effect of the INHIBIT input on the  $\bar{f}$  output. With the INHIBIT low, the selected input appears at the  $f$  output and, in complement, on the  $\bar{f}$  output. With the INHIBIT input high, both the  $f$  and the  $\bar{f}$  output are unconditionally low.

## TRUTH TABLE

ADDRESS			DATA INPUTS								OUTPUT			
A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>	I <sub>7</sub>	I <sub>6</sub>	I <sub>5</sub>	I <sub>4</sub>	I <sub>3</sub>	I <sub>2</sub>	I <sub>1</sub>	I <sub>0</sub>	INH	f	8230 8231 $\bar{f}$	8232 $\bar{f}$
0	0	0	x	x	x	x	x	x	x	1	0	1	0	0
0	0	1	x	x	x	x	x	x	1	x	0	1	0	0
0	1	0	x	x	x	x	x	1	x	x	0	1	0	0
0	1	1	x	x	x	x	1	x	x	x	0	1	0	0
1	0	0	x	x	x	1	x	x	x	x	0	1	0	0
1	0	1	x	x	1	x	x	x	x	x	0	1	0	0
1	1	0	x	1	x	x	x	x	x	x	0	1	0	0
1	1	1	1	x	x	x	x	x	x	x	0	1	0	0
0	0	0	x	x	x	x	x	x	0	0	0	0	1	1
0	0	1	x	x	x	x	x	0	x	0	0	0	1	1
0	1	0	x	x	x	x	0	x	x	0	0	0	1	1
0	1	1	x	x	x	0	x	x	x	0	0	0	1	1
1	0	0	x	x	0	x	x	x	x	0	0	0	1	1
1	0	1	x	0	x	x	x	x	x	0	0	0	1	1
1	1	0	x	0	x	x	x	x	x	0	0	0	1	1
1	1	1	0	x	x	x	x	x	x	0	0	0	1	1
x	x	x	x	x	x	x	x	x	x	x	1	0	1	0

x = don't care

## LOGIC DIAGRAMS

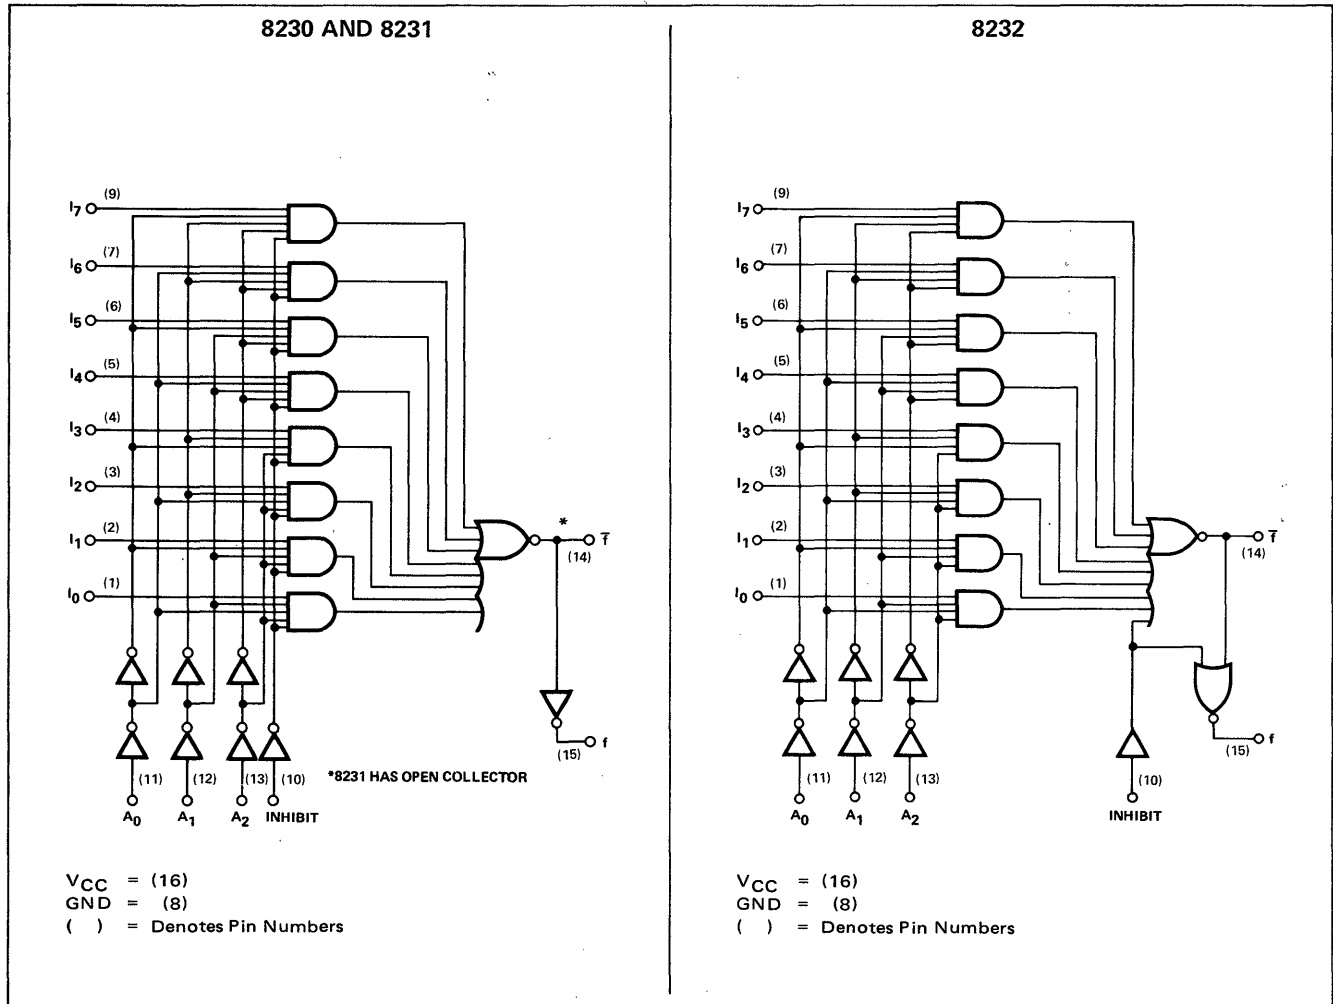

SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8230/31/32

ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS						NOTES
	MIN.	TYP.	MAX.	UNITS	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	INH	DATA INPUT I <sub>n</sub>	OUTPUTS	
"1" Output Voltage, Output f	2.6	3.5		V	*	*	*	0.8V	2.0V	-800μA	6, 11
Output $\bar{f}$ (8230, 8232)	2.6	3.5		V	*	*	*	2.0V	*	-800μA	6, 11
"1" Output Leakage Current, Output $\bar{f}$ (8231)			150	μA	0.8V	2.0V	2.0V	2.0V	0.6V		14
"0" Output Voltage			0.4	V	0.8V	0.8V	0.8V	0.8V	0.8V	16mA	7, 11
"1" Input Current											
Inputs A <sub>n</sub> , I <sub>n</sub>			40	μA	4.5V	4.5V	4.5V		4.5V		
Input INH, 8230 & 8231			80	μA				4.5V			
Input INH, 8232			80	μA				4.5V			
"0" Input Current											
A <sub>n</sub> , I <sub>n</sub> , INH (8230 & 8231)	-0.1		-1.6	mA	0.4V	0.4V	0.4V		0.4V		
INH, (8232)	-0.1		-3.2	mA				0.4V			

T<sub>A</sub> = 25° C and V<sub>CC</sub> = 5.0V



CHARACTERISTICS	LIMITS				TEST CONDITIONS						NOTES
	MIN.	TYP.	MAX.	UNITS	A	A	A	INH	DATA INPUT I <sub>n</sub>	OUTPUTS f $\bar{f}$	
Propagation Delay											
A <sub>n</sub> to $\bar{f}$ (8230, 8232)		19	30	ns							8
A <sub>n</sub> to $\bar{f}$ (8231)		17	30	ns							8
I <sub>n</sub> to $\bar{f}$ (8230, 8232)		11	20	ns							8
$\bar{f}$ to f		10	15	ns							8
I <sub>n</sub> to $\bar{f}$ (8231)		13	24	ns							8
INH to $\bar{f}$ (8230, 8231)		18	30	ns							8
INH to f or $\bar{f}$ (8232)		11	20	ns							8
Power Consumption/Supply Current											
8230, 8231			250/47.7	mW/mA	4.5V	4.5V	4.5V	4.5V	0V		13
8232			262/50.0	mW/mA	4.5V	4.5V	4.5V	4.5V	0V		13
Output Short Circuit Current											
Output f	-20		-70	mA	0V	0V	0V	0V	4.5V	0V	
Output $\bar{f}$ (8230, 8232)	-20		-70	mA	0V	0V	0V	0V	0V	0V	
Input Latch Voltage	5.5			V	10mA	10mA	10mA	10mA	10mA		12

\*See Truth Table for Logical Conditions


NOTES:

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive logic definition: "UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V<sub>CC</sub>.
- Refer to AC Test Figures.
- One AC fan-out is defined as 50pF.
- Manufacturer reserves the right to make design and process changes and improvements.
- By DC tests per the truth table, all inputs have guaranteed thresholds of 0.8V for logical "0" and 2.0V for logical "1".
- This test guarantees operation free of input latch-up over the specific operating power supply voltage range.
- All I<sub>n</sub> data inputs are at 0V. V<sub>CC</sub> = 5.25V.
- Connect an external 1k resistor from V<sub>CC</sub> to the output terminal for this test.

**SCHEMATIC DIAGRAMS**

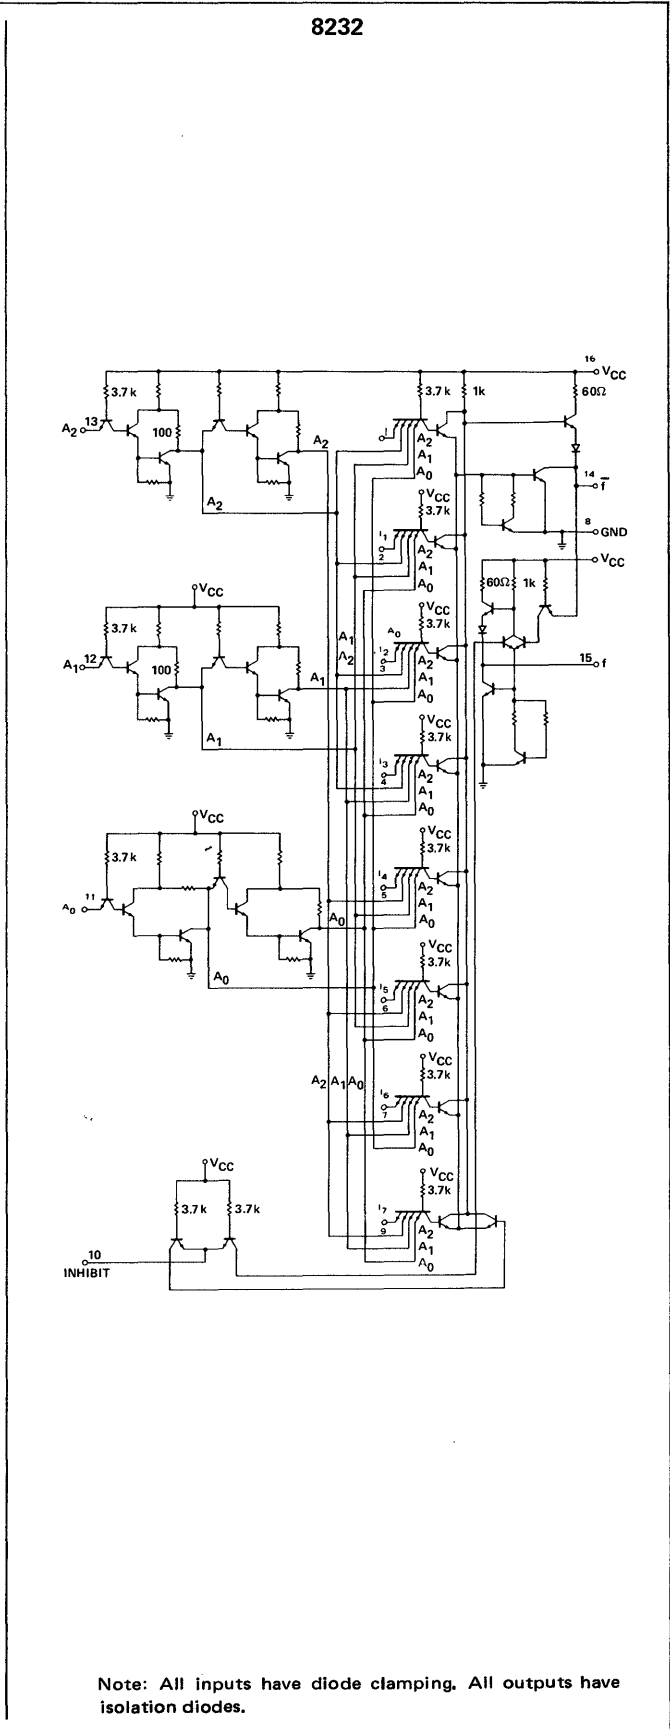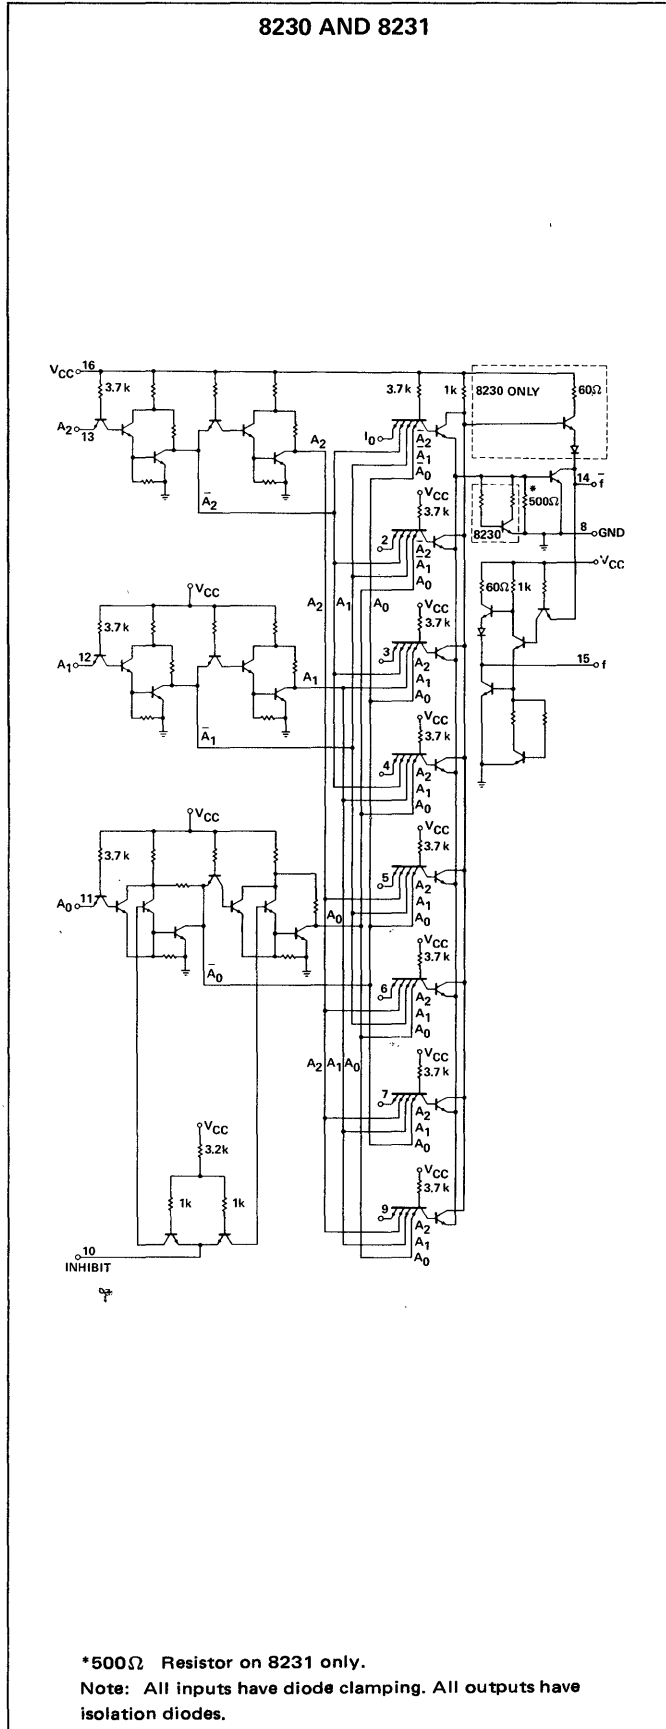


AC TEST FIGURE AND WAVEFORMS

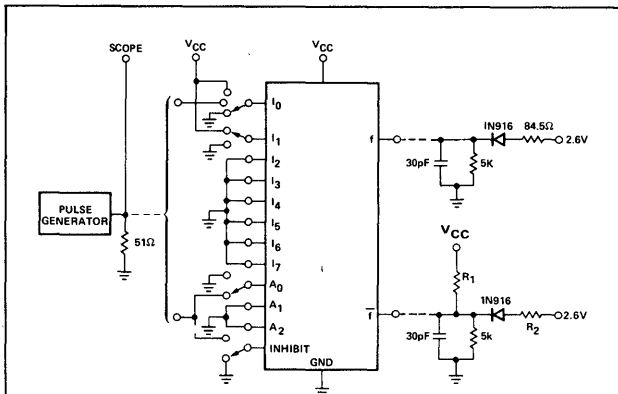


	8320/32	8231
R <sub>1</sub>	∞	360Ω
R <sub>2</sub>	84.5Ω	440Ω

NON-INVERTING PATHS

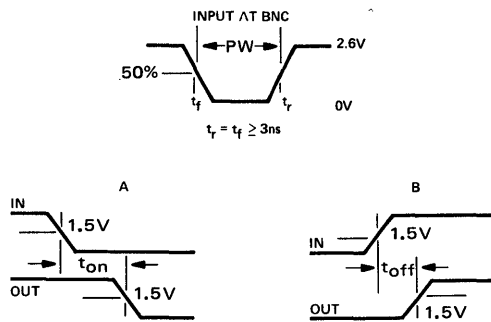

INVERTING PATHS

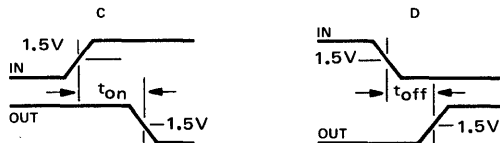

- NOTES:
- 5K, 30pF load includes test jigs and scope impedance.
  - Scope terminals to be ≤ 1½" from package pins.
  - See truth table for logical conditions.


AC TEST CONDITIONS

STEP NO.	TYPE/S	DELAY FROM-TO	INPUTS				WAVE-FORM TYPE
			I <sub>0</sub>	I <sub>1</sub>	A <sub>0</sub>	INH	
1	ALL	A <sub>0</sub> to $\bar{f}$	0 V	V <sub>CC</sub>	P.G.	0 V	C, D
2	ALL	I <sub>0</sub> to $\bar{f}$	P.G.	0 V	0 V	0 V	C, D
3	ALL	$\bar{f}$ to f*	P.G.	0 V	0 V	0 V	C, D
4	8230 8231	INH to $\bar{f}$	V <sub>CC</sub>	0 V	0 V	P.G.	A, B
5	8232	INH to $\bar{f}$	0 V	0 V	0 V	P.G.	C, D
6	8232	INH to f	V <sub>CC</sub>	0 V	0 V	P.G.	C, D

NOTE: 1. P. G. = Pulse Generator  
\*Both f and  $\bar{f}$  are simultaneously loaded.

TYPICAL APPLICATIONS

EXPANSION OF 8231 TO MULTIPLEXER 64 LINES

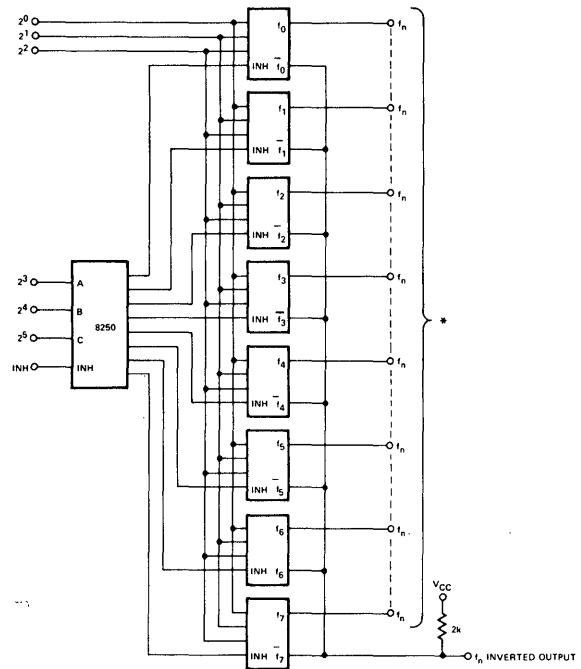

\* $f_n = f_0 + f_1 + f_2 \dots f_7$   
True Output  
All Outputs may be tied together to drive 8x16mA (eight 1.6mA F.O.) or each Output may drive separately ten 1.6mA F.O.

Note:  
Each 8231 has 8 data inputs which are not shown.

# 2-INPUT 4-BIT DIGITAL MULTIPLEXER

# 8233 8234 8235

DIGITAL 8000 SERIES TTL/MSI

## DESCRIPTION

These devices are 2-input, 4-Bit Digital Multiplexers designed for general purpose data-selection applications.

The 8233 features *non-inverting* data paths; and, the 8234 features *inverting* data paths.

The 8235 is designed for input to adders, registers and general paralleled data handling due to its capability to perform **CONDITIONAL COMPLEMENTING (TRUE/COMPLEMENT)**. When the two inputs for each bit position ( $A_i, B_i$ ) are connected together, the  $f$  output will provide either the *True* or *Complement* of the input data. This


capability is especially useful for transferring data into parallel adders where both true data for adding or multiplying and also complemented data for subtracting or dividing are needed.

The 8234 and 8235 designs have open collector outputs which permit direct wiring to other open collector outputs (collector logic) to yield "free" four-bit words. As many as one hundred four-bit words can be multiplexed by using fifty 8234/8235s in the WIRED-AND mode.

The inhibit state  $S_0 = S_1 = 1$  can be used to facilitate transfer operations in an arithmetic section.

## LOGIC DIAGRAM AND TRUTH TABLES


8233

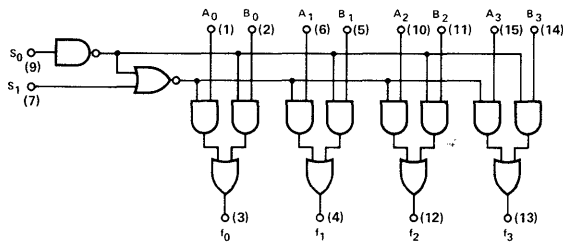

$S_0$	$S_1$	$f_n$
0	0	B
1	0	A
0	1	B
1	1	0

$V_{CC} = (16)$   
 $GND = (8)$   
 ( ) = Denotes Pin Numbers


8234

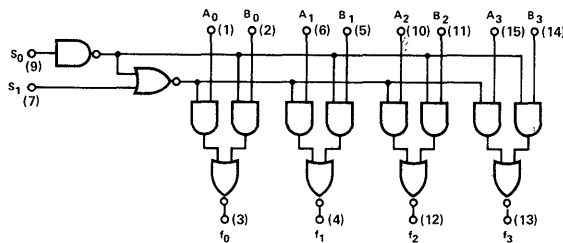

$S_0$	$S_1$	$f_n$
0	0	$\overline{B}$
1	0	$\overline{A}$
0	1	$\overline{B}$
1	1	1

$V_{CC} = (16)$   
 $GND = (8)$   
 ( ) = Denotes Pin Numbers

8235

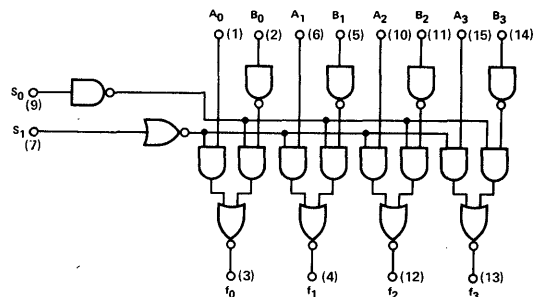

$S_0$	$S_1$	$f_n$
0	0	$\overline{A_n B_n}$
0	1	$B_n$
1	0	$\overline{A_n}$
1	1	1

$V_{CC} = (16)$   
 $GND = (8)$   
 ( ) = Denotes Pin Numbers

SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8233/34/35

ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS				OUTPUTS	NOTES
	MIN.	TYP.	MAX.	UNITS	INPUTS					
					A <sub>n</sub>	B <sub>n</sub>	S <sub>0</sub>	S <sub>1</sub>		
"1" Output Voltage (8233)	2.6	3.5		V	2.0V	2.0V	0.8V	0.8V	-800μA	6
"0" Output Voltage (8233)			0.4	V	0.8V	2.0V	2.0V	0.8V	16mA	7
"0" Output Voltage (8234)			0.4	V	0V	2.0V	0.8V	0.8V	16mA	7
"0" Output Voltage (8235)			0.4	V	2.0V	2.0V	2.0V	0.8V	16mA	7
"1" Output Leakage Current (8234)			100	μA	2.0V	2.0V	2.0V	2.0V	5.0V	13
"1" Output Leakage Current (8235)			100	μA	2.0V	2.0V	2.0V	2.0V	5.0V	13
"0" Input Current										
A <sub>n</sub>	-0.1		-1.6	mA	0.4V	4.5V		0V		
B <sub>n</sub>	-0.1		-1.6	mA	4.5V	0.4V		0V		
S <sub>0</sub>	-0.1		-1.6	mA			0.4V			
S <sub>1</sub>	-0.1		-1.6	mA				0.4V		
"1" Input Current										
A <sub>n</sub>			40	μA	4.5V	0V				
B <sub>n</sub>			40	μA	0V	4.5V				
S <sub>0</sub>			40	μA			4.5V			
S <sub>1</sub>			40	μA				4.5V		
Input Latch Voltage										
A <sub>n</sub>	5.5			V	10mA	0V				11
B <sub>n</sub>	5.5			V	0V	10mA				11
S <sub>0</sub>	5.5			V			10mA			11
S <sub>1</sub>	5.5			V				10mA		11
Output Short Circuit Current (8233)	-20		-70	mA	5V	5V	0V	0V	0V	
Input Clamp Voltage										
A <sub>n</sub>			-1.5	V	-12mA					
B <sub>n</sub>			-1.5	V		-12mA				
S <sub>0</sub>			-1.5	V			-12mA			
S <sub>1</sub>			-1.5	V				-12mA		

T<sub>A</sub> = 25° C and V<sub>CC</sub> = 5.0V


CHARACTERISTICS	LIMITS				TEST CONDITIONS				OUTPUTS	NOTES
					INPUTS					
	MIN.	TYP.	MAX.	UNITS	A <sub>n</sub>	B <sub>n</sub>	S <sub>0</sub>	S <sub>1</sub>		
Power/Current										
Consumption:										
8233		200/38	252/48	mW/mA		0V		0V		15
8234		160/31	210/40	mW/mA		0V		0V		15
8235		230/44	310/59	mW/mA		4.5V		4.5V		15
8233 Turn-On Times										
A <sub>n</sub> , B <sub>n</sub> to f <sub>n</sub>		16	25	ns						8,14
S <sub>0</sub> to f <sub>n</sub>		27	38	ns						8,14
S <sub>1</sub> to f <sub>n</sub>		27	38	ns						8,14
8233 Turn-Off Times										
A <sub>n</sub> , B <sub>n</sub> to f <sub>n</sub>		16	25	ns						8,14
S <sub>0</sub> to f <sub>n</sub>		27	38	ns						8,14
S <sub>1</sub> to f <sub>n</sub>		27	38	ns						8,14
8234 Turn-On Times										
A <sub>n</sub> , B <sub>n</sub> to f <sub>n</sub>		16	25	ns						8,14
S <sub>0</sub> to f <sub>n</sub>		27	38	ns						8,14
S <sub>1</sub> to f <sub>n</sub>		27	38	ns						8,14
8234 Turn-Off Times										
A <sub>n</sub> , B <sub>n</sub> to f <sub>n</sub>		16	25	ns						8,14
S <sub>0</sub> to f <sub>n</sub>		27	38	ns						8,14
S <sub>1</sub> to f <sub>n</sub>		27	38	ns						8,14
8235 Turn-On Times										
A <sub>n</sub> to f <sub>n</sub>		16	25	ns						8,14
B <sub>n</sub> to f <sub>n</sub>		24	35	ns						8,14
S <sub>0</sub> to f <sub>n</sub>		27	38	ns						8,14
S <sub>1</sub> to f <sub>n</sub>		27	38	ns						8,14
8235 Turn-Off Times										
A <sub>n</sub> to f <sub>n</sub>		16	25	ns						8,14
B <sub>n</sub> to f <sub>n</sub>		24	35	ns						8,14
S <sub>0</sub> to f <sub>n</sub>		27	38	ns						8,14
S <sub>1</sub> to f <sub>n</sub>		27	38	ns						8,14

NOTES:


- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive logic: "UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V<sub>CC</sub>.
- One DC fan-out is defined as 0.8mA.
- One AC fan-out is defined as 50pF.
- Manufacturer reserves the right to make design and process changes and improvements.
- This test guarantees operation free of input latch-up within the specified operating supply voltage range.
- Measurements apply to each gate element independently.
- Connect an external 1k ±1% resistor from V<sub>CC</sub> to the output for this test.
- Reference AC Test Circuit, Waveforms and Test Tables.
- V<sub>CC</sub> = 5.25V.



**SCHEMATIC DIAGRAMS**

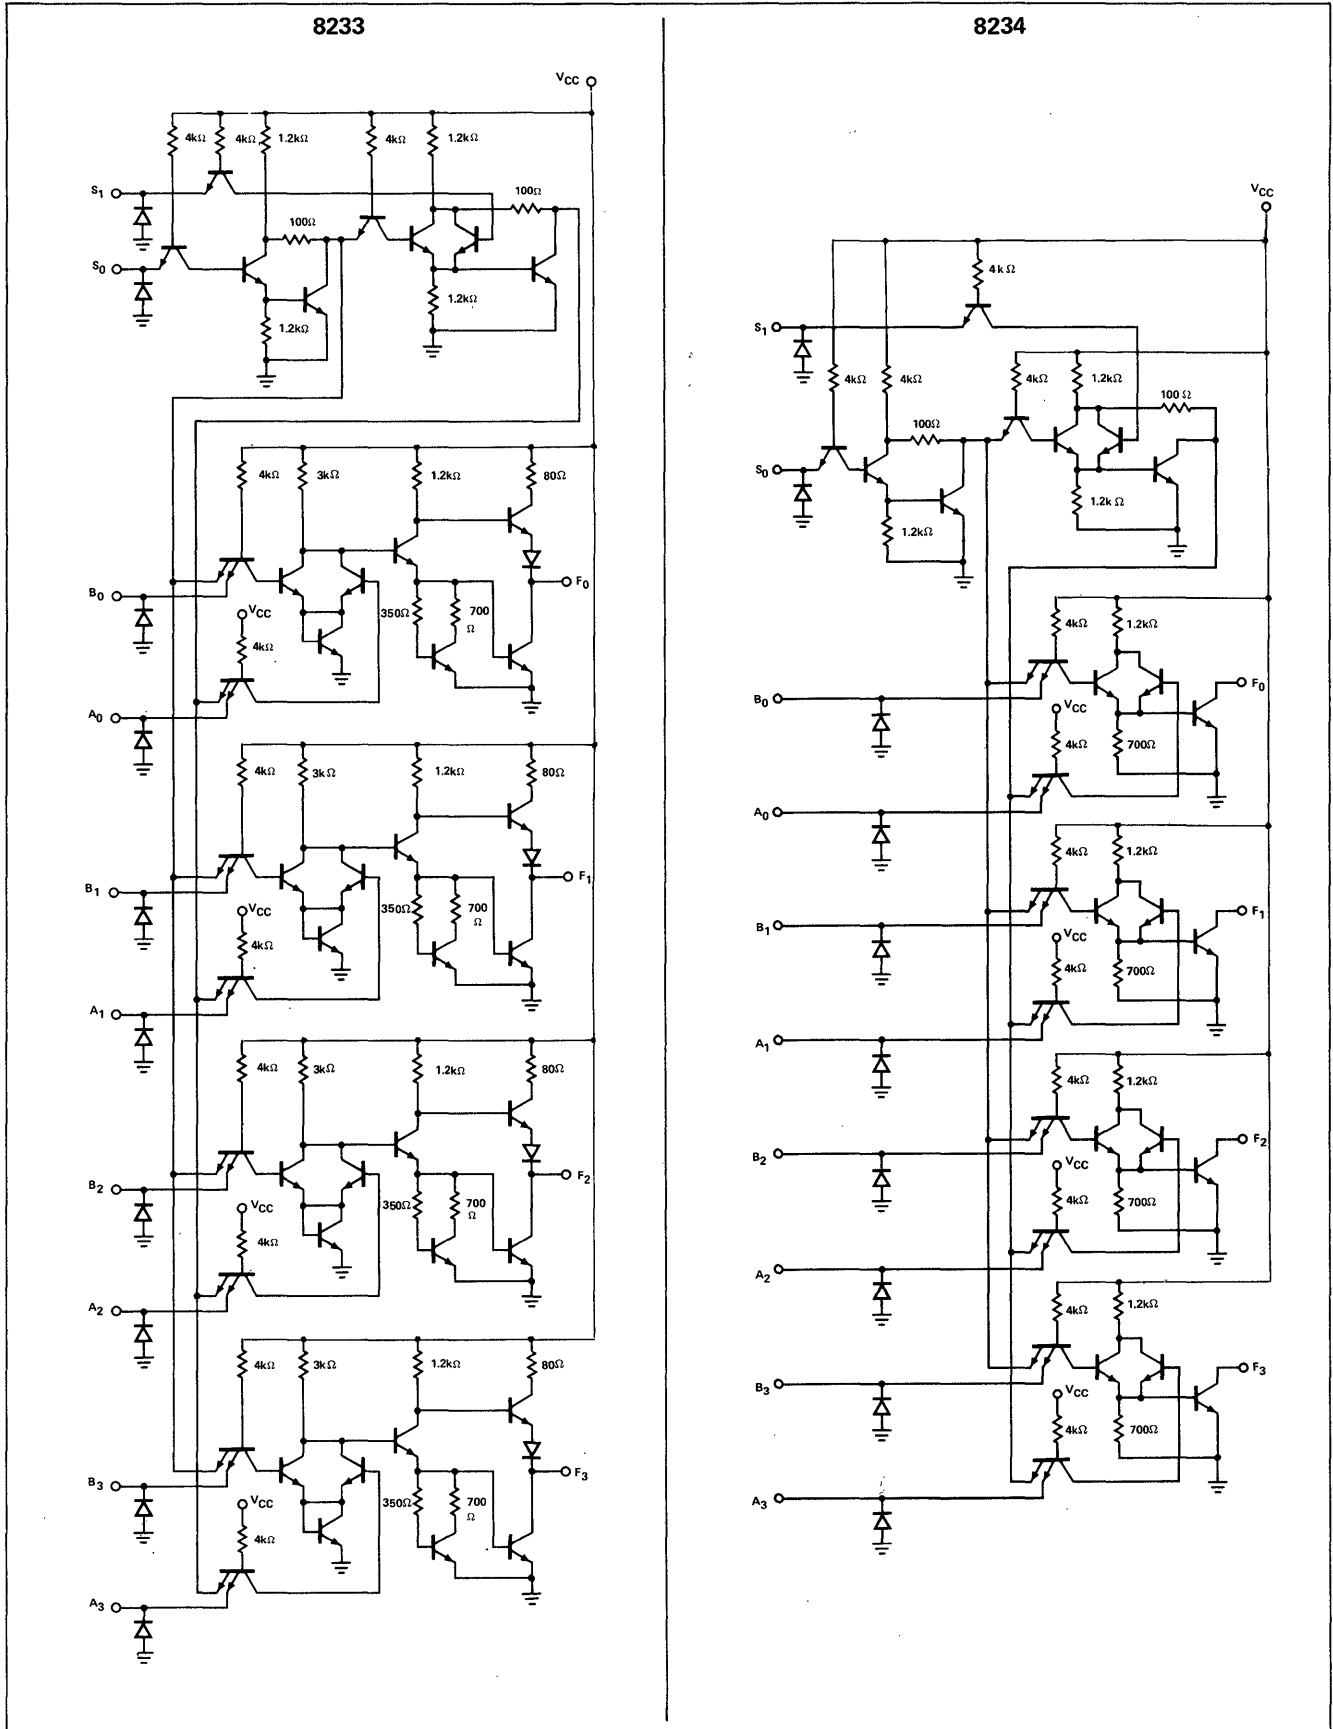


**SCHEMATIC DIAGRAMS (Cont'd)**

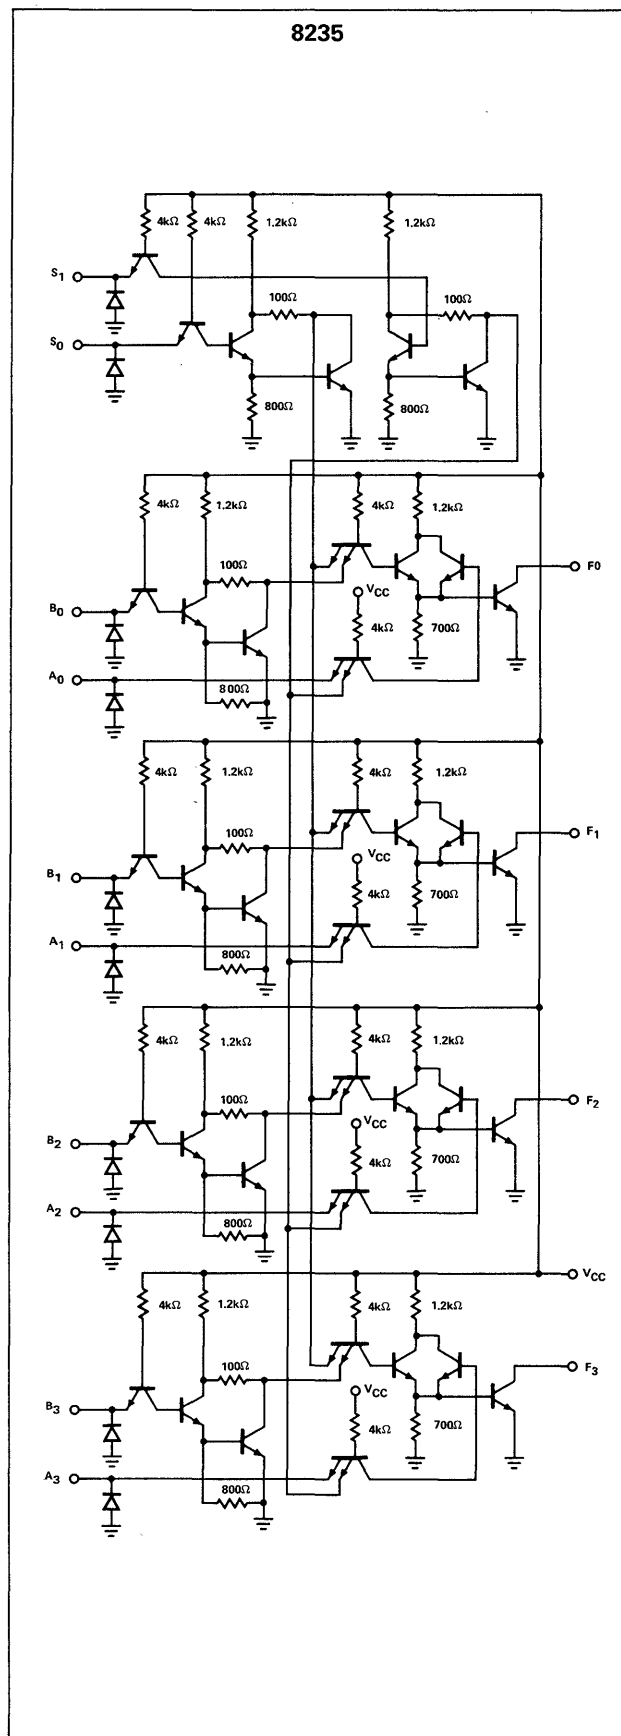

**PROPAGATION DELAY TEST TABLE**

PRODUCT	PATH	PARAMETER	S <sub>1</sub>	S <sub>2</sub>	S <sub>3</sub>	S <sub>4</sub>
ALL	A <sub>0</sub> to f <sub>0</sub>	$\frac{t_{on}}{t_{off}}$	a	b	b	c
8233 8234	B <sub>0</sub> to f <sub>0</sub>	$\frac{t_{on}}{t_{off}}$	c	a	c	b
8233 8234	S <sub>0</sub> to f <sub>0</sub>	$\frac{t_{on}}{t_{off}}$	b	b	a	b
8233 8234	S <sub>0</sub> to f <sub>0</sub>	$\frac{t_{on}}{t_{off}}$	b	c	a	c
8235	B <sub>0</sub> to f <sub>0</sub>	$\frac{t_{on}}{t_{off}}$	c	a	c	b
8235	B <sub>0</sub> to f <sub>0</sub>	$\frac{t_{on}}{t_{off}}$	b	c	a	b
8235	S <sub>1</sub> to f <sub>0</sub>	$\frac{t_{on}}{t_{off}}$	b	b	c	a
8233 8234	S <sub>1</sub> to f <sub>0</sub>	$\frac{t_{on}}{t_{off}}$	b	c	b	a


**AC TEST FIGURE AND WAVEFORMS**

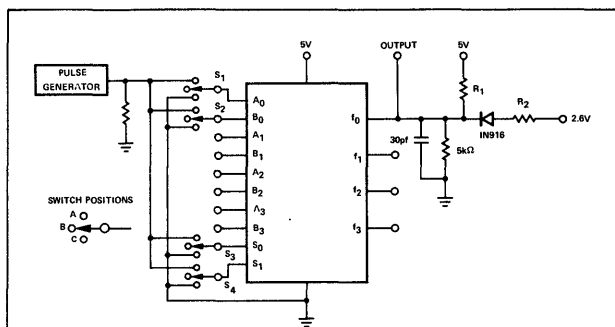

	R <sub>1</sub>	R <sub>2</sub>
8233	∞	84.5Ω
8234	360Ω	440Ω
8235	360Ω	440Ω

**INPUT PULSE:**  
 Amplitude = 2.6V  
 PW = 200ns  
 PRR = 1 MHz  
 t<sub>r</sub> = t<sub>f</sub> = 5ns

**PULSE REQUIREMENTS**

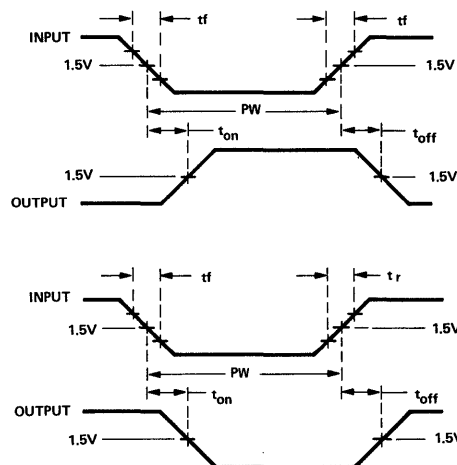



**QUAD EXCLUSIVE-OR  
QUAD EXCLUSIVE-NOR**

**8241  
8242**

**DIGITAL 8000 SERIES TTL/MSI**

**DESCRIPTION**


The 8241 contains four independent gating structures to perform the Exclusive-OR function on two input variables. The output of the 8241 employs the totem-pole structure characteristic of TTL devices.

The 8242 contains four independent Exclusive-NOR gates

which may be used to implement digital comparison functions. The 8242 outputs are bare collector to facilitate implementation of multiple-bit comparisons; a 4-bit comparison is made by connecting the outputs of the four independent gates together.

**LOGIC DIAGRAMS AND TRUTH TABLES**


**8241 QUAD EXCLUSIVE - OR**

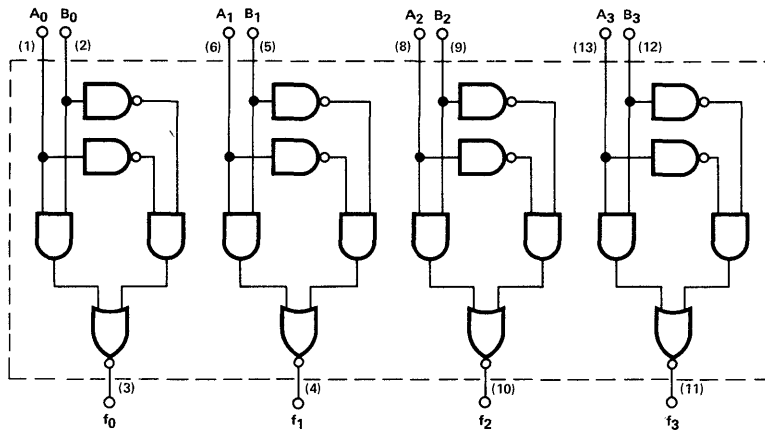

A	B	f
0	0	0
1	0	1
0	1	1
1	1	0

V<sub>CC</sub> = (14)  
GND = (7)  
( ) = Denotes Pin Numbers

**8242 4-BIT DIGITAL COMPARATOR**

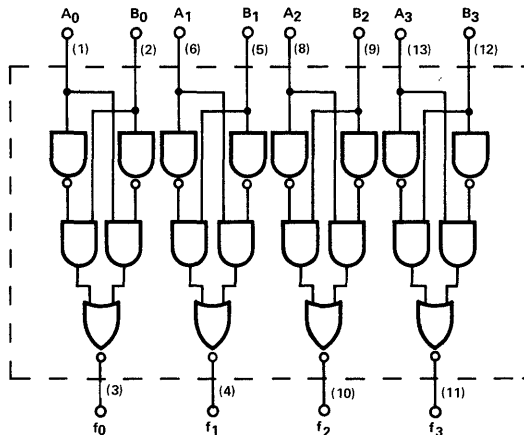

A	B	f
0	0	1
1	0	0
0	1	0
1	1	1

V<sub>CC</sub> = (14)  
GND = (7)  
( ) = Denotes Pin Numbers

SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8241/42

ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

(8241)

CHARACTERISTICS	LIMITS				TEST CONDITIONS			NOTES
	MIN.	TYP.	MAX.	UNITS	INPUTS		OUTPUTS	
					A	B		
Output "1" Voltage	2.6	3.5		V	2.0	0.8	800 $\mu$ A	7
Output "0" Voltage			0.4	V	2.0	2.0	16mA	8
Input "1" Current			80	$\mu$ A	4.5	4.5V		13
Input "0" Current	-0.1		-3.2	mA	0.4	0.4		14
Power/Current Consumption		225/42.4	300/57.1	mW/mA				
Output Short Circuit Current	-20		-70	mA			0V	6
Input Latch Voltage								
A Input	5.5			V	10mA	0V		10
B Input	5.5			V	0V	10mA		10

T<sub>A</sub> = 25° C and V<sub>CC</sub> = 5.0V

(8241)

CHARACTERISTICS	LIMITS				TEST CONDITIONS			NOTES
	MIN.	TYP.	MAX.	UNITS	INPUTS		OUTPUTS	
					A	B		
Propagation Delay		12	20	ns				9

ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

(8242)

CHARACTERISTICS	LIMITS				TEST CONDITIONS			NOTES
	MIN.	TYP.	MAX.	UNITS	INPUTS		OUTPUT	
					A	B		
Output "1" Leakage Current			25	$\mu$ A	2.0	2.0		12
Output "0" Voltage			0.4	V	2.0	0.8	25mA	8
Input "1" Current			80	$\mu$ A	4.5	4.5V		13
Input "0" Current	-0.1		-3.2	mA	0.4	0.4		14
Power/Current Consumption		170/32	250/47.5	mW/mA	0.4	0.4		15
Input Latch Voltage								
A Input	5.5			V	10mA	0V		
B Input	5.5			V	0V	10mA		10

T<sub>A</sub> = 25° C and V<sub>CC</sub> = 5.0V


(8242)

CHARACTERISTICS	LIMITS				TEST CONDITIONS			INPUTS
	MIN.	TYP.	MAX.	UNITS	INPUTS		OUTPUTS	
					A	B		
Propagation Delay		18	25	ns				9


NOTES:

1. All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
2. All measurements are taken with ground pin tied to zero volts.
3. Positive current flow is defined as into the terminal referenced.
4. Positive NAND logic definition:  
"UP" Level = "1", "DOWN" Level = "0".
5. Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
6. Measurements apply to each gate element independently.
7. Output source current is supplied through a resistor to ground.
8. Output sink current is supplied through a resistor to  $V_{CC}$ .
9. Refer to AC Test Figure.
10. This test guarantees operation free of input latch-up over the specified operating supply voltage range.
11. Manufacturers reserves the right to make design and process changes and improvements.
12. Connect an external  $1K \pm 1\%$  resistor from  $V_{CC}$  to the output terminal for this test.
13. A and B are tested separately. When A is 4.5V, B is 0V, and vice versa.
14. A and B are tested separately. When A is 0.4V, B is 5.25V, and vice versa.
15.  $V_{CC} = 5.25V$ .


SCHEMATIC DIAGRAMS

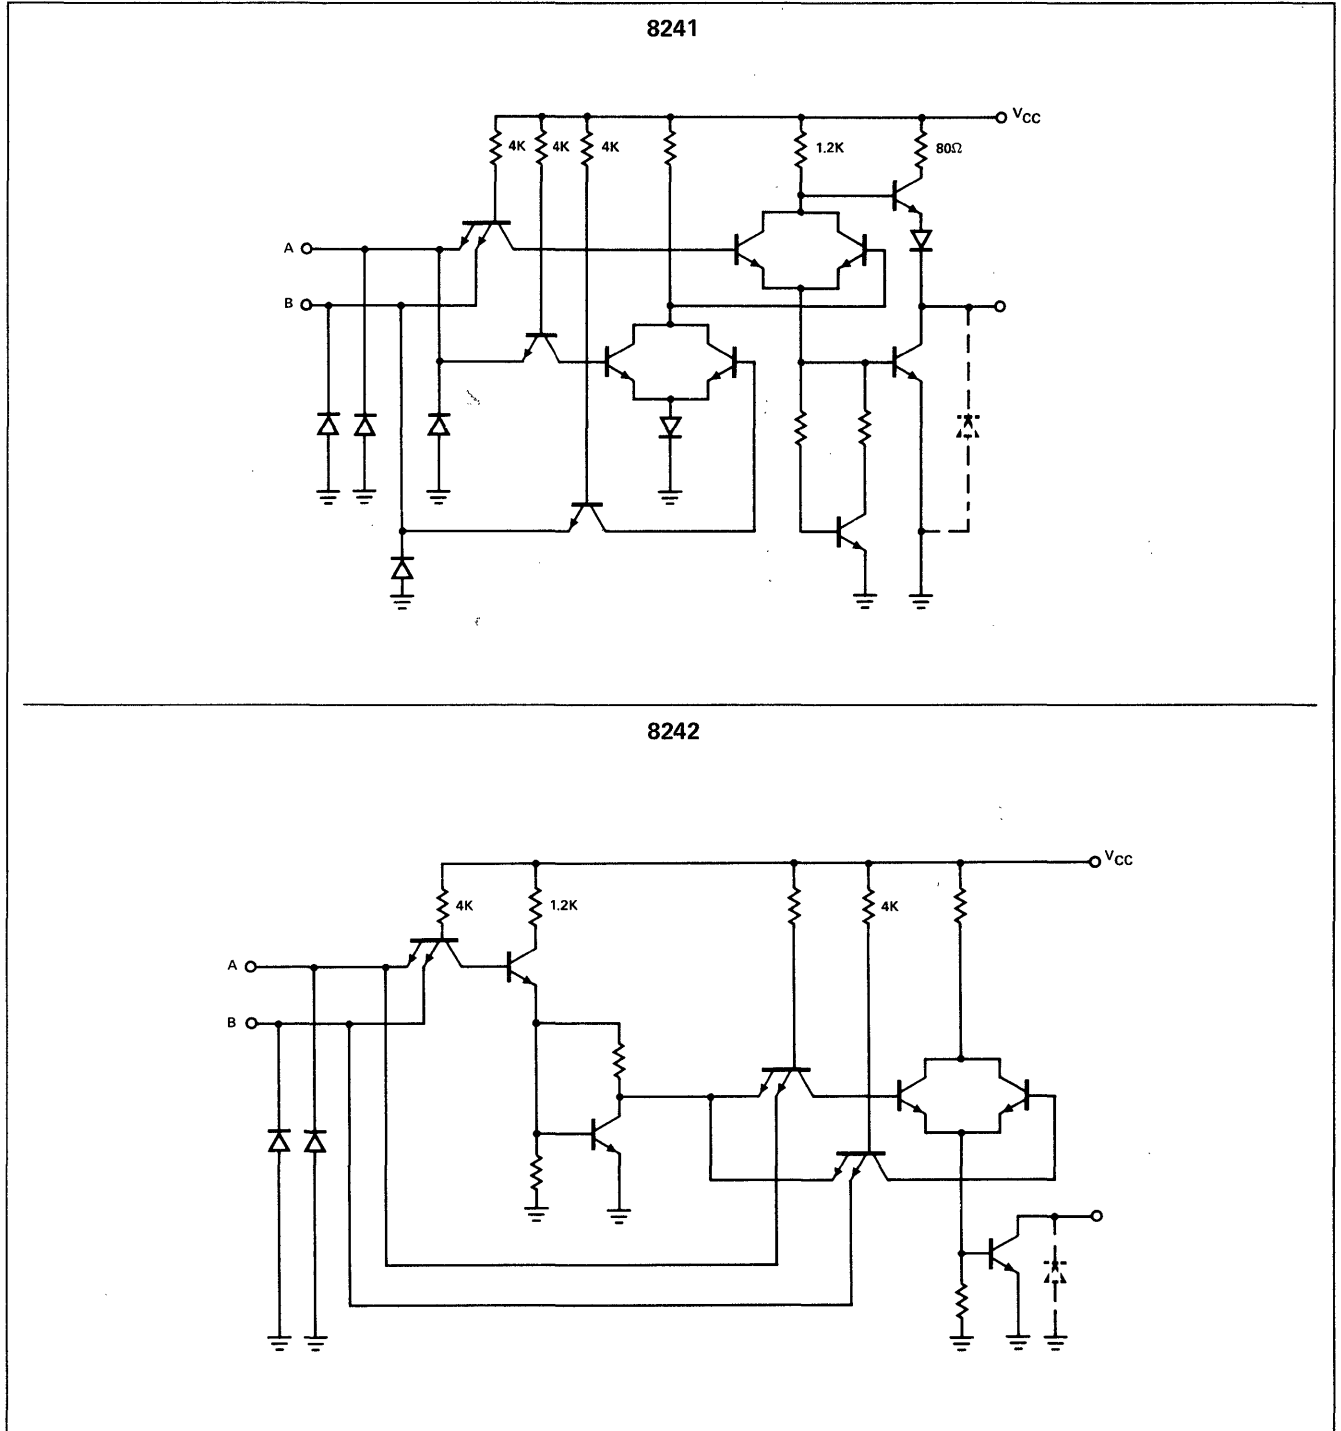

AC TEST FIGURE AND WAVEFORMS

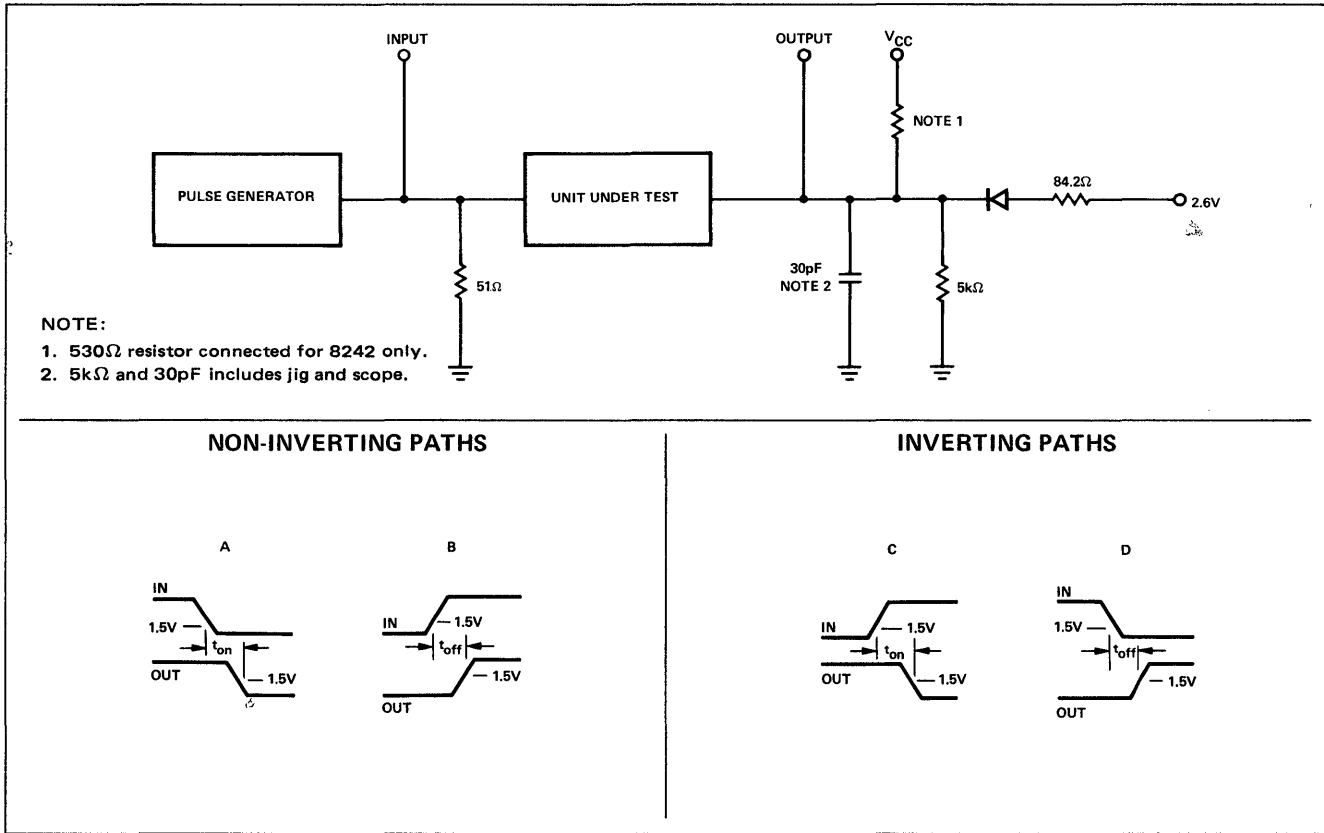

TYPICAL APPLICATIONS

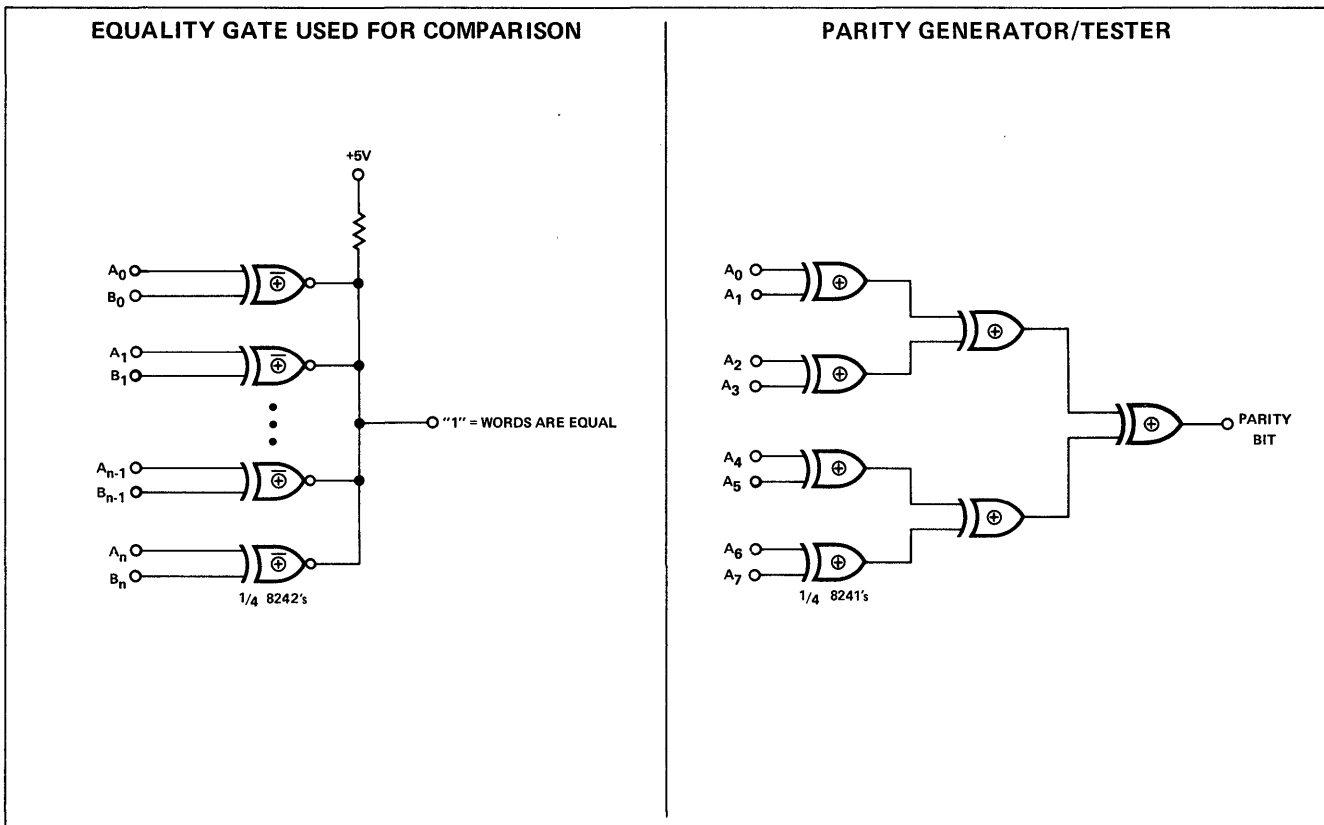

# 8-BIT POSITION SCALER

# 8243

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION

The 8243 8-Bit Position Scaler is an MSI array of approximately 70 gate complexity. The primary function of the 8243 is to scale (or shift) data bit positions by a selection of a 3-bit binary selector code.


The most significant bit input ( $I_7$ ) may be shifted 8 positions to the least significant bit output ( $O_0$ ). At zero shift, or scale select, all eight input data bits are transferred and inverted to their respective outputs, ( $I_0$  to  $O_0$ ,  $I_1$  to  $O_1$ ,  $I_2$  to  $O_2$ , etc.) At a shift, or scale select, of one, each input bit ( $I_n$ ) will shift to the next lower output bit ( $O_{n-1}$ ). See truth table for other shift codes.

The 8243's advantages over shift registers are the speed of operation and lower complexity of external logic required to effect a scale function. The speed of the 8243 Scaler is a function of gate propagation delays—the speed of equivalent shift registers is the time for clock periods plus the propagation delay to effect a scale function.

The 8243 is provided with open collector outputs to provide expansion to larger scaling functions. Data input logic zero loading is reduced to less than  $-100\mu A$  when the unit is disabled.

### LOGIC DIAGRAM AND TRUTH TABLE

$V_{CC}$  = (24)  
 $GND$  = (12)  
 ( ) = Denotes Pin Numbers

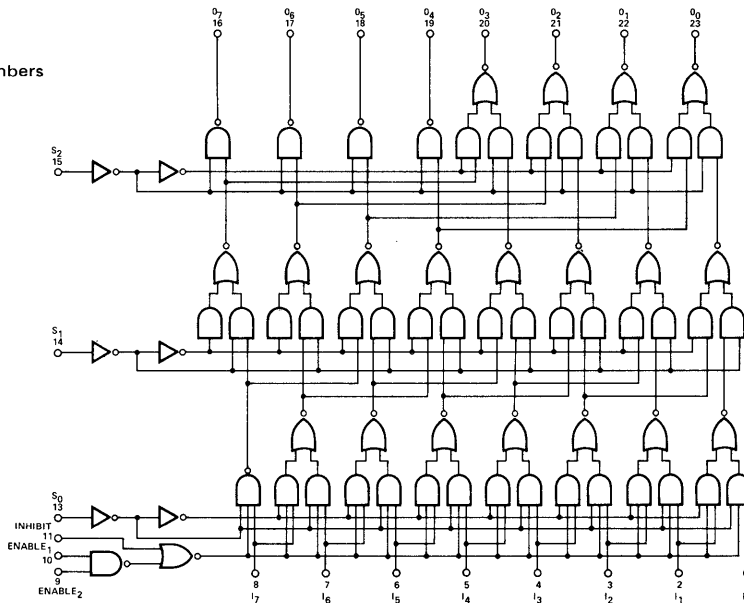

NOTE: All inputs have diode clamps.

INHIBIT	ENABLE 1 & 2	$S_0$	$S_1$	$S_2$	$O_0$	$O_1$	$O_2$	$O_3$	$O_4$	$O_5$	$O_6$	$O_7$
0	1	0	0	0	$\bar{I}_0$	$\bar{I}_1$	$\bar{I}_2$	$\bar{I}_3$	$\bar{I}_4$	$\bar{I}_5$	$\bar{I}_6$	$\bar{I}_7$
0	1	1	0	0	$\bar{I}_1$	$\bar{I}_2$	$\bar{I}_3$	$\bar{I}_4$	$\bar{I}_5$	$\bar{I}_6$	$\bar{I}_7$	1
0	1	0	1	0	$\bar{I}_2$	$\bar{I}_3$	$\bar{I}_4$	$\bar{I}_5$	$\bar{I}_6$	$\bar{I}_7$	1	1
0	1	1	1	0	$\bar{I}_3$	$\bar{I}_4$	$\bar{I}_5$	$\bar{I}_6$	$\bar{I}_7$	1	1	1
0	1	0	0	1	$\bar{I}_4$	$\bar{I}_5$	$\bar{I}_6$	$\bar{I}_7$	1	1	1	1
0	1	1	0	1	$\bar{I}_5$	$\bar{I}_6$	$\bar{I}_7$	1	1	1	1	1
0	1	0	1	1	$\bar{I}_6$	$\bar{I}_7$	1	1	1	1	1	1
0	1	1	1	1	$\bar{I}_7$	1	1	1	1	1	1	1
1	X	X	X	X	1	1	1	1	1	1	1	1
X	0	X	X	X	1	1	1	1	1	1	1	1

X Indicates either logic "1" or logic "0" may be present.



SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8243

ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS							NOTES
	MIN.	TYP.	MAX.	UNITS	I <sub>n</sub>	S <sub>0</sub>	S <sub>1</sub>	S <sub>2</sub>	ENABLE 1&2	INHIBIT	OUTPUTS	
"1" Output Leakage Current			150	μA	0.8V	*	*	*	2.0V	0.8V		7
"0" Output Voltage			0.4	V	2.0V	*	*	*	2.0V	0.8V	12.8mA	7
"0" Input Current												
Data In (Disabled)			-100	μA	0.4V				0.8V	2.0V		
Data In (Enabled)	-0.1		-1.6	mA	0.4V	0.8V			2.0V	0.8V		
Select S <sub>n</sub>	-0.1		-1.6	mA			0.4V	0.4V				
Inhibit	-0.1		-1.6	mA					0.4V	0.4V		
Enable 1 & 2	-0.1		-1.6	mA					0.4V	4.5V		11
"1" Input Current												
Data In			80	μA	4.5V	2.0V				2.0V		
Select S <sub>n</sub>			40	μA		4.5V	4.5V	4.5V				
Inhibit			40	μA					2.0V	4.5V		
Enable 1 & 2			40	μA					4.5V			12


T<sub>A</sub> = 25° C and V<sub>CC</sub> = 5.0V

CHARACTERISTICS	LIMITS				TEST CONDITIONS							NOTES
	MIN.	TYP.	MAX.	UNITS	I <sub>n</sub>	S <sub>0</sub>	S <sub>1</sub>	S <sub>2</sub>	ENABLE 1&2	INHIBIT	OUTPUTS	
Propagation Delay												
Data In		20	32	ns								9, 10
Select S <sub>n</sub>		30	40	ns								
Inhibit		25	35	ns								
Enable 1 & 2		30	45	ns								
Power/Current		315/	500/	mW/								13
Consumption		60	75.2	mA								
Input Voltage Rating	5.5				10mA	10mA	10mA	10mA	10mA	10mA		




NOTES:

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive NAND logic definition:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Output sink current is supplied through a resistor to V<sub>CC</sub>.
- Connect an external 1k resistor from V<sub>CC</sub> to the output terminal for this test.
- Manufacturer reserves the right to make design and process changes and improvements.
- Refer to AC Test figures.
- I<sub>n</sub> "0" threshold 0.7 volts for S8243.
- Input under test at 0.4V, other Enable Input tied to V<sub>CC</sub>.
- Input under test at 4.5V, other Enable Input, 0 volts.
- V<sub>CC</sub> = 5.25V.

AC TEST FIGURES AND WAVEFORMS

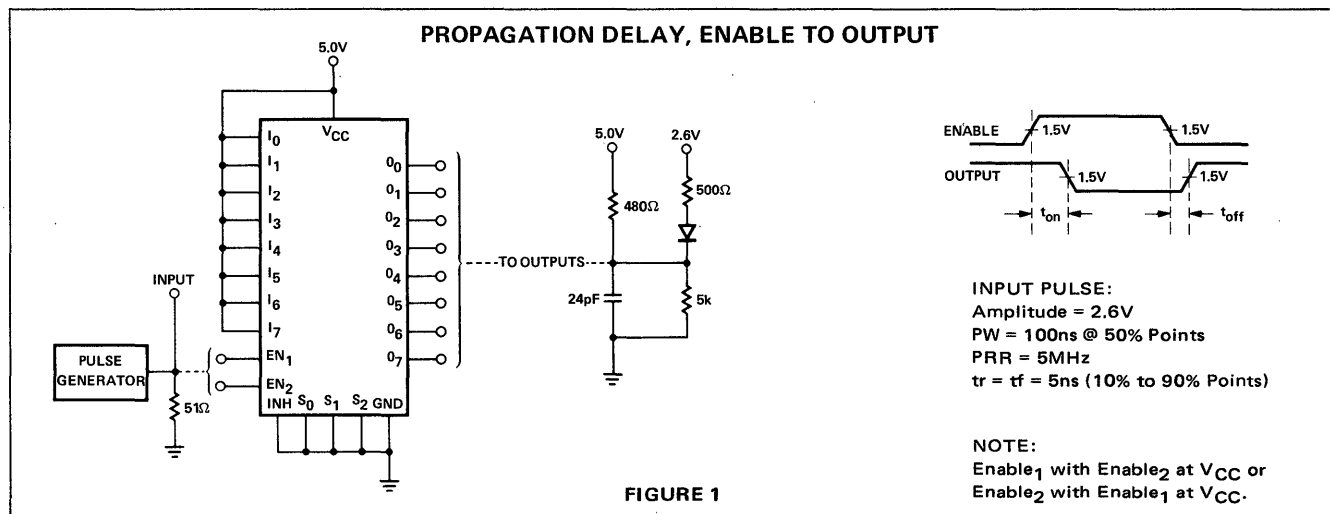


AC TEST FIGURES AND WAVEFORMS (Cont'd)

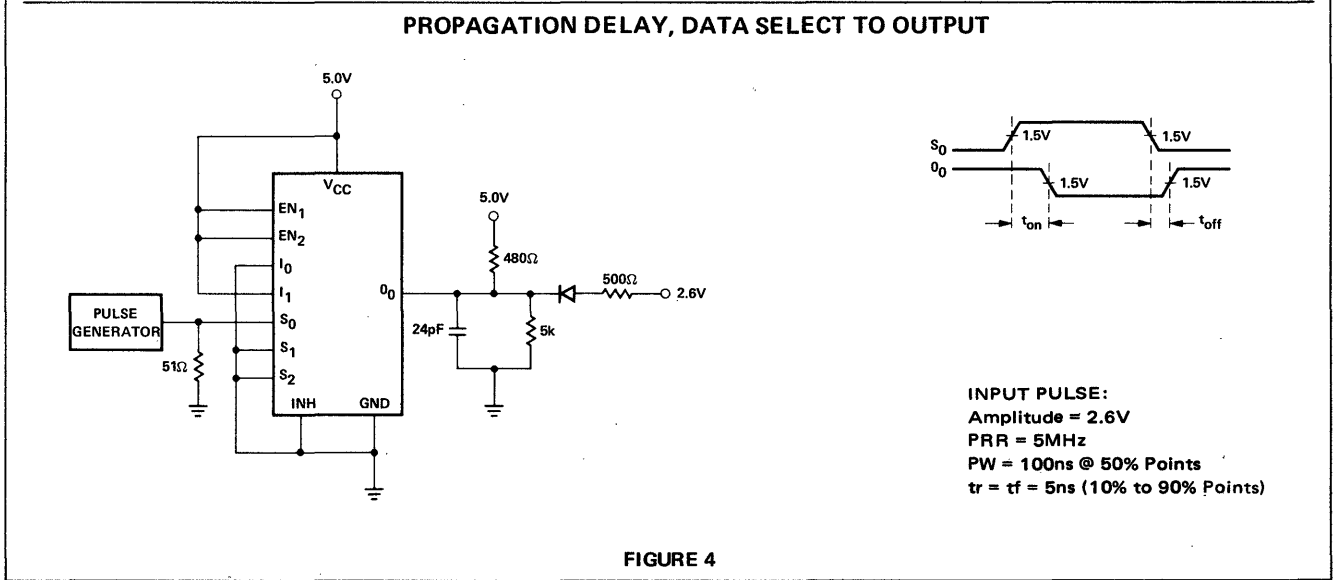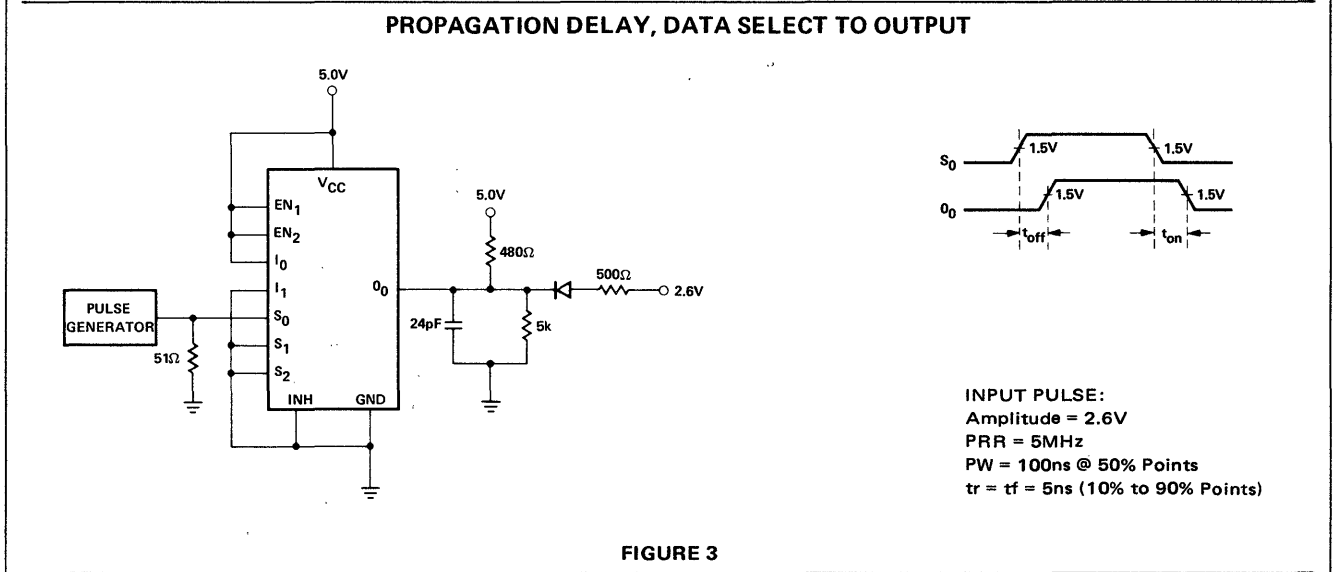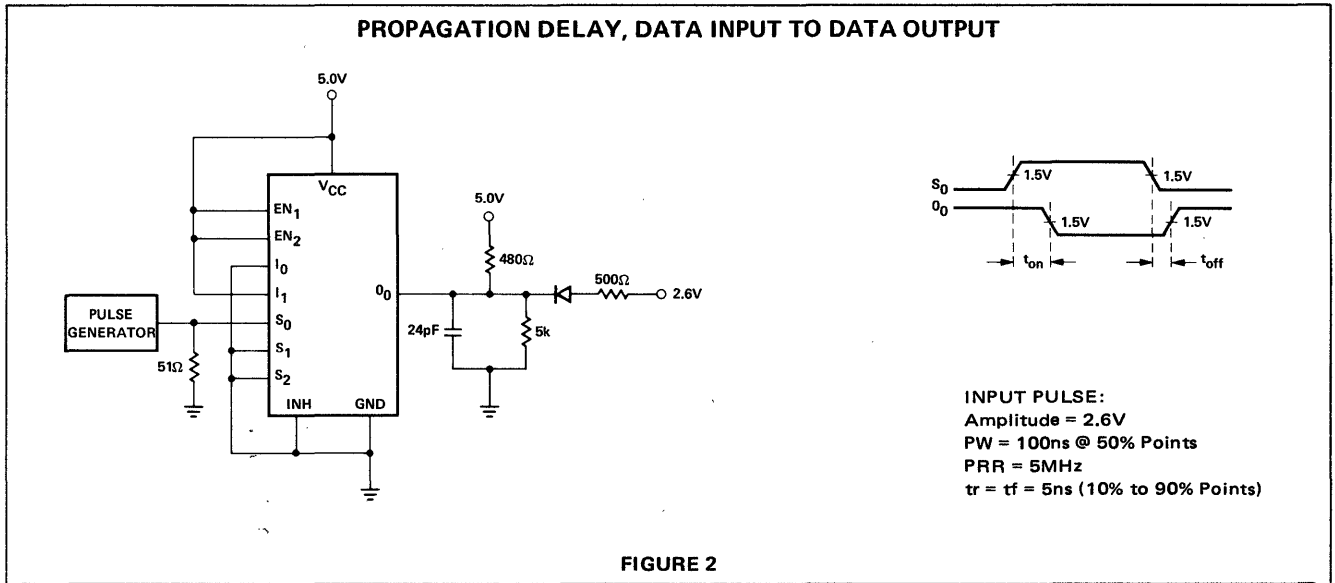


TYPICAL APPLICATIONS

ONE TO EIGHT LINE DEMULTIPLEXER

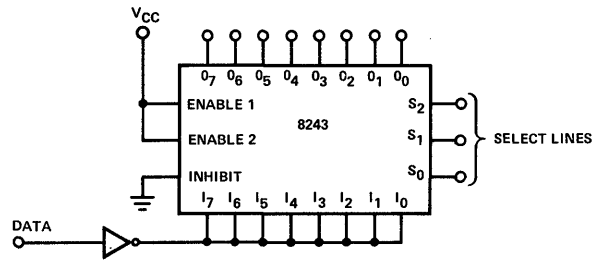

SCALE SELECT	3 BIT BINARY CODE			OUTPUTS							
	S <sub>2</sub>	S <sub>1</sub>	S <sub>0</sub>	O <sub>0</sub>	O <sub>1</sub>	O <sub>2</sub>	O <sub>3</sub>	O <sub>4</sub>	O <sub>5</sub>	O <sub>6</sub>	O <sub>7</sub>
0	0	0	0	Data	Data	Data	Data	Data	Data	Data	Data
1	0	0	1	Data	Data	Data	Data	Data	Data	Data	1
2	0	1	0	Data	Data	Data	Data	Data	Data	1	1
3	0	1	1	Data	Data	Data	Data	Data	1	1	1
4	1	0	0	Data	Data	Data	Data	1	1	1	1
5	1	0	1	Data	Data	Data	1	1	1	1	1
6	1	1	0	Data	Data	1	1	1	1	1	1
7	1	1	1	Data	1	1	1	1	1	1	1

BI-DIRECTIONAL 8-POSITION SHIFTER

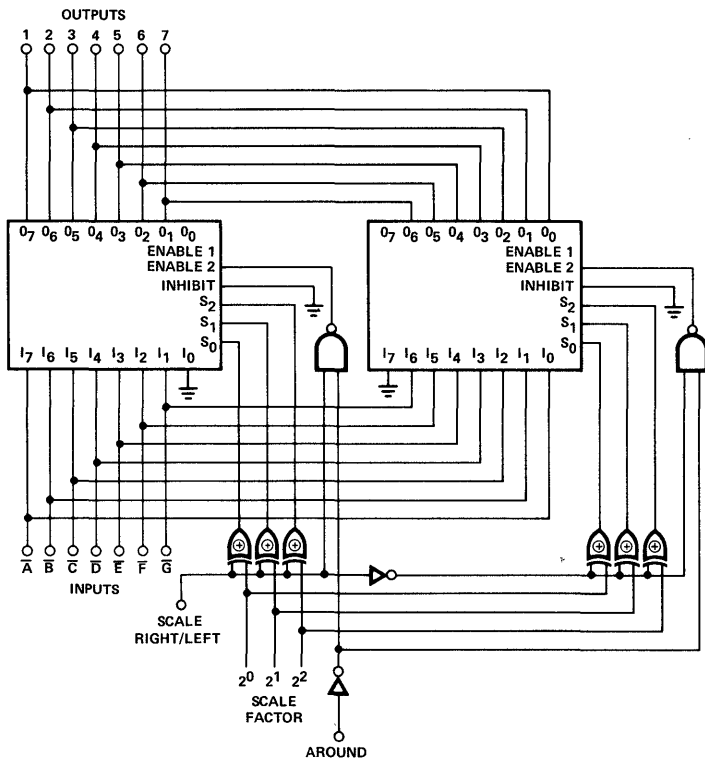

SCALE FACTOR	OUTPUTS								SCALE RIGHT
0	1	2	3	4	5	6	7		
1	A	B	C	D	E	F	G		
2	1	1	A	B	C	D	E		
3	1	1	1	A	B	C	D		
4	1	1	1	1	A	B	C		
5	1	1	1	1	1	A	B		
6	1	1	1	1	1	1	A		
7	1	1	1	1	1	1	1		

SCALE = 0  
AROUND = 0

SCALE FACTOR	OUTPUTS								SCALE LEFT
0	A	B	C	D	E	F	G		
1	B	C	D	E	F	G	1		
2	C	D	E	F	G	1	1		
3	D	E	F	G	1	1	1		
4	E	F	G	1	1	1	1		
5	F	G	1	1	1	1	1		
6	G	1	1	1	1	1	1		
7	1	1	1	1	1	1	1		

SCALE = 1  
AROUND = 0

SCALE FACTOR	OUTPUTS								SCALE RIGHT & AROUND
0	A	B	C	D	E	F	G		
1	G	A	B	C	D	E	F		
2	F	G	A	B	C	D	E		
3	E	F	G	A	B	C	D		
4	D	E	F	G	A	B	C		
5	C	D	E	F	G	A	B		
6	B	C	D	E	F	G	A		
7	A	B	C	D	E	F	G		

SCALE = 0  
AROUND = 1

SCALE FACTOR	OUTPUTS								SCALE LEFT & AROUND
0	A	B	C	D	E	F	G		
1	B	C	D	E	F	G	A		
2	C	D	E	F	G	A	B		
3	D	E	F	G	A	B	C		
4	E	F	G	A	B	C	D		
5	F	G	A	B	C	D	E		
6	G	A	B	C	D	E	F		
7	A	B	C	D	E	F	G		

SCALE = 1  
AROUND = 1

# BINARY-TO-OCTAL DECODER BCD-TO-DECIMAL DECODER

# 8250 8251 8252

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION

The 8250, 8251 and 8252 are gate arrays for decoding and logic conversion applications.

The 8250 converts 3 lines of input to a one-of-eight output. The fourth input line (D) is utilized as an inhibit to allow use in larger decoding networks.


The 8251 and 8252 convert a 4 line input code (with

1-2-4-8 weighting) to a one-of-ten output as shown in the Truth Table.

The 8252 is a direct replacement for the 9301 with all outputs being forced high when a binary code greater than nine is applied to the inputs.

The selected output is a logic "0".

### LOGIC DIAGRAMS

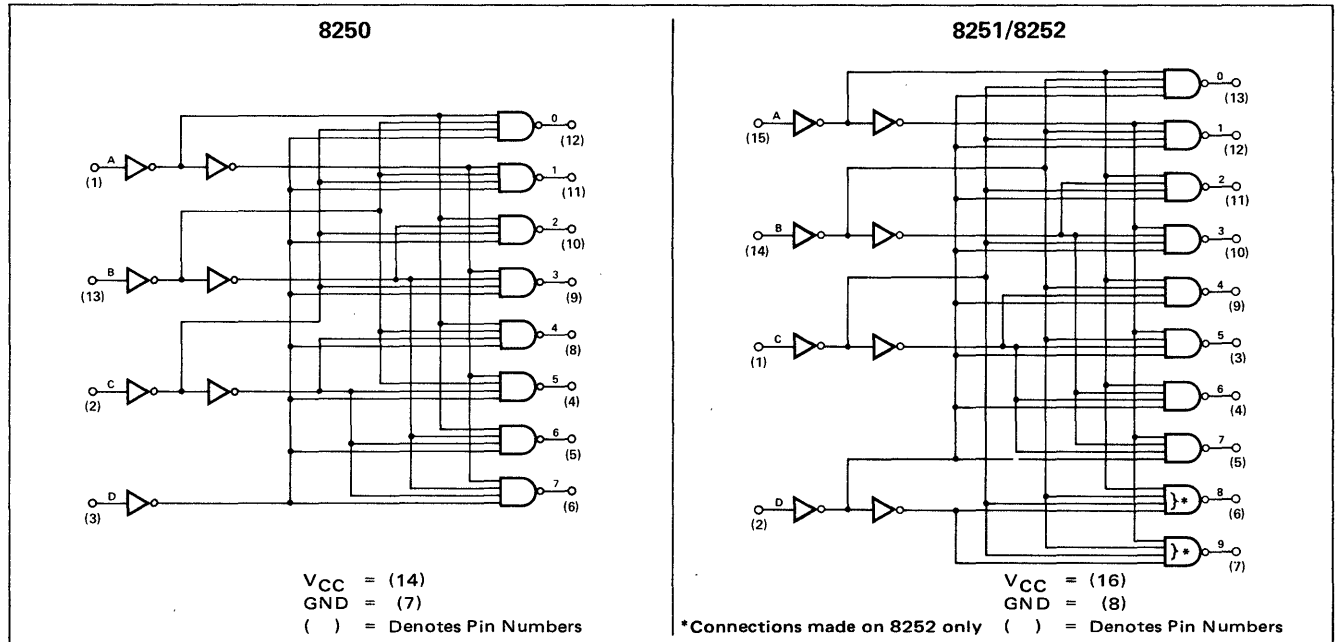

### TRUTH TABLE

INPUT STATE				OUTPUT STATES											
				8250								8251		8252	
A	B	C	D	0	1	2	3	4	5	6	7	8	9	8	9
0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1
1	0	0	0	1	0	1	1	1	1	1	1	1	1	1	1
0	1	0	0	1	1	0	1	1	1	1	1	1	1	1	1
1	1	0	0	1	1	1	0	1	1	1	1	1	1	1	1
0	0	1	0	1	1	1	1	0	1	1	1	1	1	1	1
1	0	1	0	1	1	1	1	1	0	1	1	1	1	1	1
0	1	1	0	1	1	1	1	1	1	0	1	1	1	1	1
1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1
0	0	0	1	1	1	1	1	1	1	1	1	0	1	0	1
1	0	0	1	1	1	1	1	1	1	1	1	1	0	1	0
0	1	0	1	1	1	1	1	1	1	1	1	0	1	1	1
1	1	0	1	1	1	1	1	1	1	1	1	1	0	1	1
0	0	1	1	1	1	1	1	1	1	1	1	0	1	1	1
1	0	1	1	1	1	1	1	1	1	1	1	1	0	1	1
0	1	1	1	1	1	1	1	1	1	1	1	0	1	1	1
1	1	1	1	1	1	1	1	1	1	1	1	1	0	1	1

**SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8250/51/52**

**ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)**

CHARACTERISTICS	LIMITS				A	B	C	D	OUTPUTS	NOTES
	MIN.	TYP.	MAX.	UNITS						
"1" Output Voltage	2.6	3.5		V					-800	6, 10
"0" Output Voltage			0.4	V					16mA	7, 10
"1" Input Current A, B, C, D			40	μA	4.5V	4.5V	4.5V	4.5V		
"0" Input Current A, B, C (8250, 8251)	-0.1		-1.2	mA	0.4V	0.4V	0.4V			
A, B, C, D (8252)	-0.1		-1.6	mA	0.4V	0.4V	0.4V	0.4V		
D (8251 Only)	-0.1		-1.2	mA				0.4V		
D (8250 Only)	-0.1		-1.0	mA				0.4V		


$T_A = 25^\circ C$  and  $V_{CC} = 5.0V$

CHARACTERISTICS	LIMITS				A	B	C	D	OUTPUTS	NOTES
	MIN.	TYP.	MAX.	UNITS						
Turn-on Delay $t_{on}$		20	35	ns						8
Turn-off Delay $t_{off}$		20	35	ns						8
Power/Current Consumption (8251 Only)			135/25.7	mW/mA	5.25V	5.25V	5.25V	0V		12
(8250 Only)			125/23.8	mW/mA	5.25V	5.25V	5.25V	0V		12
Input Latch Voltage	5.5			V	10mA	10mA	10mA	10mA		11
Output Short Circuit Current Outputs 1 thru 9	-10		-55	mA	0V	0V	0V	0V	0V	
Output 0	-10		-55	mA	5.0V	0V	0V	0V	0V	



**NOTES:**

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive logic definition:  
"UP" Level = "1". "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- Refer to AC Test Figures.
- Manufacturer reserves the right to make design and process changes and improvements.
- Inputs for "1" and "0" output voltage test is per TRUTH table with threshold levels of 0.8V for logical "0" and 2.0V for logical "1".
- This test guarantees operation free of input latch-up over the specified operating power supply voltage range.
- $V_{CC} = 5.25$  volts.

**SCHEMATIC DIAGRAM**

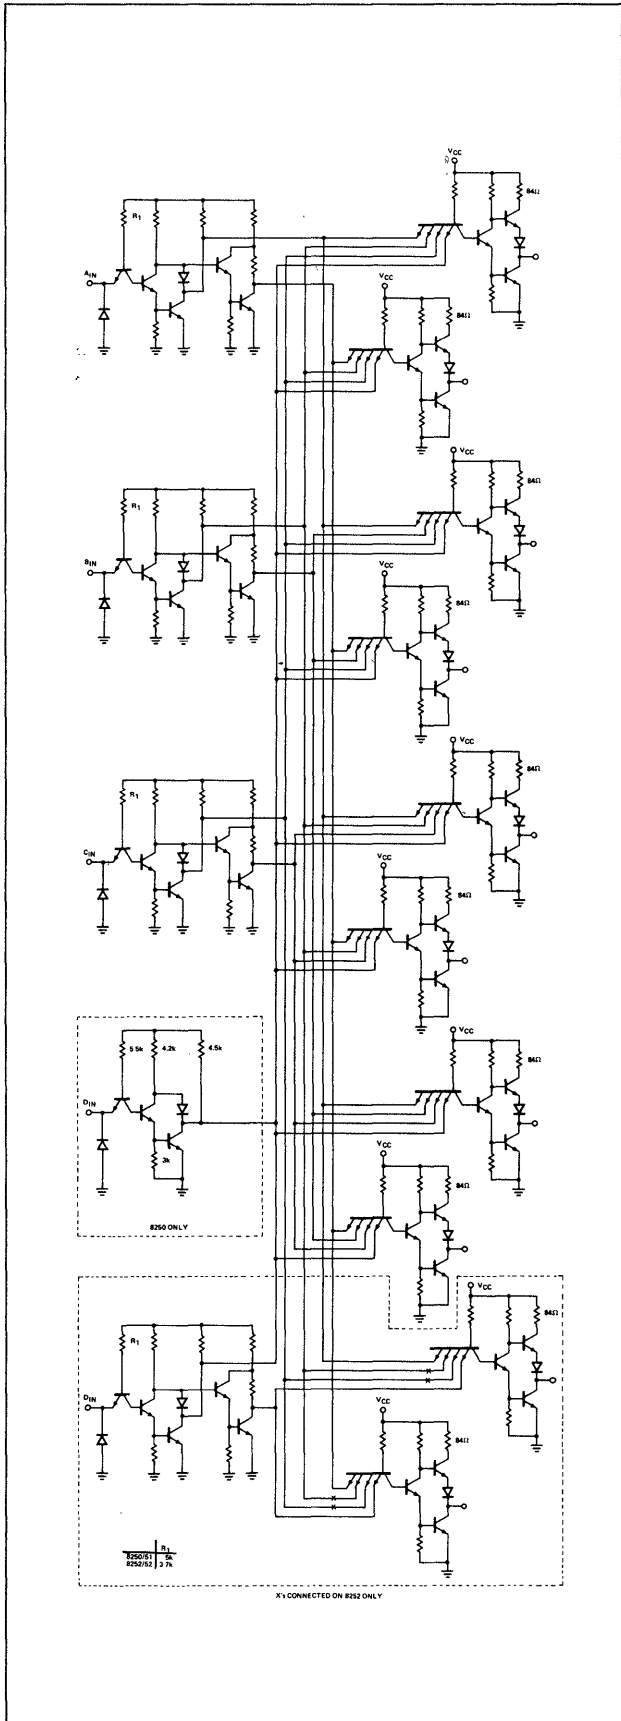


**AC TEST FIGURE AND WAVEFORMS**

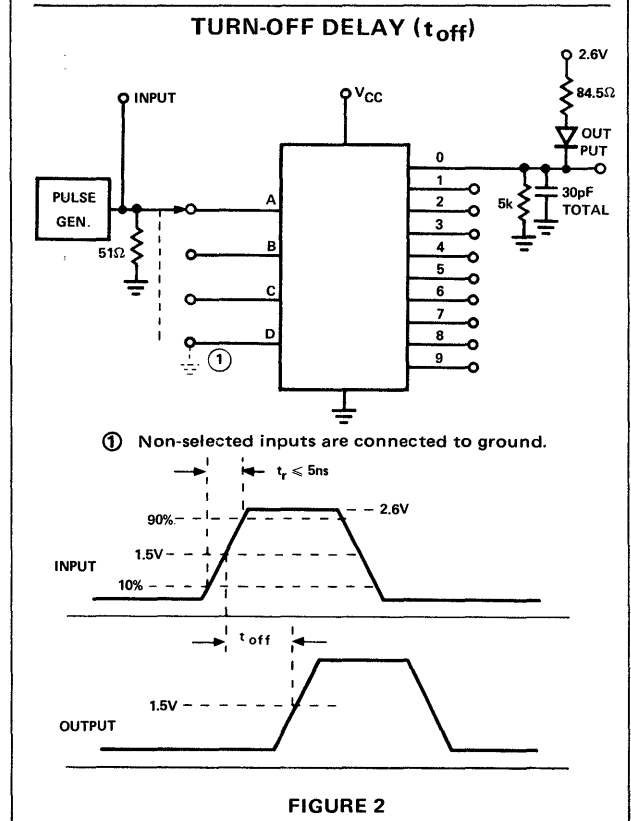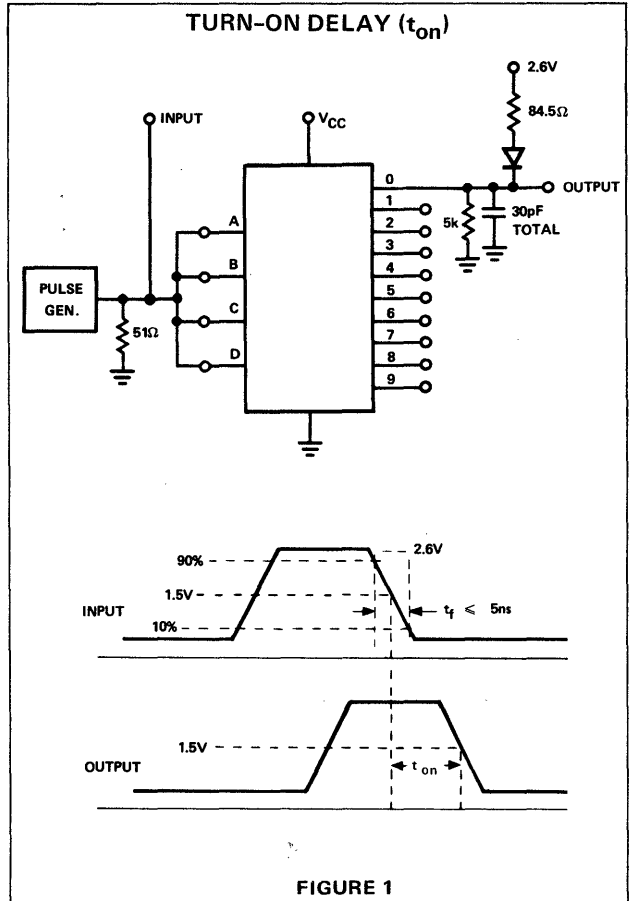


TYPICAL APPLICATIONS

ONE-OF-10 DECODER

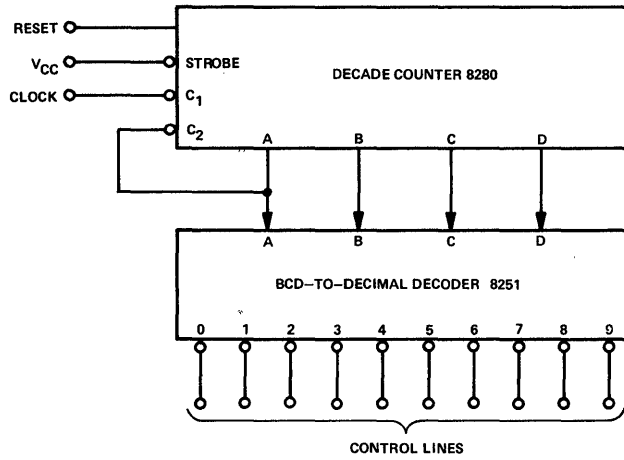

ONE-OF-64 DECODER

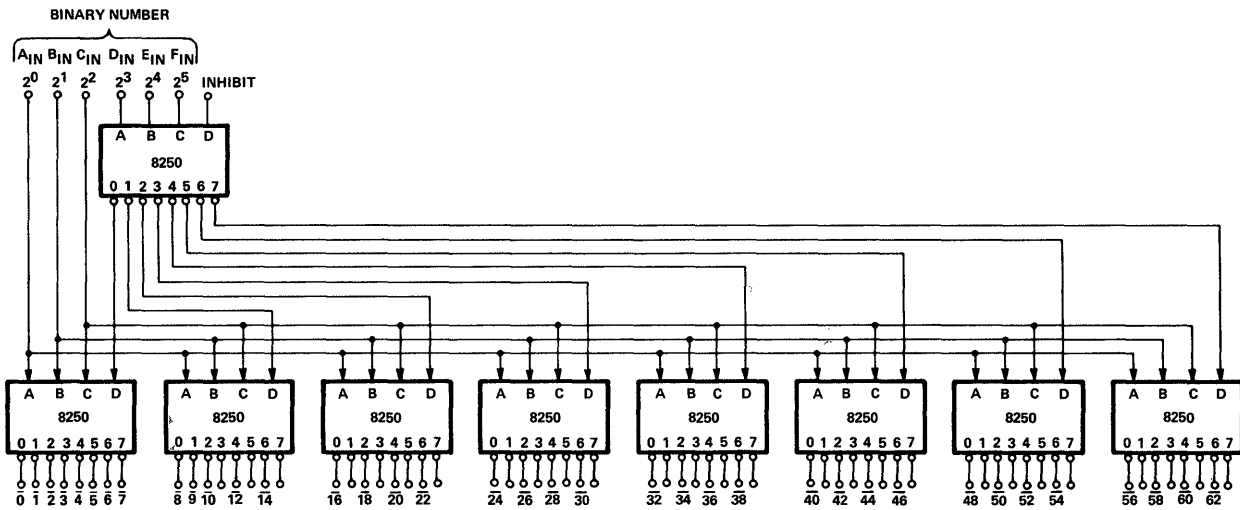

**DESCRIPTION**

The 8260 Arithmetic Logic Element is a monolithic gate array incorporating four full-adders structured in a look-ahead mode. The device may be used as four mutually independent exclusive NOR or AND gates by proper addressing of the inhibit lines.


As a four-bit adder, the 8260 permits high speed parallel addition of four sets of data and features both simultaneous addition on a character to character and on a bit to bit basis

within the package.

When true input variables are used, the true sum is formed at the  $f$  output. Inverted input variables produce the complement of the sum of the true variables.

The carry-outs available are: Internally Generated ( $C_G$ ); Propagated ( $C_P$ ); and Ripple ( $C_R$ ). This gives the 8260 complete flexibility when used in Ripple Carry or Anticipated Carry Adder Systems.

**LOGIC DIAGRAM**

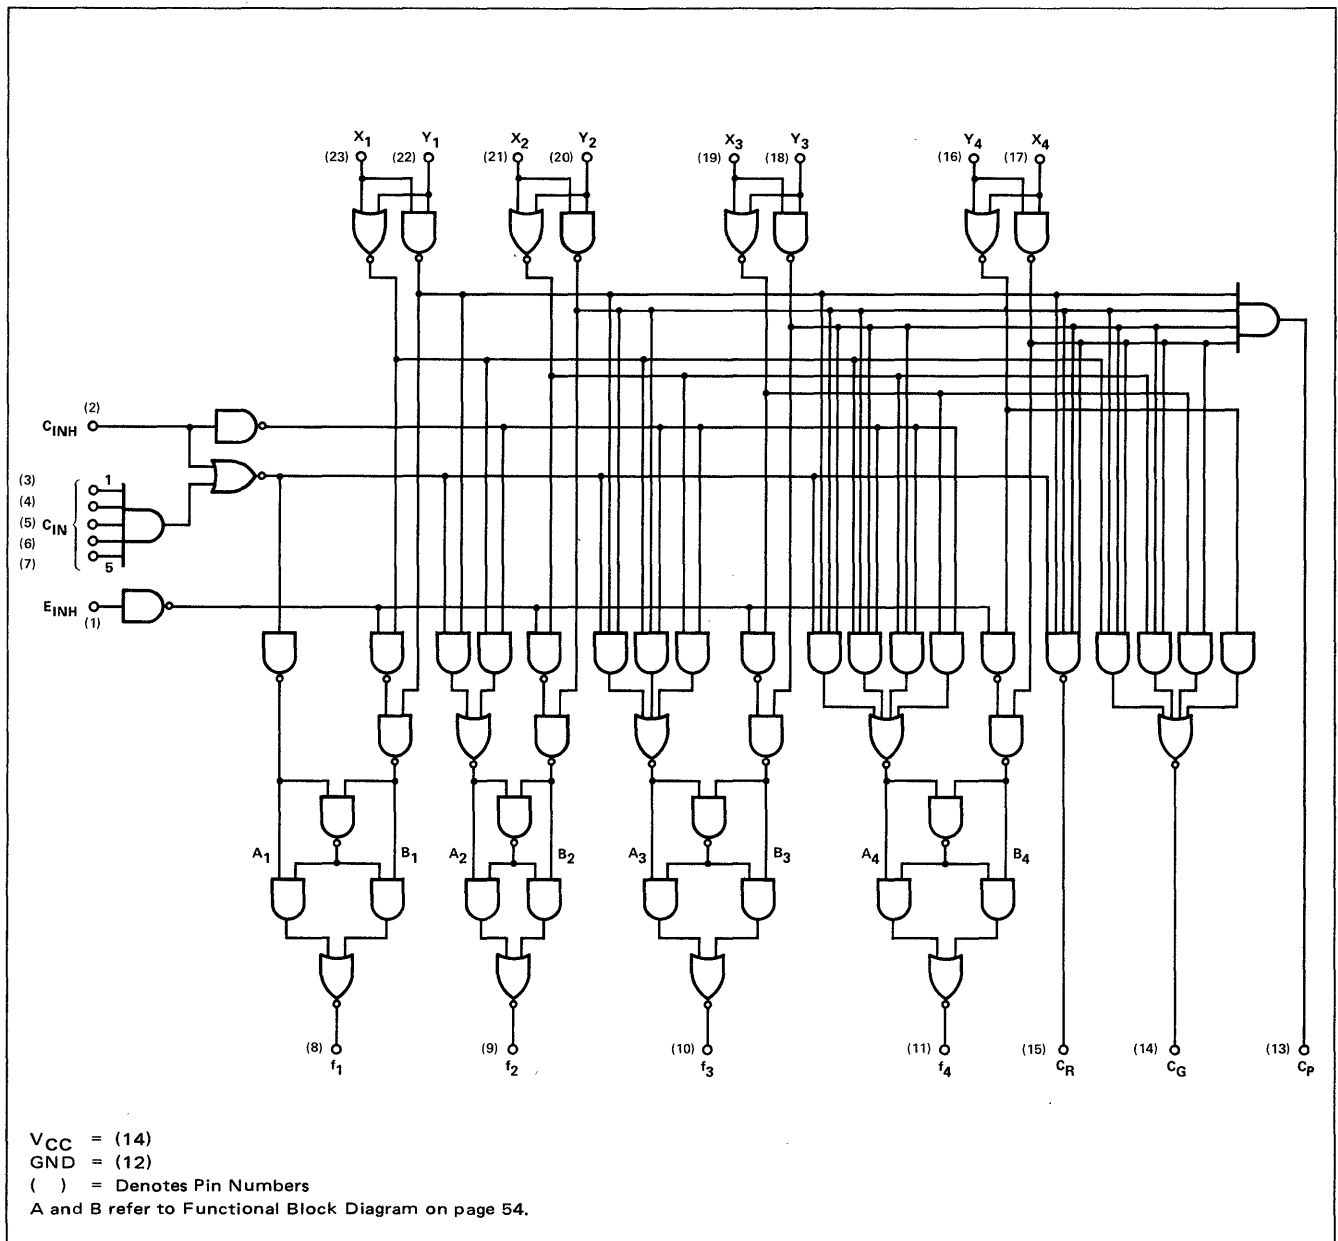



**SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8260**

**ELECTRICAL CHARACTERISTICS** (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS					OUTPUT TERMINALS (mA)				NOTES
					INPUT TERMINALS									
	MIN.	TYP.	MAX.	UNITS	X <sub>n</sub>	Y <sub>n</sub>	C <sub>IN</sub>	C <sub>INH</sub>	E <sub>INH</sub>	C <sub>p</sub>	C <sub>G</sub>	C <sub>R</sub>	f <sub>n</sub>	
"1" Output Voltage	2.6	3.5		V	2.0	2.0	2.0	2.0	2.0		-0.8	-0.8	-0.8	1
"0" Output Voltage														
f <sub>n</sub> , C <sub>G</sub> and C <sub>R</sub>			0.4	V	0.8	0.8	0.8	0.8	0.8		9.6	9.6	9.6	2
"0" Input Current														
X <sub>n</sub> and C <sub>INH</sub>	-0.1		-3.2	mA	0.4	5.25		0.4						
Y <sub>n</sub>	-0.1		-3.2	mA	5.25	0.4								
E <sub>INH</sub> & C <sub>IN1</sub> , through C <sub>IN5</sub>	-0.1		-1.6	mA			0.4		0.4					3
"1" Input Current														
X <sub>n</sub> and C <sub>INH</sub>			80	μA	4.5	0V		4.5						
Y <sub>n</sub>			80	μA	0V	4.5								
E <sub>INH</sub> & C <sub>IN1</sub> , through C <sub>IN5</sub>			40	μA			4.5		4.5					4
Input Latch Voltage														
X <sub>n</sub> and C <sub>INH</sub>	5.5			V	10mA	0V		10mA						
Y <sub>n</sub>	5.5			V	0V	10mA								
E <sub>INH</sub> & C <sub>IN1</sub> , through C <sub>IN5</sub>	5.5			V			10mA		10mA					4
Power/Current Consumption			400/ 76.2	600/ 114.1	mW/ mA									15


T<sub>A</sub> = 25° C and V<sub>CC</sub> = 5.0V

CHARACTERISTICS	LIMITS				TEST CONDITIONS					OUTPUT TERMINALS (mA)				NOTES
					INPUT TERMINALS									
	MIN.	TYP.	MAX.	UNITS	X <sub>n</sub>	Y <sub>n</sub>	C <sub>IN</sub>	C <sub>INH</sub>	E <sub>INH</sub>	C <sub>p</sub>	C <sub>G</sub>	C <sub>R</sub>	f <sub>n</sub>	
Propagation Delay														
X <sub>n</sub> , Y <sub>n</sub> and C <sub>IN</sub> to C <sub>R</sub>		14	20	ns										14
X <sub>n</sub> and Y <sub>n</sub> to C <sub>p</sub> and C <sub>G</sub>		14	20	ns										14
X <sub>n</sub> and Y <sub>n</sub> to f <sub>n</sub>		24	33	ns										14
C <sub>IN</sub> to f <sub>n</sub>		14	22	ns										14
Output Short Circuit Current														
f <sub>n</sub> , C <sub>G</sub> and C <sub>R</sub>	-20		-70	mA	5.0	5.0	5.0	5.0	5.0		0V	0V	0V	13
C <sub>p</sub>	-40		-90	mA	0V					0V				

**NOTES:**

- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V<sub>CC</sub>.
- When testing for separate C<sub>IN</sub> inputs, tie the remaining C<sub>IN</sub> inputs to V<sub>CC</sub>.
- When testing for separate C<sub>IN</sub> inputs, tie the remaining C<sub>IN</sub> inputs to ground.
- Keep unused inputs tied to V<sub>CC</sub> unless otherwise specified.
- All voltage and capacitance measurements are referenced to the ground terminal.
- All measurements are taken with ground pin tied to "0" volts.
- Positive current flow is defined as into the terminal referenced.
- Positive logic definition: "UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Manufacturer reserves the right to make design and process changes and improvements.
- Input latch voltage test guarantees operation free of input latch-up over the specified operating power supply voltage range.
- Ground one output at a time.
- Measure switching times at 1.5 volt level.
- V<sub>CC</sub> = 5.25V.

SCHEMATIC DIAGRAM

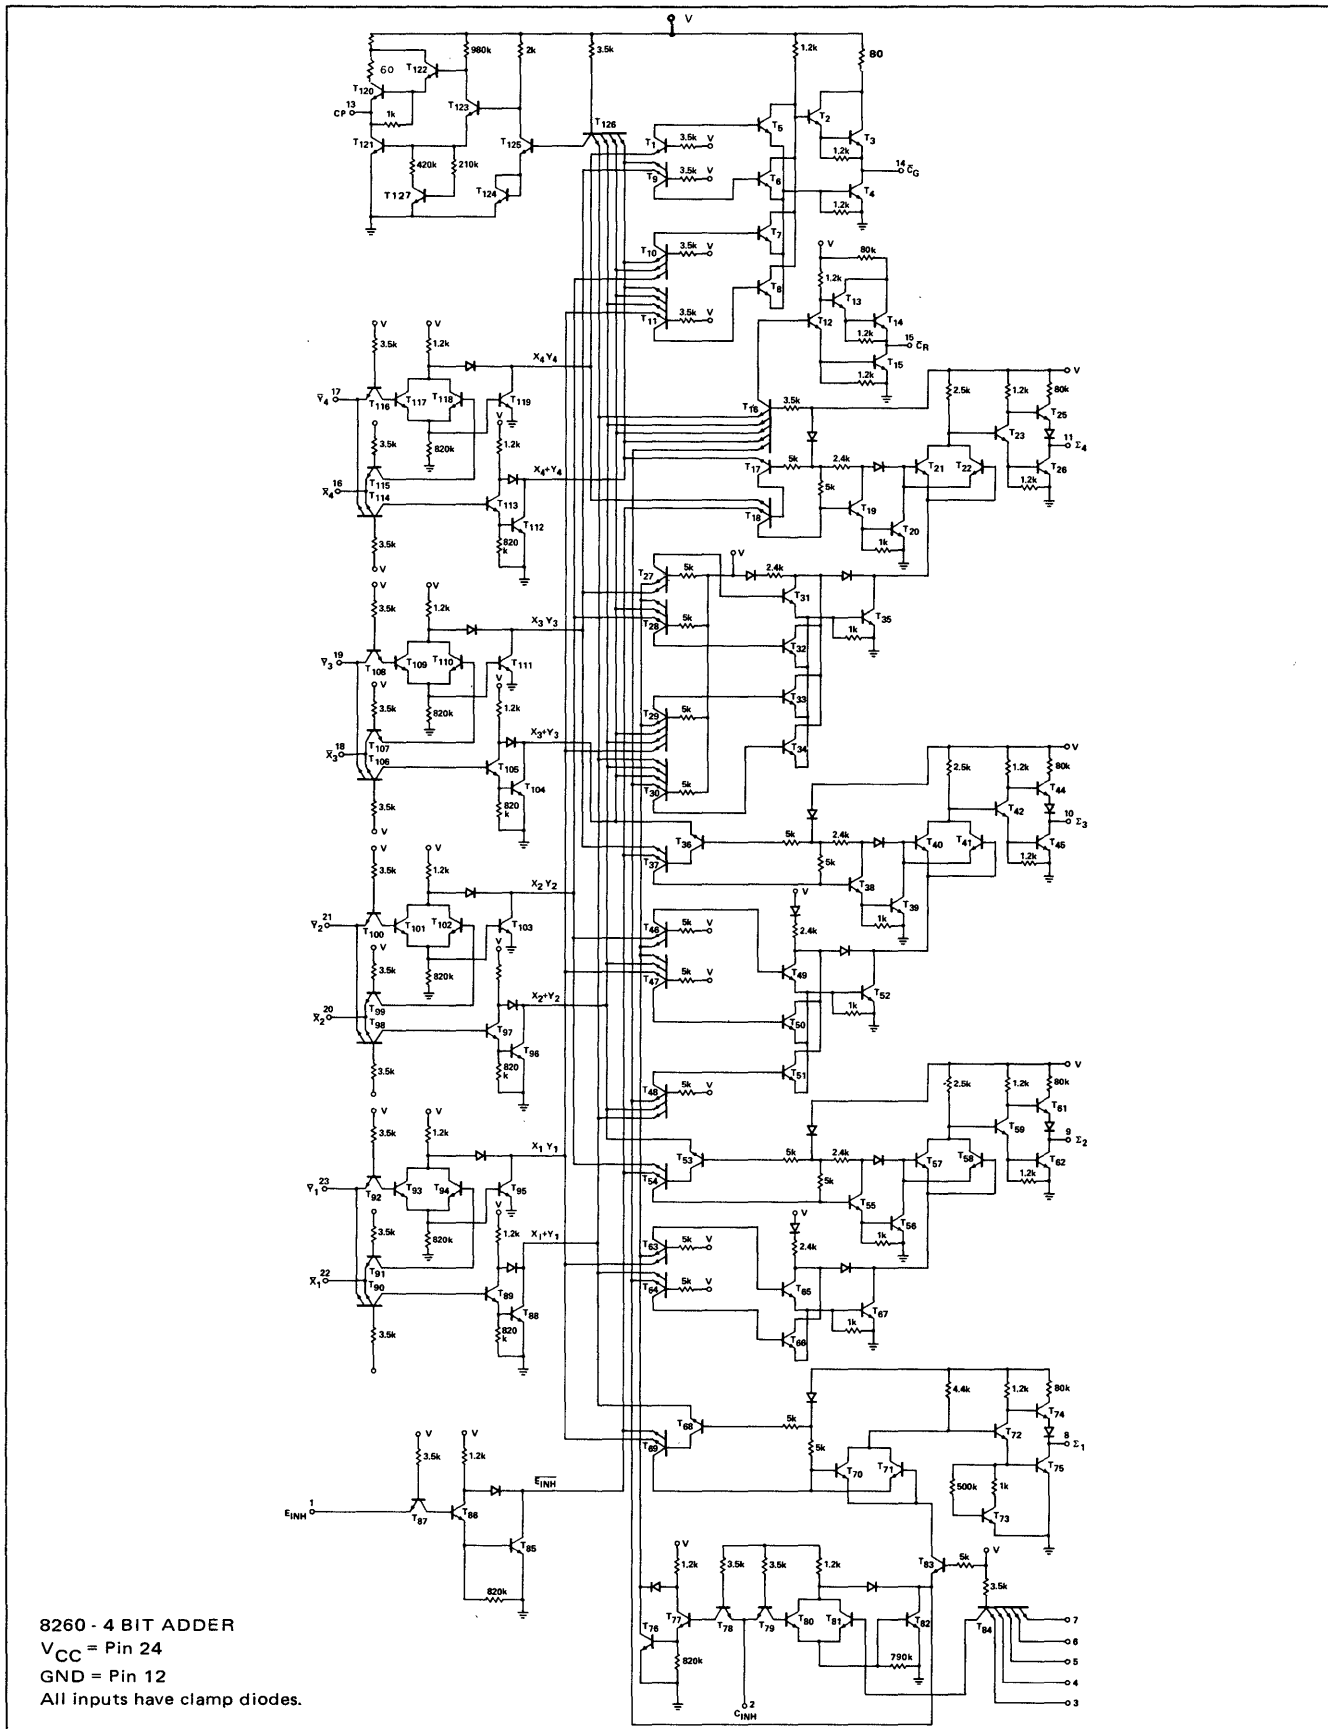


MODE OF OPERATION

INPUTS	Least Significant C <sub>IN</sub> Inputs to be *	CONTROLS		f	
		C <sub>INH</sub>	E <sub>INH</sub>		
X <sub>n</sub> ' Y <sub>n</sub> ↓	0	0	0	Σ <sub>n</sub>	Add
	0	0	1	--	Not Used
	0	1	0	X <sub>n</sub> Y <sub>n</sub> +X <sub>n</sub> Y <sub>n</sub>	Coincidence
	0	1	1	X <sub>n</sub> Y <sub>n</sub>	AND
X̄ <sub>n</sub> ' Ȳ <sub>n</sub> ↓	1	0	0	Σ̄ <sub>n</sub>	Add
	1	0	1	--	Not Used
	1	1	0	X̄ <sub>n</sub> Ȳ <sub>n</sub> +X <sub>n</sub> Y <sub>n</sub>	Coincidence
	1	1	1	X̄ <sub>n</sub> Ȳ <sub>n</sub>	AND

\*Least significant of a "Multiple Package" adder system.

FUNCTIONAL BLOCK DIAGRAM

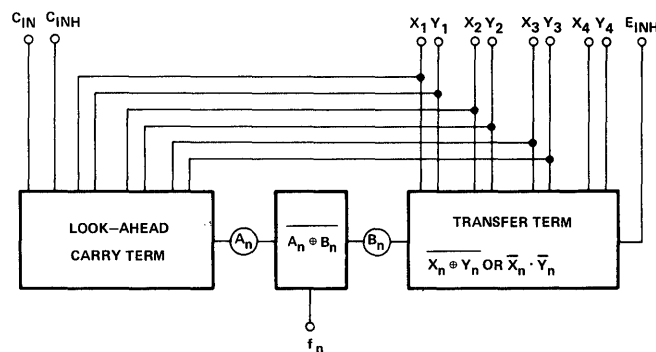

TRUTH TABLES

C<sub>INH</sub> = 1 → A<sub>n</sub> = 1  
 C<sub>INH</sub> = 0 → A<sub>n</sub> = 0


C <sub>IN</sub>	A <sub>1</sub>	A <sub>1</sub>	X <sub>1</sub>	Y <sub>1</sub>	A <sub>2</sub>	A <sub>2</sub>	X <sub>2</sub>	Y <sub>2</sub>	A <sub>3</sub>	A <sub>3</sub>	X <sub>3</sub>	Y <sub>3</sub>	A <sub>4</sub>	
0	0	0	0	0	0	0	0	0	0	0	0	0	0	
1	1	0	0	1	0	0	0	1	0	0	0	1	0	
		0	1	0	0	0	1	0	0	0	1	0	0	
		0	1	1	1	0	1	1	1	0	1	1	1	
		1	0	0	0	1	0	0	0	1	0	0	0	
		1	0	1	1	1	1	0	1	1	0	1	1	
		1	1	0	1	1	1	1	0	1	1	1	0	1
		1	1	1	1	1	1	1	1	1	1	1	1	1

A <sub>n</sub>	B <sub>n</sub>	f <sub>n</sub>
0	0	1
0	1	0
1	0	0
1	1	1






  

E <sub>INH</sub>	X <sub>n</sub>	Y <sub>n</sub>	B <sub>n</sub>
0	0	0	1
0	0	1	0
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	0
1	1	0	0
1	1	1	1

AC TEST FIGURE AND WAVEFORMS

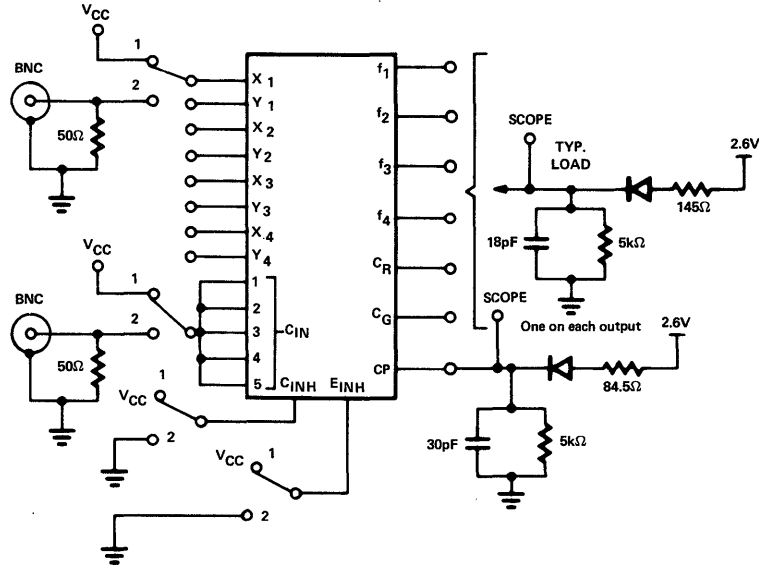

NOTE: Scope terminals to be  $\leq \frac{1}{2}$ " from Package Pins.




STEP NO.	DELAY FROM-TO	SWITCH POSITION											WAVEFORM TYPE		
		DRIVEN INPUTS	OTHER INPUTS												
			X <sub>1</sub>	Y <sub>1</sub>	X <sub>2</sub>	Y <sub>2</sub>	X <sub>3</sub>	Y <sub>3</sub>	X <sub>4</sub>	Y <sub>4</sub>	C <sub>IN</sub>	E <sub>INH</sub>		C <sub>INH</sub>	
1	X <sub>n</sub> to C <sub>R</sub> or X <sub>n</sub> to C <sub>p</sub>	2	2	1	2	1	2	1	2	1	2	2	2	2	A, B C, D
2	Y <sub>n</sub> to C <sub>R</sub> or Y <sub>n</sub> to C <sub>p</sub>	2	1	2	1	2	1	2	1	2	2	2	2	2	A, B C, D
3	X <sub>n</sub> , Y <sub>n</sub> to f <sub>n</sub>	2	1	1	1	1	1	1	1	1	1	1	1	1	A, B
4	C <sub>IN</sub> to C <sub>R</sub>	2	2	2	2	2	2	2	2	2	2	2	2	2	A, B
5	C <sub>IN</sub> to f <sub>n</sub>	2	1	2	1	2	1	2	1	2	2	2	2	2	C, D

**TYPICAL APPLICATIONS**

The 8260 contains the control logic necessary to allow operation as a general purpose arithmetic logic device. Below, the internal carries are inhibited to effect Exclusive-NOR or coincidence operation. The 8260 may also be operated as four independent


AND gates to implement masking and similar requirements of micro-programming.

The Ripple Adder System is the simplest but also the slowest application of the 8260. The typical total addition time (input to sum output for 12-bit ripple adder is 42ns).

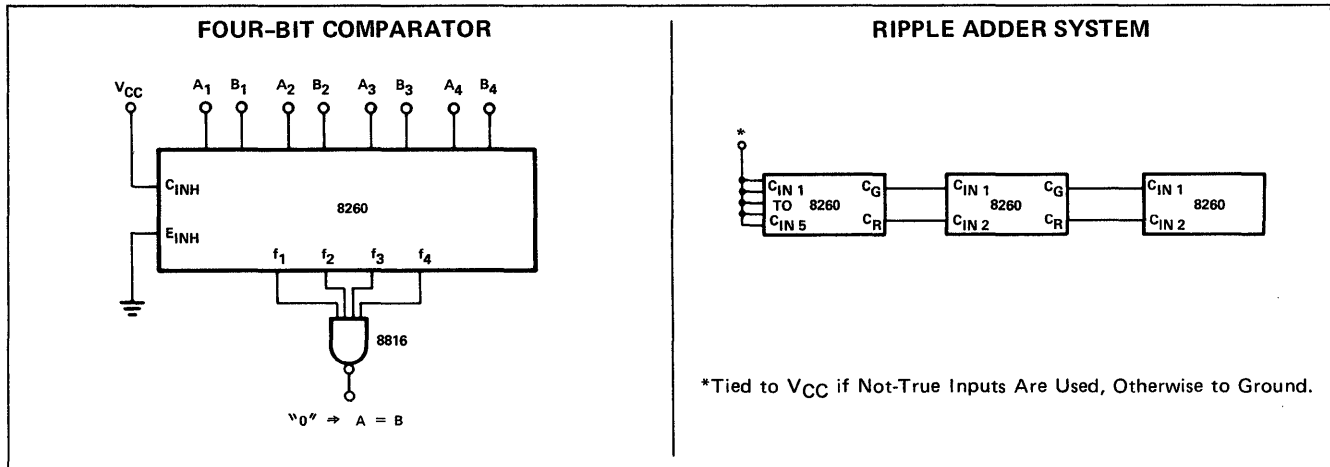

The Fast Adder System provides complete carry look-ahead addition for words to 24 bits in length and is the fastest application of

the 8260 units. The typical total addition time for a 24 bit fast adder is 42ns.

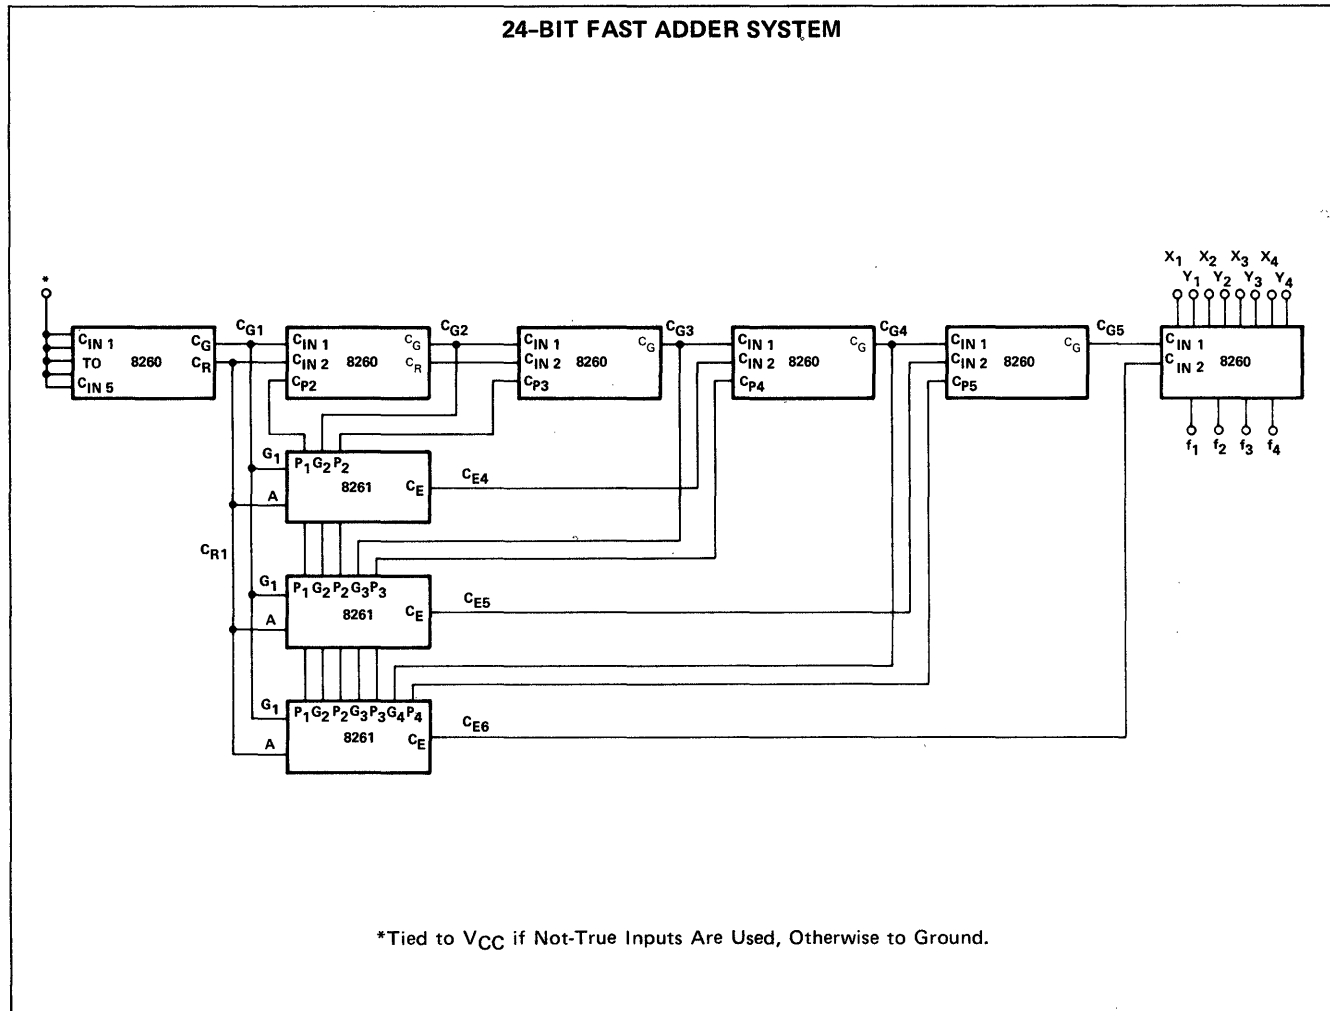

# FAST CARRY EXTENDER


# 8261

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION

The 8261 Fast Carry Extender is a monolithic gate array designed specifically to be used in conjunction with the 8260 Arithmetic Logic element. A 8260/8261 combination facilitates the implementation of the look-ahead technique in adder systems, thus considerably improving propagation times. The circuit structure of this array is of the familiar TTL type.

### LOGIC DIAGRAM

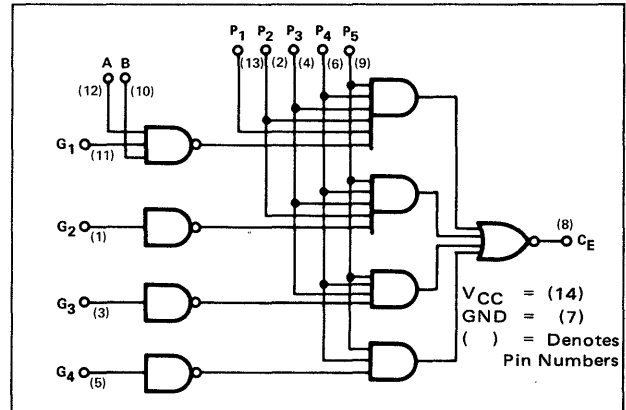

### ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS				OUTPUTS	NOTES
					DRIVEN INPUTS		OTHER INPUTS			
	MIN.	TYP.	MAX.	UNITS	G,A,B	P	G,A,B	P		
"1" Output Voltage	2.6	3.5		V	2.0V				-800 $\mu$ A	6
"0" Output Voltage			0.4	V	0.8V		4.75V	4.75V	9.6mA	7
"1" Input Current										
G Input			40	$\mu$ A	4.5V		A = 0V			
A and B Inputs			40	$\mu$ A	4.5V		G <sub>1</sub> = 0V			
P <sub>1</sub> Input			40	$\mu$ A		4.5V		0V		
P <sub>2</sub> Input			80	$\mu$ A		4.5V		0V		
P <sub>3</sub> Input			120	$\mu$ A		4.5V		0V		
P <sub>4</sub> and P <sub>5</sub> Inputs			160	$\mu$ A		4.5V		0V		
"0" Input Current										
G, A and B			-1.6	mA	0.4V			5.25V		
P <sub>1</sub> Input			-1.6	mA		0.4V	0V	5.25V		
P <sub>2</sub> Input			-3.2	mA		0.4V	0V	5.25V		
P <sub>3</sub> Input			-4.8	mA		0.4V	0V	5.25V		
P <sub>4</sub> and P <sub>5</sub> Inputs			-6.4	mA		0.4V	0V	5.25V		
Power/Current Consumption		95/18.1	140/26.6	mW/mA			5.25V	0V		12
Input Latch Voltage	5.5			V	10mA	10mA	0V	0V		9

$T_A = 25^\circ \text{C}$  and  $V_{CC} = 5.0\text{V}$


CHARACTERISTICS	LIMITS				TEST CONDITIONS				OUTPUTS	NOTES
					DRIVEN INPUTS		OTHER INPUTS			
	MIN.	TYP.	MAX.	UNITS	G,A,B	P	G,A,B	P		
Turn-on Delay										
G to C <sub>E</sub>		12	18	ns						8
P to C <sub>E</sub>		9	14	ns						8
Turn-off Delay										
G to C <sub>E</sub>		11	16	ns						8
P to C <sub>E</sub>		8	12	ns						8
Output Short Circuit Current	-20		-70	mA	5.0V	0V			0V	

# SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8261


## NOTES:

1. All voltage and current measurements are referenced to the ground terminal. Input terminals not specifically referenced are tied to  $V_{CC}$ .
2. All measurements are taken with ground pin tied to zero volts.
3. Positive current flow is defined as into the terminal referenced.
4. Positive logic definition: "UP" Level = "1", "DOWN" Level = "0".
5. Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
6. Output source current is supplied through a resistor to ground.
7. Output sink current is supplied through a resistor to  $V_{CC}$ .
8. Refer to AC Test Figure.
9. This test guarantees operation free of input latch-up over the specified operating power supply voltage range.
10. Manufacturer reserves the right to make design and process changes and improvements.
11. Input "0" thresholds for  $P_1$  through  $P_5$  inputs are guaranteed to be 0.7 volts.
12.  $V_{CC} = 5.25V$ .






## SCHEMATIC DIAGRAM

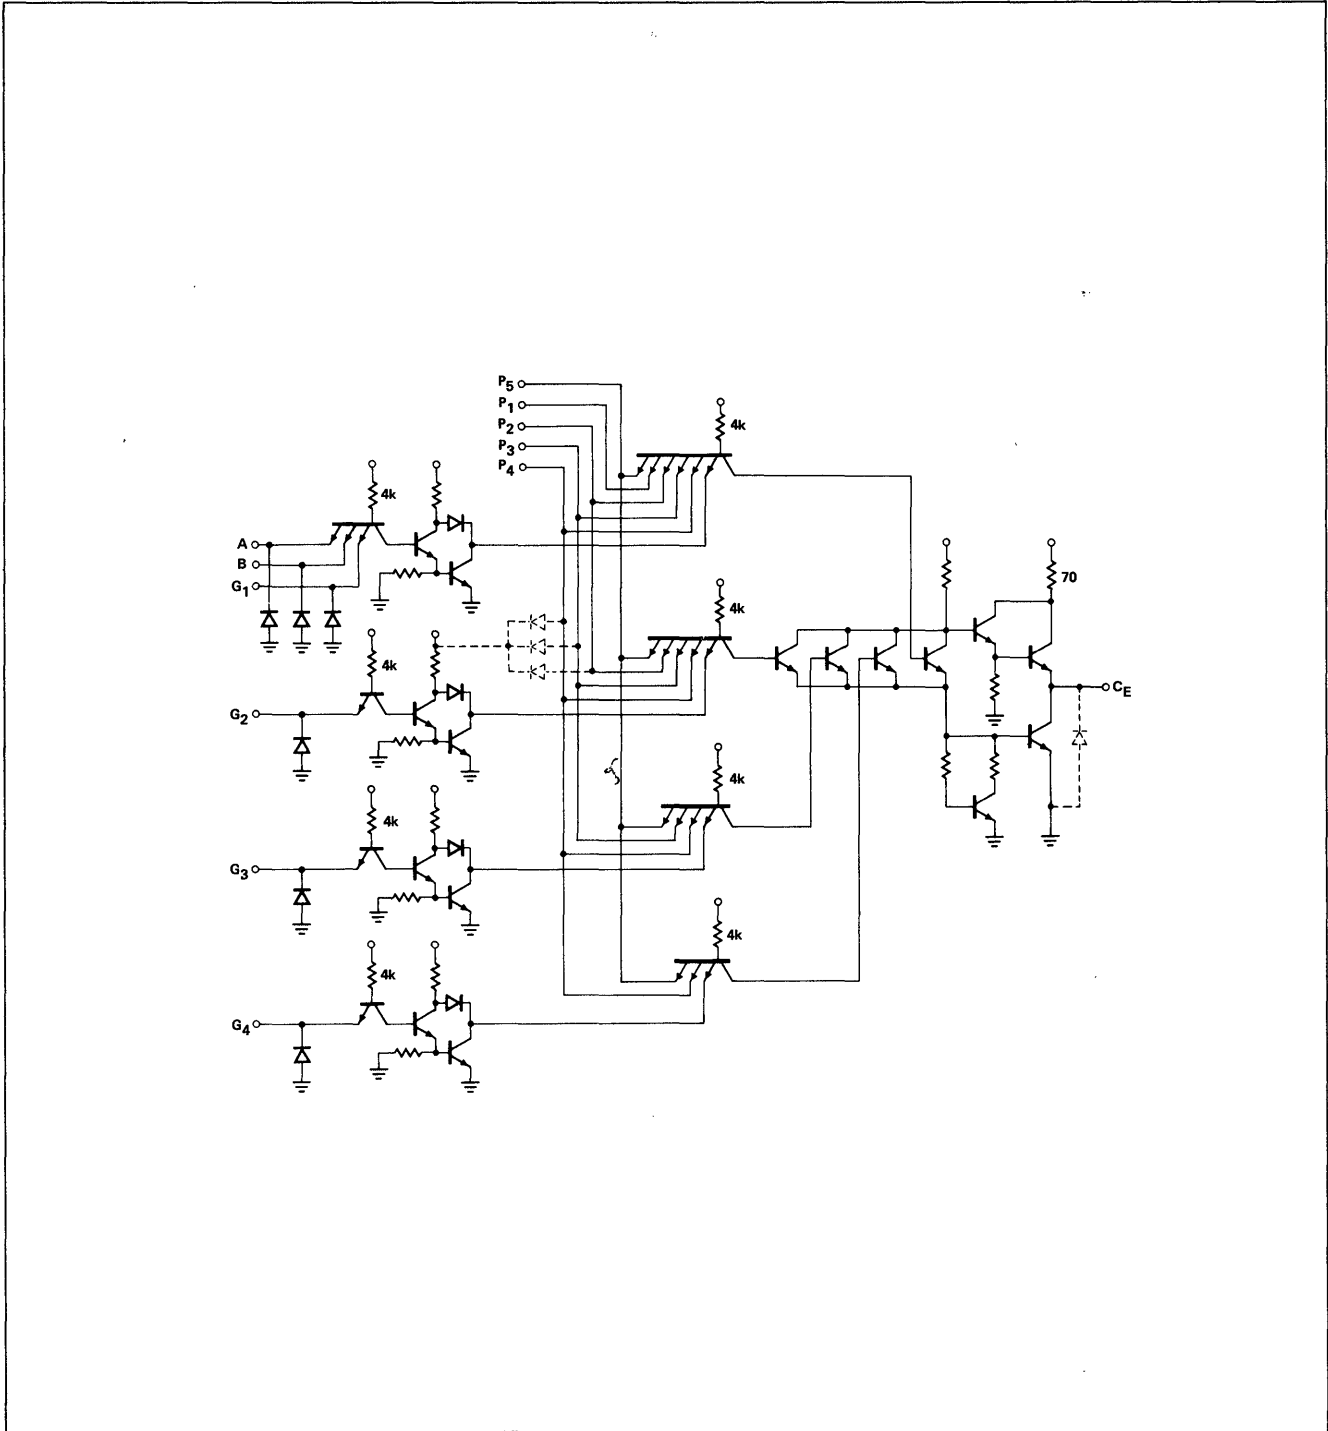

AC TEST FIGURE AND WAVEFORMS

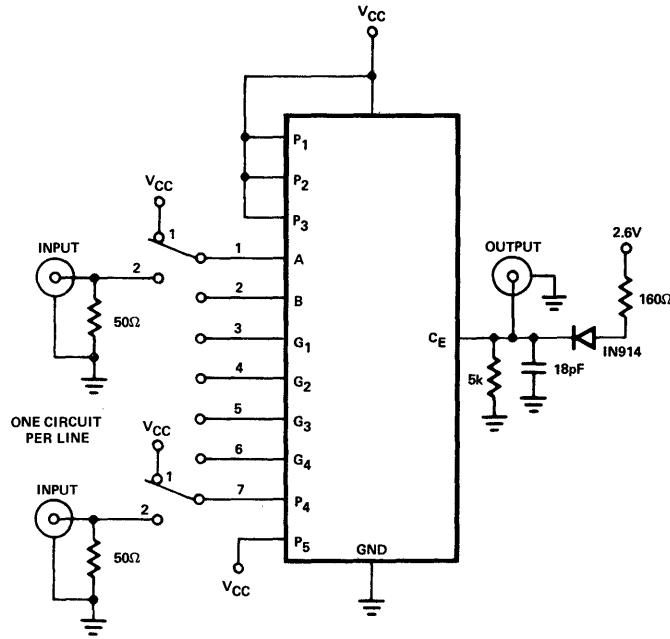

SWITCH NO. PIN DES.	SWITCH POSITION							WAVEFORM TYPE
	1	2	3	4	5	6	7	
A	2	1	1	1	1	1	1	A and B
B	1	2	1	1	1	1	1	
G <sub>1</sub>	1	1	2	1	1	1	1	
G <sub>2</sub>	1	1	1	2	1	1	1	
G <sub>3</sub>	1	1	1	1	2	1	1	
G <sub>4</sub>	1	1	1	1	1	2	1	
P <sub>4</sub>								C and D
STEP A	2	1	1	1	1	1	2	
STEP B	1	2	1	1	1	1	2	
STEP C	1	1	2	1	1	1	2	
STEP D	1	1	1	2	1	1	2	
STEP E	1	1	1	1	2	1	2	
STEP F	1	1	1	1	1	2	2	

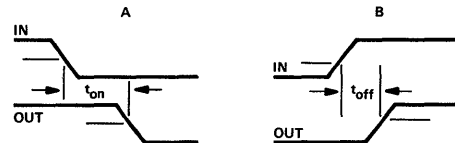


NOTES:

1. Scope terminals to be  $\leq 1-1/2''$  from package pins.
2. Position 1 on all switches provides a logical "1".  
Position 2 on all switches provides a logical "0" when input signal is not present.
3. All measurements are made at 1.5 volts level.



TYPICAL APPLICATION

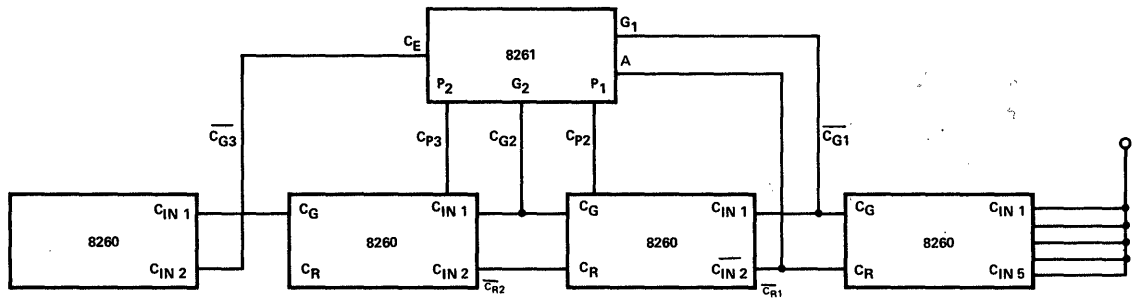

16 BIT,  $T_A = 42\text{ns}$ , typical Fast Adder System (5 packages)  
 \*Tied to  $V_{CC}$  if not-true inputs are used, otherwise to ground. Unused 8261 pins should be tied to  $V_{CC}$ .

# 9-BIT PARITY GENERATOR AND CHECKER

# 8262

DIGITAL 8000 SERIES TTL/MSI


## DESCRIPTION

The 8262 9-Input Parity Generator/Parity Checker is a versatile MSI device commonly used to detect errors in data transmission or in data retrieval. Two outputs (EVEN and ODD) are provided for versatility. An INHIBIT input is provided to disable both outputs of the 8262. (A logic 1 on the INHIBIT input forces both outputs to a logic 0).

When used as a Parity Generator, the 8262 supplies a parity bit which is transmitted together with the data word.

At the receiving end, the 8262 acts as a Parity Checker and indicates that data has been received correctly or that an error has been detected.

## LOGIC DIAGRAM

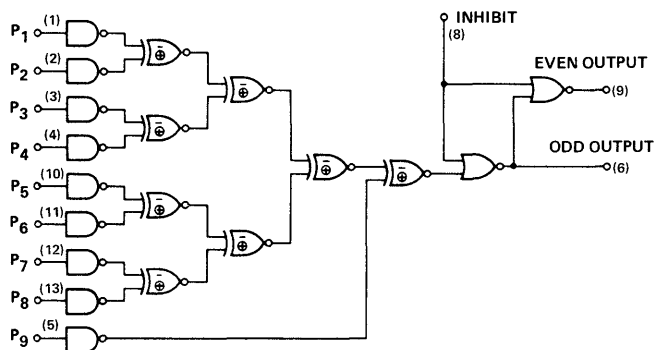

V<sub>CC</sub> = (14)  
GND = (7)  
( ) = Denotes Pin Numbers

### LOGIC EQUATIONS:

$$\text{Odd} = P_1 \oplus P_2 \oplus P_3 \oplus P_4 \oplus P_5 \oplus P_6 \oplus P_7 \oplus P_8 \oplus P_9$$

$$\text{Even} = \overline{P_1 \oplus P_2 \oplus P_3 \oplus P_4 \oplus P_5 \oplus P_6 \oplus P_7 \oplus P_8 \oplus P_9}$$

**SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8262**

**ELECTRICAL CHARACTERISTICS** (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS	INHIBIT	OUTPUTS UNDER TEST	NOTES
	MIN.	TYP.	MAX.	UNITS	DATA INPUT UNDER TEST			
"1" Output Voltage								
Even	2.6	3.5		V	0V	.8V	-800μA	6
Odd	2.6	3.5		V	2.0V	.8V	-800μA	6
"0" Output Voltage								
Even			0.40	V	2.0V	.8V	16mA	7
Odd			0.40	V	0V	.8V	16mA	7
"0" Input Current								
Data Inputs	-0.1		-1.6	mA	0.4V			
Inhibit	-0.1		-3.2	mA		0.4V		
"1" Input Current								
Data Inputs			80	μA	4.5V			
Inhibit			160	μA		4.5V		
Input Latch Voltage								
Data Inputs	5.5			V	10mA			10
Inhibit	5.5			V		10mA		10
Power/Current Consumption			370/70	mW/mA				11
Output Short Circuit Current								
Even	-20		-70	mA	0V	0V	0V	
Odd	-20		-70	mA	4.5V	0V	0V	


$T_A = 25^\circ\text{C}$  and  $V_{CC} = 5.0\text{V}$

CHARACTERISTICS	LIMITS				TEST CONDITIONS	INHIBIT	OUTPUTS UNDER TEST	NOTES
	MIN.	TYP.	MAX.	UNITS	UNDER TEST			
Turn-On Times								
$P_1 - P_8$ to Even		35	50	ns	Pulse			8
$P_1 - P_8$ to Odd		30	45	ns	Pulse			8
$P_9$ to Even		20	35	ns	Pulse			8
$P_9$ to Odd		15	30	ns	Pulse			8
Inhibit to Even		8	15	ns		Pulse		8
Inhibit to Odd		8	15	ns		Pulse		8
Turn-Off Times								
$P_1 - P_8$ to Even		38	55	ns	Pulse			8
$P_1 - P_8$ to Odd		32	45	ns	Pulse			8
$P_9$ to Even		23	40	ns	Pulse			8
$P_9$ to Odd		20	35	ns	Pulse			8
Inhibit to Even		10	18	ns		Pulse		8
Inhibit to Odd		10	18	ns		Pulse		8


**NOTES:**

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive logic: "UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- Refer to AC Test Figure.
- Manufacturer reserves the right to make design and process changes and improvements.
- This test guarantees operation free of input latch-up over the specified operating supply voltage range.
- $V_{CC} = 5.25$  volts.

SCHEMATIC DIAGRAM

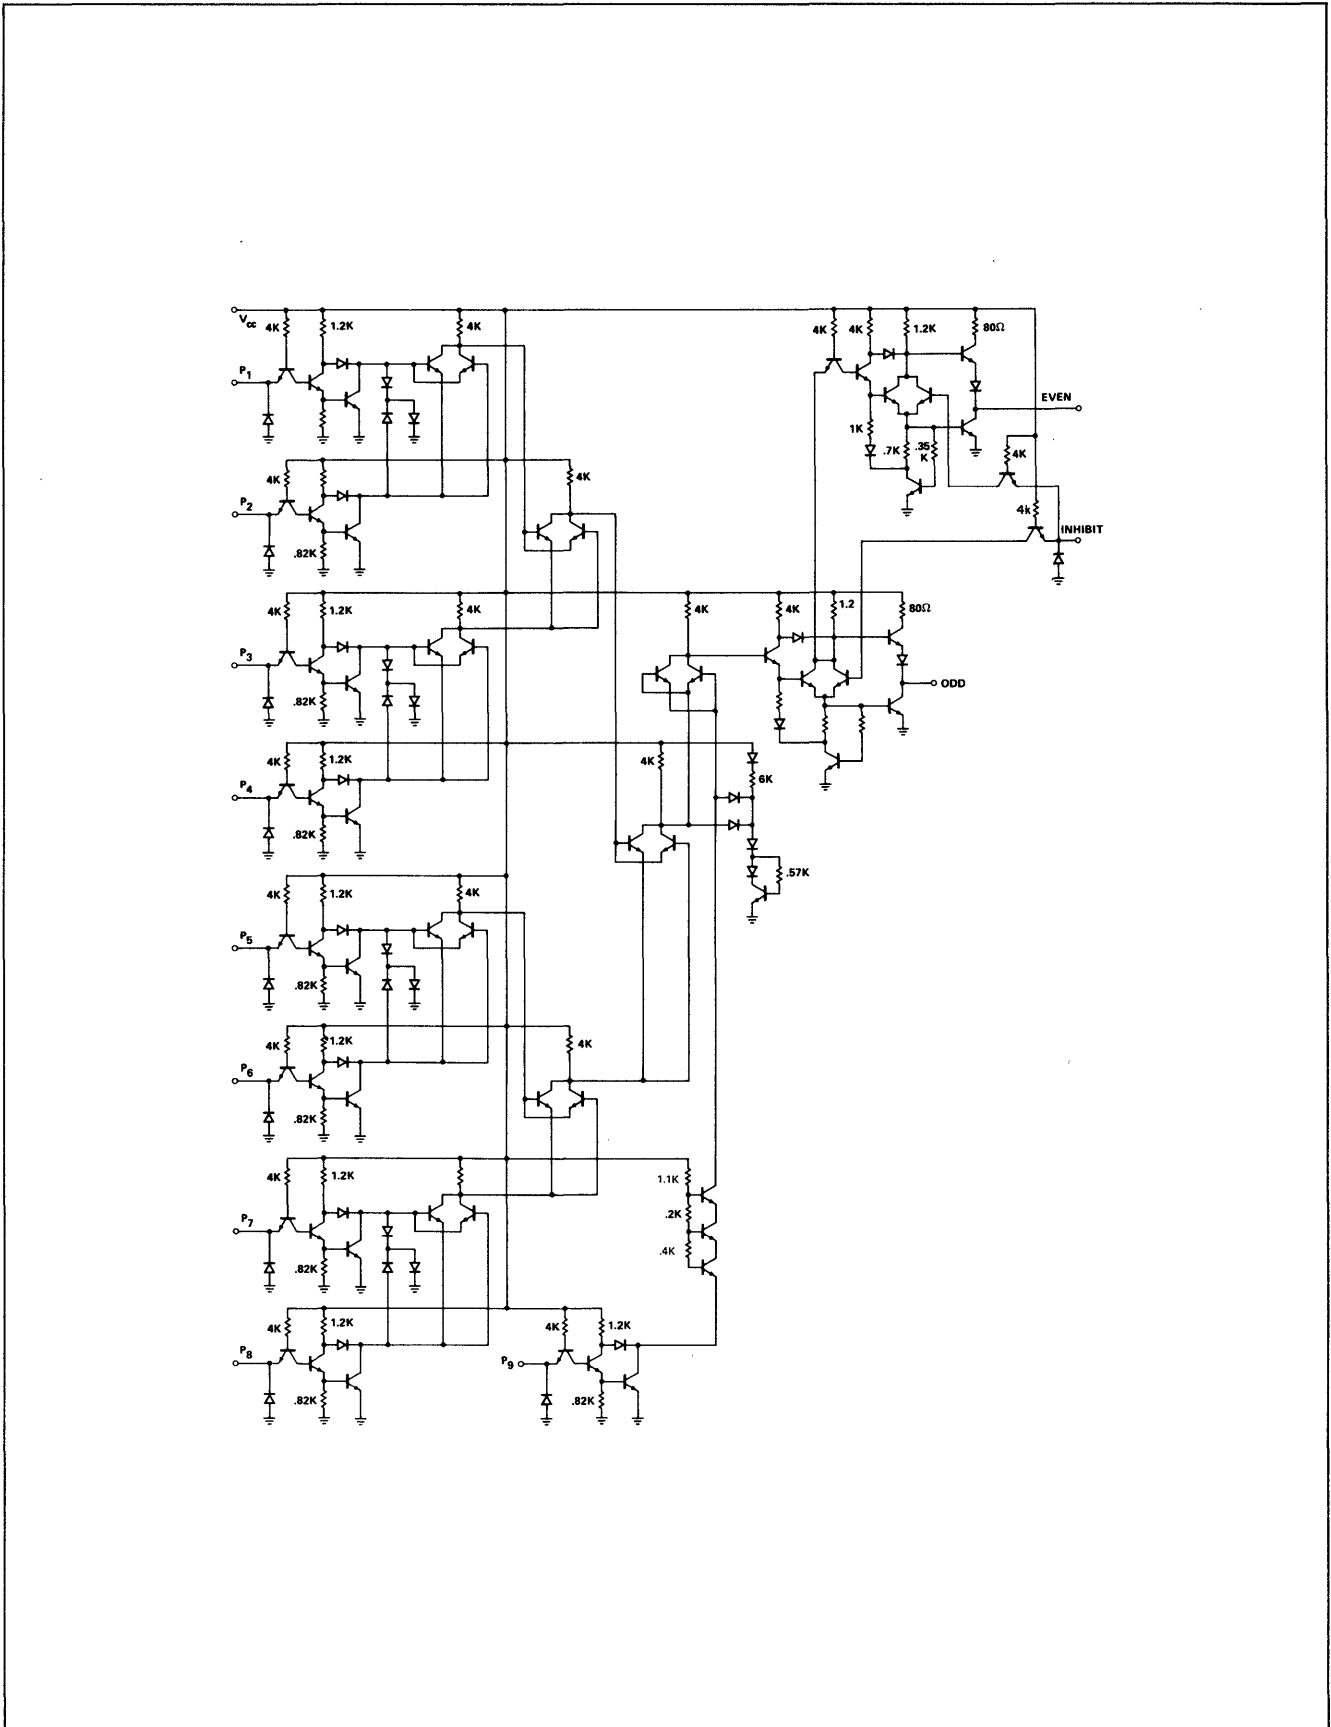


AC TEST FIGURE AND WAVEFORMS

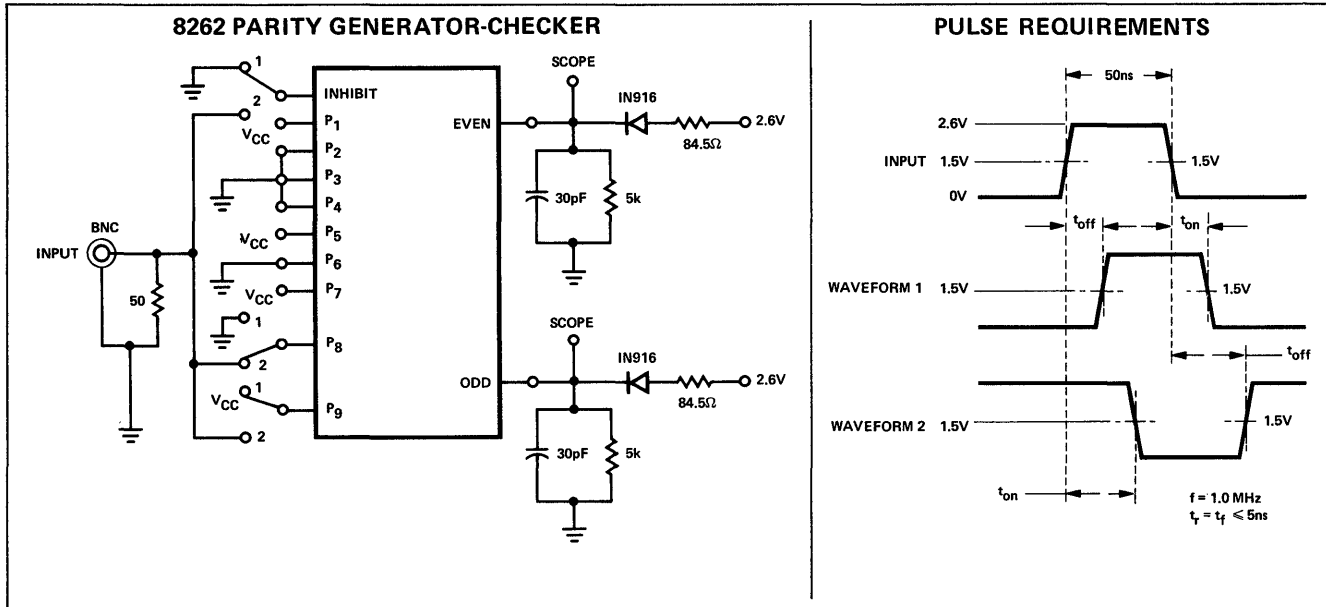

TRUTH TABLE

MEASURE DELAY FROM	SWITCH POSITION			WAVEFORM	
	INH	P <sub>8</sub>	P <sub>9</sub>	EVEN	ODD
P <sub>8</sub> to ODD	1	2	1		1
P <sub>9</sub> to ODD	1	1	2		2
P <sub>8</sub> to EVEN	1	2	1	2	
P <sub>9</sub> to EVEN	1	1	2	1	
INH to EVEN	2	1	1	2	

TYPICAL APPLICATIONS

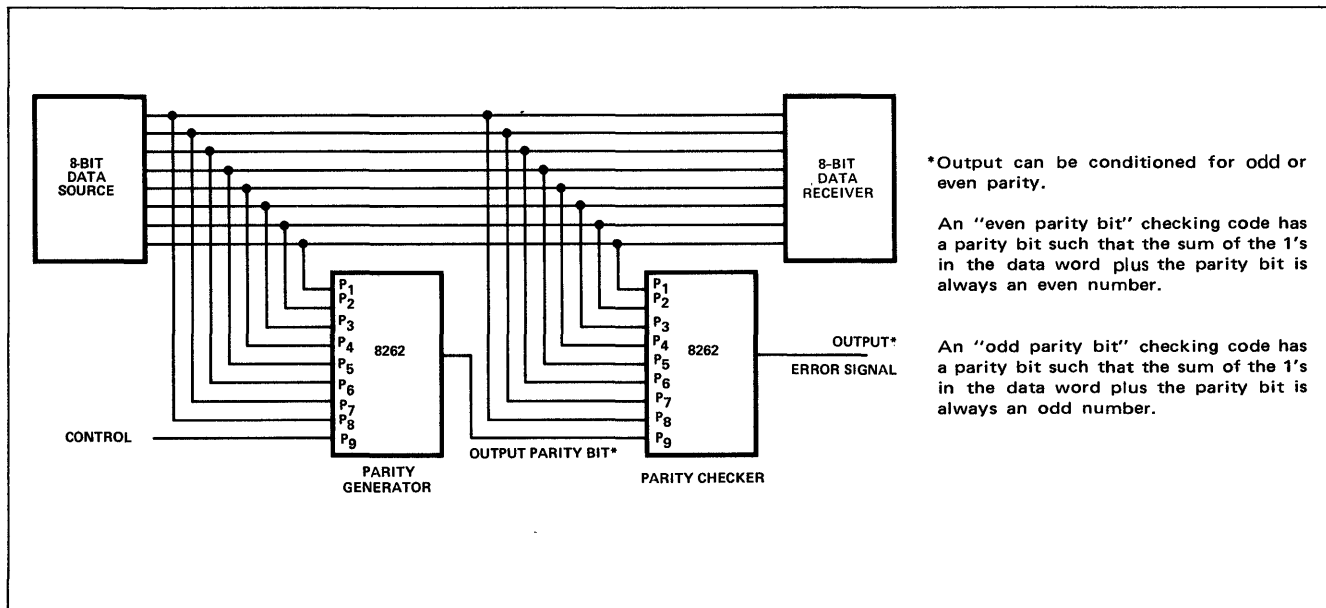

# 3-INPUT, 4-BIT DIGITAL

# 8263 8264

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION

The 8263/8264 3-Input, 4-Bit Multiplexer is a gating array whose function is analogous to that of a 4-pole, 3-position switch. Four bits of digital data are selected from one of three inputs. A 2-bit channel-selection code determines which input is to be active.

The Data Complement input controls the conditional complement circuit at the Multiplexer output to effect either inverting or non-inverting data flow. The 8263 employs active output structures to effect minimum delays: the 8264 utilizes bare collector outputs for expansion of input terms.

The 8264 may be expanded by connecting its outputs to the outputs of another 8264. Provision is made for use of a 3-bit code to determine which Multiplexer is selected; thus,


eight Multiplexers may be commoned to effect a 4-pole, 24-position switch.

### TRUTH TABLE

Data Input	Channel Select	Data Complement	Output Enable (8264)	Data Outputs
$A_n B_n C_n$	$S_0 S_1$			
$A_n \times \times$	1 1	0	1	$A_n$
$\times B_n \times$	0 1	0	1	$B_n$
$\times \times C_n$	1 0	0	1	$C_n$
$\times \times \times$	0 0	0	1	0
$A_n \times \times$	1 1	1	1	$\bar{A}_n$
$\times B_n \times$	0 1	1	1	$\bar{B}_n$
$\times \times C_n$	1 0	1	1	$\bar{C}_n$
$\times \times \times$	0 0	1	1	1
$\times \times \times$	$\times \times$	$\times$	0	1

X = Either State

### LOGIC DIAGRAMS

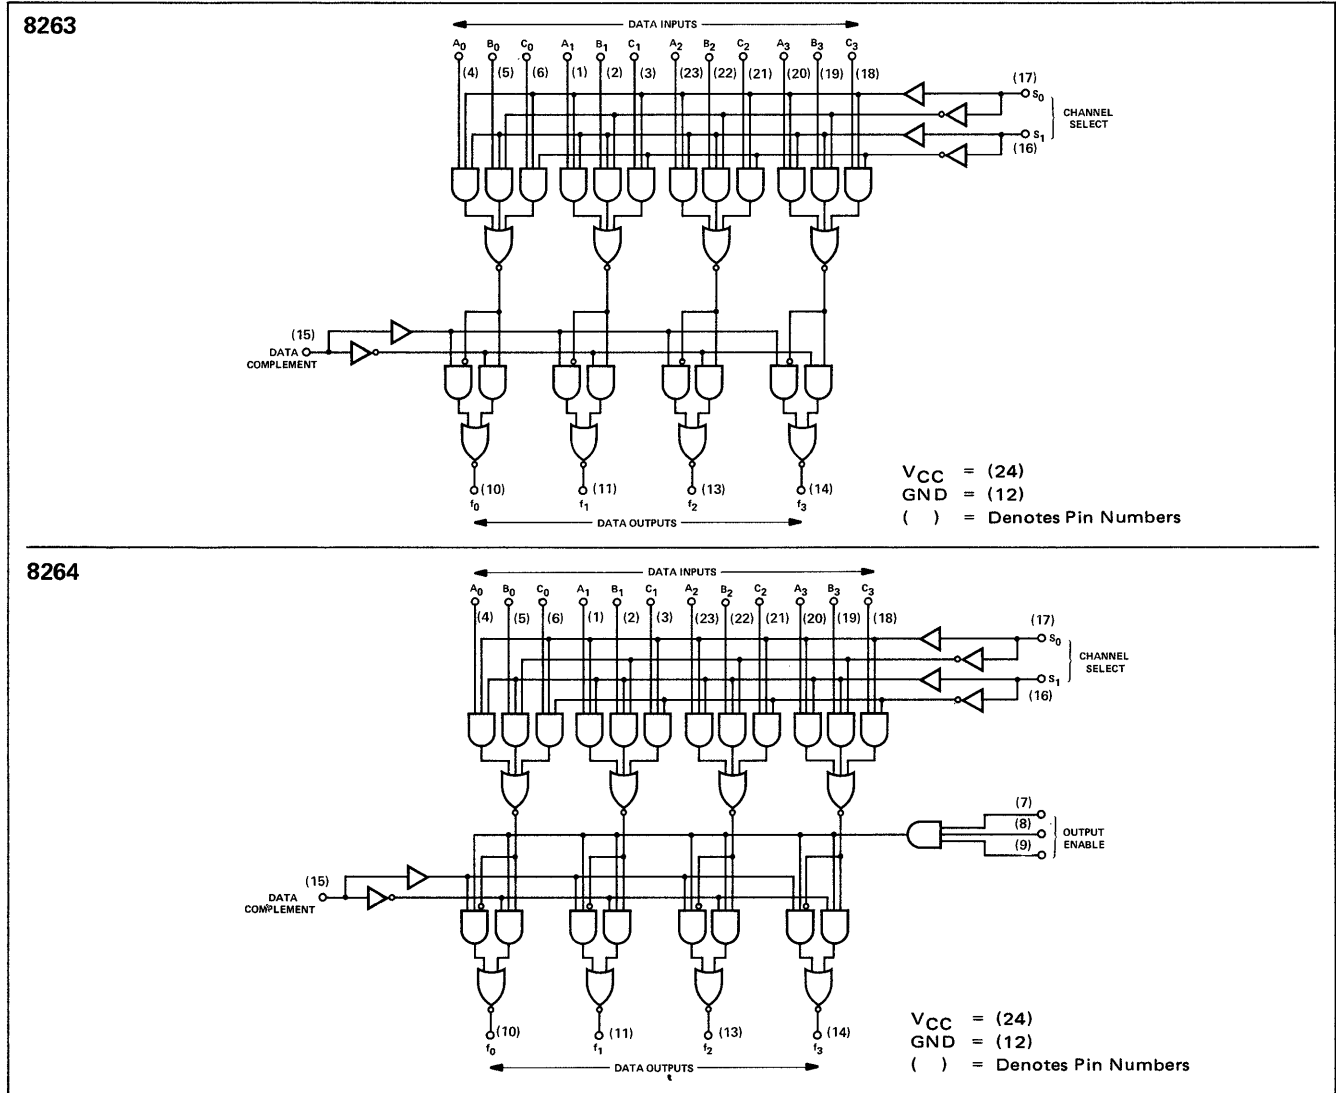

SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8263/64

ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS								NOTES
	MIN.	TYP.	MAX.	UNITS	A <sub>n</sub>	B <sub>n</sub>	C <sub>n</sub>	S <sub>0</sub>	S <sub>1</sub>	DATA COMP	OUTPUT ENABLE	OUTPUTS	
"1" Output Voltage (8263)	2.6	3.5		V	2.0V	2.0V	2.0V	2.0V	2.0V	0.8V		800μA	8
"1" Output Leakage Current (8264)			200	μA	2.0V	2.0V	2.0V	2.0V	2.0V	0.8V	2.0V		11
"0" Output Voltage (8263)			0.4	V	0.8V	0.8V	0.8V	2.0V	2.0V	0.8V		9.6mA	9
"0" Output Voltage (8264)			0.4	V	0.8V							16.0mA	11
"0" Input Current													
A <sub>n</sub>	-0.1		-1.6	mA	0.4V								
B <sub>n</sub>	-0.1		-1.6	mA		0.4V		0.4V					
C <sub>n</sub>	-0.1		-1.6	mA			0.4V		0.4V				
OE, DC	-0.1		-1.6	mA						0.4V	0.4V		6
S <sub>0</sub> , S <sub>1</sub>	-0.1		-3.2	mA				0.4V	0.4V				
"1" Input Current													
A <sub>n</sub>			40	μA	4.5V			0V	0V				
B <sub>n</sub>			40	μA		4.5V			0V				
C <sub>n</sub>			40	μA			4.5V	0V					
OE, DC			40	μA						4.5V	4.5V		
S <sub>0</sub> , S <sub>1</sub>			40	μA				4.5V	4.5V				

T<sub>A</sub> = 25° C and V<sub>CC</sub> = 5.0V


CHARACTERISTICS	LIMITS				TEST CONDITIONS								NOTES
	MIN.	TYP.	MAX.	UNITS	A <sub>n</sub>	B <sub>n</sub>	C <sub>n</sub>	S <sub>0</sub>	S <sub>1</sub>	DATA COMP	OUTPUT ENABLE	OUTPUTS	
Propagation Delay (8263)													
A <sub>n</sub> to f <sub>n</sub>		17	26	ns									10
S <sub>0</sub> , S <sub>1</sub> to f <sub>n</sub>		25	36	ns									10
DC to f <sub>n</sub>		17	26	ns									10
Propagation Delay (8264)													
A <sub>n</sub> to f <sub>n</sub>		25	36	ns									10
S <sub>0</sub> , S <sub>1</sub> to f <sub>n</sub>		25	36	ns									10
DC to f <sub>n</sub>		20	30	ns									10
OE to f <sub>n</sub>		20	30	ns									10
Input Latch Voltage													
Rating													
A <sub>n</sub>	5.5			V	10mA			0V	0V				12
B <sub>n</sub>	5.5			V		10mA			0V				12
C <sub>n</sub>	5.5			V			10mA	0V					12
S <sub>0</sub>	5.5			V				10mA					12
S <sub>1</sub>	5.5			V					10mA				12
DC	5.5			V						10mA			12
OE	5.5			V							10mA		12
Output Short Circuit Current	-20		-70									0V	14
Power/Current Consumption													
(8263)		378/	420/	mW/				0V					
		72	80	mA									
(8264)		400/	475/	mW/				0V					
		76	90.4	mA									

NOTES:

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive NAND Logic Definition: "UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Measurements apply to each gate element independently.
- Capacitance as measured on Boonton Electric Corporation


- Model 75A-S8 Capacitance Bridge or equivalent. f = 1 MHz, V<sub>ac</sub> = 25m Vrms. All pins not specifically referenced are tied to ground for capacitance tests. Output pins are left open.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V<sub>CC</sub>.
- Refer to AC Test Figure.
- Connect an external 1k ± 1% resistor from V<sub>CC</sub> to the output for this test.
- This test guarantees operation free of input latch-up over the specified operating supply voltage range.
- Manufacturer reserves the right to make design and process changes and improvements.
- V<sub>CC</sub> = 5.25 volts.

**SCHEMATIC DIAGRAMS**

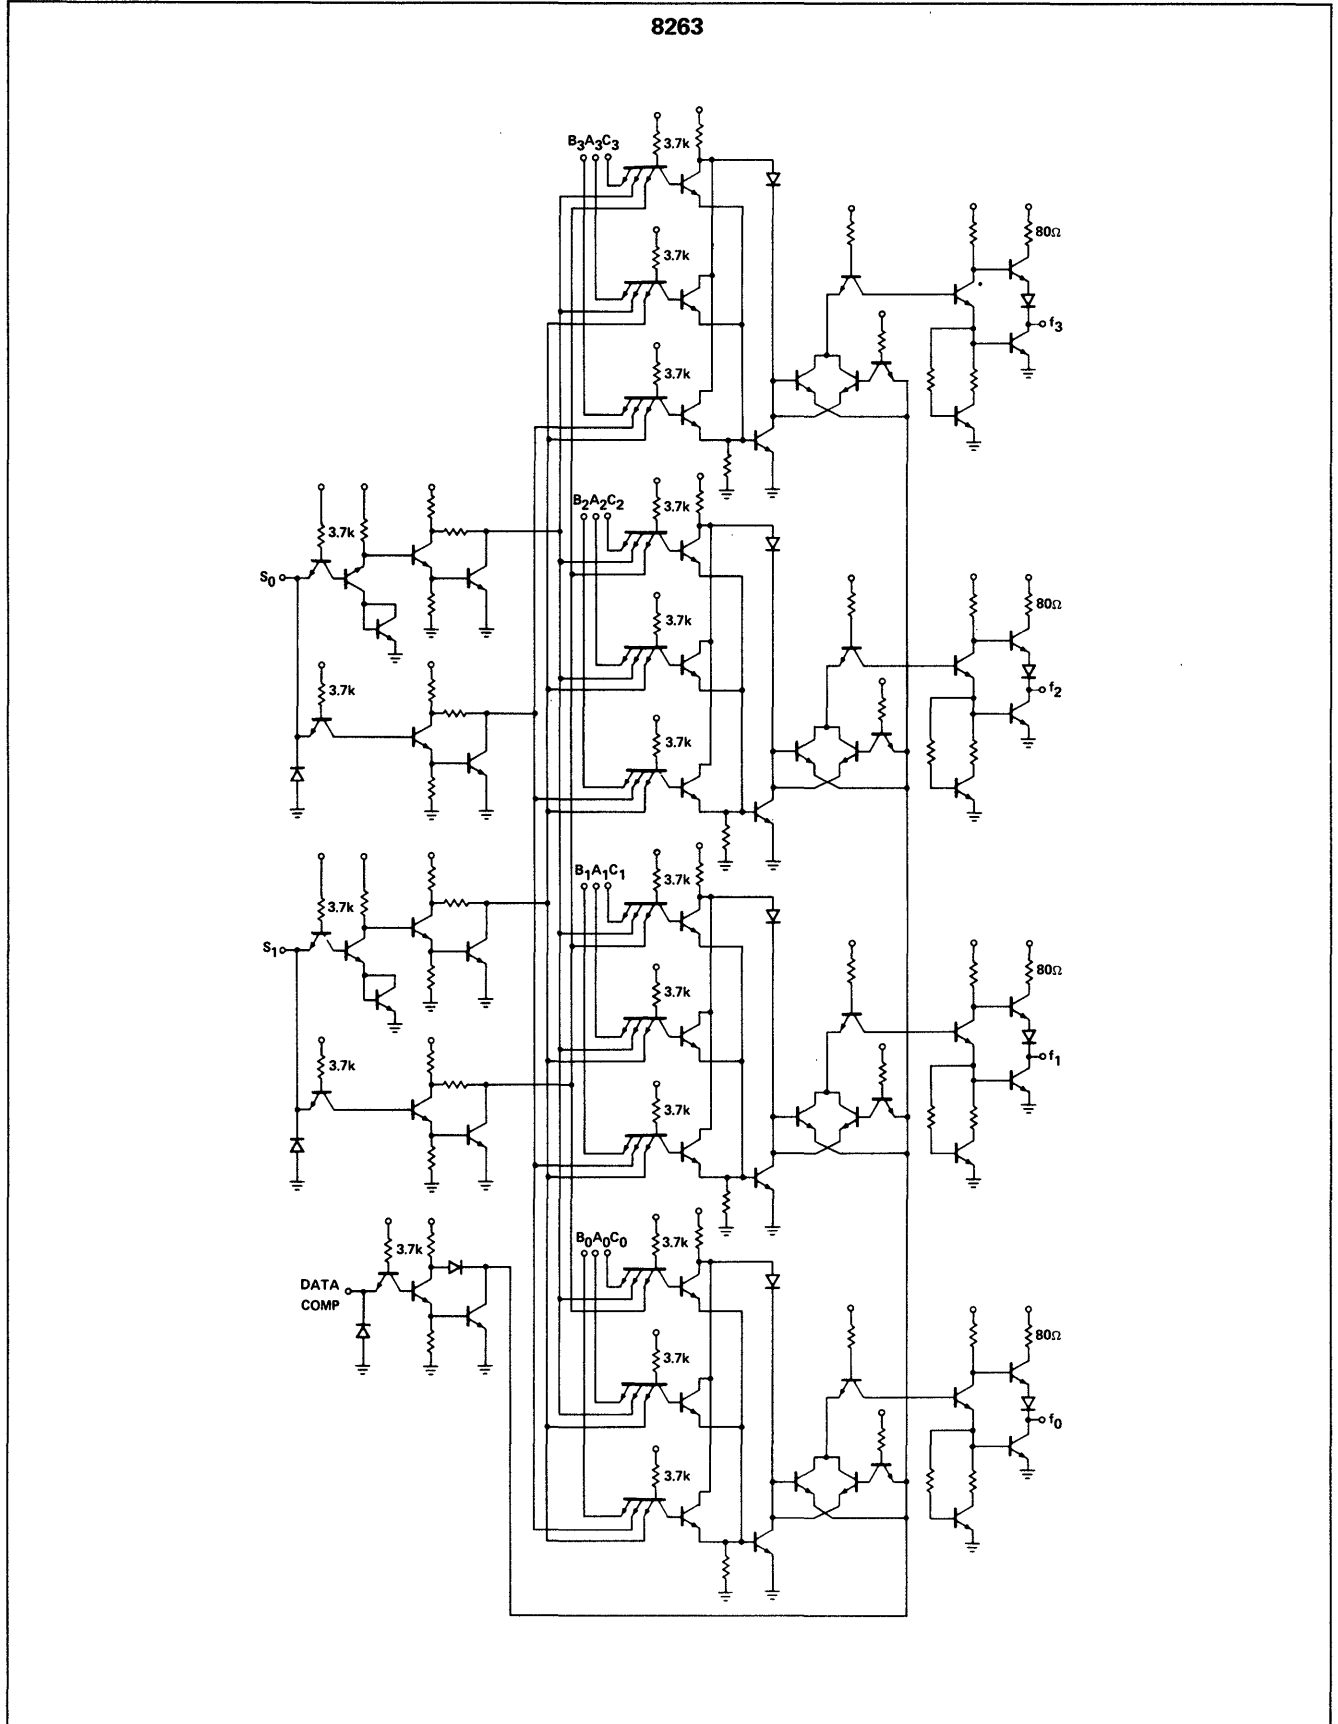



SCHEMATIC DIAGRAMS (Cont'd)

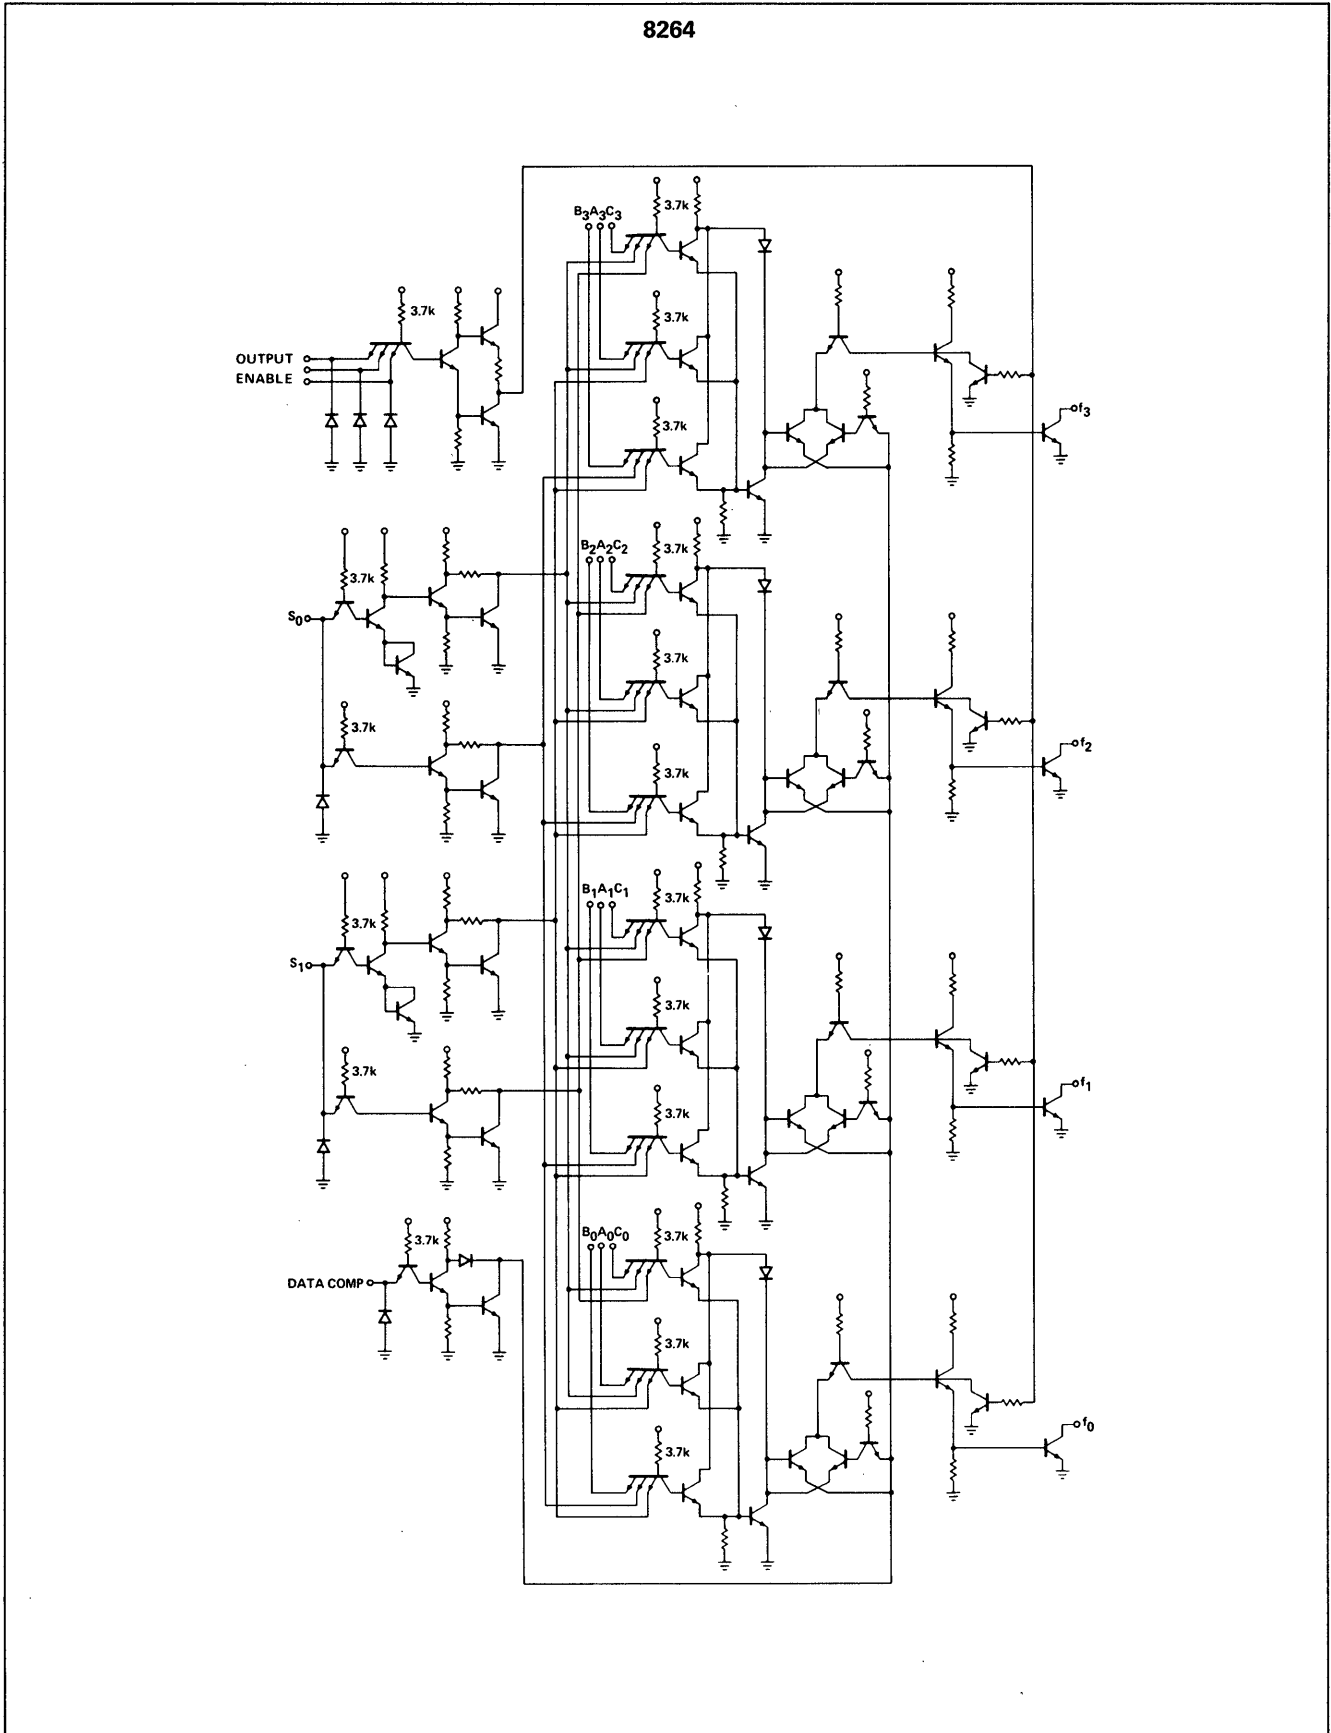


AC TESTING

Step No.	Delay From-To	Driven Inputs	Switching Positions																	Waveform Types					
			Other Inputs																						
			A <sub>0</sub>	B <sub>0</sub>	C <sub>0</sub>	A <sub>1</sub>	B <sub>1</sub>	C <sub>1</sub>	A <sub>2</sub>	B <sub>2</sub>	C <sub>2</sub>	A <sub>3</sub>	B <sub>3</sub>	C <sub>3</sub>	OE	OE	OE	S <sub>0</sub>	S <sub>1</sub>		DC				
1	A <sub>n</sub> to f <sub>n</sub>	2	2	1	1	2	1	1	2	1	1	2	1	1	1	1	1	1	1	1	1	1	1	1	C, D
2	S <sub>0</sub> to f <sub>n</sub>	2	3	1	1	3	1	1	3	1	1	3	1	1	1	1	1	1	2	1	1				A, B
3	S <sub>0</sub> to f <sub>n</sub>	2	1	3	1	1	3	1	1	3	1	1	3	1	1	1	1	1	2	1	1				C, D
4	S <sub>1</sub> to f <sub>n</sub>	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	1				C, D
5	DC to f <sub>n</sub>	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2				C, D
6	OE <sub>n</sub> to f <sub>n</sub>	2	1	1	1	1	1	1	1	1	1	1	1	1	*	*	*	1	1	1					C, D

NOTE: Step number 6 is for 8264 only.

\* Test one input at a time - others remain at "1".

AC TEST FIGURE AND WAVEFORMS

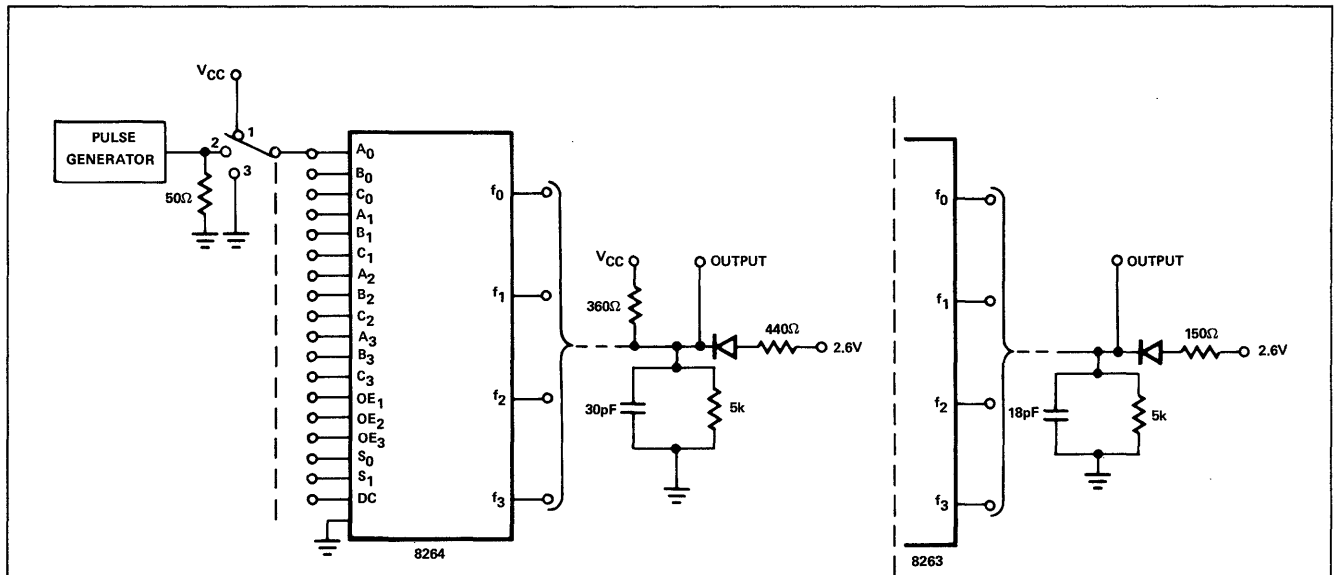


NOTE:



1. Scope terminals to be < 1/8" from package pins.
2. Position 1 on switch provides a logical "1".

- Position 2 on switch provides pulse.
- Position 3 on switch provides a logical "0".
3. All measurements are made at 1.5V level.
4. See truth table for logical conditions.



NON-INVERTING PATHS



$t_r = t_f \leq 3ns$   
 Amplitude = 2.6V  
 PW = 200ns  
 PRR = 1MHz



INVERTING PATHS



**TYPICAL APPLICATIONS**

An approach to expanding the 8264 (bare collector output) is shown in Figure 1. The idea is to use common collectors with external pull-up resistors (one resistor for each of the four outputs) and make use of the output enable code.

As can be seen, the channel select lines are tied common, while a different enable code would be used to select a particular 8264. All non-selected 8264's have their outputs in the logic "1" condition, thus allowing the selected multiplexer to predominate.

Figure 2 illustrates a typical example using the 8263 (totem pole output) along with the 8281 (4-bit binary counter) and the 8270/71 (4-bit shift register), to implement a variable modulus counter. The 8270's act as a 3-register memory. The outputs of the 8270's are fed to the corresponding inputs of the 8263. Now there are three different pre-settable 4-bit words that can be chosen by the 8264. By alternating the channel select codes, the 8281 counter is preset with one of three words and produces an output whose repetition rate is dependent on the inputs from the multiplexer.

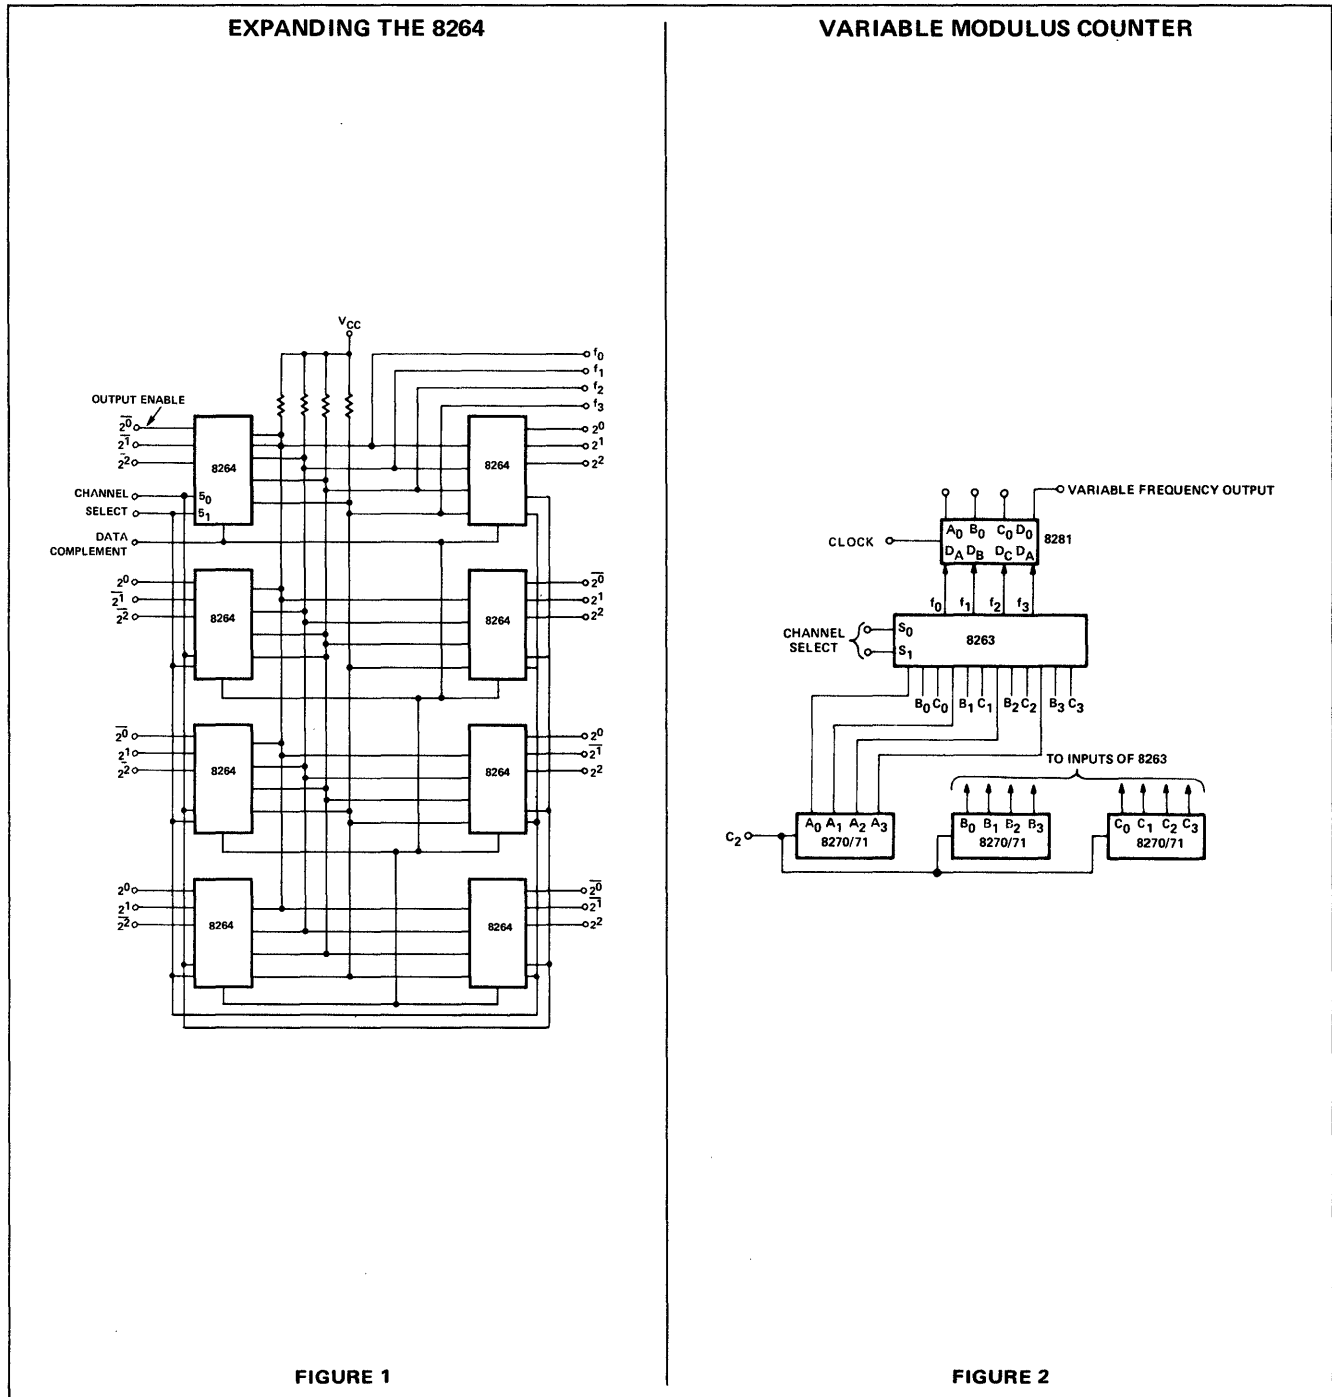


FIGURE 1

FIGURE 2

# 2-INPUT, 4-BIT DIGITAL MULTIPLEXER

# 8266 8267

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION


The 8266/8267 2-Input, 4-Bit Digital Multiplexer is a monolithic array utilizing familiar TTL circuit structures. The 8267 features a bare-collector output to allow expansion with other devices.

The multiplexer is intended for use at the inputs to adders, registers and in other parallel data handling applications.

The multiplexer is able to choose from two different input sources, each containing 4 bits:  $A = (A_0, A_1, A_2, A_3)$ ,  $B = (B_0, B_1, B_2, B_3)$ . The selection is controlled by the input  $S_0$ , while the second control input,  $S_1$ , is held at zero.

For conditional complementing, the two inputs ( $A_n, B_n$ ) are tied together to form the function TRUE/COMPLEMENT, which is needed in conjunction with added elements to perform ADDITION/SUBTRACTION. Further, the inhibit state  $S_0 = S_1 = 1$  can be used to facilitate transfer operations in an arithmetic section.


### LOGIC DIAGRAM

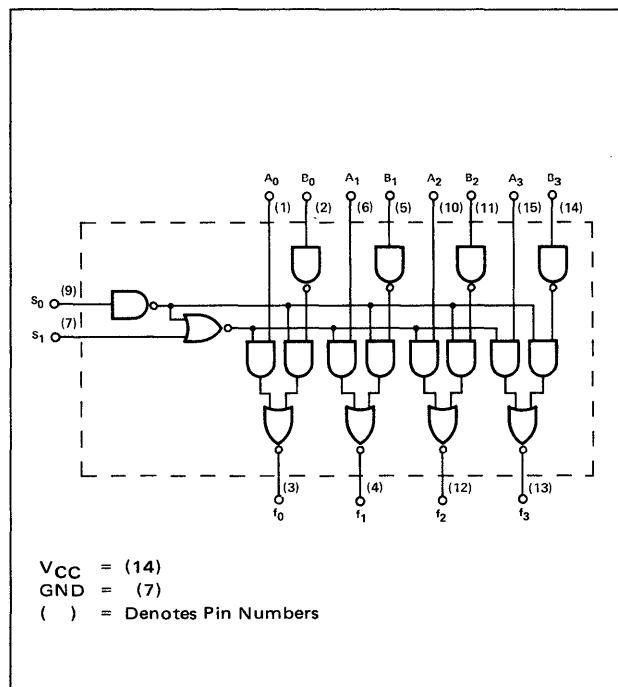

### TRUTH TABLE

SELECT LINES		OUTPUTS
$S_0$	$S_1$	$f_n (0, 1, 2, 3)$
0	0	$B_n$
0	1	$\overline{B_n}$
1	0	$A_n$
1	1	1

### SCHEMATIC DIAGRAM

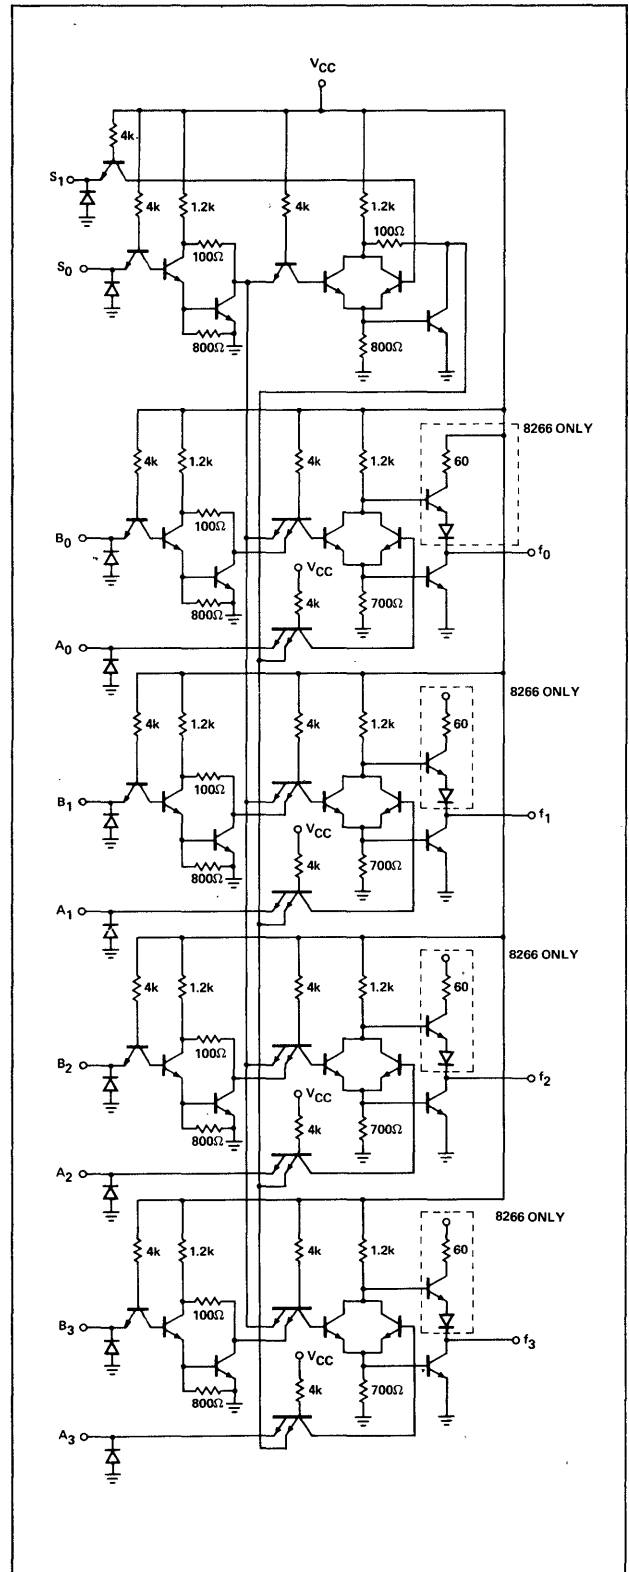

**ELECTRICAL CHARACTERISTICS** (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS					NOTES
	MIN.	TYP.	MAX.	UNITS	A <sub>n</sub>	B <sub>n</sub>	S <sub>0</sub>	S <sub>1</sub>	OUTPUTS	
"1" Output Voltage (8266)	2.6	3.5		V	0.8V	2.0V	0.8V	0.8V	-800μA	7
"0" Output Voltage			0.40	V	2.0V	2.0V	2.0V	0.8V	16mA	8
"1" Output Leakage Current (8267)			25	μA	0.6V	2.0V	2.0V	0.8V		10
"0" Input Current										
A <sub>n</sub> , B <sub>n</sub>	-0.1		-1.6	mA	0.4V	0.4V	0V	0V		
S <sub>0</sub> , S <sub>1</sub>	-0.1		-1.6	mA			0.4V	0.4V		
"1" Input Current										
A <sub>n</sub> , B <sub>n</sub>			40	μA	4.5V	4.5V		2.0V		
S <sub>0</sub> , S <sub>1</sub>			40	μA			4.5V	4.5V		
Input Voltage Rating										
S <sub>0</sub> , A <sub>n</sub> , B <sub>n</sub>	5.5			V	10mA	10mA	10mA	2.0V		11
S <sub>1</sub>	5.5			V			2.0V	10mA		11
Output Short Circuit Current (8266)	-20		-70	mA					0V	


T<sub>A</sub> = 25° C and V<sub>CC</sub> = 5.0V

CHARACTERISTICS	LIMITS				TEST CONDITIONS					NOTES
	MIN.	TYP.	MAX.	UNITS	A <sub>n</sub>	B <sub>n</sub>	S <sub>0</sub>	S <sub>1</sub>	OUTPUTS	
Propagation Delay (8266)										
S <sub>0</sub> to f <sub>n</sub> (short path)		18	28	ns						9
S <sub>0</sub> to f <sub>n</sub> (long path)		20	30	ns						9
A <sub>n</sub> to f <sub>n</sub>		13	20	ns						9
B <sub>n</sub> , S <sub>1</sub> to f <sub>n</sub>		14	25	ns						9
Propagation Delay (8267)										
S <sub>0</sub> to f <sub>n</sub>		27	36	ns						9
A <sub>n</sub> to f <sub>n</sub>		15	20	ns						9
B <sub>n</sub> , S <sub>1</sub> to f <sub>n</sub>		21	28	ns						9
S <sub>0</sub> to f <sub>n</sub> (short path)		18	28	ns						9
Power/Current Consumption		200/ 38.1	275/ 52.4	mW/ mA	4.5V	0V	4.5V	0V		13

NOTES:




- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive NAND logic definition:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Measurements apply to each gate element independently.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V<sub>CC</sub>. Refer to AC Test Figure.
- Connect an external 1k ± 1% resistor from V<sub>CC</sub> to the output for this test.
- This test guarantees operation free of input latch-up over the specified operating supply voltage range.
- Manufacturer reserves the right to make design and process changes and improvements.
- V<sub>CC</sub> = 5.25 volts.

AC TEST FIGURE AND WAVEFORMS

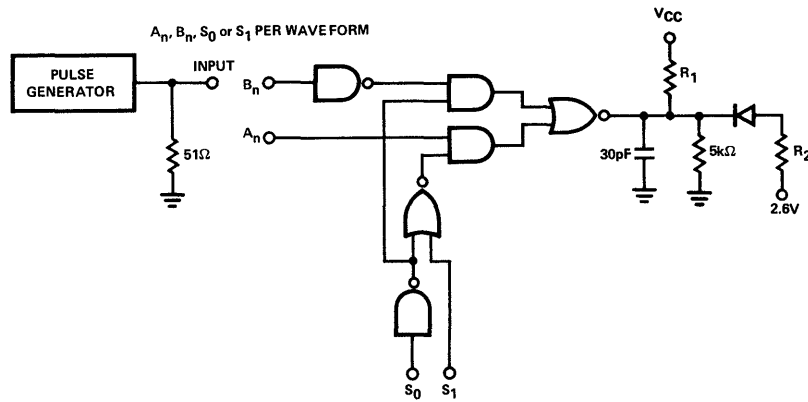



	8266	8267
R <sub>1</sub>	∞	330Ω
R <sub>2</sub>	84.5Ω	470Ω

NON-INVERTING PATHS




t<sub>r</sub> = t<sub>f</sub> ≤ 5ns  
 Amplitude = 2.6V  
 PW = 200ns  
 PRR = 1MHz

INVERTING PATHS



TYPICAL APPLICATIONS

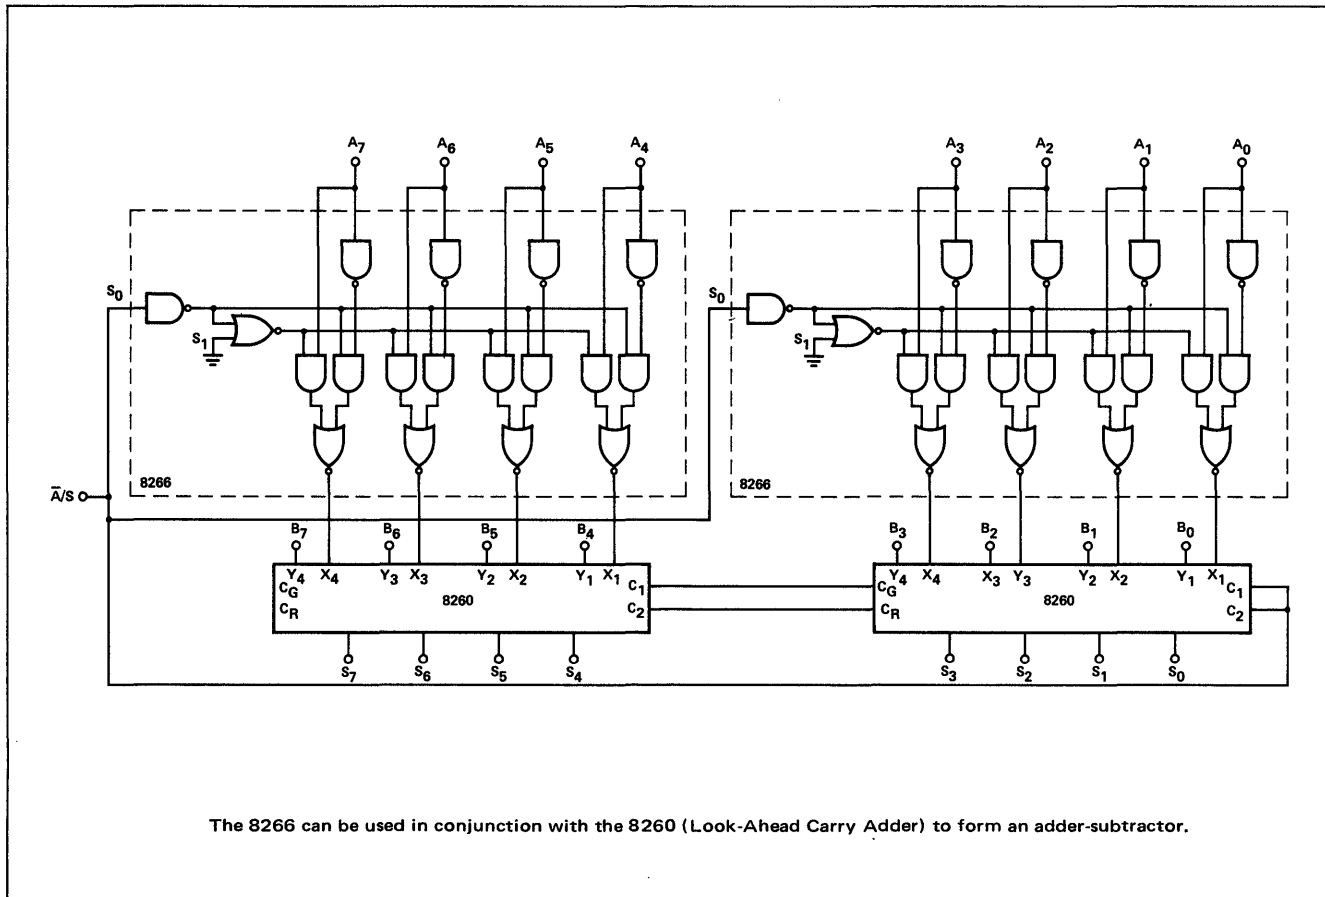

The 8266 can be used in conjunction with the 8260 (Look-Ahead Carry Adder) to form an adder-subtractor.

# GATED FULL ADDER | 8268


## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION

The 8268 is a single-bit full adder with gated true and complementary inputs, complementary sum ( $\Sigma$  and  $\bar{\Sigma}$ ) outputs and an inverted carry output. By taking advantage of the unique true or inverted inputs and true or inverted outputs, parallel addition speed is greatly enhanced (by eliminating unnecessary inversions).

The device is designed for medium speed parallel and serial adder systems.

### LOGIC DIAGRAM

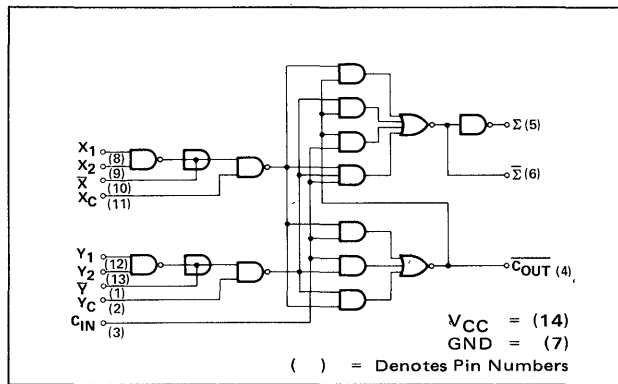

### TRUTH TABLE (See Notes 1, 2 and 3)

C <sub>IN</sub>	Y	X	$\overline{C_{OUT}}$	$\Sigma$	$\bar{\Sigma}$
0	0	0	1	1	0
0	0	1	1	0	1
0	1	0	1	0	1
0	1	1	0	1	0
1	0	0	1	0	1
1	0	1	0	1	0
1	1	0	0	1	0
1	1	1	0	0	1

#### NOTES:

1.  $X = \overline{X \cdot X_c}$ ;  $Y = \overline{Y \cdot Y_c}$   
 where  $\bar{X} = X_1 \cdot Y_2$ ;  $\bar{Y} = Y_1 \cdot X_2$
2. When  $\bar{X}$  or  $\bar{Y}$  are used as inputs,  $X_1$  and  $X_2$  or  $Y_1$  and  $Y_2$  respectively must be tied to GND.
3. When  $X_1$  and  $X_2$  or  $Y_1$  and  $Y_2$  are used as inputs,  $\bar{X}$  or  $\bar{Y}$  respectively must be left open or used to perform the WIRED-AND function.

### ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS										NOTES
	MIN.	TYP.	MAX.	UNITS	X <sub>1</sub>	X <sub>2</sub>	X	X <sub>c</sub>	Y <sub>1</sub>	Y <sub>2</sub>	Y	Y <sub>c</sub>	C <sub>IN</sub>	OUTPUTS	
"1" Output Voltage	2.6	3.5		V	0.8V	0.8V	2.0V	2.0V	0.8V	0.8V	0.8V	2.0V	0.8V	-500μA	6
"0" Output Voltage			0.4	V	0.8V	0.8V	2.0V	2.0V	0.8V	0.8V	2.0V	2.0V	0.8V	16mA	7
"0" Input Current															
X <sub>1</sub>	-0.1		-1.6	mA	0.4V	4.5V									
X <sub>2</sub>	-0.1		-1.6	mA	4.5V	0.4V									
X	-0.1		-2.6	mA	0.0V	0.0V	0.4V	4.5V							
X <sub>c</sub>	-0.1		-1.6	mA	0.0V	0.0V		0.4V							
Y <sub>1</sub>	-0.1		-1.6	mA					0.4V	4.5V					
Y <sub>2</sub>	-0.1		-1.6	mA					4.5V	0.4V					
Y	-0.1		-2.6	mA					0.0V	0.0V	0.4V	4.5V			
Y <sub>c</sub>	-0.1		-1.6	mA					0.0V	0.0V		0.4V			
C <sub>IN</sub>	-0.1		-8.0	mA									0.4V		
"1" Input Current															
X <sub>1</sub>			40	μA	4.5V										
X <sub>2</sub>			40	μA	0.0V										
X <sub>c</sub>			40	μA			0.0V	4.5V							
Y <sub>1</sub>			40	μA					4.5V	4.5V					
Y <sub>2</sub>			40	μA					0.0V	0.4V					
Y			40	μA							0.0V	4.5V			
Y <sub>c</sub>			40	μA								0.0V	4.5V		
C <sub>IN</sub>			160	μA	0.0V	0.0V			0.0V	0.0V			4.5V		
Input Voltage Rating															12
X <sub>1</sub>	5.5			V	10mA	0.0V									
X <sub>2</sub>	5.5			V	0.0V	10mA									
X <sub>c</sub>	5.5			V			0.0V	10mA							
Y <sub>1</sub>	5.5			V					10mA	0.0V					
Y <sub>2</sub>	5.5			V					0.0V	10mA					
Y	5.5			V							0.0V	10mA			
Y <sub>c</sub>	5.5			V								0.0V	10mA		
C <sub>IN</sub>	5.5			V									10mA		



**SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8268**


$T_A = 25^\circ C$  and  $V_{CC} = 5.0V$

CHARACTERISTICS	LIMITS				TEST CONDITIONS										NOTES
	MIN.	TYP.	MAX.	UNITS	X <sub>1</sub>	X <sub>2</sub>	X	X <sub>c</sub>	Y <sub>1</sub>	Y <sub>2</sub>	Y	Y <sub>c</sub>	C <sub>IN</sub>	OUTPUTS	
Power/Current Consumption		152/29	185/35	mW/ mA											14
Output Short Circuit Current ( $\Sigma$ )	-18		-57	mA	0.0V	0.0V			0.0V	0.0V	0.0V		2.0V	0.0V	11, 14
Output Short Circuit Current ( $\bar{\Sigma}$ )	-18		-57	mA	0.0V	0.0V			0.0V	0.0V			0.0V	0.0V	11, 14
Output Short Circuit Current ( $\bar{C}_{out}$ )	-18		-70	mA	0.0V	0.0V			0.0V	0.0V			0.0V	0.0V	11, 14
t <sub>pd</sub> 1 C <sub>in</sub> to $\bar{C}_{out}$		8	13	ns											8
t <sub>pd</sub> 0 C <sub>in</sub> to $\bar{C}_{out}$		8	13	ns											8
t <sub>pd</sub> 1 Y <sub>c</sub> to $\bar{C}_{out}$		20	25	ns											8
t <sub>pd</sub> 0 Y <sub>c</sub> to $\bar{C}_{out}$		20	25	ns											8
t <sub>pd</sub> 1 X <sub>c</sub> to $\Sigma$		35	45	ns											8
t <sub>pd</sub> 0 X <sub>c</sub> to $\Sigma$		35	45	ns											8
t <sub>pd</sub> 1 Y <sub>c</sub> to $\bar{\Sigma}$		25	35	ns											8
t <sub>pd</sub> 0 Y <sub>c</sub> to $\bar{\Sigma}$		25	35	ns											8
t <sub>pd</sub> X <sub>1</sub> , X <sub>2</sub> to $\bar{X}$		30	40	ns											8, 9
t <sub>pd</sub> 0 X <sub>1</sub> , X <sub>2</sub> to $\bar{X}$		15	20	ns											8, 9
t <sub>pd</sub> 1 Y <sub>1</sub> , Y <sub>2</sub> to $\bar{Y}$		30	40	ns											8, 9
t <sub>pd</sub> 0 Y <sub>1</sub> , Y <sub>2</sub> to $\bar{Y}$		15	20	ns											8, 9

**NOTES:**

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive logic definition:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V<sub>CC</sub>
- Refer to AC Test Figure.
- This test is a measure of the required worst-case data set-up time.
- Manufacturer reserves the right to make design and process changes and improvements.
- Not more than one output should be shorted at a time.
- This test guarantees operation free of input latch-up over the specified operating power supply voltage range.
- The total time required to perform the ADD function may be determined by summing the delays from X<sub>1</sub>, X<sub>2</sub> to  $\bar{X}$  or Y<sub>2</sub> to  $\bar{Y}$  with the delay from X<sub>c</sub> or Y<sub>c</sub> to  $\Sigma$  or  $\bar{\Sigma}$ .
- V<sub>CC</sub> = 5.25 volts.


**AC TEST FIGURE AND WAVE FORMS**

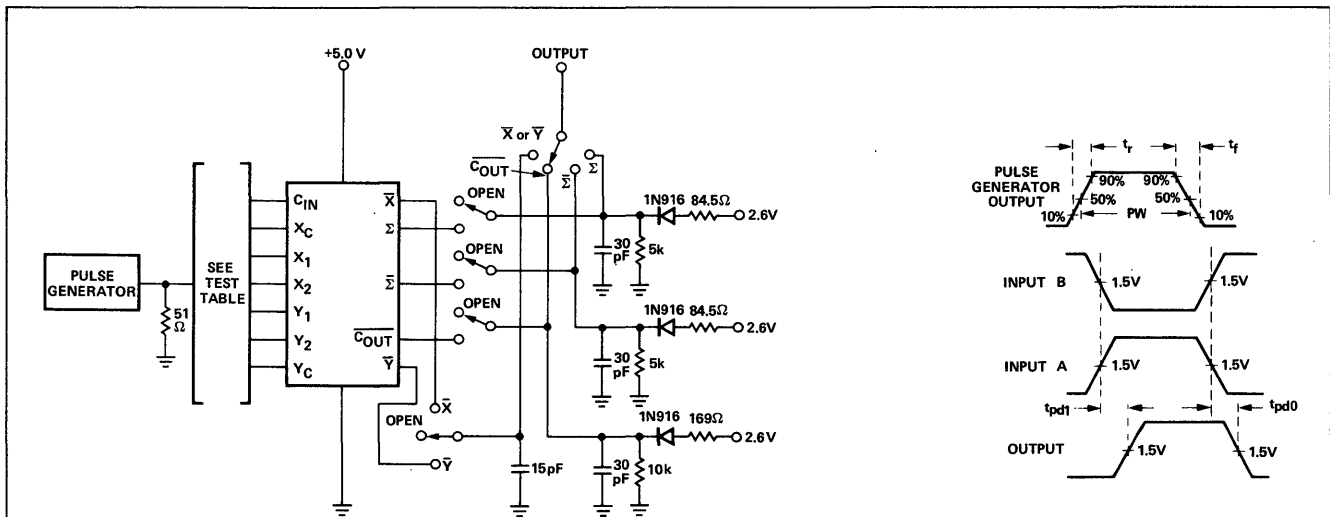

**NOTES:**

- Perform test in accordance with test table.
- Each output is tested separately.
- Voltage values are with respect to network GND terminal.
- The generator has the following characteristics:  
V<sub>gen</sub> = 2.6V, tr = tf ≤ 15ns, PW = 0.5ns, PRR = 1MHz.
- Inputs and outputs not otherwise specified are open.
- Capacitance shown include probe and jig capacitance.
- All resistances are in ohms.

**SCHEMATIC DIAGRAM**

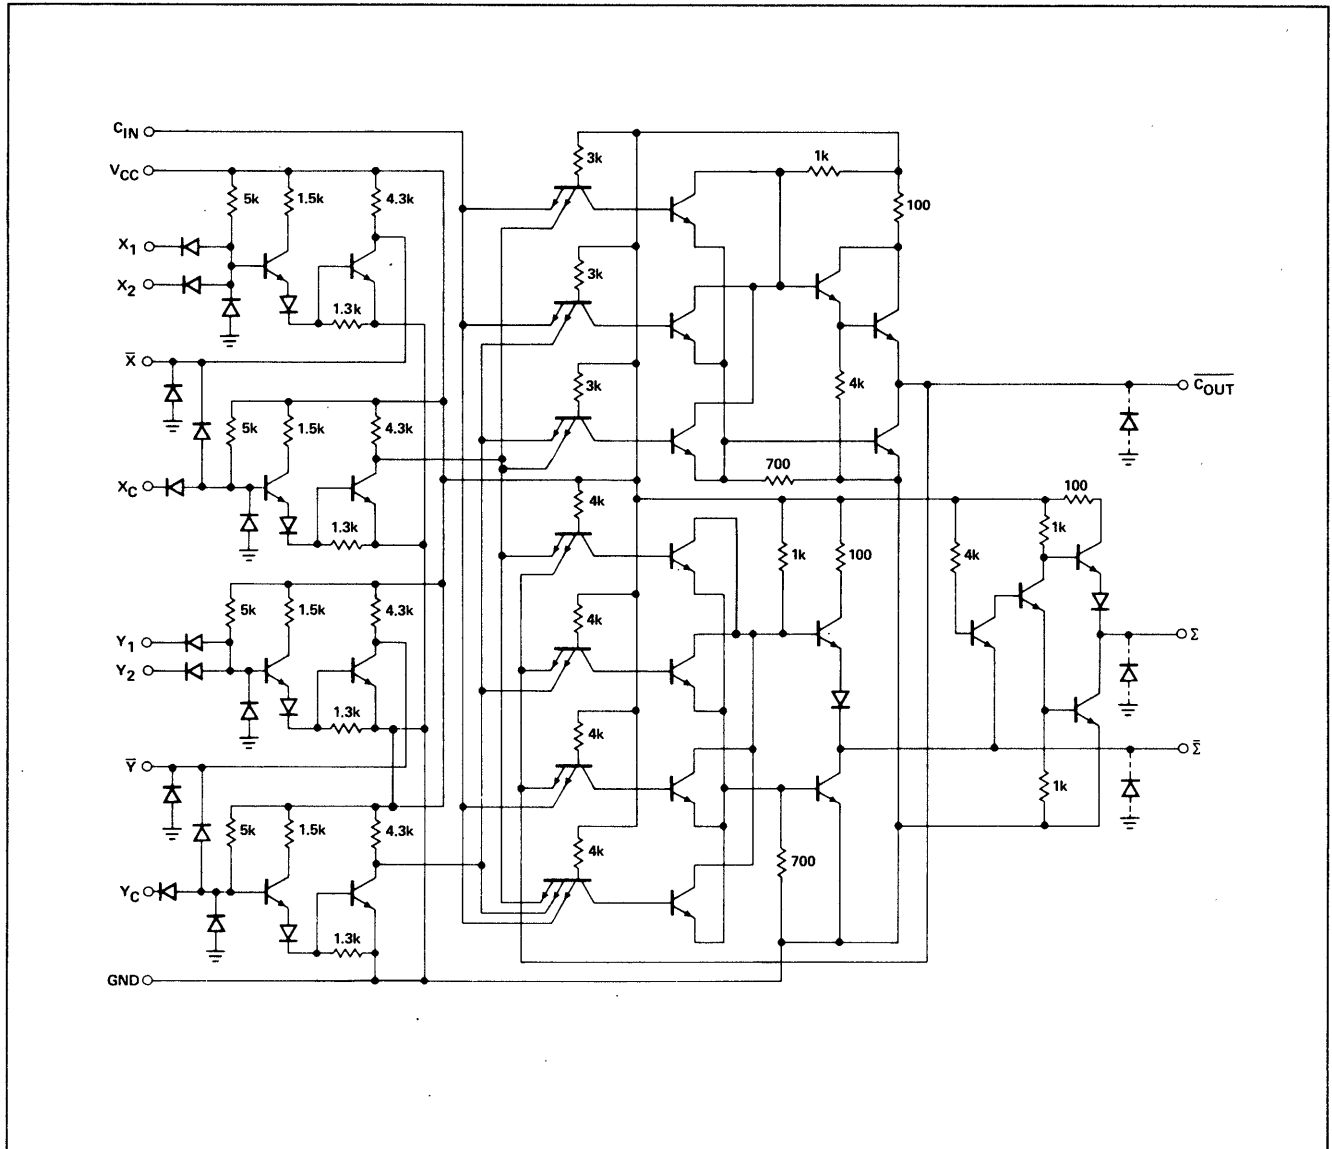


**TEST TABLE** (See Note 5)


TEST NO.	OUTPUTS UNDER TEST	APPLY INPUT A TO	APPLY INPUT B TO	APPLY +2.6V TO	APPLY GND TO	APPLY OUTPUT LOADING TO
1	$\bar{C}_{out}$	None	$C_{in}$	None	$Y_1$	$\bar{C}_{out}$
2	$\bar{C}_{out}$	None	$C_{in}$	None	$Y_1$	$\bar{C}_{out}$
3	$\bar{C}_{out}$	$Y_c$	None	$C_{in}$	$X_1, Y_1$	$\bar{C}_{out}$
4	$\bar{C}_{out}$	$Y_c$	None	$C_{in}$	$X_1, Y_1$	$\bar{C}_{out}$
5	$\Sigma$	$X_c$	None	$C_{in}$	$X_1, Y_1$	$\Sigma$ $\Sigma$ $\bar{C}_{out}$ $\Sigma$
6	$\Sigma$	$X_c$	None	$C_{in}$	$X_1, Y_1$	$\bar{\Sigma}$ $\bar{C}_{out}$ $\bar{\Sigma}$
7	$\bar{\Sigma}$	$Y_c$	None	$C_{in}$	$Y_1$	$\bar{\Sigma}$
8	$\bar{\Sigma}$	$Y_c$	None	$C_{in}$	$Y_1$	$\bar{\Sigma}$
9	$\bar{X}$	None	$X_1$	$X_2$	None	$\bar{X}$ (CL = 15 pF)
10	$\bar{X}$	None	$X_1$	$X_2$	None	$\bar{X}$ (CL = 15 pF)
11	$\bar{Y}$	None	$Y_1$	$Y_2$	None	$\bar{Y}$ (CL = 15 pF)
12	$\bar{Y}$	None	$Y_1$	$Y_2$	None	$\bar{Y}$ (CL = 15 pF)

TYPICAL APPLICATIONS

4-BIT SERIAL ADD/SUBTRACTOR

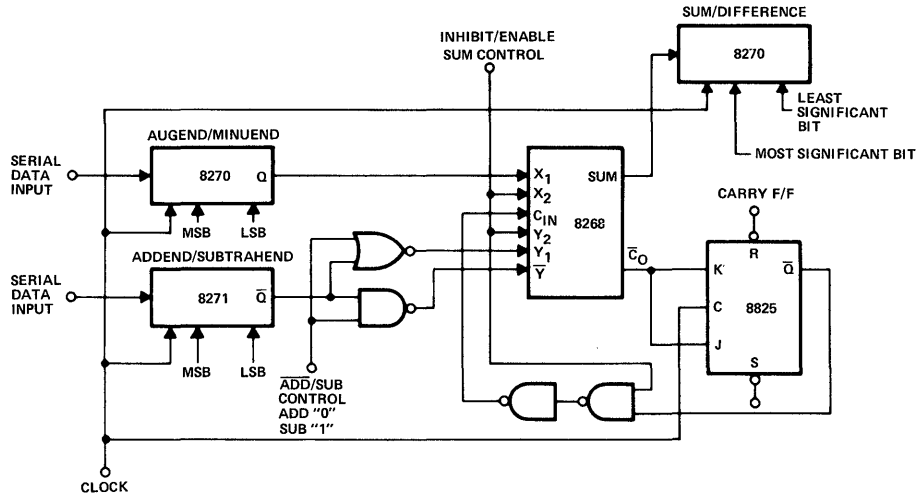

N-BIT PARALLEL ADDER

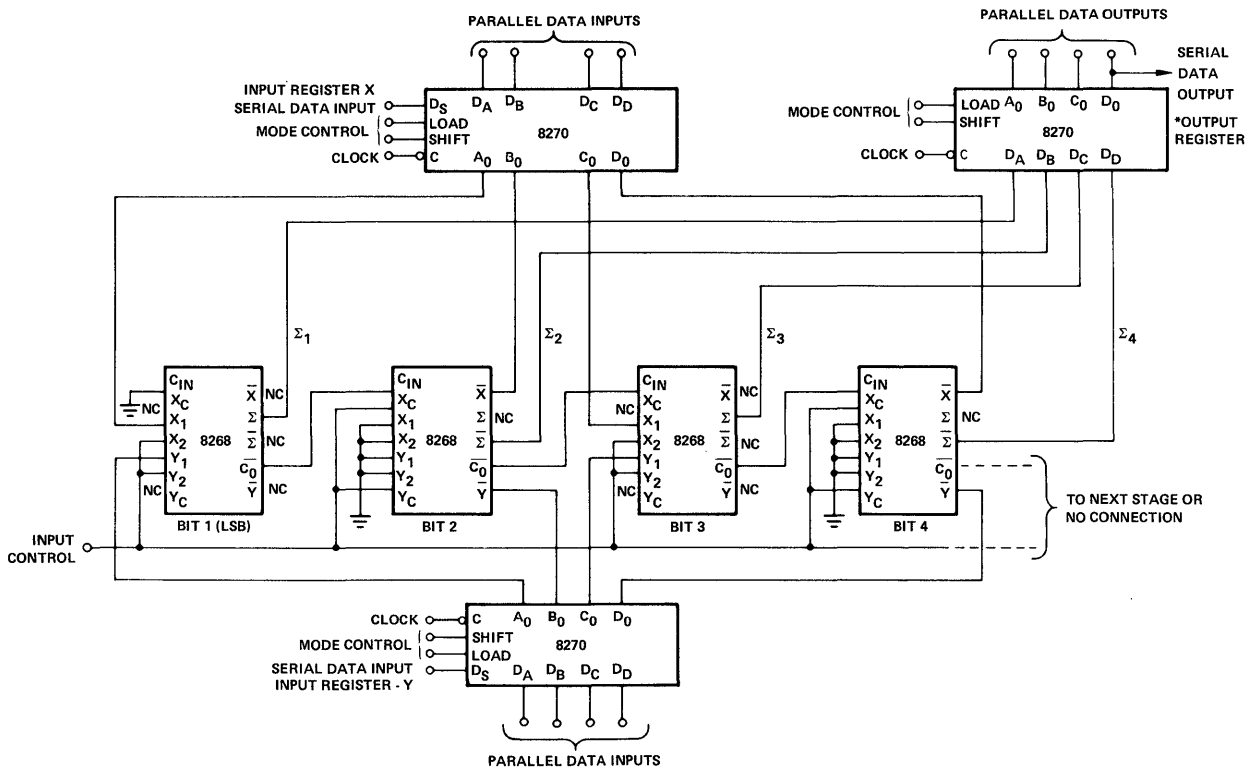

NOTES:

To expand storage register for serial/parallel operation, connect D<sub>0</sub> to D<sub>s</sub> of next stage and common the mode control lines and the clock line of the first stage to their respective second stage equivalents.

\*NOTE:

To expand output register for parallel outputs common clock, shift and load lines with their respective counterparts. For serial data output, also connect D<sub>0</sub> of first register to D<sub>s</sub> of next register.

# 4-BIT COMPARATOR | 8269

## DIGITAL 8000 SERIES TTL/MSI


### DESCRIPTION

The 8269, a 4 BIT COMPARATOR, is an array of gates designed to perform the numerical comparison of two four-bit binary numbers. The outputs indicate whether the two numbers are equal in value, or which number is the greater. The 8269 is a functional and pin-for-pin replacement for the DM8200.

### TRUTH TABLE

INPUT			OUTPUT	
A <sub>n</sub>	B <sub>n</sub>	STROBE	X	Y
A > B		0	1	0
A < B		0	0	1
A = B		0	1	1
A ≠ B		1	0	0

### LOGIC DIAGRAM

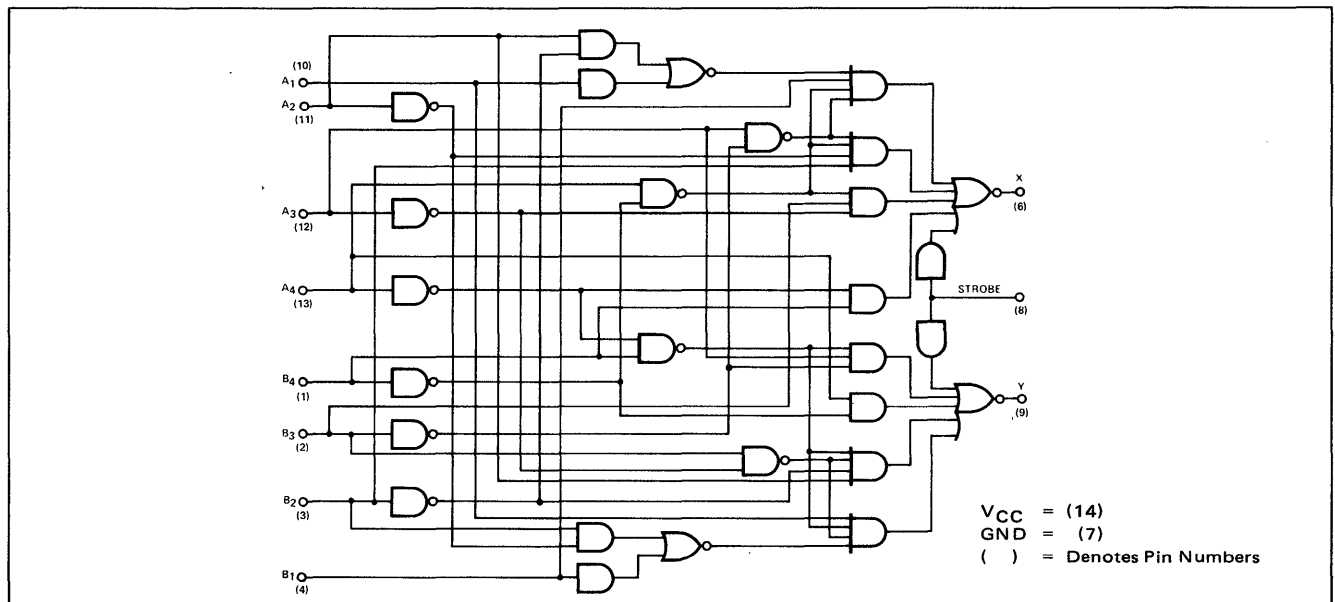

### ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS
	MIN.	TYP.	MAX.	UNITS	
"1" Output Voltage	2.6	3.5		V	I <sub>out</sub> = 800μA I <sub>out</sub> = 16mA V <sub>in</sub> = 4.5V V <sub>in</sub> = 0.4V V <sub>CC</sub> = 5.25V V <sub>out</sub> = 0V, V <sub>CC</sub> = 5.25V I <sub>out</sub> = 10mA
"0" Output Voltage		0.2	0.4	V	
"1" Input Current			80	μA	
"0" Input Current	-0.1		-3.2	mA	
Power Consumption			278/53	mW/mA	
Short Circuit Output Current	-18		-55	mA	
Input Latch Voltage	5.5			V	

T<sub>A</sub> = 25°C and V<sub>CC</sub> = 5.0V

CHARACTERISTICS	LIMITS				TEST CONDITIONS
	MIN.	TYP.	MAX.	UNITS	
Propagation Delay					
tpd1 (Data Input to Output)			40	ns	Test Figure 1
tpd0 (Data Input to Output)			30	ns	Test Figure 1
tpd1 (Strobe to Output)			27	ns	Test Figure 2
tpd0 (Strobe to Output)			18	ns	Test Figure 2

# SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8269

## NOTES:

1. All voltage and capacitance measurements are referenced to the ground terminal.  
Terminals not specifically referenced are left electrically open.
2. All measurements are taken with ground pin tied to zero volts.
3. Positive current flow is defined as into the terminal referenced.
4. Positive logic definition: "UP" Level = "1", "DOWN" Level = "0".

5. Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
6. Output source current is supplied through a resistor to ground.
7. Output sink current is supplied through a resistor to  $V_{CC}$ .
8. Manufacturer reserves the right to make design and process changes and improvements.

## AC TEST FIGURE AND WAVEFORMS

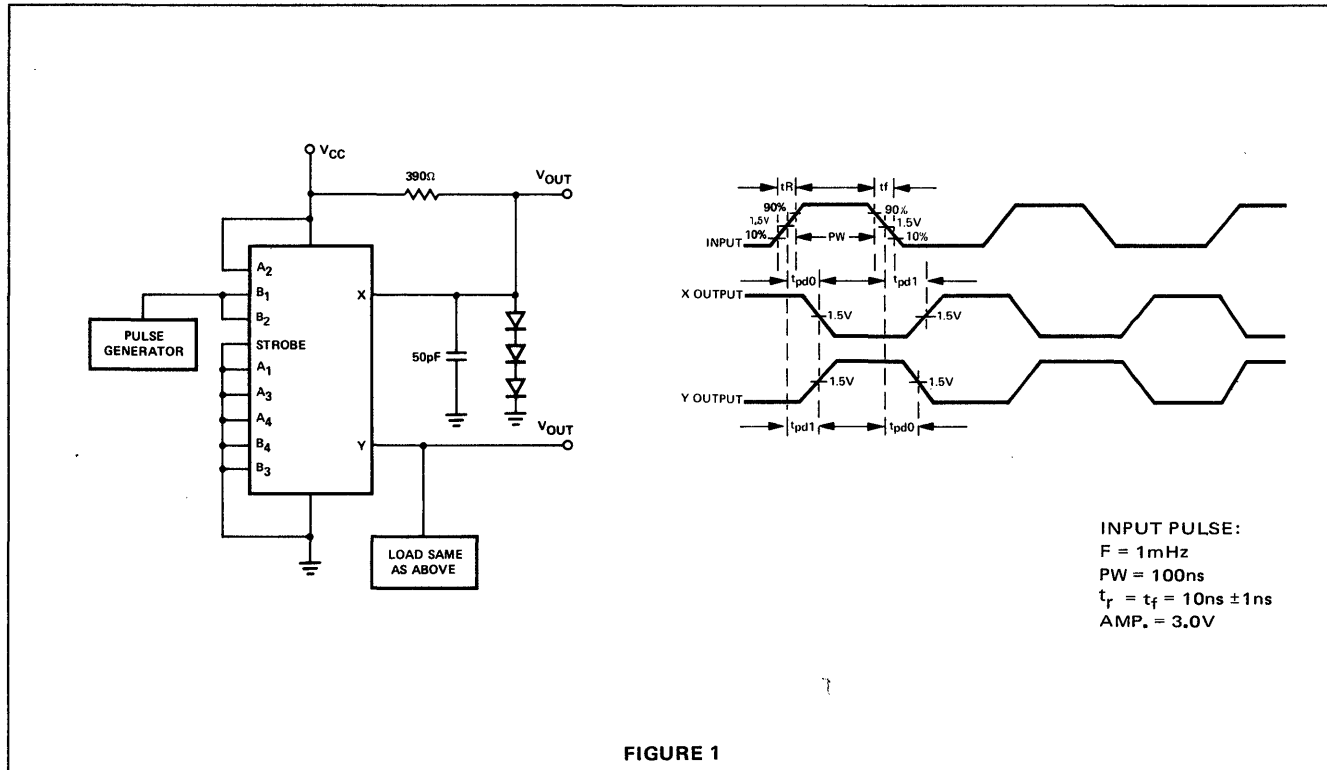


FIGURE 1

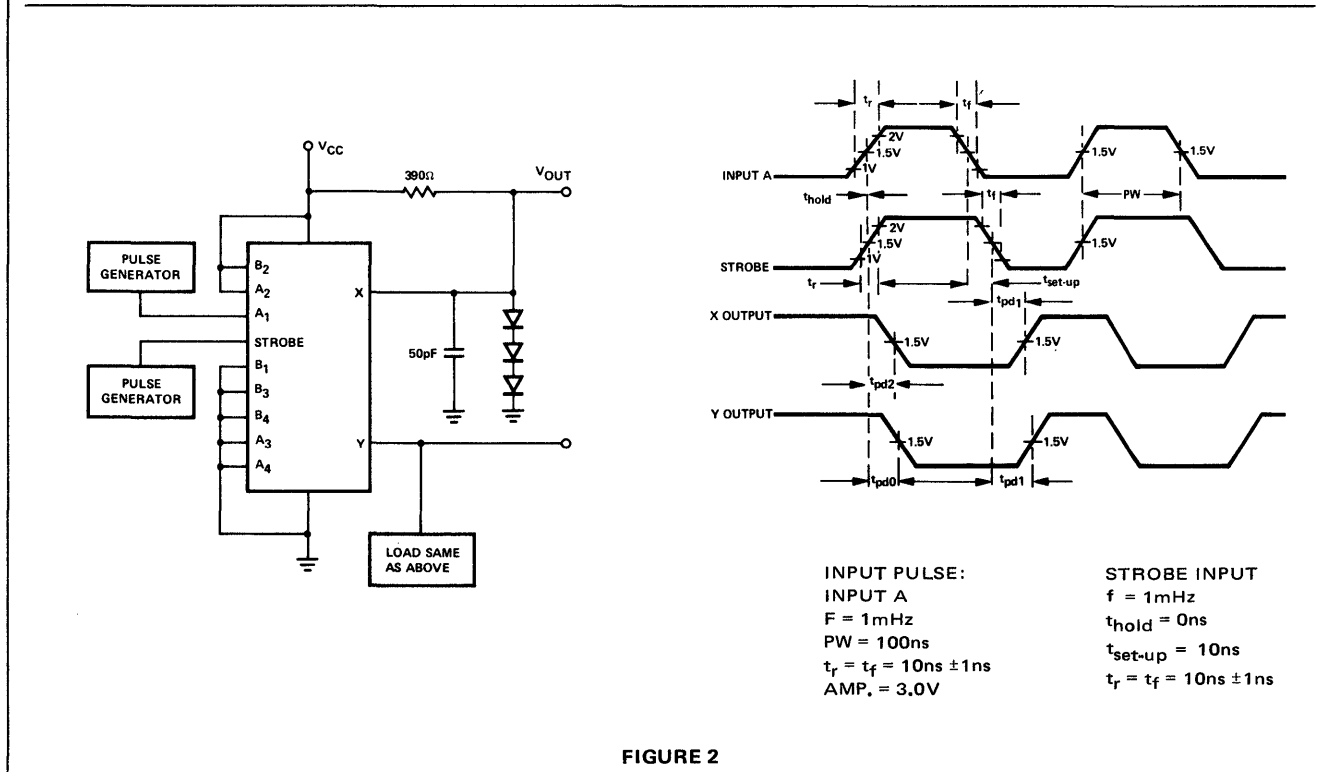


FIGURE 2

# 4-BIT SHIFT REGISTERS

# 8270 8271

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION

The 8270 is a 4-bit Shift Register with both serial and parallel data entry capability.

The data input lines are single-ended true input data lines which condition their specific register bit location after an enabled clocking transition. Since data transfer is synchronous with clock, data may be transferred in any serial/parallel input/output relationship.

The internal design uses level sensitive binaries which respond to the negative-going clock transition. A buffer clock driver has been included to minimize input clock loading.

Mode control logic is available to determine three possible control states. These register states are serial shift right mode, parallel enter mode, and no change or hold mode. These states accomplish logical decoding for system control.

The truth table for the control modes is shown below.


For applications not requiring the hold mode, the load input may be tied high and the shift input used as the mode control.

The 8271 provides a direct reset ( $R_D$ ), and a  $\overline{D}_{out}$  line in addition to the available outputs of the 8270 element. The fan-out specification for this output is the same as the true outputs of the 8270 element.

### TRUTH TABLE

CONTROL STATE	LOAD	SHIFT
Hold	0	0
Parallel Entry	1	0
Shift Right	0	1
Shift Right	1	1

### LOGIC DIAGRAM

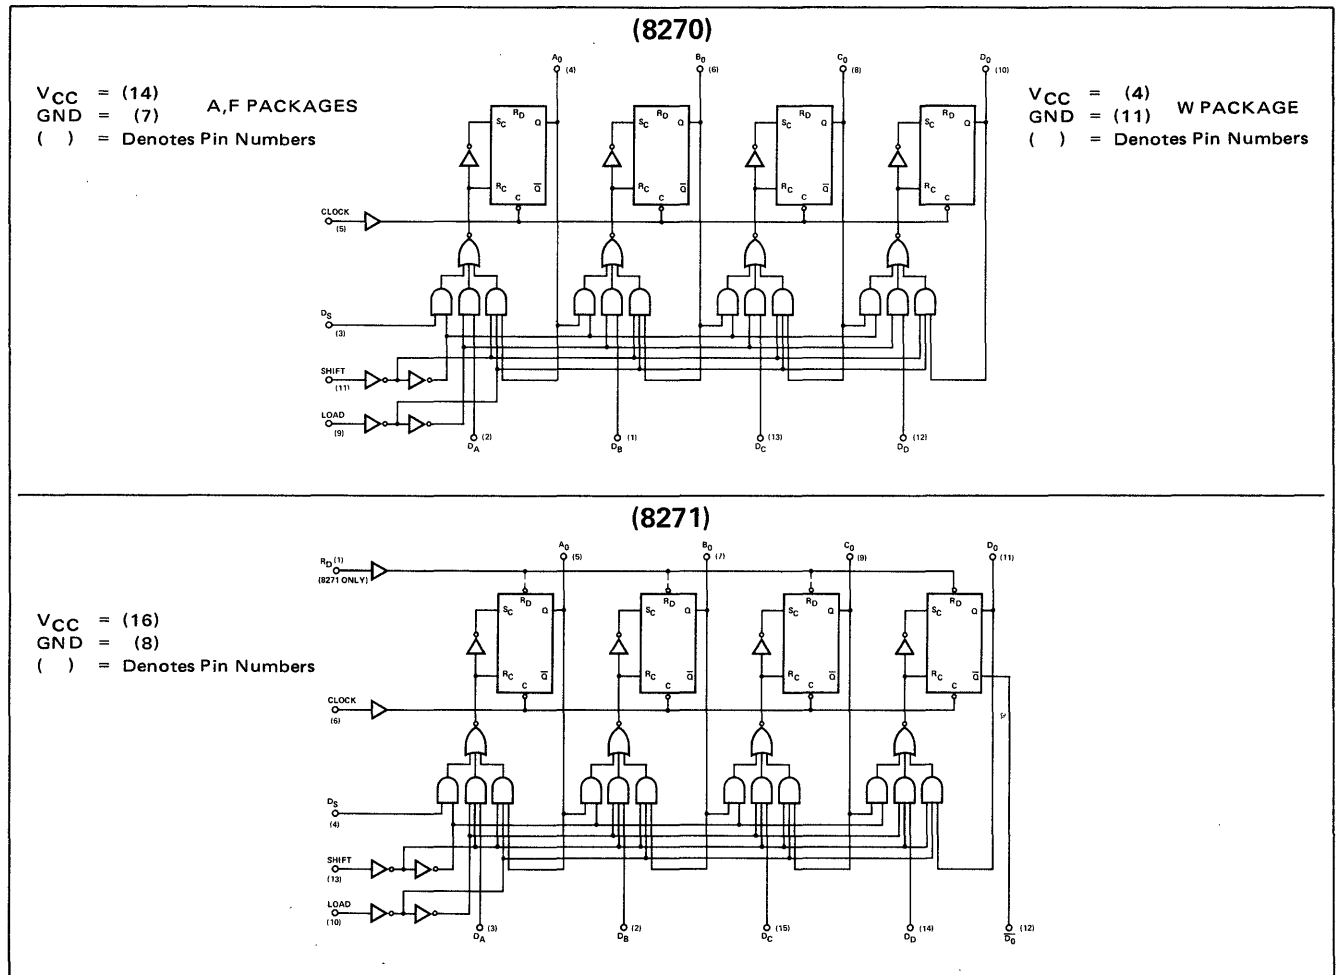

**SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8270/71**

**ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)**

CHARACTERISTICS	LIMITS				TEST CONDITIONS						NOTES
	MIN.	TYP.	MAX.	UNITS	LOAD	SHIFT	DATA INPUT	CLOCK	RESET 8271	OUTPUTS	
"1" Output Voltage	2.6	3.5		V	2.0V	0.8V	2.0V	Pulse	2.0V	-800µA	6
"0" Output Voltage			0.4	V	2.0V	0.8V	0.8V	Pulse	2.0V	11.2mA	7
"0" Input Current											
Load	-0.1		-1.2	mA	0.4V						
Shift	-0.1		-1.2	mA		0.4V	0.4V				
Data Input	-0.1		-1.2	mA			0.4V				
Clock	-0.1		-1.2	mA				0.4V			
Reset (8271 only)	-0.1		-1.2	mA					0V		
"1" Input Current											
Load			40	µA	4.5V						
Shift			40	µA		4.5V					
Data Input			40	µA			4.5V				
Clock			40	µA				4.5V			
Reset (8271 only)			40	µA					4.5V		
Input Voltage Rating (All Inputs)	5.5			V	10mA	10mA	10mA	10mA	10mA		

**T<sub>A</sub> = 25° C and V<sub>CC</sub> = 5.0V**


CHARACTERISTICS	LIMITS				TEST CONDITIONS						NOTES
	MIN.	TYP.	MAX.	UNITS	LOAD	SHIFT	DATA INPUT	CLOCK	RESET 8271	OUTPUTS	
Power/Current Consumption											
8270 Only		168/32	247/47	mW/mA							10
8271 Only		271/52	344/65	mW/mA							10
Turn-On Delay											
All Binaries		25	40	ns							8
Turn-Off Delay											
All Binaries		25	40	ns							8
Clock "1" Interval	20			ns				2.0V			
Transfer Rate	15	22		MHz							
Shift Load Set-Up Time		20	30	ns							
Data Set-Up Time		7	15	ns							

**NOTES:**

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive logic definition:  
"UP" Level = "1", "DOWN" Level "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Rating should the isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V<sub>CC</sub>.
- Refer to AC Test Figure.
- Manufacturer reserves the right to make design and process changes and improvements.
- V<sub>CC</sub> = 5.25 volts.

SCHEMATIC DIAGRAM

SINETICS DIGITAL 8000 SERIES TTL/MSI - 8270/71

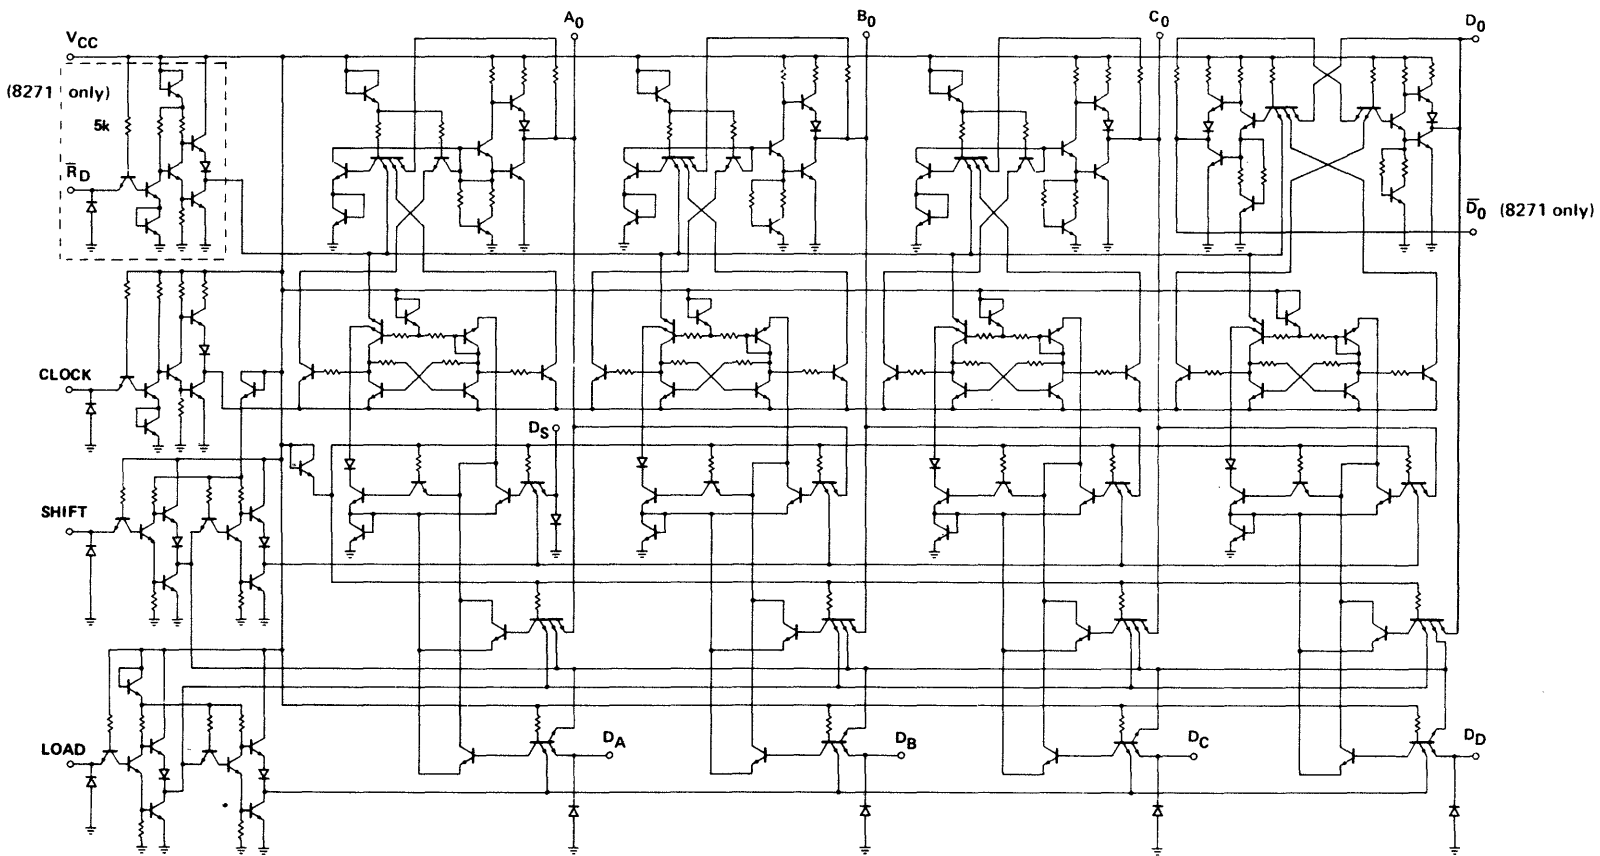



AC TEST FIGURES AND WAVEFORMS

TURN ON/OFF AND TRANSFER RATE

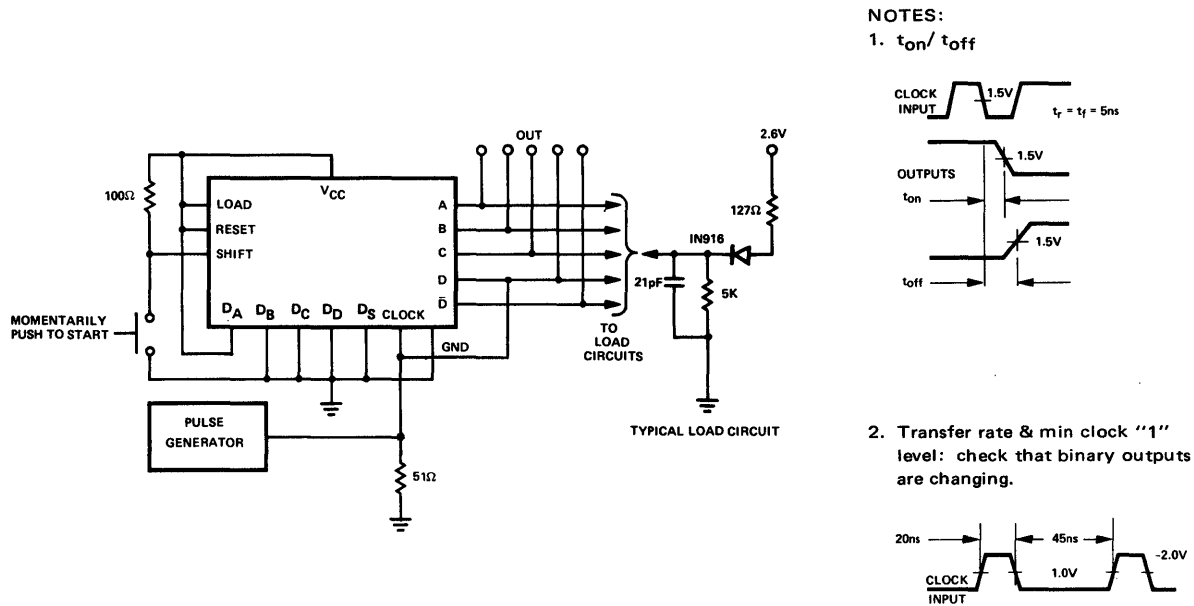


FIGURE 1

DATA SET-UP TIME


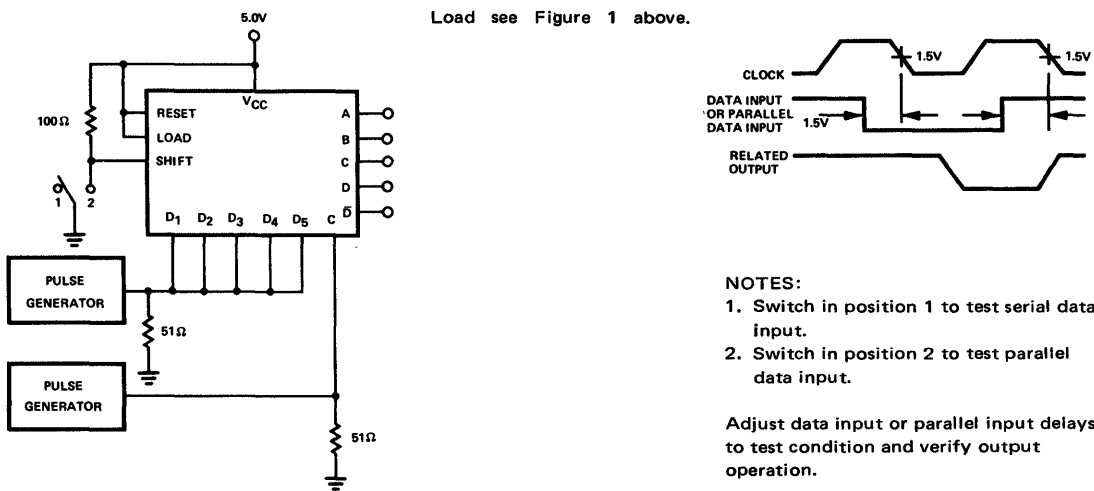


FIGURE 2

AC TEST FIGURES AND WAVEFORMS (Cont'd)

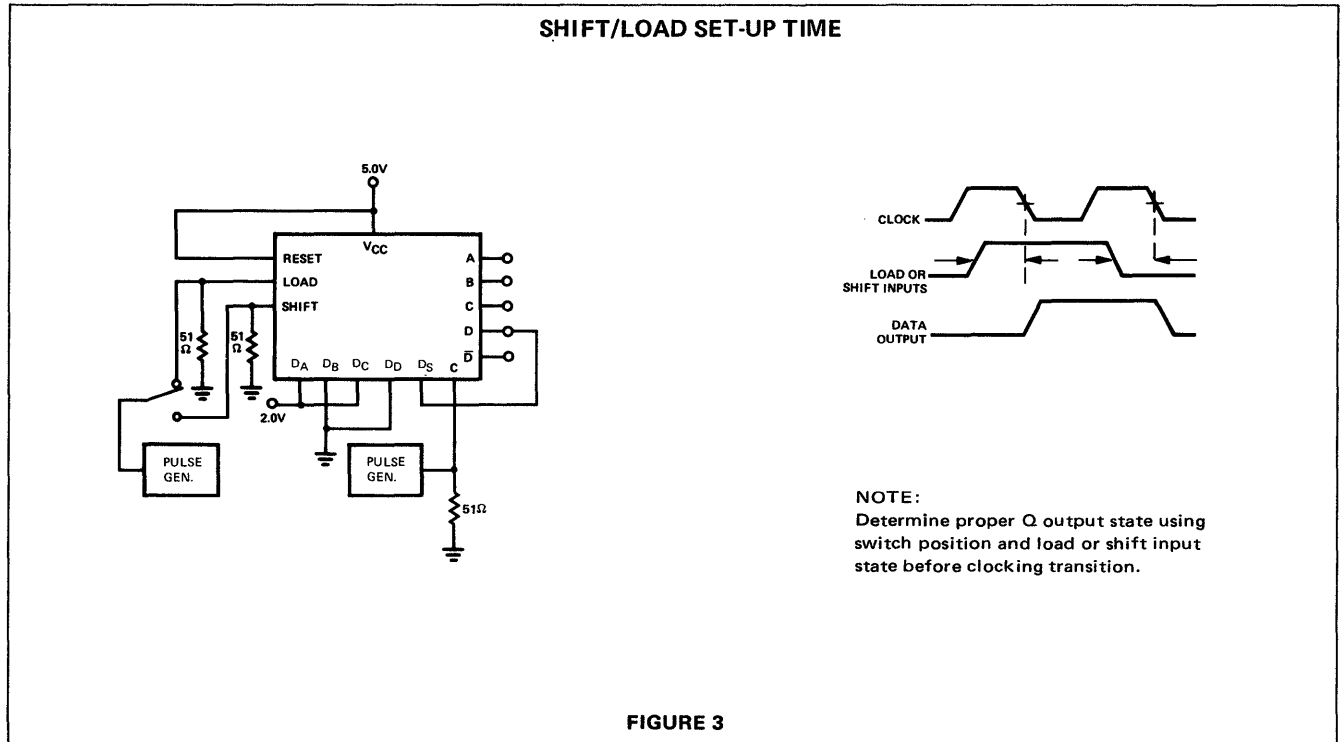


NOTES:

1. All resistor values are in ohms.
2. All capacitance values are in picofarads and include jig and probe capacitance. Capacitance as measured on Boonton

- Electronic Corporation Model 75A-S8 Capacitance Bridge or equivalent.  $f = 1 \text{ MHz}$ ,  $V_{AC} = \text{mV rms}$ .
3. All diodes are 1N916.

TYPICAL APPLICATIONS

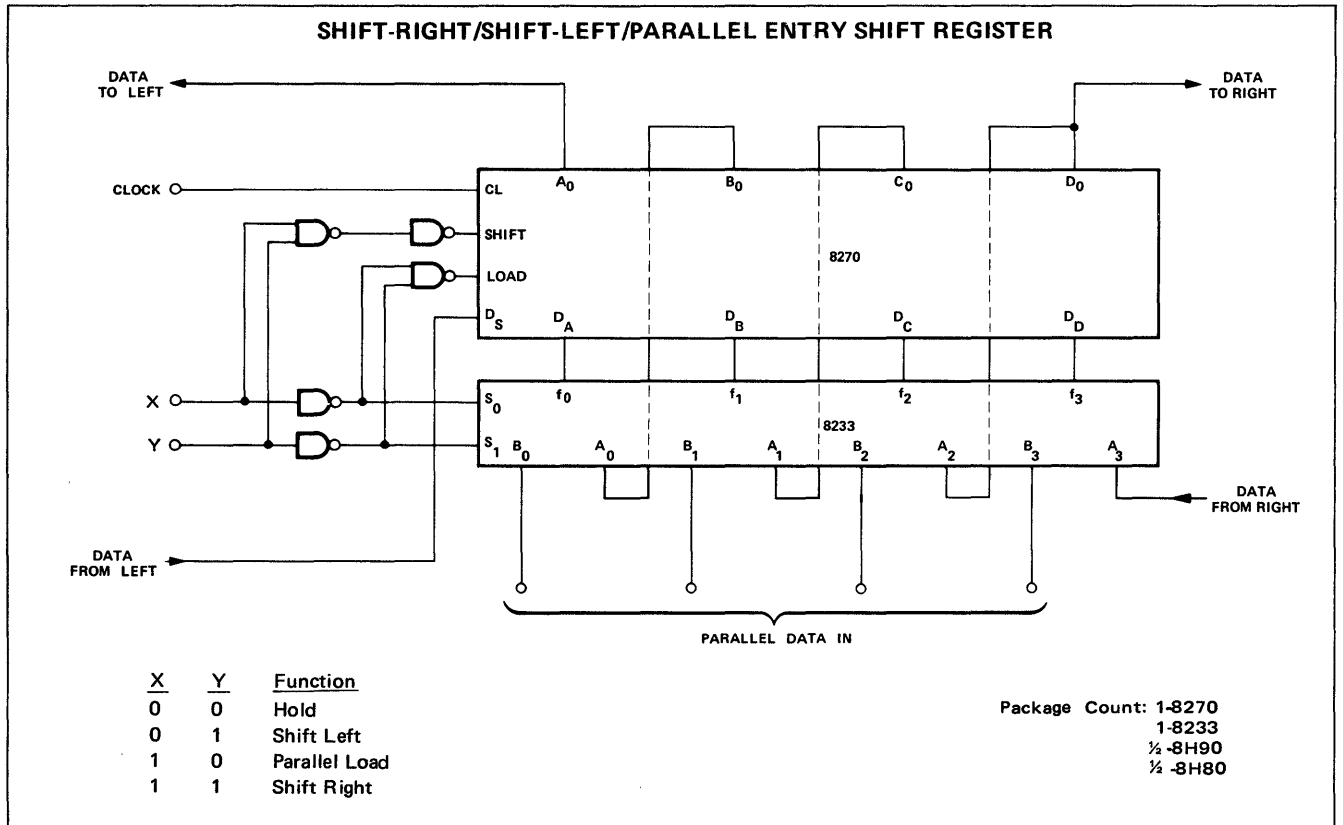



# 10-BIT SERIAL-IN, PARALLEL-OUT SHIFT REGISTER

# 8273

DIGITAL 8000 SERIES TTL/MSI

## DESCRIPTION


The 8273, 10-Bit Shift Register is an array of binary elements interconnected to perform the serial-in, parallel-out shift function. This device utilizes a common buffered reset and operates from either a positive or negative edge clock pulse. Clock 1 is triggered by a negative going clock pulse and Clock 2 is triggered by a positive going clock pulse. The unused clock input performs the inhibit function. The circuit configuration is arranged as a single serial input register with ten true parallel outputs.

## TRUTH TABLE

INPUT	RESET	CLOCK 1	CLOCK 2	Q <sub>n</sub> + 1
1	1	Pulse	0	1
0	1	Pulse	0	0
1	1	1	Pulse	1
0	1	1	Pulse	0
1	1	Pulse	1	Q
0	1	Pulse	1	Q
1	1	0	Pulse	Q
0	1	0	Pulse	Q

NOTE: The unused clock input performs the INHIBIT function.  
RESET = 0 ⇒ Q = 0

## LOGIC DIAGRAM

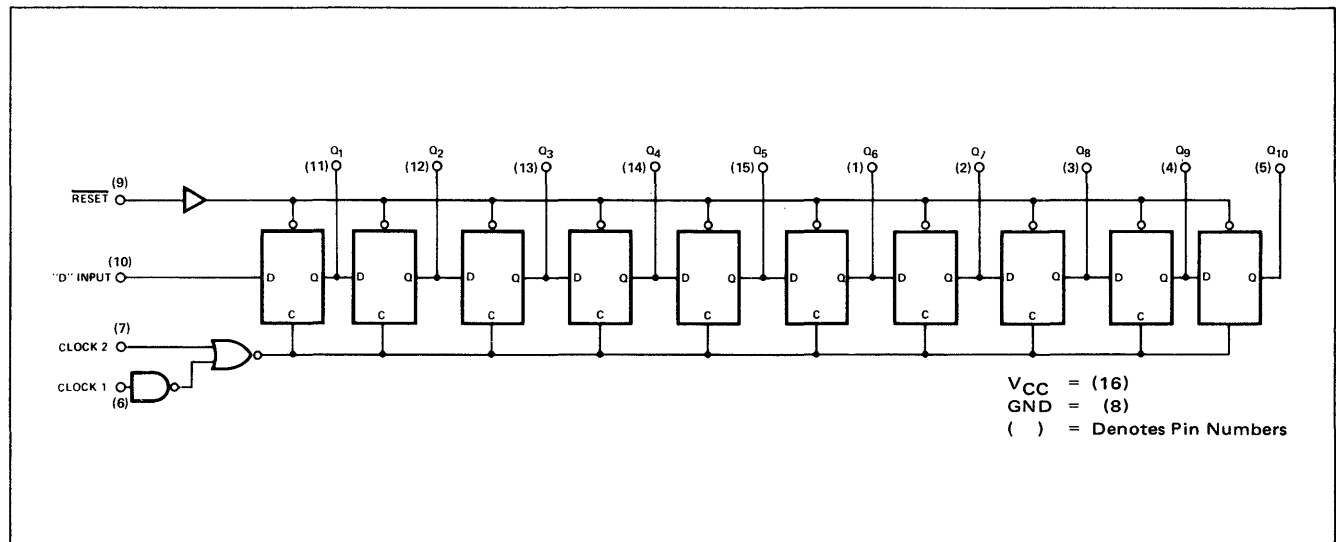

## ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS				OUTPUTS	NOTES
	MIN.	TYP.	MAX.	UNITS	"D" INPUT	CLOCK 1	CLOCK 2	RESET		
"1" Output Voltage	2.6	3.4		V	2.0V	Pulse	0.8V		-500μA	6
"0" Output Voltage		0.2	0.4	V	0.8V	Pulse	0.8V		9.6mA	7
"0" Input Current										
"D" Input	-0.1		-1.6	mA	0.4V					
Clock 1	-0.1		-1.6	mA		0.4V				
Clock 2	-0.1		-1.6	mA			0.4V			
Reset	-0.1		-1.6	mA				0.4V		
"1" Input Current										
"D" Input			40	μA	4.5V					
Clock 1			40	μA		4.5V				
Clock 2			40	μA			4.5V			
Reset			40	μA				4.5V		
Input Voltage Rating (All Inputs)	5.5			V	10mA	10mA	10mA	10mA		

# SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8273


$T_A = 25^\circ\text{C}$  and  $V_{CC} = 5.0\text{V}$

CHARACTERISTICS	LIMITS				TEST CONDITIONS				OUTPUTS	NOTES
	MIN.	TYP.	MAX.	UNITS	"D" INPUT	CLOCK 1	CLOCK 2	RESET		
Max. Data Transfer Rate	25	35		MHz						
Turn-On Delay										
Clock 1 to Output		32	40	ns			0.0V	4.5V		
Clock 2 to Output		28	40	ns				4.5V		
Reset to Output		35	50	ns		4.5V				
Turn-Off Delay										
Clock 1 to Output		25	40	ns			0.0V			
Clock 2 to Output		19	40	ns		4.5V				
Clock Pulse Width										
Clock 1		16	25	ns			0.0V			
Clock 2		12	20	ns		4.5V				
Set-Up Time ( $t_{\text{set-up}}$ )										
Clock 1			15	ns			0.0V			
Clock 2			10	ns		4.5V				
Hold Time ( $t_{\text{hold}}$ )										
Clock 1			15	ns			0.0V			
Clock 2			10	ns		4.5V				
Power Consumption			540	mW						8
Short Circuit Output Current	-20		-70	mA						
Input Voltage Rating (All Inputs)	5.5			V	10mA	10mA	10mA	10mA		

**NOTES:**

- All voltage and capacitance measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive logic definition: "UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- $V_{CC} = 5.25\text{V}$ .
- Manufacturer reserves the right to make design and process changes and improvements.
- See AC Test Figure.

## AC TEST FIGURE AND WAVEFORMS

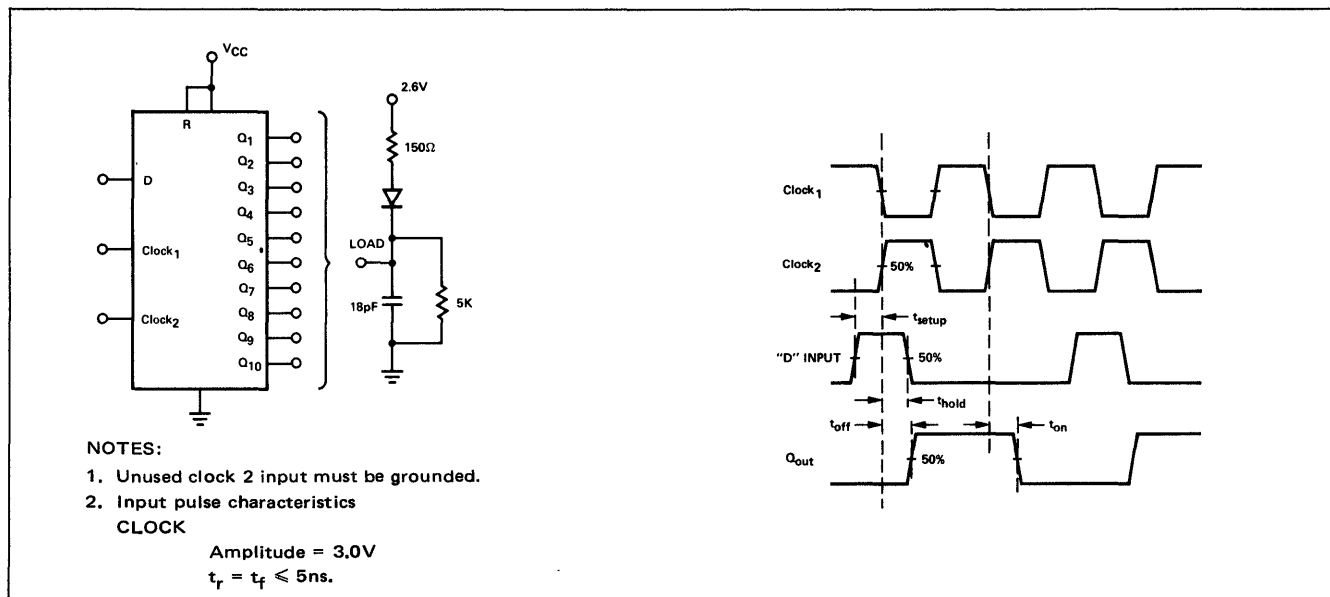

# 10-BIT PARALLEL-IN, SERIAL-OUT SHIFT REGISTER

# 8274

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION


The 8274 10-Bit Shift Register is an array of binary elements interconnected to perform the parallel-in, serial-out shift function. The circuit has ten parallel inputs and a single true serial output. The  $D_1$  input can also be used for serial entry. Two control inputs,  $S_0$  and  $S_1$ , determine the operating mode of the shift register as shown in the Truth Table. A single buffered clock line connects all ten flip-flops which are activated on the high-to-low transition of the clock pulse. Guaranteed input clock frequency is 25MHz. With the exception of the Hold Mode, the control inputs may be changed when the clock is in either the high or low state without causing false triggering. The Hold Mode can be entered only when the clock is low. Applications for the 8274 Shift Register include Parallel-to-Serial conversion,

Modem Data Transmission, Pseudo-Random Code generation and Modulo-N Frequency Division.

### TRUTH TABLE

$S_0$	$S_1$	OPERATING MODE
0	0	Hold
0	1	Clear
1	0	Load
1	1	Shift

### LOGIC DIAGRAM

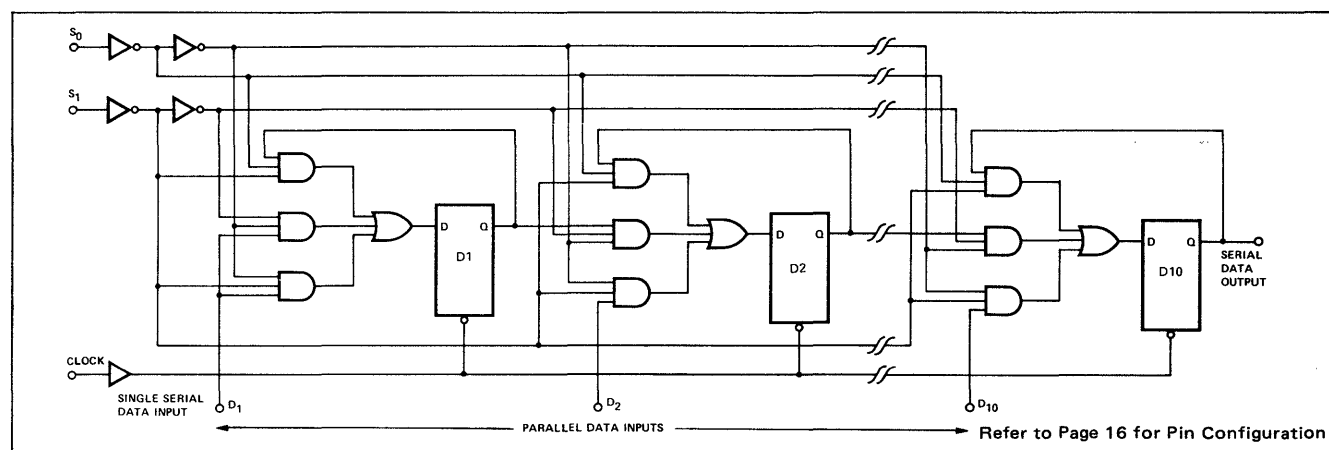

### ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS					NOTES
	MIN.	TYP.	MAX.	UNITS	$D_n$	$S_0$	$S_1$	CLOCK	OUTPUTS	
"1" Output Voltage	2.6	3.4		V	2.0V	2.0V	2.0V	Pulse	-800 $\mu$ A	6
"0" Output Voltage		0.2	0.4	V	0.8V	2.0V	2.0V	Pulse	16mA	7
"0" Input Current										
$D_n$	-0.2		1.2	mA	0.4V					
$S_0$ and $S_1$	-0.2		1.2	mA		0.4V	0.4V			
Clock	-0.2		1.6	mA				0.4V		
"1" Input Current										
$D_n$			40	$\mu$ A	4.5V					
$S_0$ and $S_1$			40	$\mu$ A		4.5V	4.5V			
Clock			40	$\mu$ A				4.5V		

# SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8274


$T_A = 25^\circ\text{C}$  and  $V_{CC} = 5.0\text{V}$

CHARACTERISTICS	LIMITS				TEST CONDITIONS					NOTES
	MIN.	TYP.	MAX.	UNITS	$D_n$	$S_0$	$S_1$	CLOCK	OUTPUT	
Data Transfer Rate	25	30		MHz						10
Turn-On Delay (Clock to Output)		27	40	ns						10
Turn-Off Delay (Clock to Output)		21	40	ns						10
Clock Pulse Width	20			ns						10
Set-Up Time ( $t_{\text{setup}}$ )										10
$D_n$		6	10	ns						
$S_0, S_1$		16	25	ns						
Hold Time ( $t_{\text{hold}}$ )										
$D_n$		2	5	ns						
$S_0, S_1$		16	25	ns						
Power Consumption		380	567	mW	4.5V	4.5V	4.5V	0V		8
Short Circuit Output Current	-20		-70	mA	2.0V	2.0V	2.0V	Pulse	0.0V	
Input Voltage Rating	5.5			V	10mA					

**NOTES:**

- All voltage and capacitance measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive logic definition:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- $V_{CC} = 5.25\text{V}$ .
- Manufacturer reserves the right to make design and process changes and improvements.
- See AC Test Figure.

## AC TEST FIGURE AND WAVEFORMS

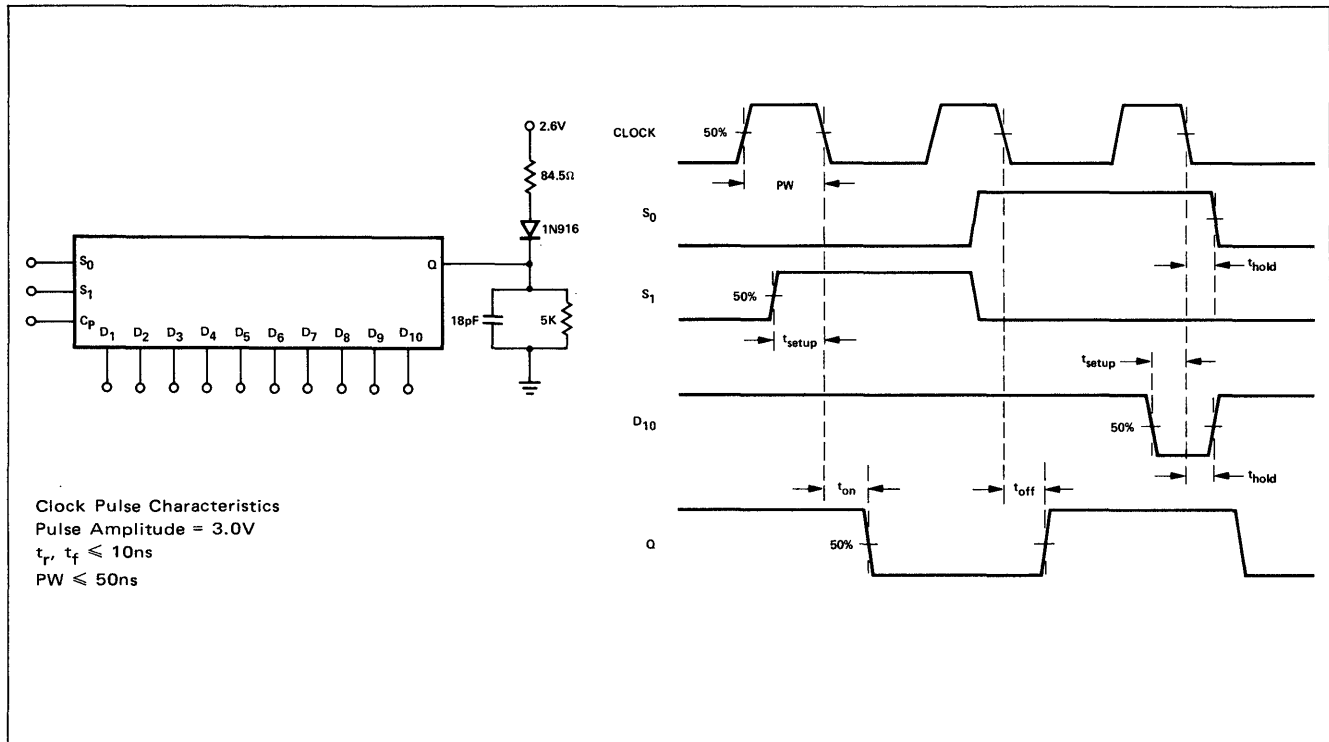

# QUAD BISTABLE LATCH

# 8275

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION

The 8275 is a QUAD LATCH circuit designed to provide temporary storage of four bits of information. A common application is as a holding register between a counter and a display driver (such as the 8280 and 8T01.) Separate enable lines to latches 1-2 and 3-4 allow individual control of each

pair of latches. Initially, data is transferred on the rising edge of the enable pulse. While the enable is high, output Q follows the data input. When the enable falls, the input data present at fall time is retained at the Q output. Both Q and  $\bar{Q}$  are accessible.

### LOGIC DIAGRAM AND TRUTH TABLE

Refer to Page 16 for Pin Configuration

(Each Latch)			
ENABLE	DATA	Q	$\bar{Q}$
1	1	1	0
1	0	0	1
0	1	*	*
0	0	*	*

\*No Change.

### ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS			NOTES
	MIN.	TYP.	MAX.	UNITS	DATA INPUT	ENABLE INPUT	OUTPUTS	
"1" Output Voltage ( $Q, \bar{Q}$ )	2.6	3.5		V			-800 $\mu$ A	6, 11
"0" Output Voltage ( $Q, \bar{Q}$ )			0.4	V			16mA	7, 11
"0" Input Current (Data)	-0.1		-3.2	mA	0.4V	5.25V		
"0" Input Current (Enable)	-0.1		-6.4	mA	5.25V	0.4V		
"1" Input Current (Data)			80	$\mu$ A	4.5V	0.0V		
"1" Input Current (Enable)			160	$\mu$ A	0.0V	4.5V		

$T_A = 25^\circ\text{C}$  and  $V_{CC} = 5.0\text{V}$

CHARACTERISTICS	LIMITS				TEST CONDITIONS			NOTES
	MIN.	TYP.	MAX.	UNITS	DATA INPUT	ENABLE INPUT	OUTPUTS	
$t_{\text{setup}}$ (1) at D input		12	20	ns				8, 12
$t_{\text{setup}}$ (0) at D input		14	20	ns				8, 12
$t_{\text{hold}}$ (1) at D input	0	15		ns				8, 13
$t_{\text{hold}}$ (0) at D input	0	6		ns				8, 13
$t_{\text{pd}}$ (1) D to Q		16	30	ns				8
$t_{\text{pd}}$ (0) D to Q		14	25	ns				8
$t_{\text{pd}}$ (1) D to $\bar{Q}$		24	40	ns				8
$t_{\text{pd}}$ (0) D to $\bar{Q}$		7	15	ns				8
$t_{\text{pd}}$ (1) E to Q		16	30	ns				8
$t_{\text{pd}}$ (0) E to Q		12	20	ns				8
$t_{\text{pd}}$ (1) E to $\bar{Q}$		16	30	ns				8
$t_{\text{pd}}$ (0) E to $\bar{Q}$		12	20	ns				8
Power Consumption/Supply Current		205/39	265/50	mW/mA				14
Input Voltage Rating (Data)	5.5			V	10mA	0.0V		12
Input Voltage Rating (Enable)	5.5			V	0.0V	10mA		12
Output Short Circuit Current	-20		-70	mA	0.0V		0.0V	




# SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8275


## NOTES:

1. All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
2. All measurements are taken with ground pin tied to zero volts.
3. Positive current flow is defined as into the terminal referenced.
4. Positive NAND Logic Definition: "UP" Level = "1", "DOWN" Level = "0".
5. Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
6. Output source current is supplied through a resistor to  $V_{CC}$ .
7. Output sink current is supplied through a resistor to  $V_{CC}$ .
8. Refer to AC Test Figure.
9. Manufacturer reserves the right to make design and process changes and improvements.
10. Inputs for output voltage test is per TRUTH TABLE with threshold levels of 0.8V for logical "0" and 2.0V for logical "1".
11. This test guarantees operation free of input latch-up over the specified operating power supply voltage range.
12.  $t_{setup}$  is defined as the time prior to the fall of the clock.
13.  $t_{hold}$  is defined as the time after the fall of the clock.
14.  $V_{CC} = 5.25$  volts.


## SCHEMATIC DIAGRAM

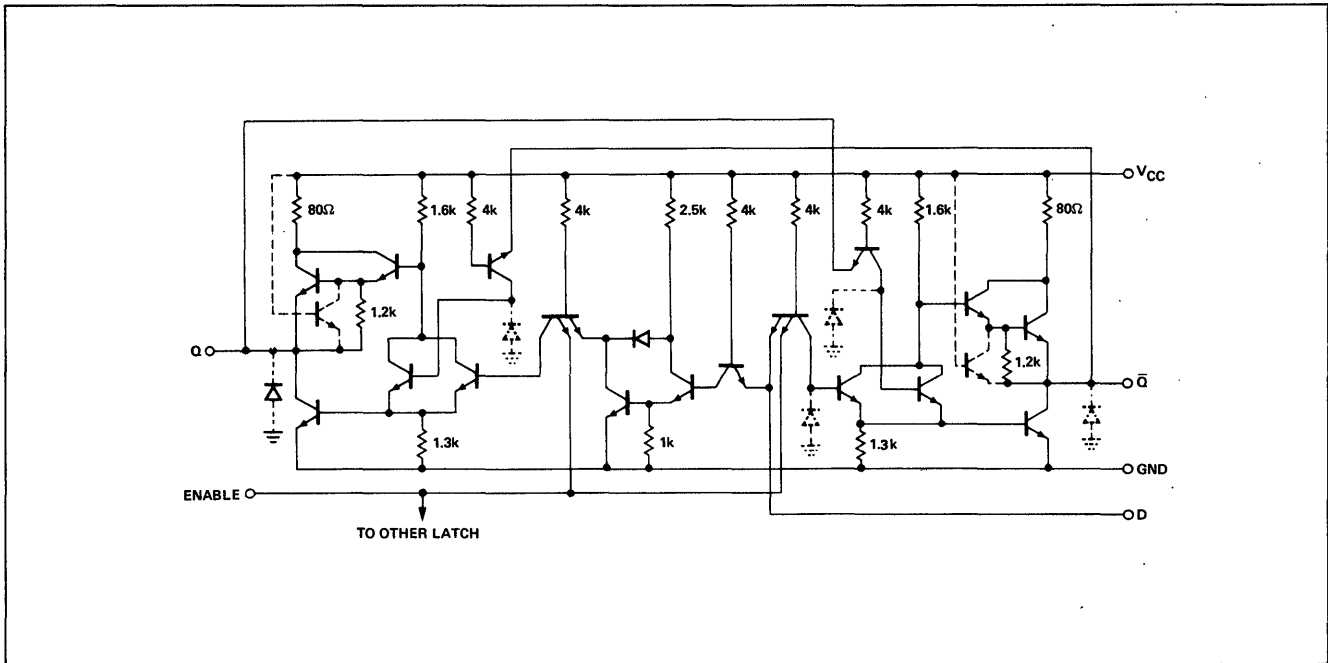

## AC TEST FIGURES AND WAVEFORMS

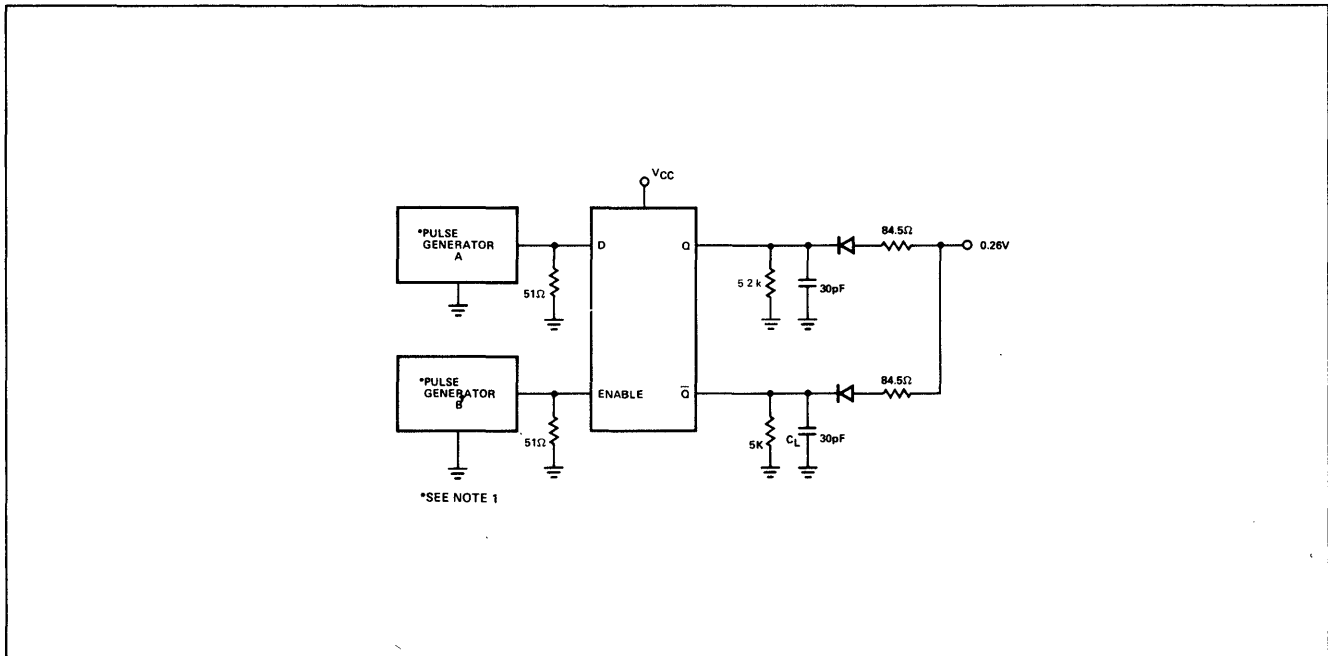

AC TEST FIGURES AND WAVEFORMS (Cont'd)

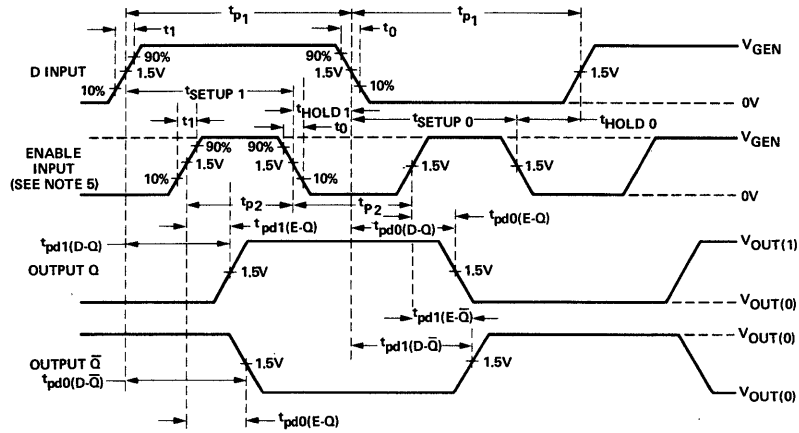


NOTES:

1. The pulse generators have the following characteristics:  $V_{gen} = 3V$ ,  $t_1 = t_0 \leq 10ns$ , and  $Z_{out} \approx 50\Omega$ . For pulse generator A  $t_{p1} = 1\mu s$  and  $PRR = 500kHz$ . For pulse generator B,  $t_{p2} = 500ns$  and  $PRR = 1MHz$ . Positions of D-input and enable input pulses are varied with respect to each other to verify setup and hold times.
2. Each latch is tested separately.
3.  $C_L$  includes probe and jig capacitance.
4. All diodes are 1N916.
5. When measuring  $t_{pd1}(D-Q)$ ,  $t_{pd0}(D-Q)$ ,  $t_{pd0}(D-\bar{Q})$ , and  $t_{pd1}(D-\bar{Q})$ , enable input must be held at logical 1.

TYPICAL APPLICATION

OUTPUT STROBING OF RIPPLE COUNTER TO ACHIEVE SYNCHRONOUS OUTPUT CHANGES

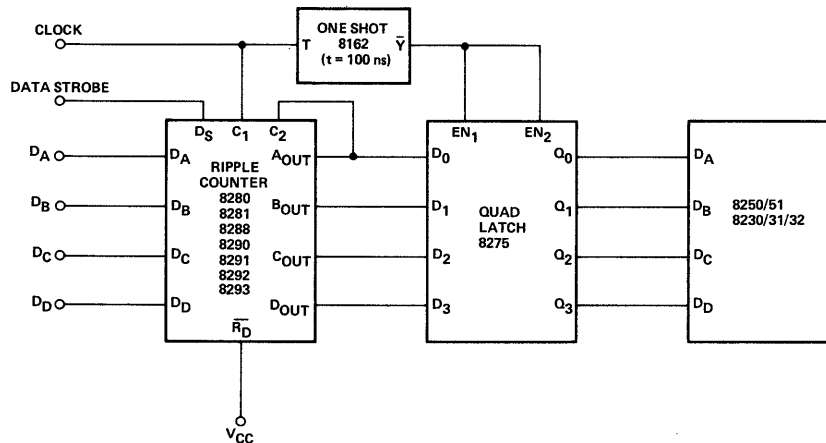



# 8-BIT SHIFT REGISTER

# 8276

PRODUCT AVAILABLE IN 0°C TO 75°C TEMP RANGE ONLY.

DIGITAL 8000 SERIES TTL/MSI



## DESCRIPTION

The 8276 is a serial-in, serial-out 8-Bit Shift Register composed of eight R-S master slave flip-flops. This shift register has input gating and an internal clock driver. In addition, a data transfer inhibit input is provided.

Data Input and Data Enable are gated through inputs A and B. An internal inverter provides the complimentary inputs to the first bit of the shift register. All inputs are fully buffered. Complementary Q and  $\bar{Q}$  outputs are provided.

The internal clock driver/inverter causes the 8276 to shift data to the output on the positive edge of the input clock pulse, making the shift register compatible with the 8825 J-K Binary and the 8828 Dual D type Binary. The register is inhibited from shifting data when the Transfer Inhibit line is high. The inhibit function is achieved by preventing data transfer from master to slave sections of the register elements when the inhibit line is used.

## LOGIC DIAGRAMS AND TRUTH TABLES

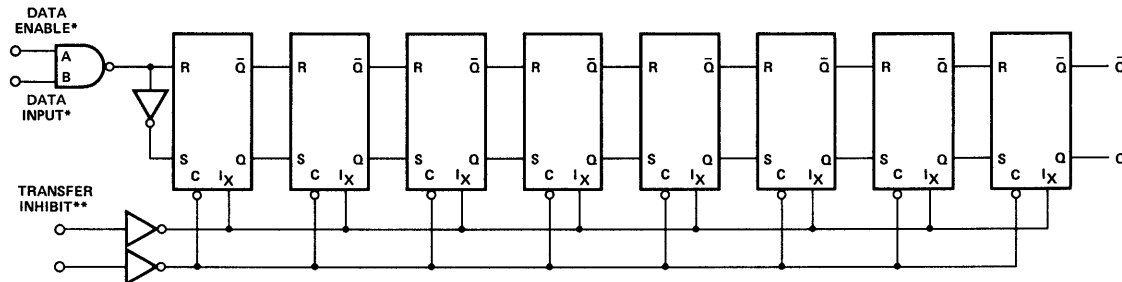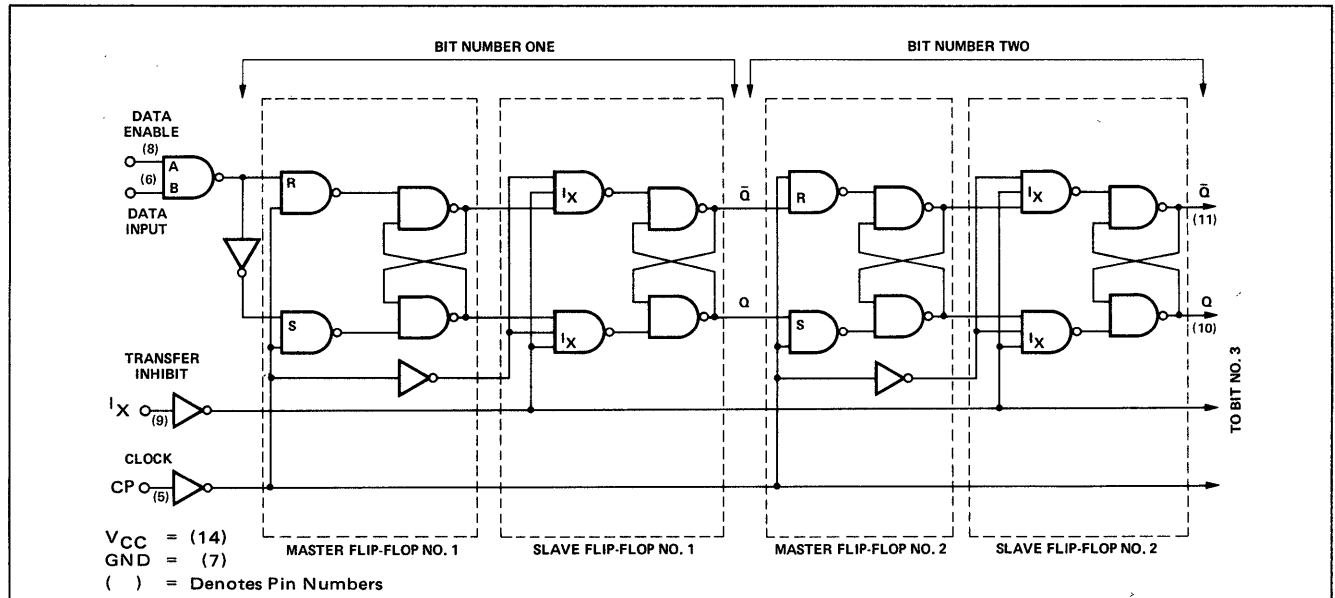

$t_n$		$t_{n+8}$
A (Data Enable)	B (Data Input)	Q
0	0	0
0	1	0
1	0	0
1	1	1

\*NOTE: These functions are interchangeable.

\*\*NOTE: Transfer Inhibit prevents transfer of data from master to slave.

NOTES:

$t_n$  = Bit time before clock pulse.

$t_{n+8}$  = Bit time after 8 clock pulses.

**SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8276**

**ELECTRICAL CHARACTERISTICS** (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS				NOTES
	MIN.	TYP.	MAX.	UNITS	DATA INPUTS	CLOCK	TRANS. INHIBIT	OUTPUTS	
"1" Output Voltage Q	2.6			V	2.0V		0.8V	-800μA	6, 10
"1" Output Voltage $\bar{Q}$	2.6			V	0.8V		0.8V	-800μA	6, 10
"0" Output Voltage Q			0.4	V	0.8V		0.8V	16mA	7, 10
"0" Output Voltage $\bar{Q}$			0.4	V	2.0V		0.8V	16mA	7, 10
"0" Input Current									
Data Input	-0.1		-1.6	mA	0.4V				
Clock Input	-0.1		-1.6	mA		0.4V			
Inhibit Input	-0.1		-1.6	mA			0.4V		
"1" Input Current									
Data Inputs			40	μA	4.5V				
Clock Input			40	μA		4.5V			
Inhibit Input			40	μA			4.5V		
Input Voltage Rating	5.5			V	10mA	10mA	10mA		



$T_A = 25^\circ\text{C}$  and  $V_{CC} = 5.0\text{V}$

CHARACTERISTICS	LIMITS				TEST CONDITIONS				NOTES
	MIN.	TYP.	MAX.	UNITS	DATA INPUTS	CLOCK	TRANS. INHIBIT	OUTPUTS	
Power/Current Consumption		205/39	340/65	mW/mA					11
Transfer Rate	15	20		MHz					
Turn-on Delay (Clock to Output)		22	33	ns					8
Turn-off Delay (Clock to Output)		22	33	ns					8
Clock Pulse Width	25			ns					
Set Up Time (Logical) "0" at A or B Input	25			ns					
Set Up Time (Logical) "1" at A or B Input	25			ns					
Output Short Circuit Current	-18		-55	mA				0V	

**NOTES:**

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive logic definition:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to  $V_{CC}$ . Refer to AC Test Figure.
- Manufacturer reserves the right to make design and process changes and improvements.
- Clock input is driven by a 1kHz square wave for at least 8 cycles prior to measurements.
- $V_{CC} = 5.25\text{V}$ .

AC TEST FIGURE AND WAVEFORMS

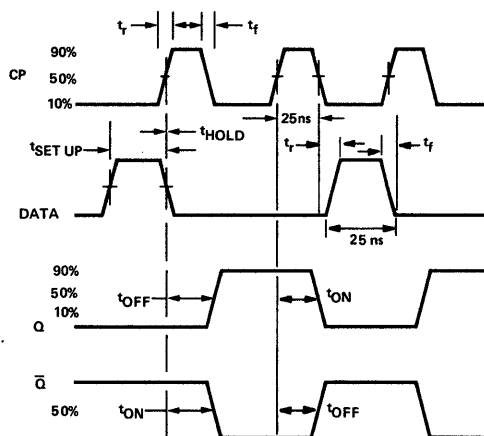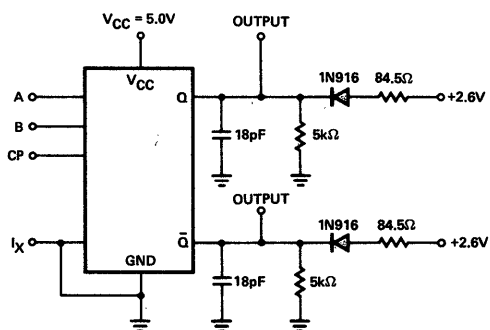


NOTES:

1. Unused input connected to 2.6V
  2. Input pulse characteristics:
  3. Setup time = 25ns  
Hold time = 0ns
- CLOCK:  
Amplitude = 3.0V  
 $t_r = t_f = 5ns$  max  
PRR = 15 MHz, Pulse width = 25ns at 50% points

INPUT:  
Amplitude = 3.0V  
 $t_r = t_f = 5ns$  max  
PRR = 7.5 MHz  
Pulse width = 25ns at 50% points

TYPICAL INPUT/OUTPUT WAVEFORMS

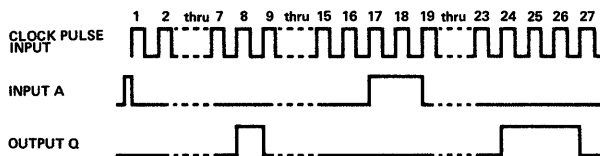

NOTE: Input B is connected to 2.6V. Transfer Inhibit Connected to 0V



# DUAL 8-BIT SHIFT REGISTER

# 8277

PRODUCT AVAILABLE IN 0°C TO +75°C TEMP RANGE ONLY.

DIGITAL 8000 SERIES TTL/MSI

## DESCRIPTION


The 8277 is a dual 8-Bit Shift Register which provides the designer with sixteen (16) bits of serial storage operating at a typical shift rate of 20MHz. Features of the 8277 are:

1. TRUE and COMPLEMENT outputs are provided on each register's eighth bit.
2. Positive edge triggering on clock input.
3. SEPARATE CLOCK lines (pins 7 and 10) for each 8-bit register are provided as well as a COMMON CLOCK line (pin 9) for all sixteen storage bits.
4. Common RESET (pin 1).
5. AND-OR gating to the input of each 8-bit register is provided to accomplish the multiplex function.
6. Direct replacement for 9328.

## TRUTH TABLE

D <sub>S</sub>	D <sub>0</sub>	D <sub>1</sub>	Reset	Function
0	0	x	1	Shift in "0"
0	1	x	1	Shift in "1"
1	x	0	1	Shift in "0"
1	x	1	1	Shift in "1"
x	x	x	0	Reset "Q" to "0"

## LOGIC DIAGRAM

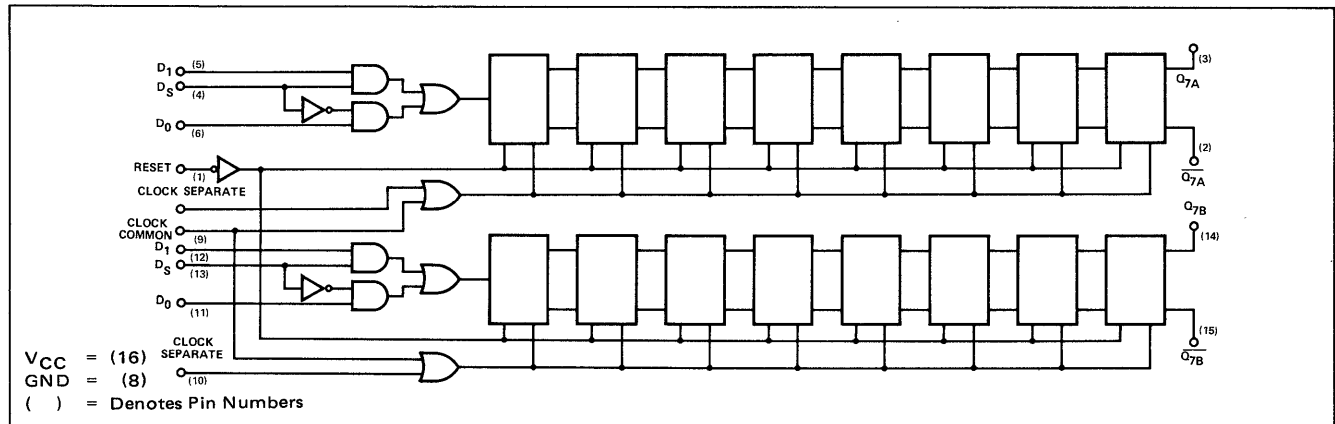

## ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS						NOTES
	MIN.	TYP.	MAX.	UNITS	DATA D <sub>1</sub> , D <sub>0</sub>	DATA SELECT	CLK COMMON	CLK SEP	RESET	OUTPUTS	
"1" Output Voltage (Q)	2.6	3.5		V	2.0V	2.0V	Pulse	0.8V	2.0V	-800μA	6
"1" Output Voltage (Q)	2.6	3.5		V	0.8V	2.0V	0.8V	Pulse		-800μA	6
"0" Output Voltage (Q)			0.4	V	0.8V	0.8V	Pulse	0.8V		16mA	7
"0" Output Voltage (Q)			0.4	V	2.0V	0.8V	Pulse	0.8V		16mA	7
"0" Input Current											
Data, Reset, Data Select			-1.6	mA	0.4V	0.4V			0.4V		
Clock Separate			-1.6					0.4V			
Clock Common			-3.2	mA			0.4V				
"1" Input Current											
Data, Reset, Clock Separate			40	μA	4.5V	4.5V		4.5V	4.5V		
Clock Common			80	μA			4.5V				
Power/Current Consumption			540/ 103	mW/ mA							11
Input Voltage Rating											
All Inputs	5.5			V	10mA	10mA	10mA	10mA	10mA		



# SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8277

$T_A = 25^\circ\text{C}$  and  $V_{CC} = 5.0\text{V}$


CHARACTERISTICS	LIMITS				TEST CONDITIONS						NOTES
	MIN.	TYP.	MAX.	UNITS	DATA $D_1, D_0$	DATA SELECT	CLK COMMON	CLK SEP	RESET	OUTPUTS	
Turn-on Delay											
Clock To Output		25	40	ns							10
Reset To Output		25	40	ns							10
Turn-off Delay											
Clock To Output		25	40	ns							10
Reset To Output		25	40	ns							10
Clock Pulse Width	15			ns							10
Shift Rate	15	20		MHz							10
Data Set-up Time		20	30	ns							10
Data Hold Time		5	10	ns							10

**NOTES:**


- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive Logic Definitions:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the

- isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- Manufacturer reserves the right to make design and process changes and improvements.
- Clock input is driven by a 1kHz square wave for at least 8 cycles prior to measurement.
- Refer to AC Test Figure.
- $V_{CC} = 5.25\text{V}$

## AC TEST FIGURE AND WAVEFORMS

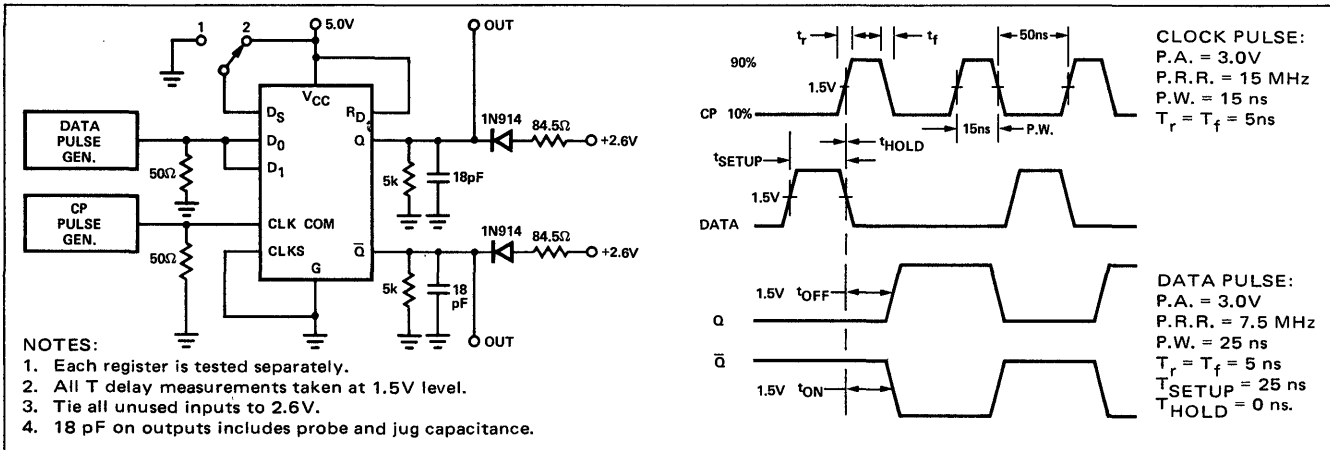

## TYPICAL APPLICATION

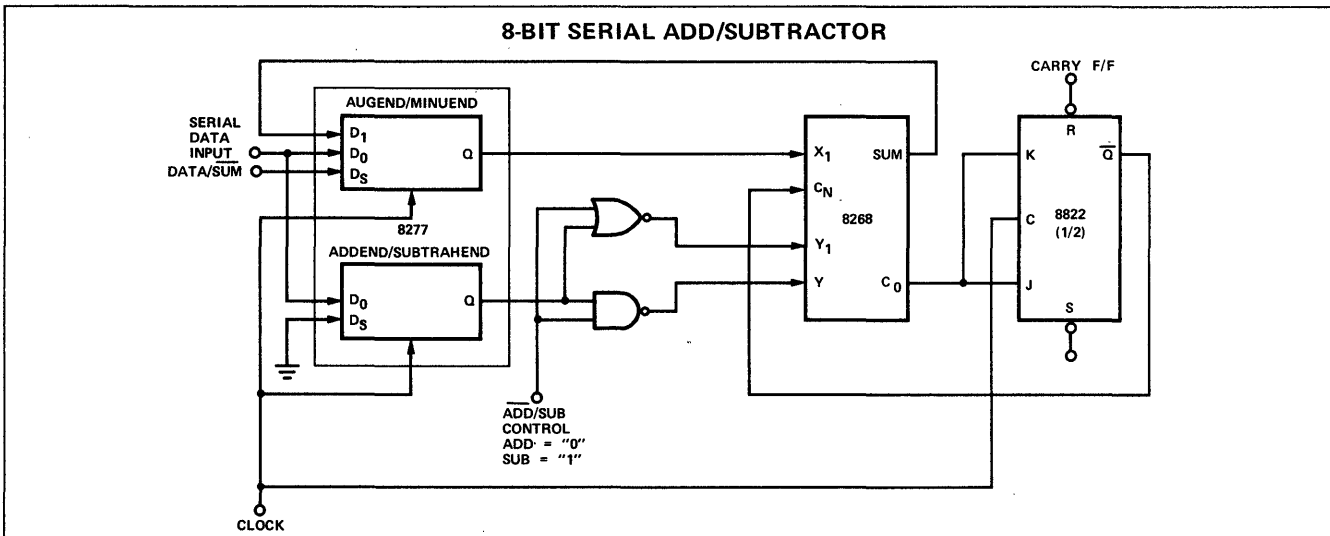

# BCD DECADE COUNTER/STORAGE ELEMENT 4-BIT BINARY COUNTER/STORAGE ELEMENT

# 8280 8281

DIGITAL 8000 SERIES TTL/MSI

## DESCRIPTION

The 8280 Decade Counter and 8281 16-State Binary Counter are four-bit subsystems providing a wide variety of counter/storage register applications with a minimum number of packages.


The 8280 Decade Counter can be connected in the familiar BCD counting mode, in a divide-by-two and divide-by-five configuration or in the Bi-Quinary mode. The Bi-Quinary mode produces a square wave output which is particularly useful in frequency synthesizer applications.

The 8281 Binary Counter may be connected as a divide-by-two, eight, or sixteen counter.

Both devices have strobed parallel-entry capability so that the counter may be set to any desired output state. A "1" or "0" at a data input will be transferred to the associated output when the strobe input is put at the "0" level. For additional flexibility, both units are provided with a reset input which is common to all four bits. A "0" on the reset line produces "0" at all four outputs.

The counting operation is performed on the falling (negative-going) edge of the input clock pulse, however there is no restriction on the transition time since the individual binaries are level-sensitive.

## LOGIC DIAGRAMS

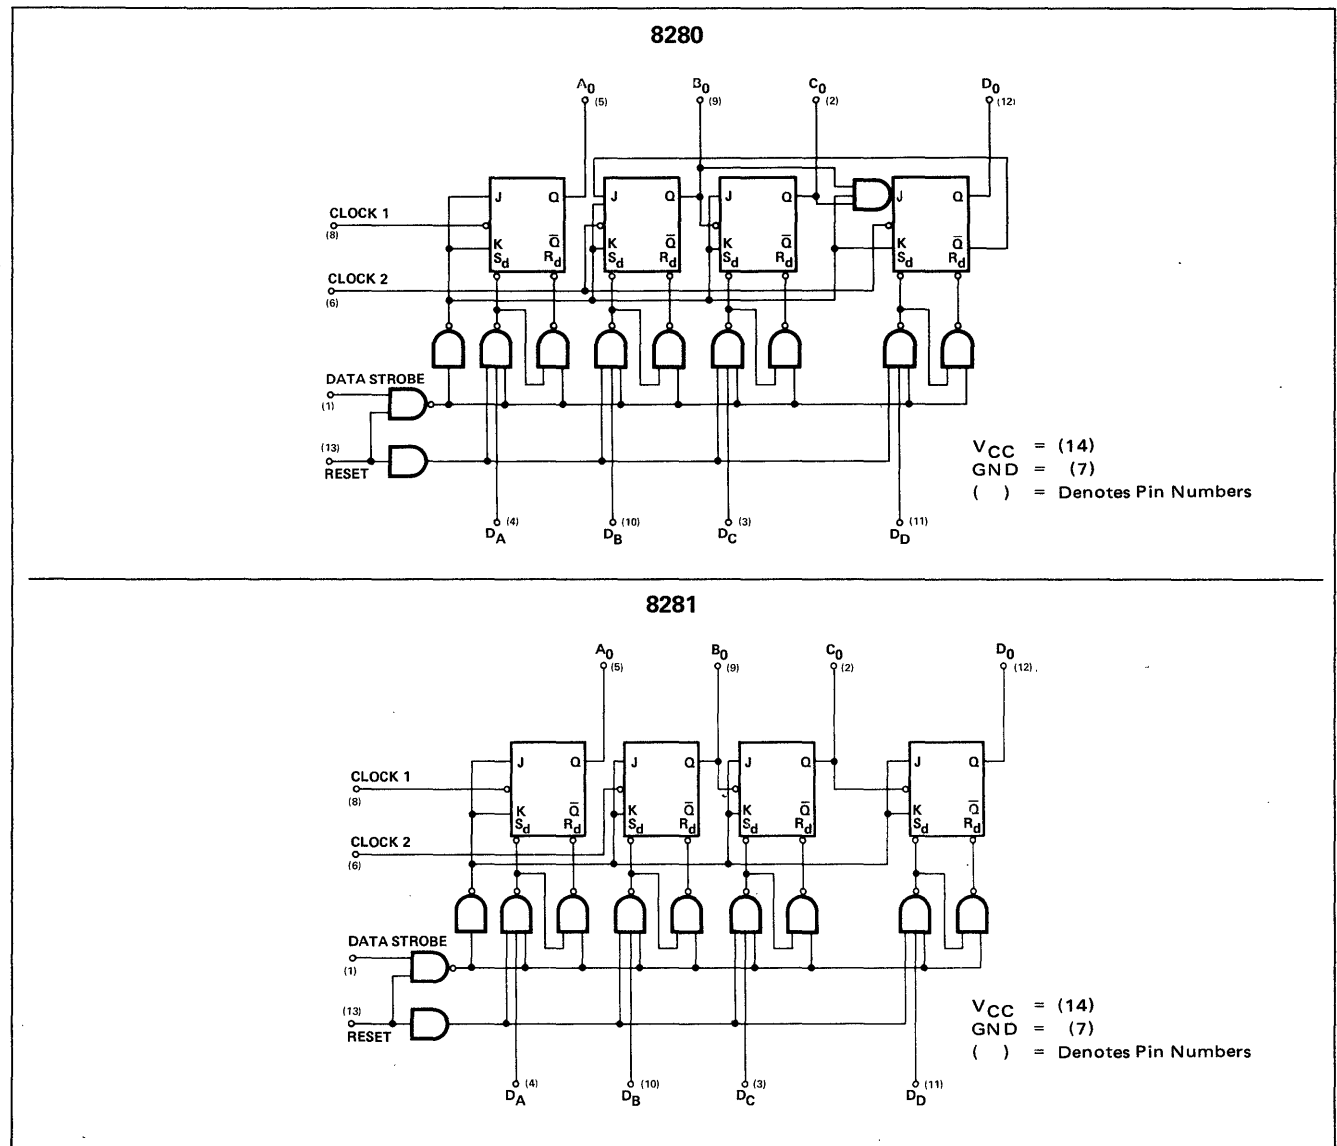

SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8280/81

ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS						NOTES	
	MIN.	TYP.	MAX.	UNITS	DATA STROBE	DATA INPUTS	RESET	CLOCK 1	CLOCK 2	OUTPUTS		
"1" Output Voltage (All Outputs)	2.6	3.5		V	0.8V	2.0V	2.0V					7
"0" Output Voltage (All Outputs)			0.4	V	0.8V	0.8V	0.8V			Output A	-800μA	8
"0" Input Current										Output A	16mA	
Strobe	-0.1		-1.6	mA	0.4V							
Data Inputs	-0.1		-1.2	mA		0.4V						
Reset	-0.1		-3.2	mA			0.4V					
Clock 1	-0.1		-3.2	mA				0.4V				
Clock 2 (8280)	-0.1		-3.2	mA					0.4V			
Clock 2 (8281)	-0.1		-1.6	mA					0.4V			
"1" Input Current												
Strobe			40	μA	4.5V							
Data Inputs			40	μA		4.5V						
Reset			80	μA			4.5V					
Clock 1			80	μA				4.5V				
Clock 2 (8280)			80	μA					4.5V			
Clock 2 (8281)			40	μA					4.5V			
Power/Current Consumption		184/35	236/45	mW/mA			0V	0V	0V			12
Input Voltage Rating all Inputs	5.5			V	10mA	10mA	10mA	10mA	10mA			10
Output Short Circuit Current	-10		-60	mA	0V						0V	


T<sub>A</sub> = 25° C and V<sub>CC</sub> = 5.0V

CHARACTERISTICS	LIMITS				TEST CONDITIONS						NOTES	
	MIN.	TYP.	MAX.	UNITS	DATA STROBE	DATA INPUTS	RESET	CLOCK 1	CLOCK 2	OUTPUTS		
Clock Mode T <sub>on</sub> Delay Bit A, B, C, D		15	25	ns								11
Clock Mode T <sub>off</sub> Delay Bit A, B, C, D		15	25	ns								11
Data/Strobe t <sub>on</sub> Delay Bit A, B, C, D		25	35	ns								11
Data/Strobe t <sub>off</sub> Delay Bit A, B, C, D		30	40	ns								11
Toggle Rate	20	25		MHz								11
Strobe Pulse Width		20	35	ns						A <sub>OUT</sub>		11
Reset Pulse Width		20	35	ns						A <sub>OUT</sub>		11
Strobe Release Time		30	40	ns						A <sub>OUT</sub>		11
Reset Release Time		50	75	ns						A <sub>OUT</sub>		11


NOTES:

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive NAND logic definition:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings
- should the isolation diodes become forward biased. Measurements apply to each output and the associated data input independently.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V<sub>CC</sub>.
- Manufacturer reserves the right to make design and process changes and improvements.
- Each input is tested separately.
- Refer to AC Test Figures.
- V<sub>CC</sub> = 5.25V.


TYPICAL OUTPUT CHARACTERISTICS

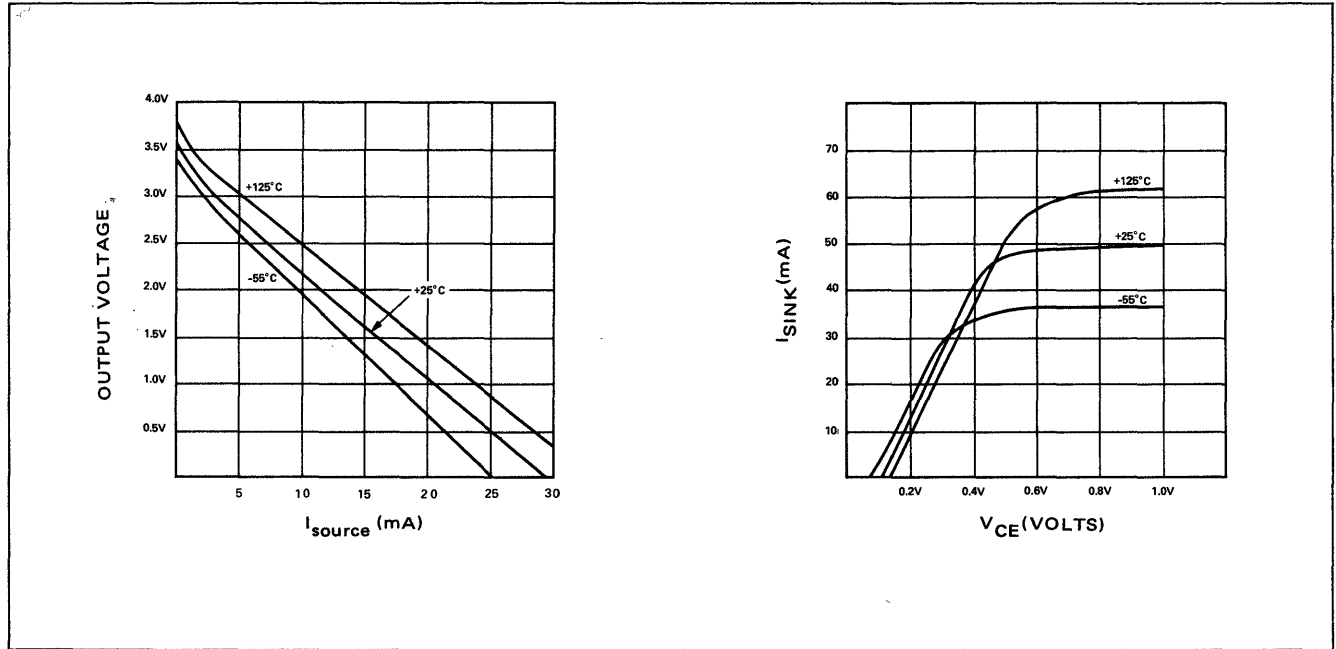

SCHEMATIC DIAGRAM

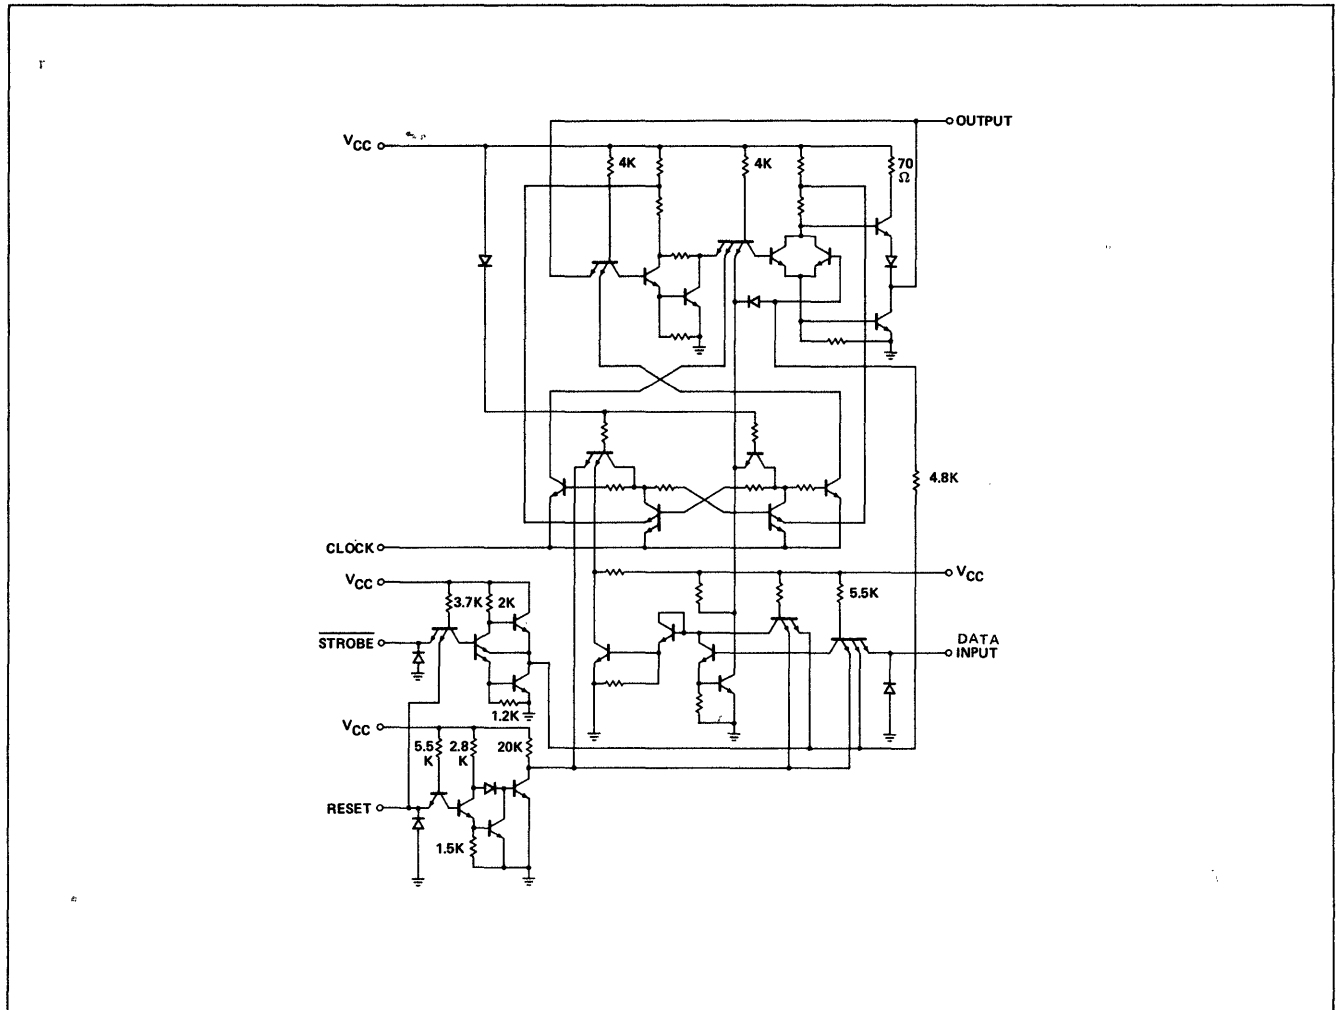


AC TEST FIGURES AND WAVEFORMS




NOTE: Input pulse notations apply unless otherwise specified.

TOGGLE RATE

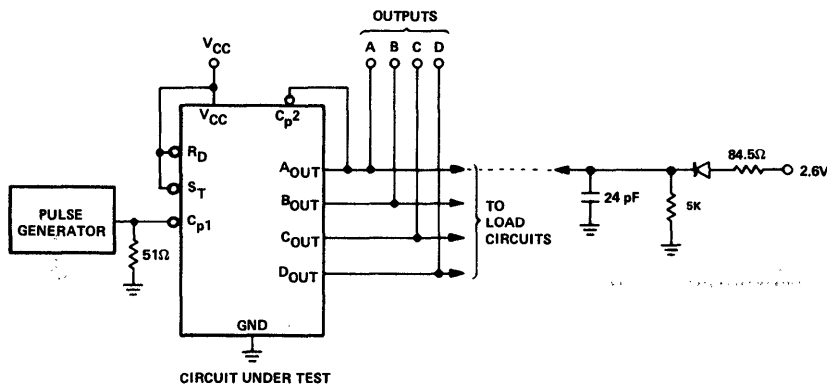


INPUT PULSE:  
Amplitude = 2.6V  
 $t_A = 25ns$ ,  $t_B = 25ns$ ,  
 $t_r = t_f = 5ns$  max.


8280

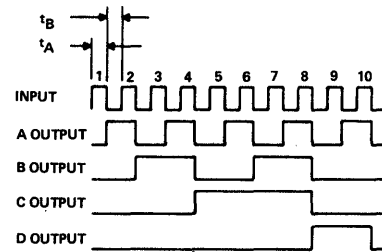


8281

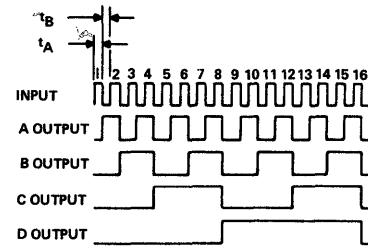

CLOCK MODE  $t_{on}/t_{off}$  DELAY

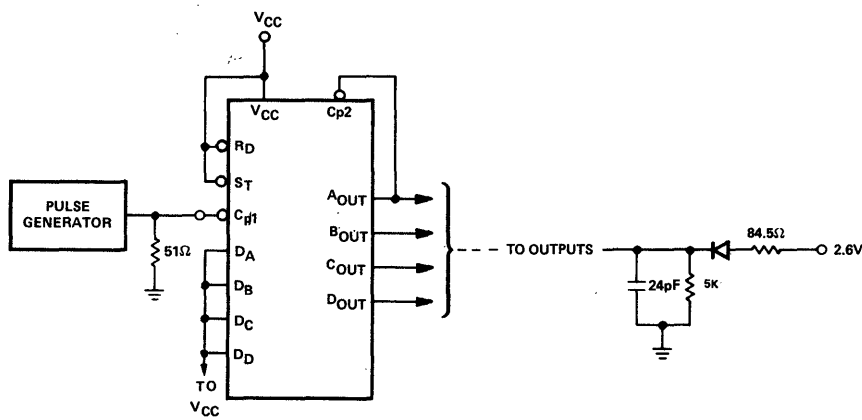

- $t_{on}$  and  $t_{off}$  are measured from the clock input of each binary to the Q output of that binary.
- Each Q output will be loaded with the following load circuit:



INPUT PULSE:  
Amplitude = 2.6V  
P.W. = 30ns  
 $t_r = t_f = 5ns$ .

AC TEST FIGURES AND WAVEFORMS (Cont'd)

### DATA/STROBE $t_{on}/t_{off}$

**Strobe, P.A. = 2.6V**  
**P.W. = 300ns, 50% to 50%**  
**PRR = 1 MHz**  
 $t_r = t_f = 5ns$   
**Data, P.A. = 2.6V**  
**P.W. = 500ns**  
**PRR = 500 KHz**  
 $t_r = t_f = 5ns.$

**NOTES:**

1. All resistor values are in ohms.
2. All capacitance values are in picofarads and include jig and probe capacitance. Capacitance as measured on Boonton Electronic Corporation Model 75A-S8 Capacitance Bridge or equivalent.  $f = 1 \text{ MHz}$ ,  $V_{ac} = 25 \text{ mV}_{rms}$ .
3. All diodes are 1N916.

### MINIMUM STROBE PULSE WIDTH


**INPUT PULSE:**  
**Amplitude = 2.6V**  
 $t_r = t_f = 5ns.$

### MINIMUM RESET PULSE WIDTH

**INPUT PULSE:**  
**Amplitude = 2.6V**  
 $t_r = t_f = 5ns \text{ max.}$   
**Note: Outputs must be previously brought high by placing a "0" on the D strobe input. A pulse generator may be substituted for the switch.**

AC TEST FIGURES AND WAVEFORMS (Cont'd)

STROBE/RESET RELEASE TIME

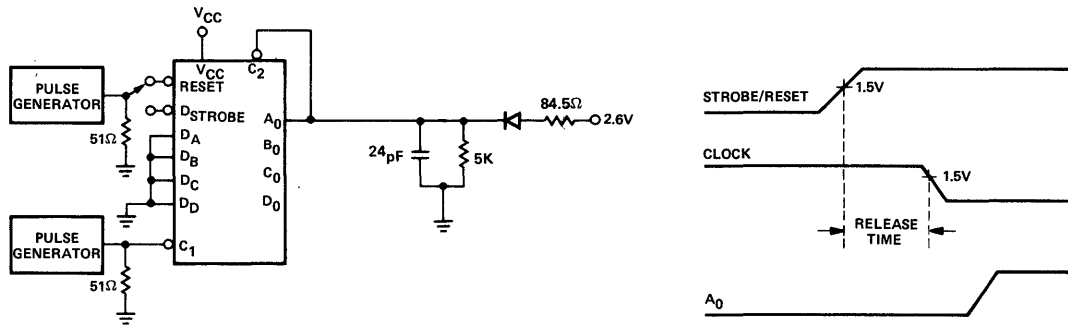


NOTES:

1. All resistor values are in ohms.
2. All capacitance values are in picofarads and include jig and probe capacitance. Capacitance as measured on Boonton Electronic Corporation Model 75A-S8 Capacitance Bridge or equivalent.  
f = 1 MHz,  $V_{ac} = 25mV_{rms}$ .
3. All diodes are 1N916.


Clock, Strobe/Reset:  
Ampl = 2.6V  
 $t_r = t_f = 5 ns max.$   
PRR = 1 MHz 50% Duty Cycle.

TYPICAL APPLICATIONS

VARIABLE MODULUS COUNTER

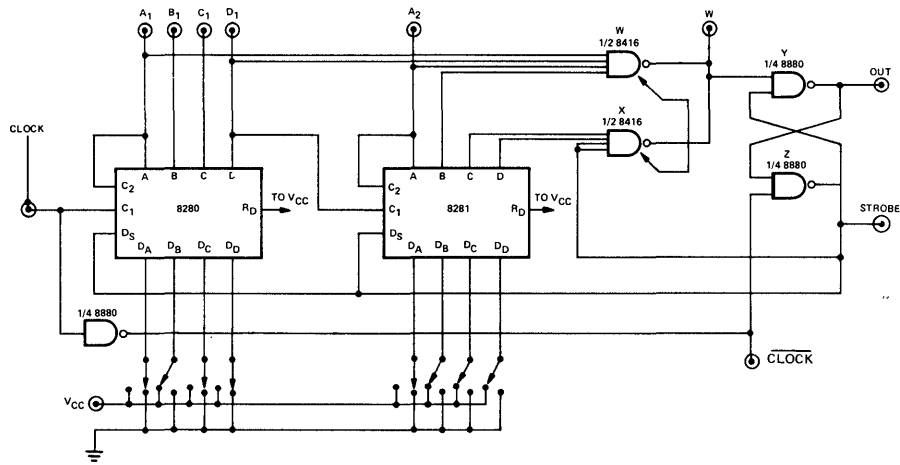

TIMING DIAGRAM

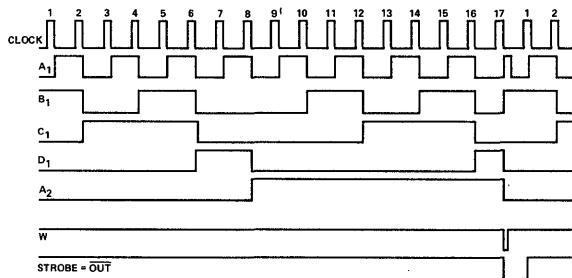

# BINARY HEXADECIMAL AND BCD DECADE, SYNCHRONOUS UP/DOWN COUNTERS

# 8284 8285

DIGITAL 8000 SERIES TTL/MSI

## DESCRIPTION

The Up/Down Counter is a monolithic MSI circuit containing gates and binaries interconnected to provide a bi-directional divide-by-ten (decade) or divide-by-sixteen (hexadecimal) result as a function of the clock input.

The output code of the decade up/down counter is the commonly used BCD (8421) code, and the output sequence generated is the binary equivalent of the decimal numbers 0 through 9.

The hexadecimal up/down counter provides the output sequence 0 through 15 which is presented in a weighted binary code (8421).


Set and Reset on the binary elements provide asynchronous entry with respect to the clock line, causing a count of "0" or "15" (8284) or of "0" or "9" (8285), and also inhibit propagation of count enable data.

Entry and propagation of data is performed in a synchronous manner with the clock line, which is active on its negative going excursion. The input from a previous stage or other source is channeled through "Carry In" and its propagation can be inhibited by the "Count Enable" line. "Carry In" and "Count Enable" input duality gives added flexibility in multiple package cascading applications.

Direction of the counter is steered from a single line (Up/Down), where a "0" level will cause a "down" count and a "1" level will accomplish an "up" count.

All Q outputs of the four binaries are brought to the outside world, together with the  $\bar{Q}$  output of the most significant binary (Q4) and the Carry Out.

## LOGIC DIAGRAMS

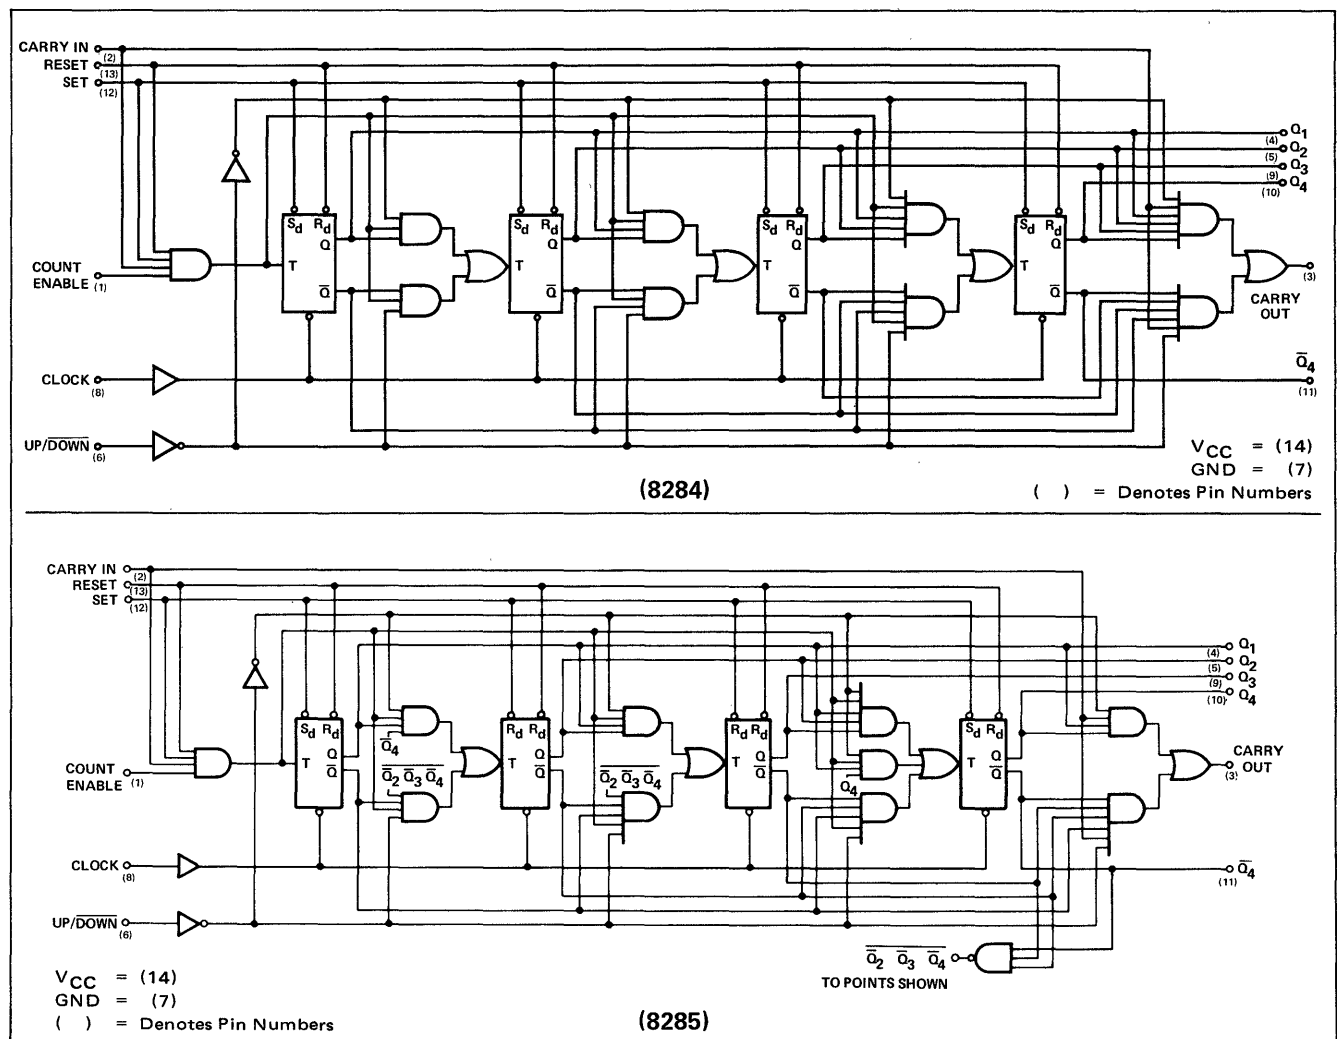



**SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8284/85**

**ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)**

CHARACTERISTICS	LIMITS				TEST CONDITIONS							NOTES
	MIN.	TYP.	MAX.	UNITS	SET	RESET	UP/DOWN	COUNT ENABLE	CLOCK	CARRY IN	OUTPUTS	
"1" Output Voltage Q <sub>1</sub> , Q <sub>4</sub> , Carry Out Q <sub>2</sub> , Q <sub>3</sub> , (8284)	2.6			V	0.8V	2.0V	2.0V			2.0V	-800μA	
Q <sub>2</sub> , Q <sub>3</sub> (8285)	2.6			V	Pulse		0.8V				-800μA	
Q <sub>4</sub>	2.6			V	2.0V	0.8V					-800μA	
"0" Output Voltage Q <sub>1</sub> , Q <sub>2</sub> , Q <sub>3</sub> , Q <sub>4</sub> and Carry Out			0.4	V	2.0V	0.8V				0.8V	9.6mA	
$\bar{Q}_4$			0.4	V	0.8V	2.0V					9.6mA	
"1" Input Current Carry In			120	μA	Pulse		5.0V			4.5V		
Set			200	μA	4.5V	Pulse						
Reset			40	μA	Pulse	4.5V						
Count Enable			40	μA				4.5V				
Clock and Up/Down			40	μA				4.5V	4.5V			
"0" Input Current Carry In			3.2	mA	Pulse		0V			0.4V		
Set			6.4	mA	0.4V							
Reset			6.4	mA		0.4V						
Count Enable			1.6	mA				0.4V				
Clock			1.6	mA					0.4V			
Up/Down			1.6	mA			0.4V					
Input Latch Voltage Carry In	5.5			V		0V	5.0V	0V		10mA		
Reset	5.5			V		10mA		0V		0V		
Set	5.5			V	10mA			0V		0V		
Count Enable	5.5			V				10mA		0V		
Up/Down	5.5			V			10mA					
Output Short Circuit Current	-20		-70	mA								0V

T<sub>A</sub> = 25° C and V<sub>CC</sub> = 5.0V

CHARACTERISTICS	LIMITS				TEST CONDITIONS							NOTES
	MIN.	TYP.	MAX.	UNITS	SET	RESET	UP/DOWN	COUNT ENABLE	CLOCK	CARRY IN	OUTPUTS	
Power Consumption		315	420	mW								12
Propagation Delay												
t <sub>on</sub> Clock to Q <sub>4</sub> & $\bar{Q}_4$		32	45	ns								7
t <sub>on</sub> Clock to Q <sub>1</sub> , Q <sub>2</sub> , Q <sub>3</sub>		28	40	ns								7
t <sub>off</sub> Clock to Q <sub>n</sub> , $\bar{Q}_n$		25	35	ns								7
t <sub>on</sub> Reset to Q <sub>n</sub>		24	35	ns								7
t <sub>off</sub> Set to Q <sub>n</sub>		15	25	ns								7
t <sub>on</sub> Reset to $\bar{Q}_n$		32	45	ns								7
t <sub>on</sub> Carry In to Carry Out		15	25	ns								7
t <sub>off</sub> Carry In to Carry Out		20	30	ns								7
Clock Min. "1" Interval	20	15		ns								7
Count Rate	20	30		MHz								
Carry In, Count Enable, & Up/Down Set-Up Time		15	25	ns								
Carry In, Count Enable & Up/Down Hold Time		0	2	ns								
Set/Reset Pulse Width		20	25	ns								

NOTES:

1. All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
2. All measurements are taken with ground pin tied to zero volts.
3. Positive current is defined as into the terminal referenced.
4. Positive NAND Logic Definition:  
"UP" Level = "1", "DOWN" Level = "0".
5. Output source current is supplied through a resistor to ground.
6. Output sink current is supplied through a resistor to V<sub>CC</sub>.
7. Refer to AC Test Figure.
8. This test guarantees operation free of input latch-up over the specified operating supply voltage range.
9. Manufacturer reserves the right to make design and process changes and improvements.
10. Connect Q<sub>4</sub> to count enable, set the counter (1001), and count down. The counter will halt at BCD-7 (0111).
11. Pulse is normally at +4.0 volts, falling to 0 volts for at least 100 nsec.
12. V<sub>CC</sub> = 5.25 volts.

AC TEST FIGURES AND WAVEFORMS

MODE OF OPERATION

8284 Binary Synchronous Up/Down Counter  
8285 BCD Synchronous Up/Down Counter

	SET	RESET	CARRY IN	COUNT ENABLE	UP/DOWN	FUNCTION
A. Asynchronous						
8284 Only	1	0	X	X	X	"0" (0000)
8285 Only	0	1	X	X	X	"15" (1111)
8285 Only	0	1	X	X	X	"9" (1001)
B. Synchronous						
	1	1	0	X	X	Hold *
	1	1	X	0	X	Hold *
	1	1	1	1	0	"Down" Count *
	1	1	1	1	1	"Up" Count *



\*Function is synchronous with NEGATIVE going transition of the Clock pin.  
X = don't care.

CARRY OUT

$$\text{Carry Out}_{8284} = \text{Carry In} (Q_1 Q_2 Q_3 Q_4 \text{ UP} + \bar{Q}_1 \bar{Q}_2 \bar{Q}_3 \bar{Q}_4 \text{ DOWN})$$

$$\text{Carry Out}_{8285} = \text{Carry In} (Q_1 Q_4 \text{ UP} + \bar{Q}_1 \bar{Q}_2 \bar{Q}_3 \bar{Q}_4 \text{ DOWN})$$


CLOCK MODE (t<sub>on</sub> AND t<sub>off</sub>)

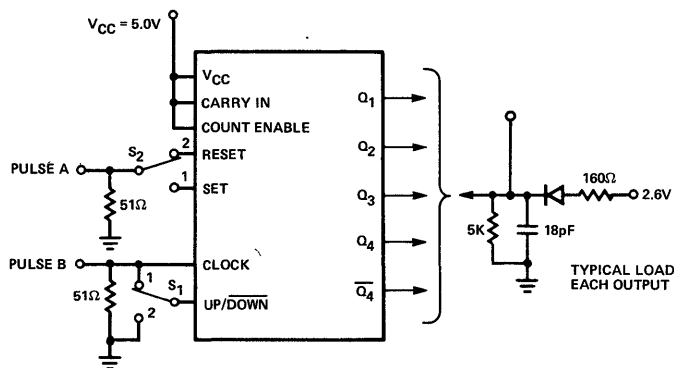

Reset Tied To V<sub>CC</sub>  
S<sub>1</sub>' Position 1  
S<sub>2</sub>' Position 1

PULSE A

Pulse Amplitude = 2.6V  
Pulse Width(t<sub>0</sub>) = 25ns at 1.5V  
Frequency = 5 MHz  
t<sub>r</sub> = t<sub>f</sub> = 5ns at 10% to 90% Points





Set Tied To V<sub>CC</sub>  
S<sub>1</sub>' Position 2  
S<sub>2</sub>' Position 2

PULSE B

Pulse Amplitude = 2.6V  
Pulse Width = 25ns at 1.5V  
Frequency = 5 MHz  
t<sub>r</sub> = t<sub>f</sub> = 5ns at 10% to 90% Points



AC TEST FIGURES AND WAVEFORMS (Cont'd)

SET/RESET MODE ( $t_{on}$  and  $t_{off}$ )

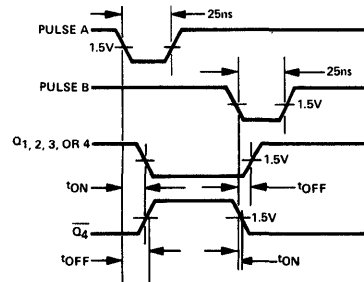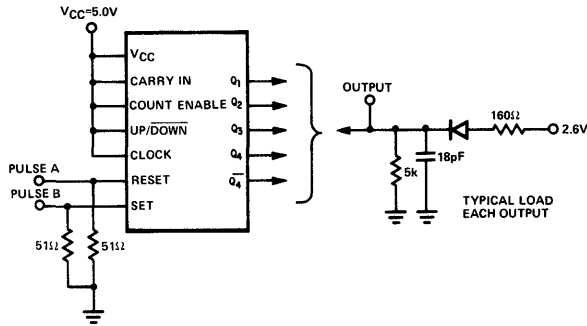

Pulse A and B  
 Pulse amplitude = 2.6V  
 Pulse width (0) = 25ns  
 Frequency = 5MHz  
 $t_r = t_f = 5ns$  at 10% to 90% points


CARRY IN/CARRY OUT ( $t_{on}$  and  $t_{off}$ )

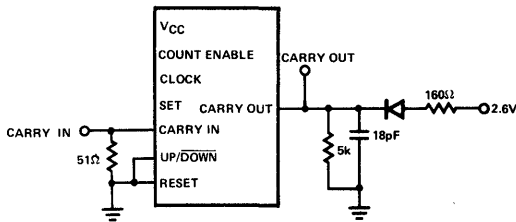

Carry in pulse  
 Pulse amplitude = 2.6V  
 Pulse width (0) = 50ns  
 Frequency = 10MHz  
 $t_r = t_f = 5ns$  at 10% to 90% points

TYPICAL APPLICATIONS

SYNCHRONOUS EXPANSION UP/DOWN COUNTERS

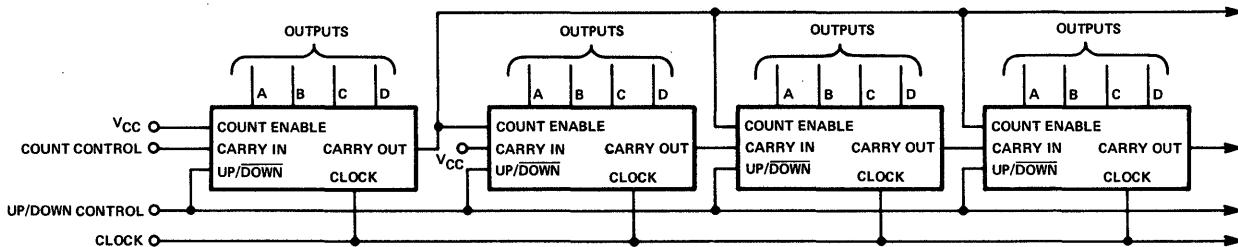

# DIVIDE-BY-TWELVE COUNTER/STORAGE ELEMENT

# 8288

DIGITAL 8000 SERIES TTL/MSI

## DESCRIPTION

The 8288 Divide by Twelve Counter is a four-bit subsystem consisting of divide by two and divide by six counters in a 14 pin package. For Divide-by-Twelve operation, output A is connected externally to the clock 2 input.

The 8288 has strobed paralleled data entry capability so that the counter may be preset to any desired output state. A "1" or "0" at a data input will be transferred to the associated output when the strobe input is put at a "0" level. For additional flexibility, the 8288 is provided with a common reset. A "0" on the reset line produces "0" at all four outputs.


The counting operation is performed on the falling (negative going) edge of the input clock pulse, however, there is no restriction on transition time since the individual binaries are level sensitive. The data strobe and reset functions are asynchronous with respect to the clock. The 8288 is compatible with all Signetics 8000 series elements.

## TRUTH TABLE\*

Count	OUTPUT			
	D	C	B	A
0	0	0	0	0
1	0	0	0	1
2	0	0	1	0
3	0	0	1	1
4	0	1	0	0
5	0	1	0	1
6	0	1	1	0
7	0	1	1	1
8	1	0	0	0
9	1	0	0	1
10	1	0	1	0
11	1	0	1	1

\*Connected for Divide-by-Twelve operation (output A connected to CP2)

## LOGIC DIAGRAM

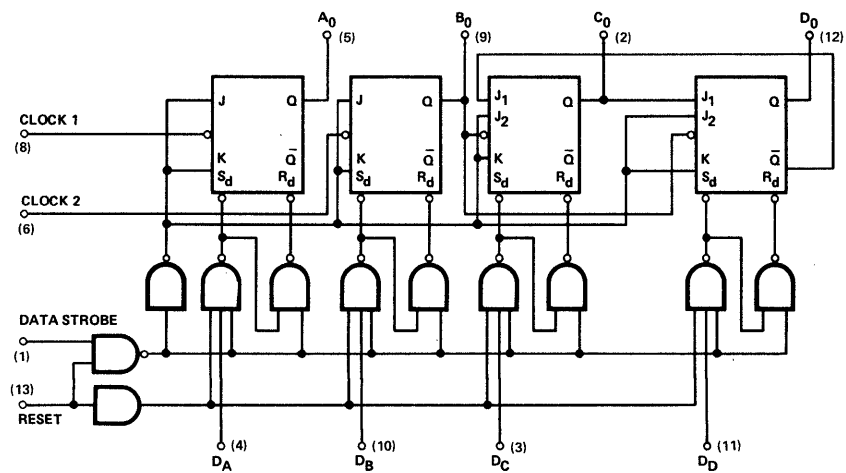

V<sub>CC</sub> = (14) A, F PACKAGES  
 GND = (7)  
 ( ) = Denotes Pin Numbers

**SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8288**

**ELECTRICAL CHARACTERISTICS** (Over Recommended Operating Temperature and Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS						NOTES
	MIN.	TYP.	MAX.	UNITS	DATA STROBE	DATA INPUTS	RESET	CLOCK 1	CLOCK 2	OUTPUTS	
"1" Output Voltage	2.6	3.5		V	0.8V	2.0V	2.0V		Output A	800µA	6, 7
"0" Output Voltage			0.4V	V	0.8V	0.8V	0.8V		Output A	16mA	6, 8
"0" Input Current											
Data Strobe	-0.1		-1.6	mA	0.4V		5.25V				
Data Inputs	-0.1		-1.2	mA		0.4V					
Reset	-0.1		-3.2	mA	5.25V		0.4V				
Clock 1	-0.1		-3.2	mA				0.4V			
Clock 2	-0.1		-1.6	mA					0.4V		
"1" Input Current											
Data Strobe			40	µA	4.5V		0V				
Data Input			40	µA		4.5V					
Reset			80	µA			4.5V				
Clock 1			80	µA				4.5V			
Clock 2			80	µA					4.5V		
Power/Current Consumption		184/35	236/45	mW/mA			0V	0V	0V		11
Input Voltage Rating											
Data Strobe	5.5			V	10mA						
Data Inputs	5.5			V		10mA					
Reset	5.5			V			10mA				
Output Short Circuit Current	-10		-60	mA	0V					0V	


$T_A = 25^\circ\text{C}$  and  $V_{CC} = 5.0\text{V}$

CHARACTERISTICS	LIMITS				TEST CONDITIONS						NOTES
	MIN.	TYP.	MAX.	UNITS	DATA STROBE	DATA INPUTS	RESET	CLOCK 1	CLOCK 2	OUTPUTS	
Clock Mode $t_{ON}$ Delay		15	25	ns							9
Bit A, B, C, D											
Clock Mode $t_{OFF}$ Delay		15	25	ns							9
Bit A, B, C, D											
Data/Strobe $t_{ON}$ Delay		20	35	ns							9
Bit A, B, C, D											
Data/Strobe $t_{OFF}$ Delay		25	40	ns							9
Bit A, B, C, D											
Toggle Rate	20	25		MHz							9
Strobe Hold Time		25	35	ns		0.8V	2.0V	2.0V	Output A		
Reset Hold Time		20	35	ns	2.0V	0.8V		2.0V	Output A		
Strobe Release Time		30	40								
Reset Release Time		50	75	ns							


NOTES:

1. All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
2. All measurements are taken with ground pin tied to zero volts.
3. Positive current flow is defined as into the terminal referenced.
4. Positive NAND Logic definition: "UP" Level = "1", "DOWN" Level = "0".
5. Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
6. Measurements apply to each output and the associated data input independently.
7. Output source current is supplied through a resistor to ground.
8. Output sink current is supplied through a resistor to  $V_{CC}$ .
9. Refer to AC Test Figures.
10. Manufacturer reserves the right to make design and process changes and improvements.
11.  $V_{CC}$  = 5.25 volts.

**SCHEMATIC DIAGRAM**


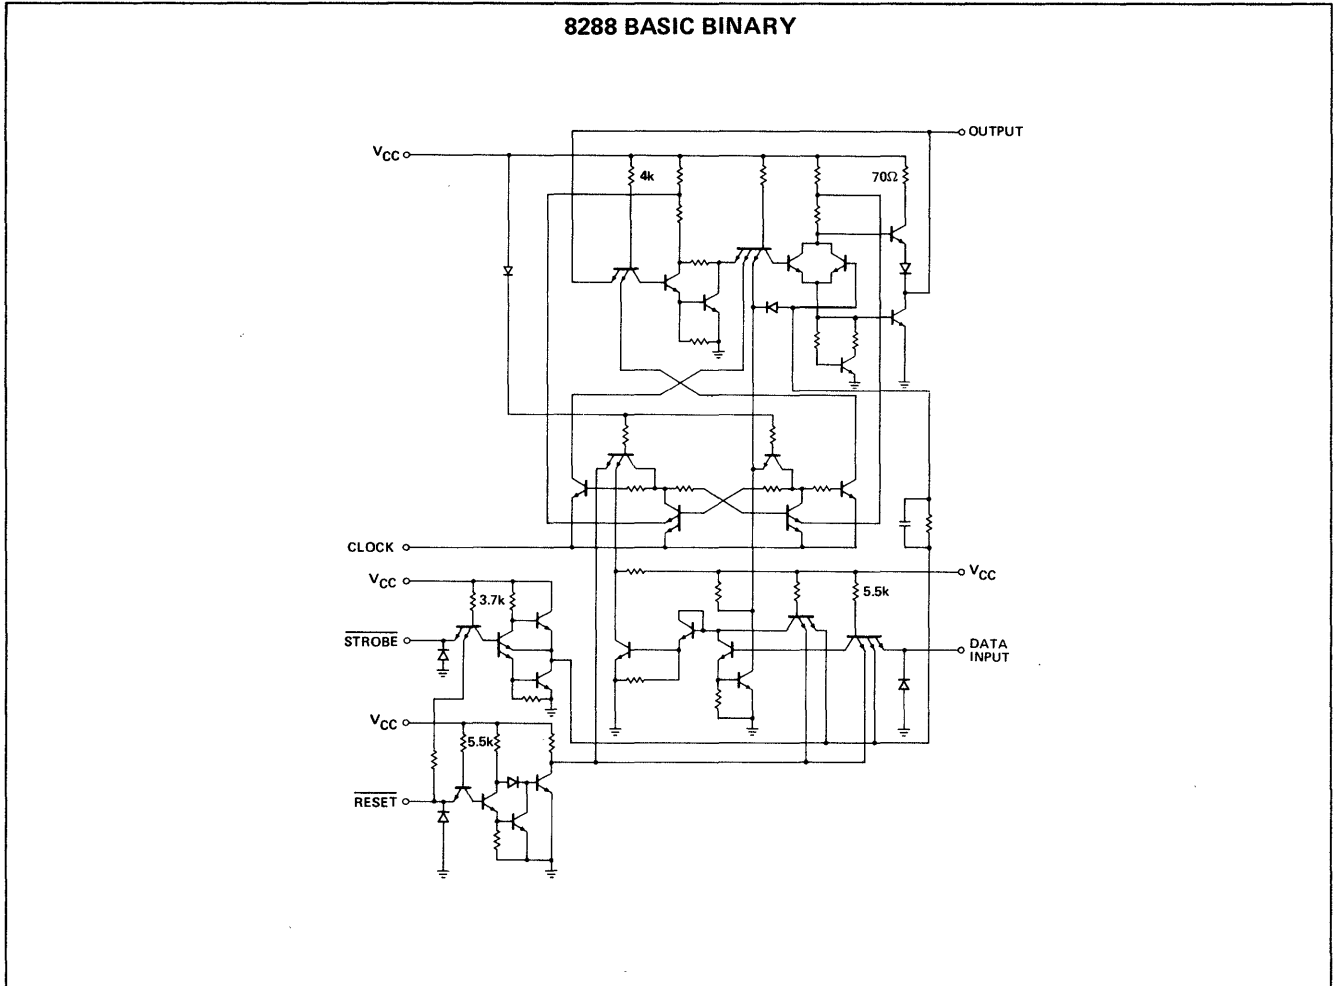


**AC TEST FIGURES AND WAVEFORMS**

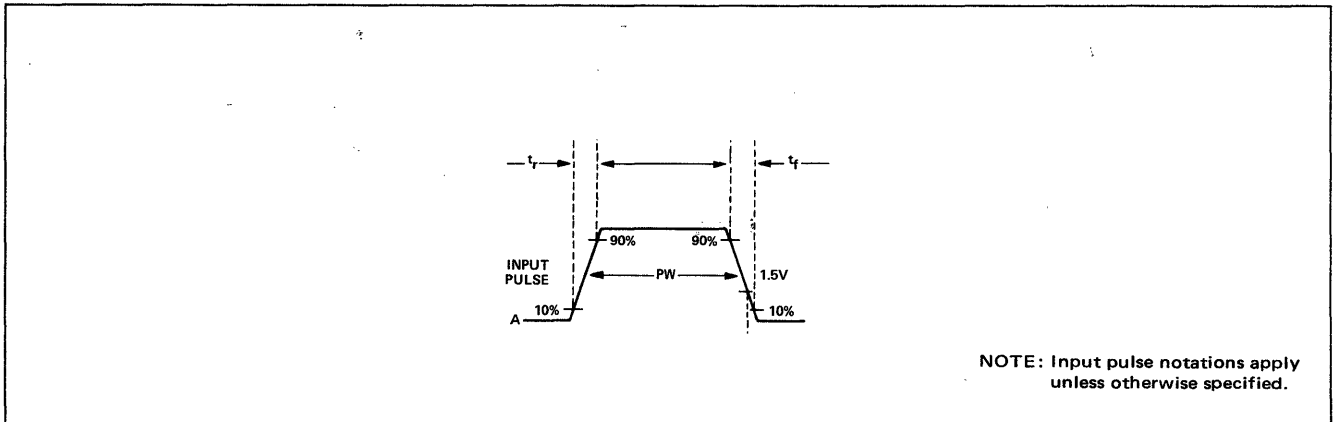



AC TEST FIGURES AND WAVEFORMS (Cont'd)

TOGGLE RATE

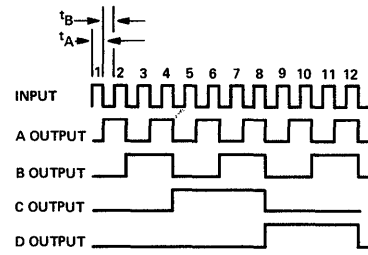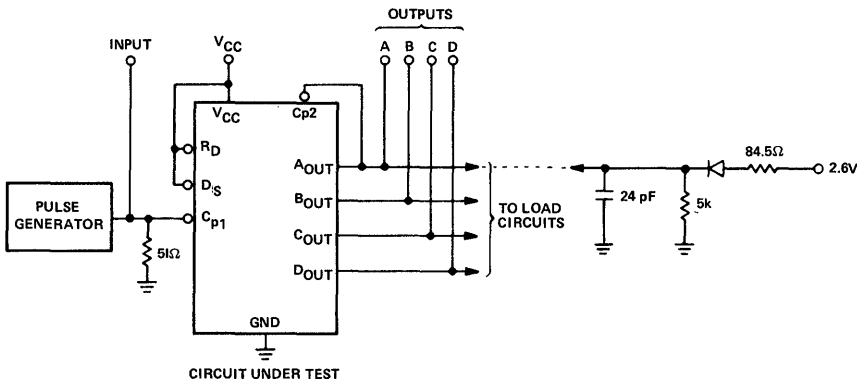

INPUT PULSE:  
 Amplitude = 3.4V  
 $t_A = 100\text{ns}$   
 $t_r = 20\text{ns}$   
 $t_B = 300\text{ns}$

CLOCK MODE  $t_{on}/t_{off}$  DELAY


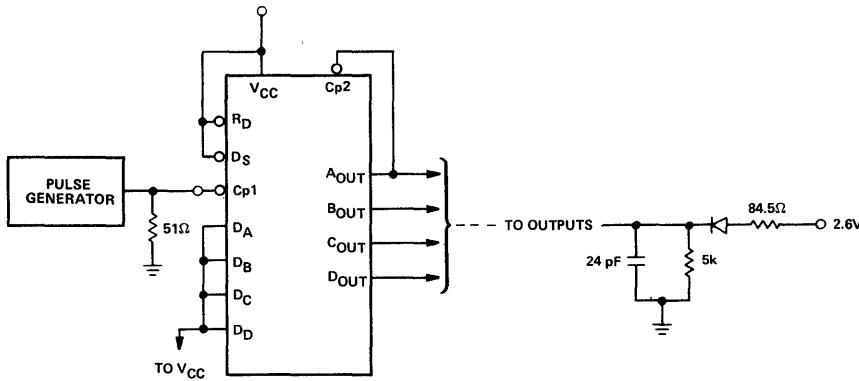


1.  $t_{on}$  and  $t_{off}$  are measured from the clock input of each binary to the Q output of that binary.
2. Each Q output will be loaded with the following load circuit:

INPUT PULSE:  
 Amplitude = 2.6V  
 P.W. = 30ns  
 $t_r = t_f = 5\text{ns}$

AC TEST FIGURES AND WAVEFORMS (Cont'd)



DATA/STROBE  $t_{on}$   $t_{off}$

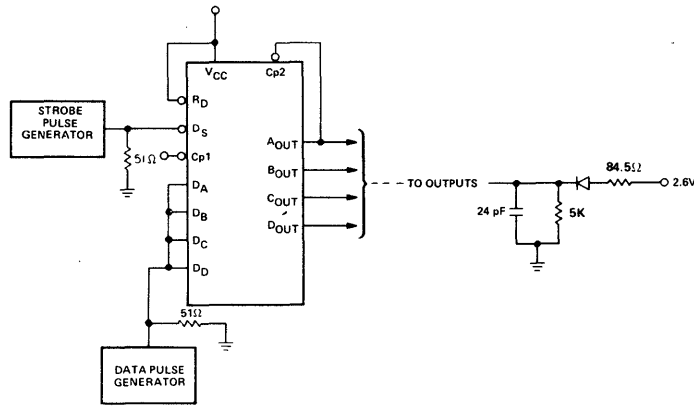

NOTES:

1. All resistor values are in ohms.
2. All capacitance values are in picofarads and include jig and probe capacitance. Capacitance as measured on Boonton Electronic Corporation Model 75A-S8 Capacitance Bridge or equivalent.  $f = 1\text{MHz}$ ,  $V_{ac} = 25\text{mF}_{rms}$ .
3. All diodes are 1N914.

STROBE HOLD TIME

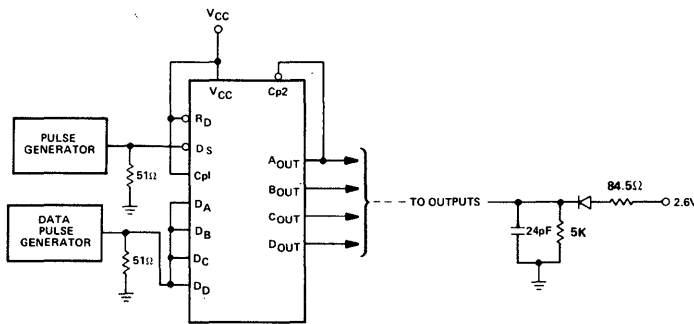


- A With all outputs initially "0", output shall have a "0" to "1" transition.
- B With all outputs initially "1", outputs shall have a "1" to "0" transition.

Amplitude = 2.6V (from Pulse Generator)  
 $t_r = t_f = 50\text{ns}$




AC TEST FIGURES AND WAVEFORMS (Cont'd)

MINIMUM RESET PULSE WIDTH

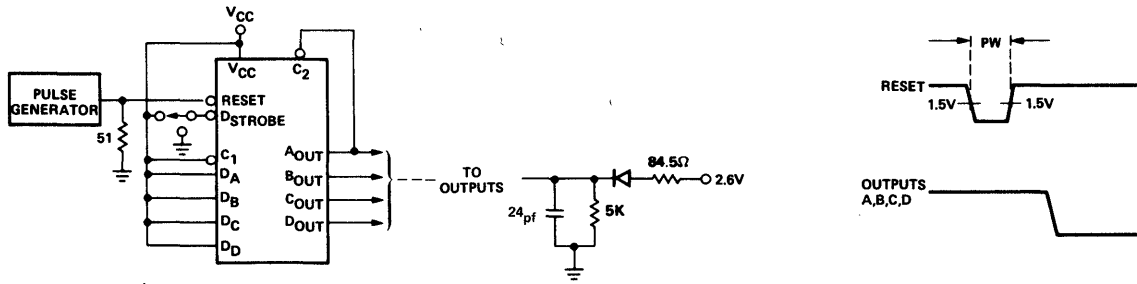

INPUT PULSE:  
 Amplitude = 2.6V  
 $t_r = t_f = 5\text{ns max.}$   
 Note: Outputs must be previously brought high by placing a "0" on the D strobe input.  
 A pulse generator may be substituted for the switch.

STROBE/RESET RELEASE TIME

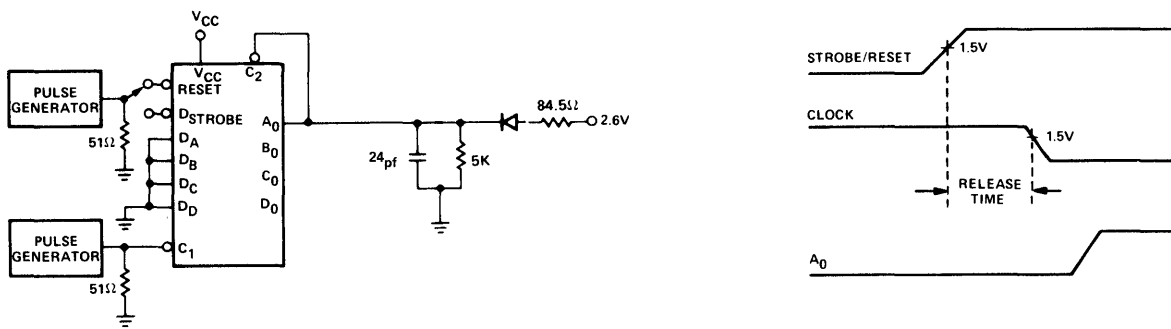

Clock, Strobe/Reset Amplitude = 2.6V  
 $t_r = t_f = 5\text{ns max. PRR} = 1\text{MHz } 50\% \text{ Duty Cycle.}$

NOTES:

1. All resistor values are in ohms.
2. All capacitance values are in picofarads and include jig and probe capacitance. Capacitance as measured on Boonton Electronic Corporation Model 75A-S8 Capacitance Bridge or equivalent.  $f = 1\text{MHz}$ ,  $V_{ac} = 25\text{mV}_{rms}$
3. All diodes are 1N916.

# PRESETTABLE HIGH SPEED DECADE/BINARY COUNTER

# 8290 8291

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION

The 8290 Decade Counter and 8291 Binary Counter are high speed devices providing a wide variety of counter/storage register applications with a minimum number of packages.

The 8290 Decade Counter can be connected in the familiar BCD counting mode, in a divide-by-two and divide-by-five configuration or in the Bi-Quinary mode. The Bi-Quinary mode produces a square wave output which is particularly useful in frequency synthesizer applications.

The 8291 Binary Counter may be connected as a divide-by-two, four, eight, or sixteen counter.

Both devices have strobed parallel-entry capability so that the counter may be set to any desired output state. A "1"

or "0" at a data input will be transferred to the associated output when the strobe input is put at the "0" level. For additional flexibility, both units are provided with a reset input which is common to all four bits. A "0" on the reset lines produces "0" at all four outputs.

The counting operation is performed on the falling (negative going) edge of the input clock pulse.

Triggering requirements are compatible with any of the 8000 Series elements.

The various counter arrangements, as well as additional applications suggestions may be found in the Signetics Handbook "DESIGNING WITH MSI—Counters and Shift Registers Vol. 1.

### LOGIC DIAGRAMS AND TRUTH TABLES

#### 8290

Bi-Quinary (5-2)				
Input	B <sub>0</sub>	C <sub>0</sub>	D <sub>0</sub>	A <sub>0</sub>
0	0	0	0	0
1	1	0	0	0
2	0	1	0	0
3	1	1	0	0
4	0	0	1	0
5	0	0	0	1
6	1	0	0	1
7	0	1	0	1
8	1	1	0	1
9	0	0	1	1

Decade (BCD)				
Input	A <sub>0</sub>	B <sub>0</sub>	C <sub>0</sub>	D <sub>0</sub>
0	0	0	0	0
1	1	0	0	0
2	0	1	0	0
3	1	1	0	0
4	0	0	1	0
5	1	0	1	0
6	0	1	1	0
7	1	1	1	0
8	0	0	0	1
9	1	0	0	1

V<sub>CC</sub> = (14)      A, F PACKAGES  
 GND = (7)  
 ( ) = Denotes Pin Numbers

V<sub>CC</sub> = (4)      W PACKAGE  
 GND = (11)  
 ( ) = Denotes Pin Numbers

---

#### 8291

Binary				
Input	A <sub>0</sub>	B <sub>0</sub>	C <sub>0</sub>	D <sub>0</sub>
0	0	0	0	0
1	1	0	0	0
2	0	1	0	0
3	1	1	0	0
4	0	0	1	0
5	1	0	1	0
6	0	1	1	0
7	1	1	1	0
8	0	0	0	1
9	1	0	0	1
10	0	1	0	1
11	1	1	0	1
12	0	0	1	1
13	1	0	1	1
14	0	1	1	1
15	1	1	1	1

V<sub>CC</sub> = (4)  
 GND = (11)  
 ( ) = Denotes Pin Numbers

SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8290/91

ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS						NOTES	
	MIN.	TYP.	MAX.	UNITS	DATA STROBE	DATA INPUTS	RESET	CLOCK 1	CLOCK 2	OUTPUTS		
"1" Output Voltage	2.6	3.5		V	0.8V	2.0V	2.0V				-200µA	6, 8
"0" Output Voltage			0.4	V	0.8V	0.8V	0.8V				9.6mA	6, 9
"0" Input Current												
Data Strobe	-0.1		-1.6	mA	0.4		5.25V					
Data Inputs	-0.1		-1.2	mA		0.4						
Reset	-0.1		-2.8	mA	5.25V		0.4					
Clock 1	-0.1		-4.8	mA	5.25V			0.4				
Clock 2 (8290)	-0.1		-4.8	mA	5.25V				0.4			
Clock 2 (8291)	-0.1		-2.4	mA	5.25V				0.4			
"1" Input Current												
Data Strobe			40	µA	4.5V		0.0V					
Data Inputs			40	µA		4.5V						
Reset			80	µA	0.0V		4.5V					
Clock 1			80	µA	0.0V			4.5V				
Clock 2 (8290)			120	µA	0.0V				4.5V			
Clock 2 (8291)			80	µA	0.0V				4.5V			
Output Short Circuit Current A	-20		-70	mA							0.0V	13
B, C, D	-10		-60	mA	0.0V						0.0V	13
Input Voltage Rating												
Data Strobe	5.5			V	10mA							
Clock 1 & 2	5.5			V				10mA	10mA			
Data Inputs	5.5			V		10mA						
Reset	5.5			V			10mA					


T<sub>A</sub> = 25° C and V<sub>CC</sub> = 5.0V

CHARACTERISTICS	LIMITS				TEST CONDITIONS						NOTES	
	MIN.	TYP.	MAX.	UNITS	DATA STROBE	DATA INPUTS	RESET	CLOCK 1	CLOCK 2	OUTPUTS		
Power Consumption/ Supply Current		190/36.5	255/48.5	mW/ mA			0.0V	0.0V	0.0V			13
Strobe Pulse Width		15		ns						A <sub>OUT</sub>		9
Reset Pulse Width		25		ns						A <sub>OUT</sub>		9
Strobe/Reset Release Time		20		ns						A <sub>OUT</sub>		9
Clock Mode t <sub>on</sub> Delay												
Bit A		12	25	ns								9
Bits B, C, D		15	30	ns								9
Clock Mode t <sub>off</sub> Delay												
Bit A		12	23	ns								9
Bits B, C, D		15	25	ns								9
Strobed Data t <sub>on</sub> Delay (All Bits)		31	42	ns								9
Strobed Data t <sub>off</sub> Delay (All Bits)		33	42	ns								9
Toggle Rate	40	60		MHz								9
Clock Mode Switching Test			75	ns								9, 11


NOTES:

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive NAND Logic definition: "UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Measurements apply to each output and the associated data input independently.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V<sub>CC</sub>.
- Refer to AC Test Figures.
- Manufacturer reserves the right to make design and process changes and improvements.
- This test guarantees the device will reliably trigger on a pulse with 75ns fall-time.
- Not more than one output should be shorted at a time.
- V<sub>CC</sub> = 5.25V.

**SCHEMATIC DIAGRAM**


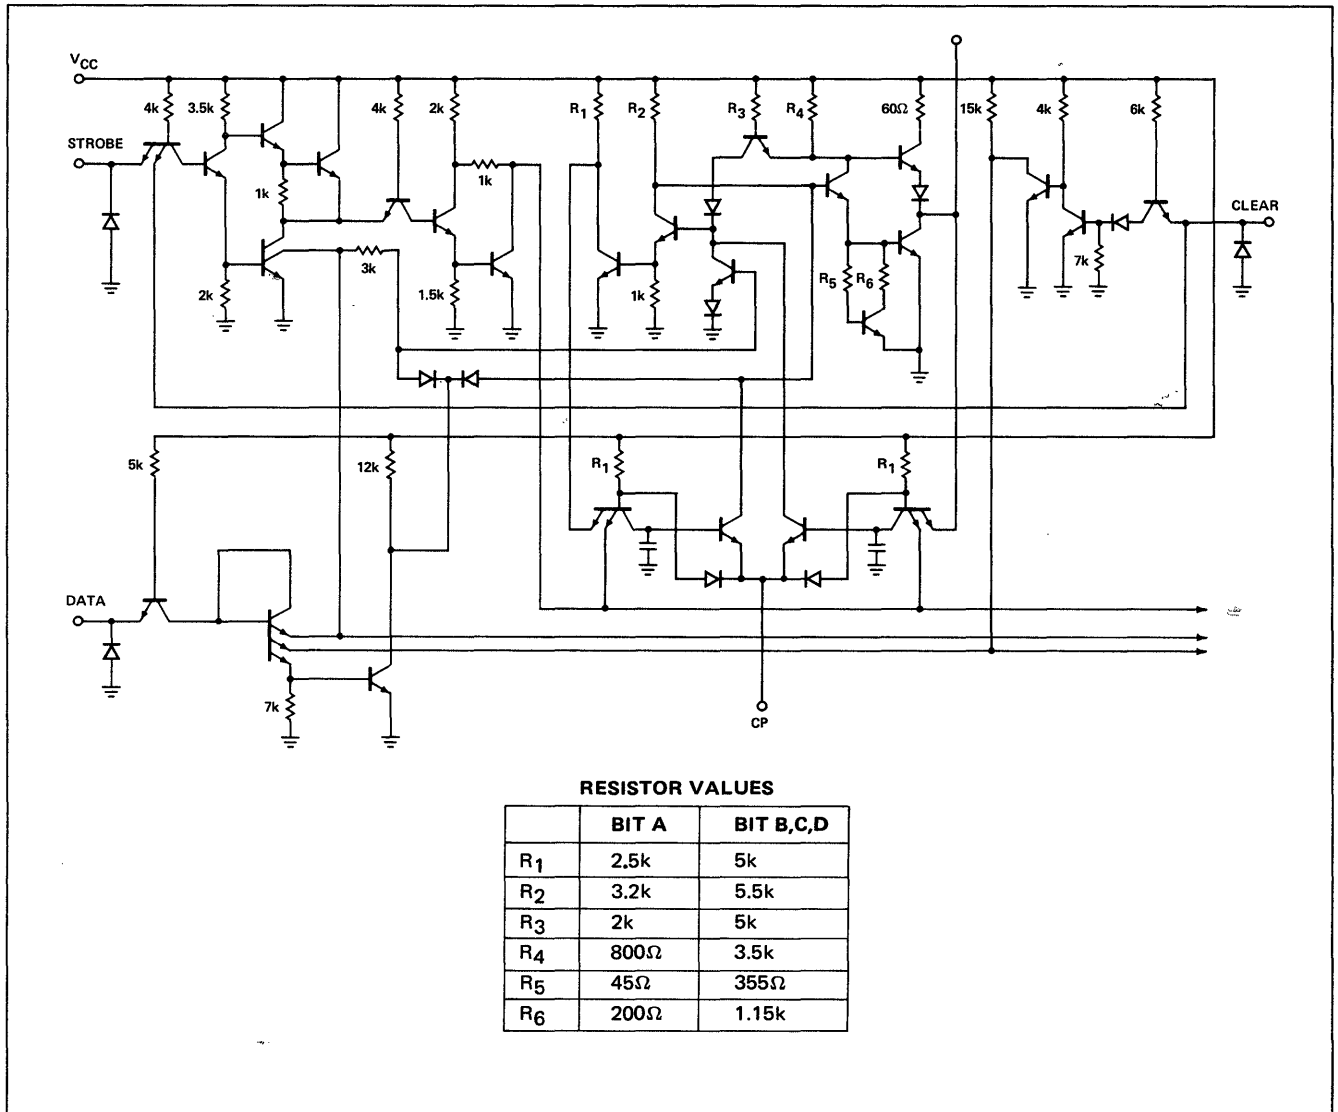


**AC TEST FIGURES AND WAVEFORMS**

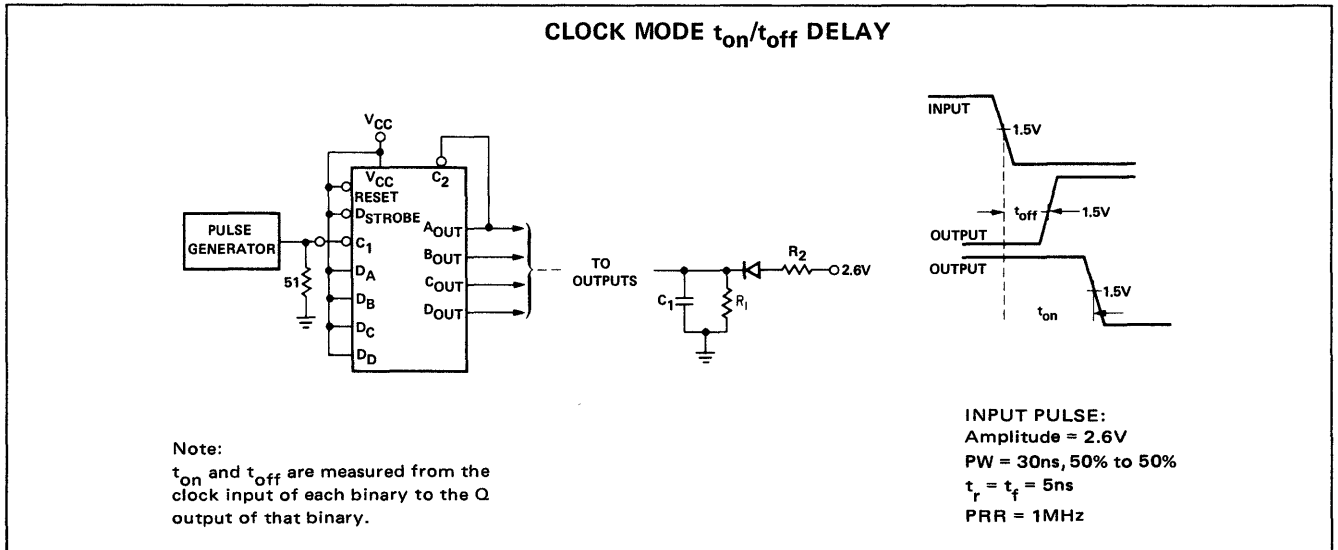

AC TEST FIGURES AND WAVEFORMS (Cont'd)



STROBED DATA  $t_{on}/t_{off}$  DELAY

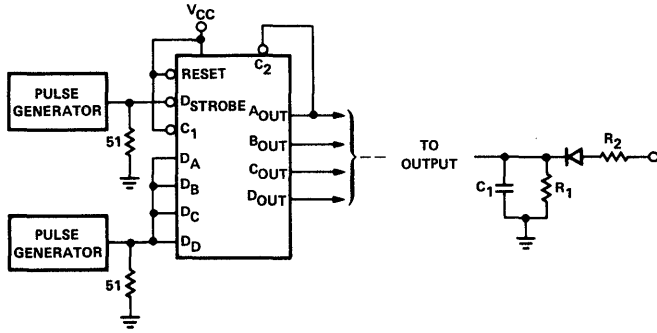


STROBE, PA = 2.6V  
 PW = 300ns, 50% to 50%  
 PRR = 1MHz  
 $t_r = t_f = 5ns$

DATA, PA = 2.6V  
 PW = 500ns, 50% to 50%  
 PRR = 500kHz  
 $t_r = t_f = 5ns$

CLOCK MODE SWITCHING TEST

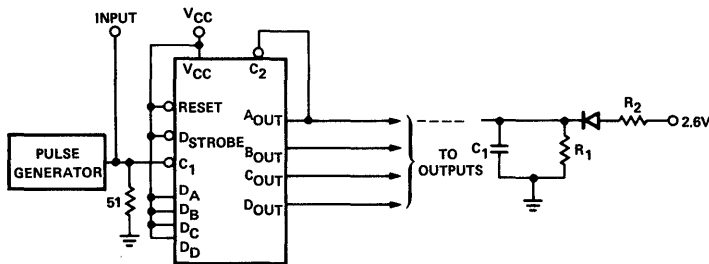


INPUT PULSE:  
 Amplitude = 3.4V  
 PW = 100ns, 50% to 50%  
 PRR = 2.5MHz  
 $t_r = 20ns, t_f = 75ns$




AC TEST FIGURES AND WAVEFORMS (Cont'd)

MINIMUM STROBE PULSE WIDTH

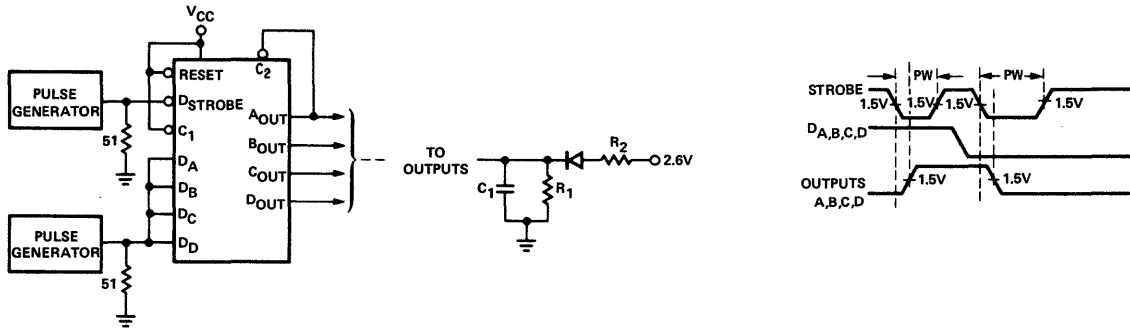

INPUT PULSE:  
 Amplitude = 2.6V  
 $t_r = t_f = 5\text{ns}$



MINIMUM RESET PULSE WIDTH

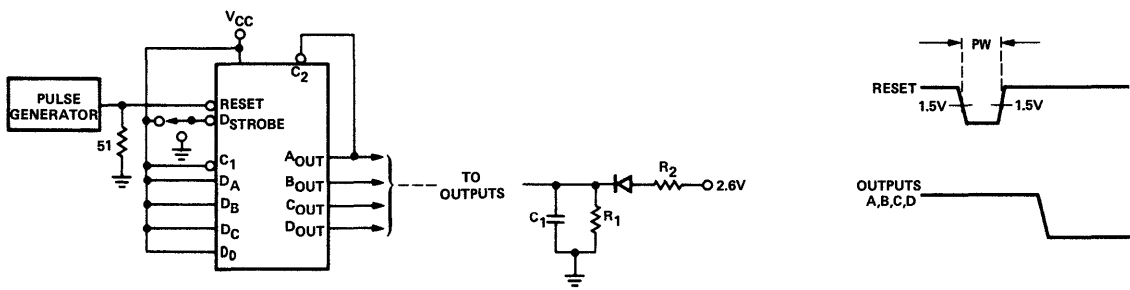


INPUT PULSE:  
 Amplitude = 2.6V  
 $t_r = t_f = 5\text{ns}$ .  
 Note: Outputs must be previously brought high by placing a "0" on the D strobe input. A pulse generator may be substituted for the switch.

AC TEST FIGURES AND WAVEFORMS (Cont'd)



TOGGLE RATE

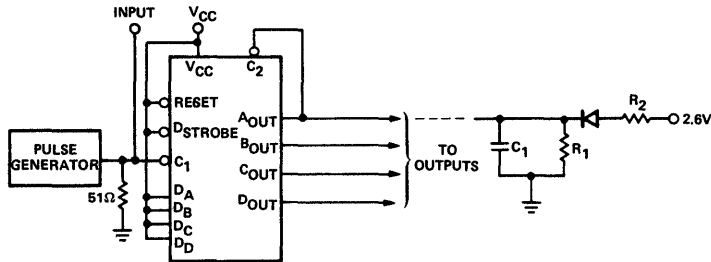

INPUT PULSE:  
Amplitude = 2.6V  
 $t_r = t_f = 5\text{ns max.}$   
PRR = 40MHz, 50% duty cycle.



STROBE/RESET RELEASE TIME

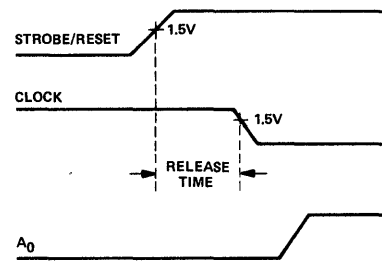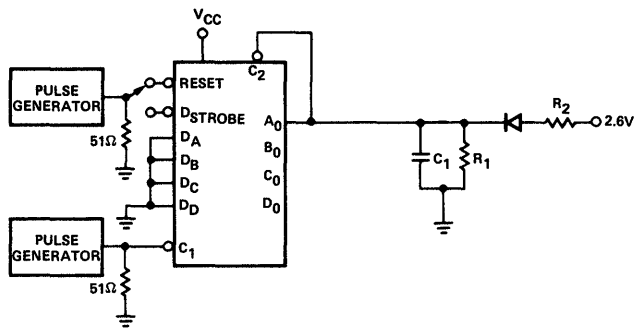

NOTES:

1. All resistor values are in ohms.
2. All capacitance values are in picofarads and include jig and probe capacitance. Capacitance as measured on Boonton Electronic Corporation Model 75A-S8 Capacitance Bridge or equivalent.  $f = 1\text{MHz}$ ,  $V_{ac} = 25\text{mV}_{rms}$ .
3. All diodes are 1N916.
4.  $R1 = 20\text{k}$ ,  $R2 = 146\Omega$ ,  $C1 = 30\text{pF}$ .

# PRESETTABLE LOW POWER DECADE/BINARY COUNTER

# 8292 8293

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION

The 8292 Decade Counter and 8293 Binary Counter are low power devices providing a wide variety of counter/storage register applications with a minimum number of packages.

The 8292 Decade Counter can be connected in the familiar BCD counting mode, in a divide-by-two and divide-by-five configuration or in the Bi-Quinary mode. The Bi-Quinary mode produces a square wave output which is particularly useful in frequency synthesizer applications.

The 8293 Binary Counter may be connected as a divide-by-two, four, eight, or sixteen counter.

Both devices have strobed parallel-entry capability so that the counter may be set to any desired output state, A "1"


or "0" at a data input will be transferred to the associated output when the strobe input is put at the "0" level. For additional flexibility, both units are provided with a reset input which is common to all four bits. A "0" on the reset line produces "0" at all four outputs.

The counting operation is performed on the falling (negative-going) edge of the input clock pulse.

Triggering requirements are compatible with any of the 8000 Series elements.

The various counter arrangements, as well as additional applications suggestions may be found in the Signetics handbook "DESIGNING WITH MSI," Counters and Shift Registers, Volume I.

### LOGIC DIAGRAMS AND TRUTH TABLES

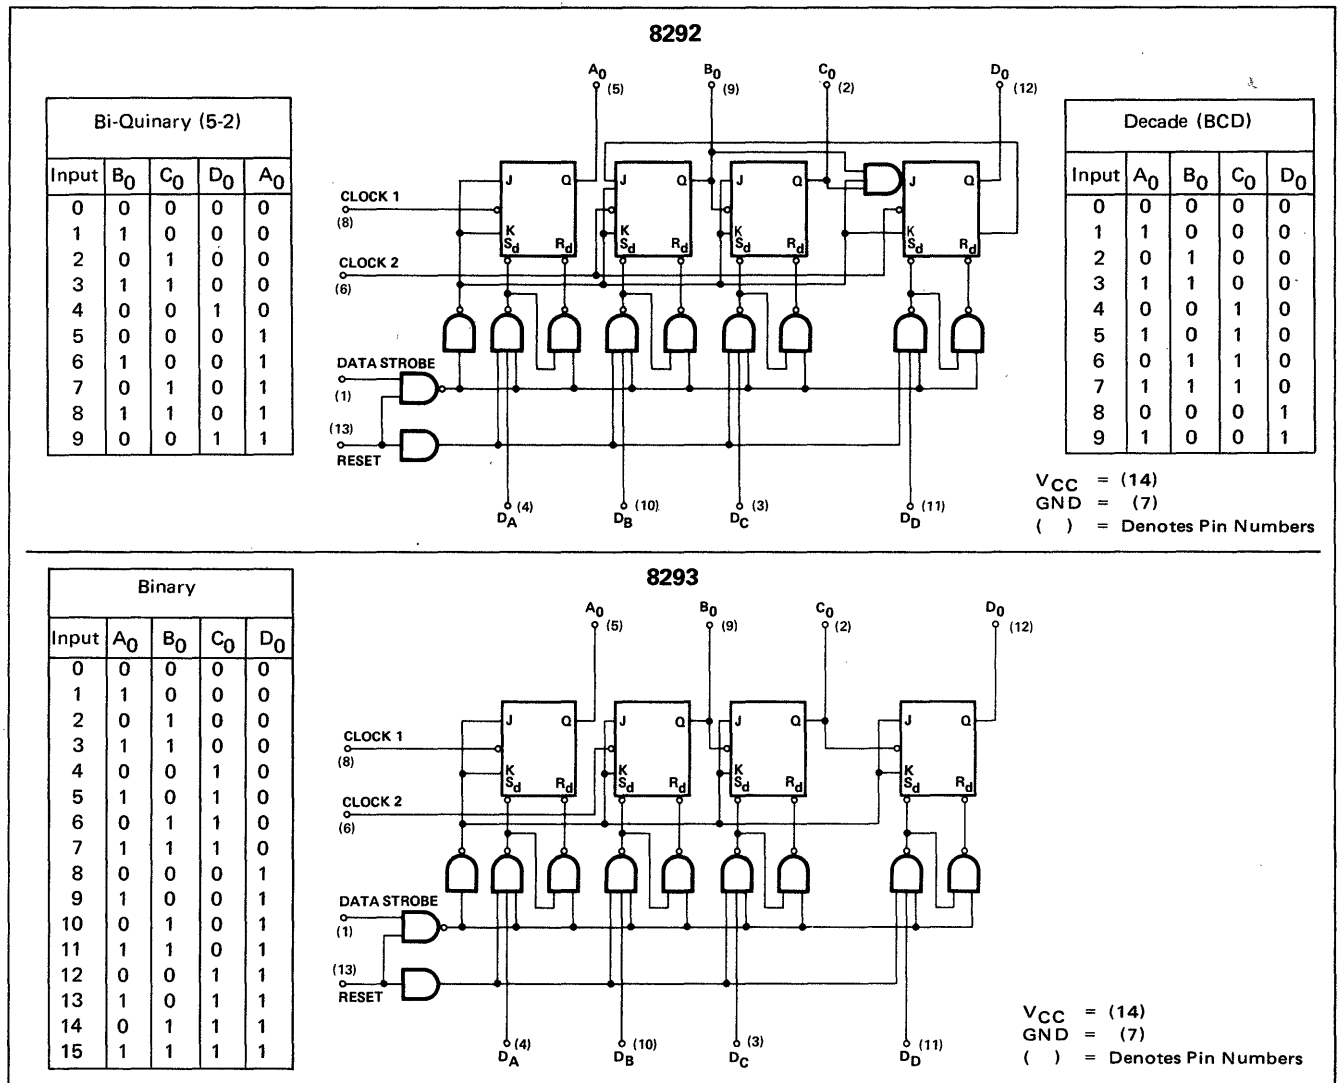



SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8292/93

ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS						NOTES	
	MIN.	TYP.	MAX.	UNITS	DATA STROBE	DATA INPUTS	RESET	CLOCK 1	CLOCK 2	OUTPUTS		
"1" Output Voltage	2.6	3.5		V	0.8V	2.0V	2.0V					6,8
"0" Output Voltage			0.4	V	0.8V	0.8V	0.8V			A <sub>OUT</sub> A <sub>OUT</sub>	-100μA 3.2mA	6,9
"0" Input Current												
Data Strobe	-0.1		-0.4	mA	0.4V		5.25V					
Data Inputs	-0.1		-0.4	mA		0.4V						
Reset	-0.1		-0.6	mA	5.25V		0.4V					
Clock 1	-0.1		-0.6	mA	5.25V			0.4V				
Clock 2 (8292)	-0.1		-1.2	mA	5.25V				0.4V			
Clock 2 (8293)	-0.1		-0.6	mA	5.25V				0.4V			
"1" Input Current												
Data Strobe			20	μA	4.5V		0.0V					
Data Inputs			20	μA		4.5V						
Reset			40	μA	0.0V		4.5V					
Clock 1			40	μA	0.0V			4.5V				
Clock 2 (8292)			80	μA	0.0V				4.5V			
Clock 2 (8293)			40	μA	0.0V				4.5V			
Output Short Circuit Current	-5		-45	mA	0.0V						0.0V	7
Input Voltage Rating												
Data Strobe					10mA							
Clock 1 and 2	5.5			V				10mA	10mA			
Data Inputs	5.5			V		10mA						
Reset	5.5			V			10mA					

T<sub>A</sub> = 25° C and V<sub>CC</sub> = 5.0V



CHARACTERISTICS	LIMITS				TEST CONDITIONS						NOTES	
	MIN.	TYP.	MAX.	UNITS	DATA STROBE	DATA INPUTS	RESET	CLOCK 1	CLOCK 2	OUTPUTS		
Power/Current Consumption		52.5/ 10	69/ 13.1	mw/ mA			0.0V	0.0V	0.0V			13
Clock Mode t <sub>on</sub> Delay (All Bits)		37	55	ns								10
Clock Mode t <sub>off</sub> Delay (All Bits)		32	55	ns								10
Strobed Data t <sub>on</sub> Delay (All Bits)		80	100	ns								10
Strobed Data t <sub>off</sub> Delay (All Bits)		80	100	ns								10
Clock Mode Switching Test			75	ns								12
Strobe Pulse Width		60	75	ns		0.8V	2.0V	2.0V		A <sub>OUT</sub>		
Reset Pulse Width		45	60	ns		2.0V	2.0V	2.0V		A <sub>OUT</sub>		
Strobe/Reset Release Time		80		ns						A <sub>OUT</sub>		
Toggle Rate	5	10		MHz								

NOTES:

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive NAND Logic Definition:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Measurements apply to each output and the associated data input independently.
- Not more than one output should be shorted at a time.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V<sub>CC</sub>. Refer to AC Test Figure.
- Manufacturer reserves the right to make design and process changes and improvements.
- This test guarantees the device will reliably trigger on a pulse with a 75ns fall-time or less.
- V<sub>CC</sub> = 5.25 volts.

AC TEST FIGURES AND WAVEFORMS



CLOCK MODE  $t_{on}/t_{off}$  DELAY

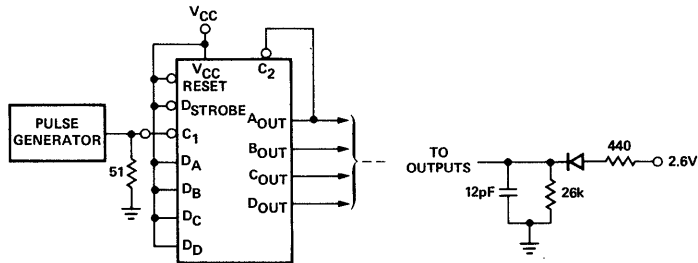

INPUT PULSE:  
 Amplitude = 2.6V  
 P.W. = 30ns, 50% to 50%  
 $t_r = t_f = 5ns$   
 PRR = 1MHz

NOTE:  
 1.  $t_{on}$  and  $t_{off}$  are measured from the clock input of each binary to the Q output of that binary.

STROBED DATA  $t_{on}/t_{off}$  DELAY



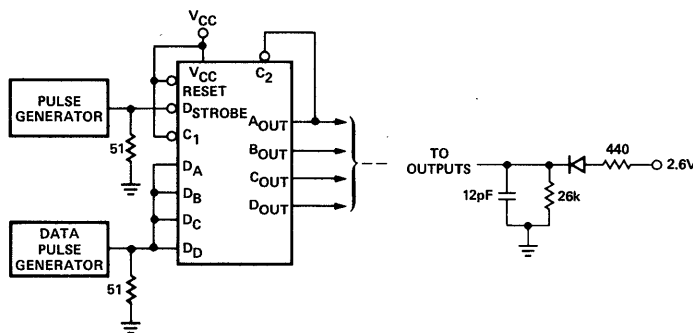


Strobe,  
 P.A. = 2.6V  
 P.W. = 300ns, 50% to 50%  
 PRR = 1MHz  
 $t_r = t_f = 5ns$

Data,  
 P.A. = 2.6V  
 P.W. = 500ns, 50% to 50%  
 PRR = 500KHz  
 $t_r = t_f = 5ns$



AC TEST FIGURES AND WAVEFORMS (Cont'd)

CLOCK MODE SWITCHING TEST

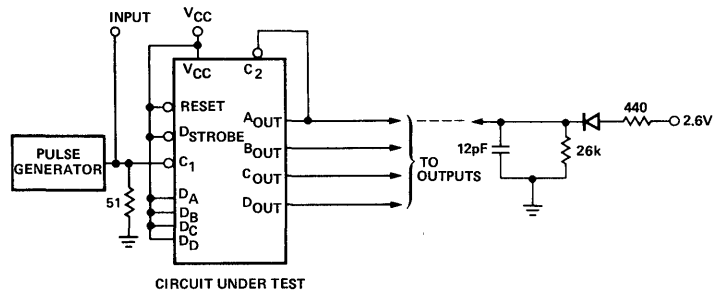

INPUT PULSE:  
 Amplitude = 3.4V  
 P.W. = 100ns, 50% to 50%  
 PRR = 2.5MHz  
 $t_r = 20\text{ ns}$   
 $t_f = 75\text{ ns}$


MINIMUM STROBE PULSE WIDTH

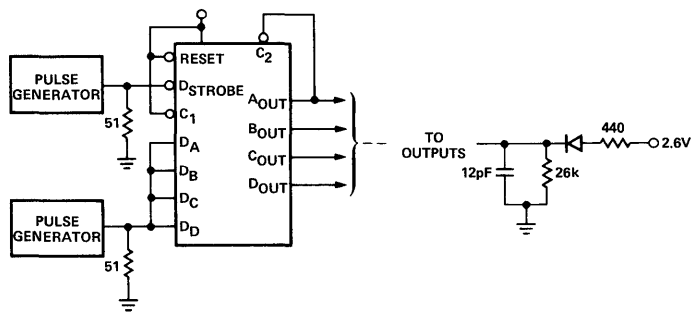

INPUT PULSE:  
 Amplitude = 2.6V  
 $t_r = t_f = 5\text{ ns max.}$




AC TEST FIGURES AND WAVEFORMS (Cont'd)

MINIMUM RESET PULSE WIDTH

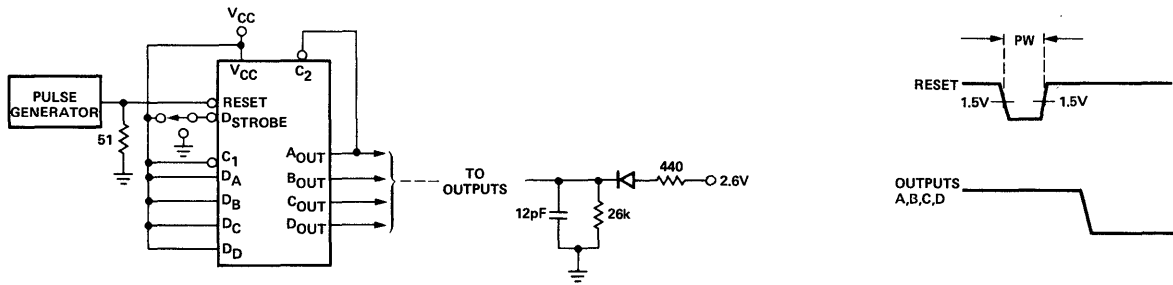

INPUT PULSE:  
 Amplitude 2.6V  
 $t_r = t_f = 5\text{ns max.}$   
 NOTE: Outputs must be previously brought high by placing a "Q" on the D strobe input. A pulse generator may be substituted for the switch.



TOGGLE RATE

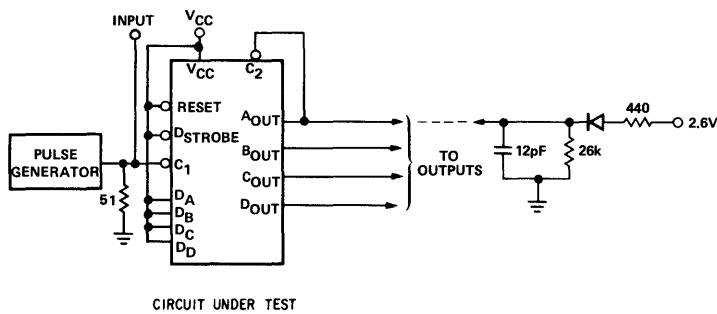

INPUT PULSE:  
 Amplitude = 2.6V  
 PRR = 5MHz, 50% duty cycle  
 $t_r = t_f = 5\text{ns max.}$

AC TEST FIGURES AND WAVEFORMS (Cont'd)

STROBE/RESET RELEASE TIME

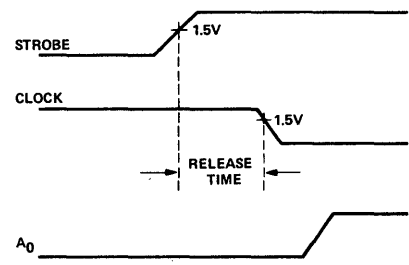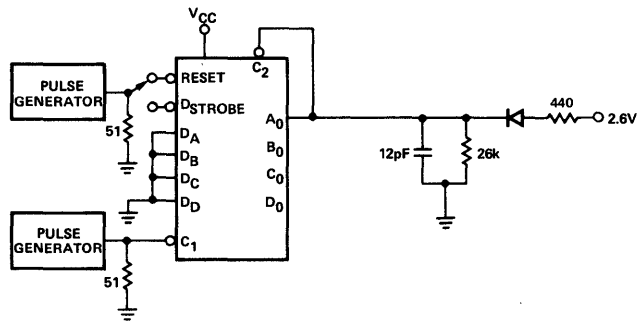

CLOCK, STROBE/RESET:  
 Amplitude = 2.6V  
 PRR = 1MHz, 50% duty cycle  
 $t_r = t_f = 5\text{ns max.}$

NOTES:

1. All resistor values are in ohms.
2. All capacitance values are in picofarads and include jig and probe capacitance. Capacitance as measured on Boonton Electronic Corporation Model 75A-S8 Capacitance Bridge or equivalent,  $f = 1\text{MHz}$ ,  $V_{ac} = 25\text{mV}_{rms}$ .
3. All diodes are 1N916.

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION


The 8T01 Nixie\* Decoder/Driver is a one-out-of-ten decoder which has been designed to provide the necessary high voltage characteristics required for driving gas-filled cold-cathode indicator tubes.

It may also be utilized in driving relays or other high voltage interface circuitry. The element is designed using

TTL techniques and is therefore completely compatible with DTL and TTL elements.

The specially designed output drivers provide the necessary stable output state. There are no input codes where all outputs are "off" or where more than one output can be turned "on."

### LOGIC DIAGRAM

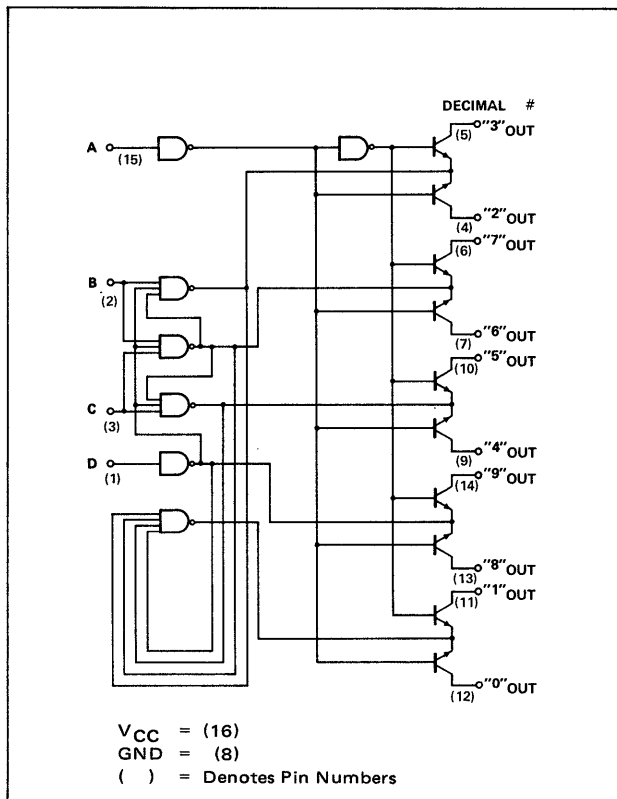

### TRUTH TABLE

INPUT				OUTPUT
D	C	B	A	ON
0	0	0	0	0
0	0	0	1	1
0	0	1	0	2
0	0	1	1	3
0	1	0	0	4
0	1	0	1	5
0	1	1	0	6
0	1	1	1	7
1	0	0	0	8
1	0	0	1	9
1	0	1	0	8
1	0	1	1	9
1	1	0	0	8
1	1	0	1	9
1	1	1	0	8
1	1	1	1	9

### ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS	
	MIN.	TYP.	MAX.	UNITS	INPUTS	OUTPUTS
"1" Output Voltage	68			V	0.8V	1.0mA
"0" Output Voltage			2.75	V	2.3V	5.0mA
"1" Input Current			40	$\mu A$	4.5V	
"0" Input Current (A and D)			-0.9	mA	0.4V	
"0" Input Current (B and C)			-1.8	mA	0.4V	
Power Consumption		60		mW		


#### NOTES:

- All voltage and capacitance measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with Pin 8 tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive NAND Logic definition:


"UP" Level = "1", "DOWN" Level = "0".

- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Manufacturer reserves the right to make design and process changes and improvements.
- S8T01B operating temperature range is  $-20^{\circ}C$  to  $+85^{\circ}C$ .

**SCHEMATIC DIAGRAM**

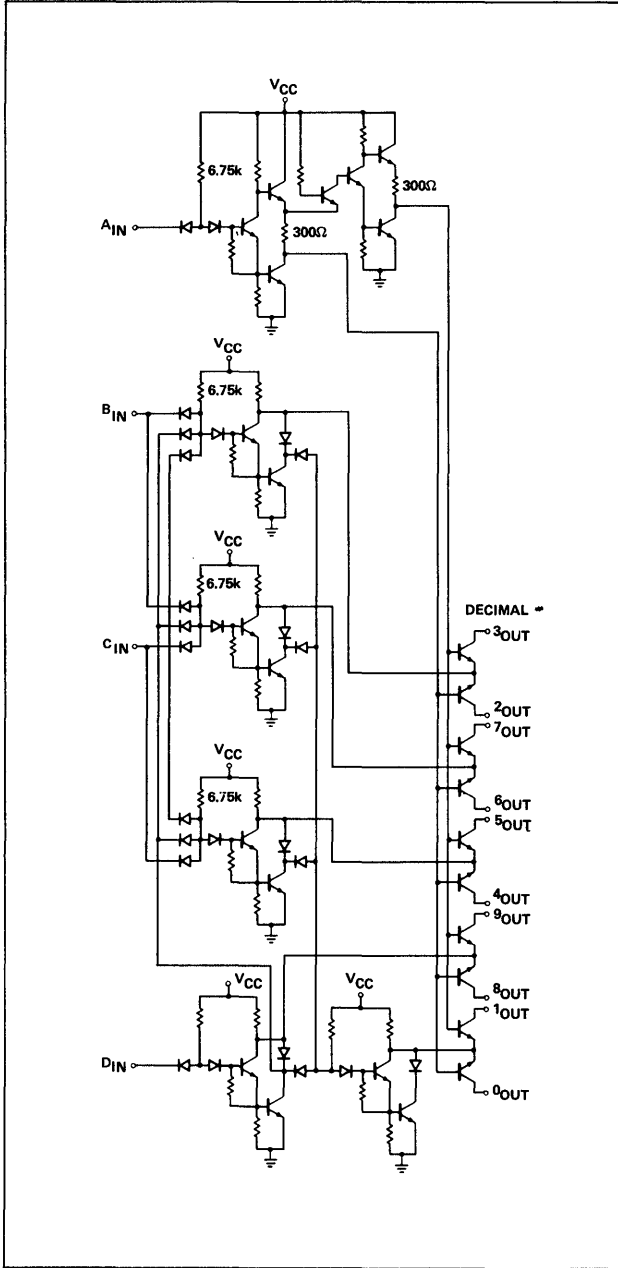

**TYPICAL APPLICATIONS**

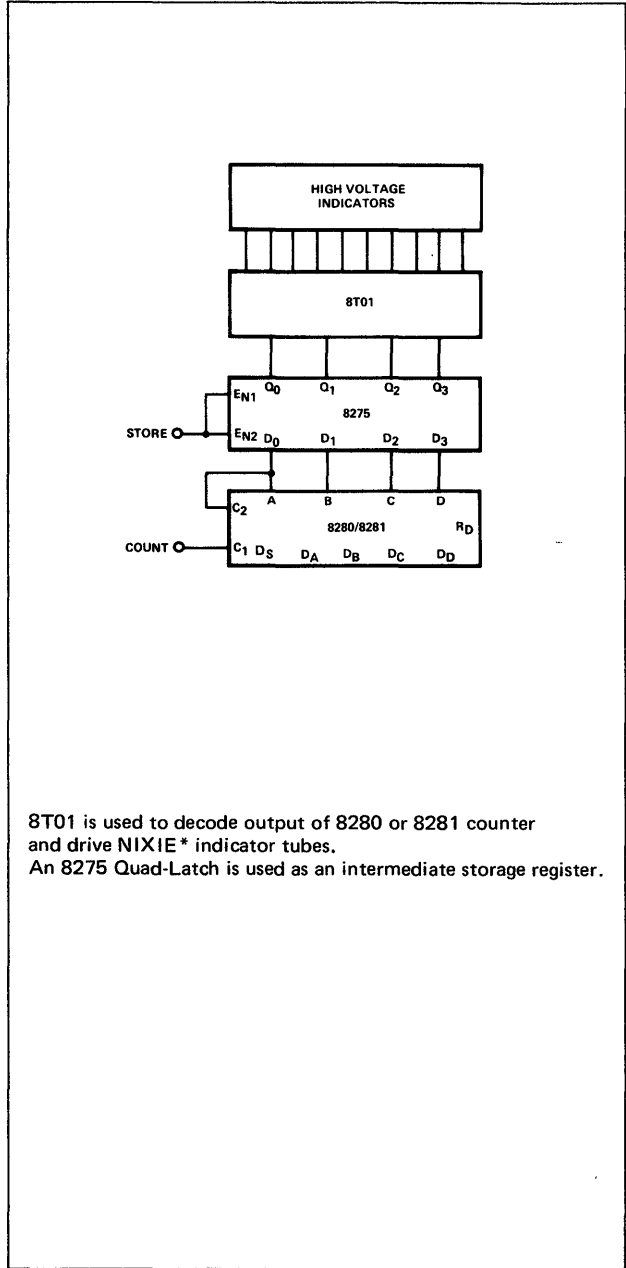

8T01 is used to decode output of 8280 or 8281 counter and drive NIXIE\* indicator tubes. An 8275 Quad-Latch is used as an intermediate storage register.

\*A trademark of the Burroughs Corporation.

# SEVEN SEGMENT DECODER/DRIVER

# 8T04

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION


The 8T04 consists of the necessary logic to decode a 4-bit BCD code to seven segment (0 through 9) readout, as well as some selected signs and letters.

Incorporated in this device is a blanking circuit which turns all segments off when activated. The blanking circuit allows suppression of all numerically insignificant zeros, thereby presenting an easily read display.

Also included is the necessary circuitry to implement suppression of leading and/or trailing zeros. A Lamp Test control is provided to turn all segments on. The Lamp Test allows the viewer to check the validity of the display lamps.

High performance bare collector output transistors are used in the 8T04 for directly driving incandescent lamps or common anode LED displays.

### LOGIC DIAGRAM

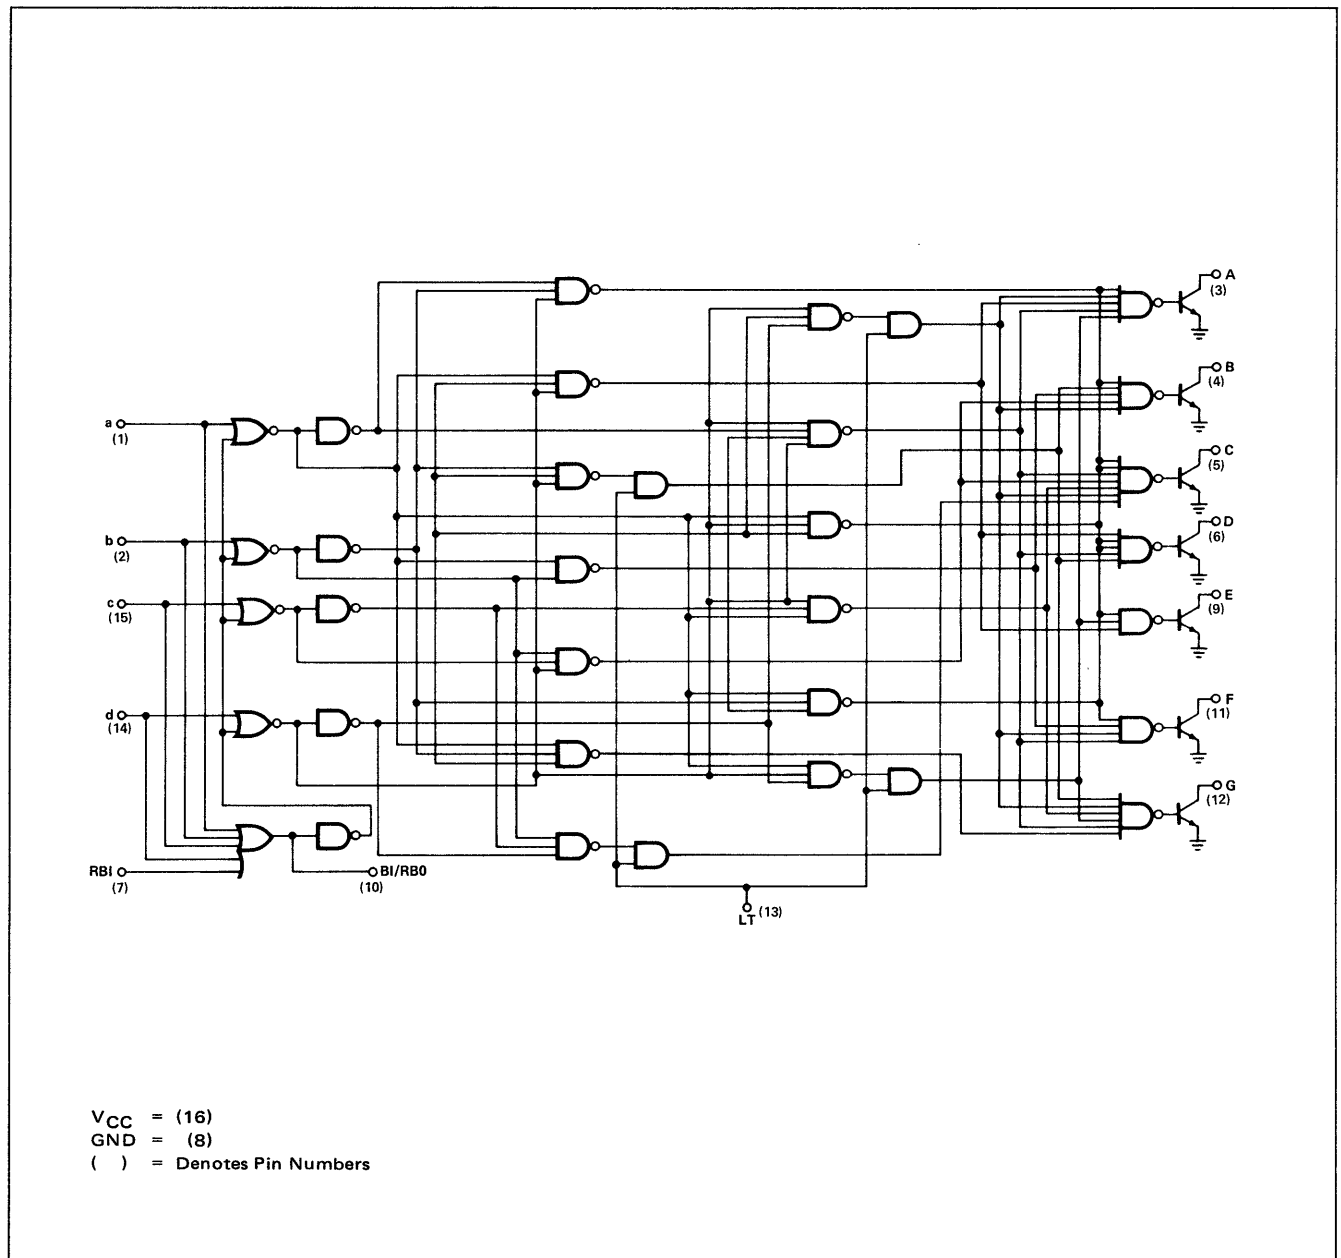



SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8T04


ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS					NOTES
	MIN.	TYP.	MAX.	UNITS	LT	RB1	RBO B1	DRIVEN INPUTS	OUTPUTS	
"1" Output Voltage RBO	3.1			V			-160 $\mu$ A			7, 9
"0" Output Voltage RBO			0.4	V		0.8V	4.8mA	0.8V		8, 9
A-G			0.50	V	0.4V	0.4V	0.4V		40mA	8, 9
"1" Output Leakage Current (A-G)			100	$\mu$ A		0.8V			6.0V	9, 10
"1" Input Current RBI			40	$\mu$ A		4.5V				
LT			160	$\mu$ A	4.5V					
All Other Inputs			80	$\mu$ A		4.5V	4.5V	4.5V		
"0" Input Current RBI	-1		-1.2	mA		0.4V				
BI	-1		-2.2	mA			0.4V			
LT	-1		-10	mA	0.4V					
All Other Inputs	-1		-1.6	mA	0.4V			0.4V		
Input Latch Voltage	5.5			V			10mA			11
Power/Current Consumption:										
"S" Temperature Range			394/75	mW/mA						13
"N" Temperature Range			446/85	mW/mA						13


NOTES:

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive NAND Logic Definition:  
"UP" Level = "1", "DOWN" = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Measurements apply to each gate element independently.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- See truth table: "1" Threshold = 2.0V for a,b,c,d.  
"0" Threshold = 0.8V for a,b,c,d.
- Connect an external 1k  $\pm$ 1% resistor to the output for this test.
- This test guarantees operation free of input latch-up over the specified operating supply voltage range.
- Manufacturer reserves the right to make design and process changes and improvements.
- $V_{CC} = 5.25V..$

TEST FIGURE FOR "0" OUTPUT VOLTAGE

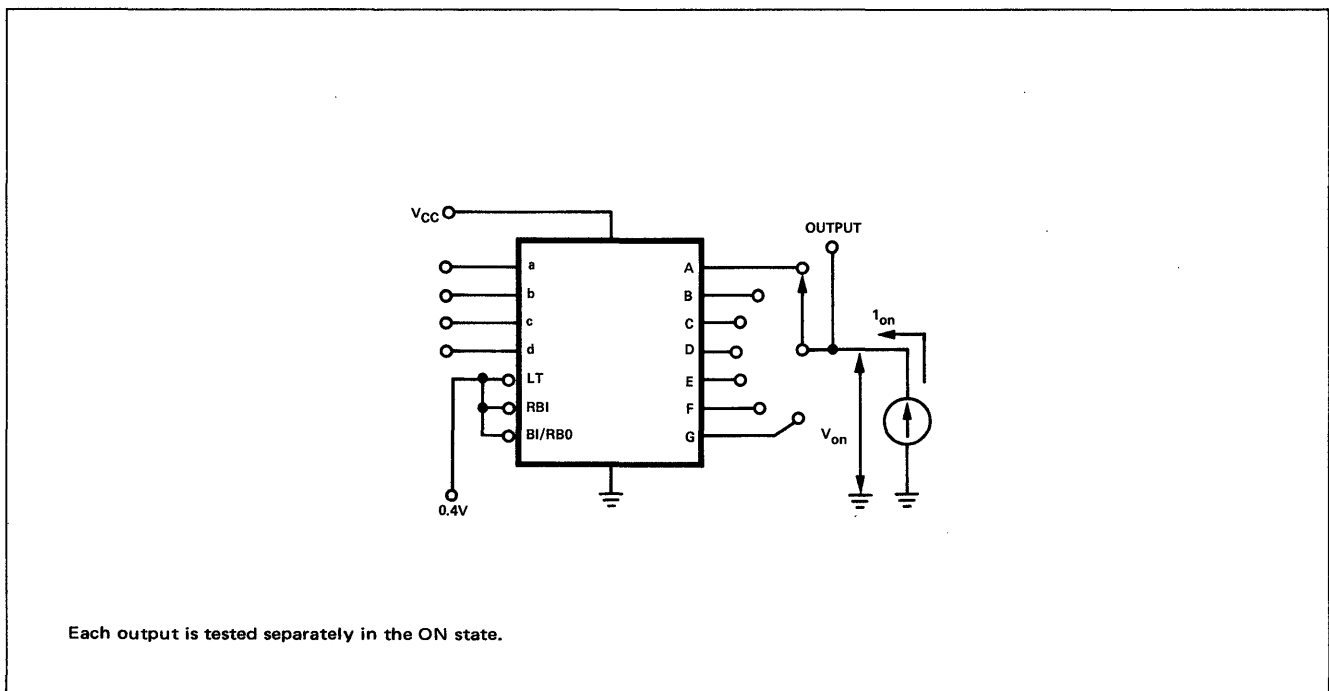

**SCHEMATIC DIAGRAM**

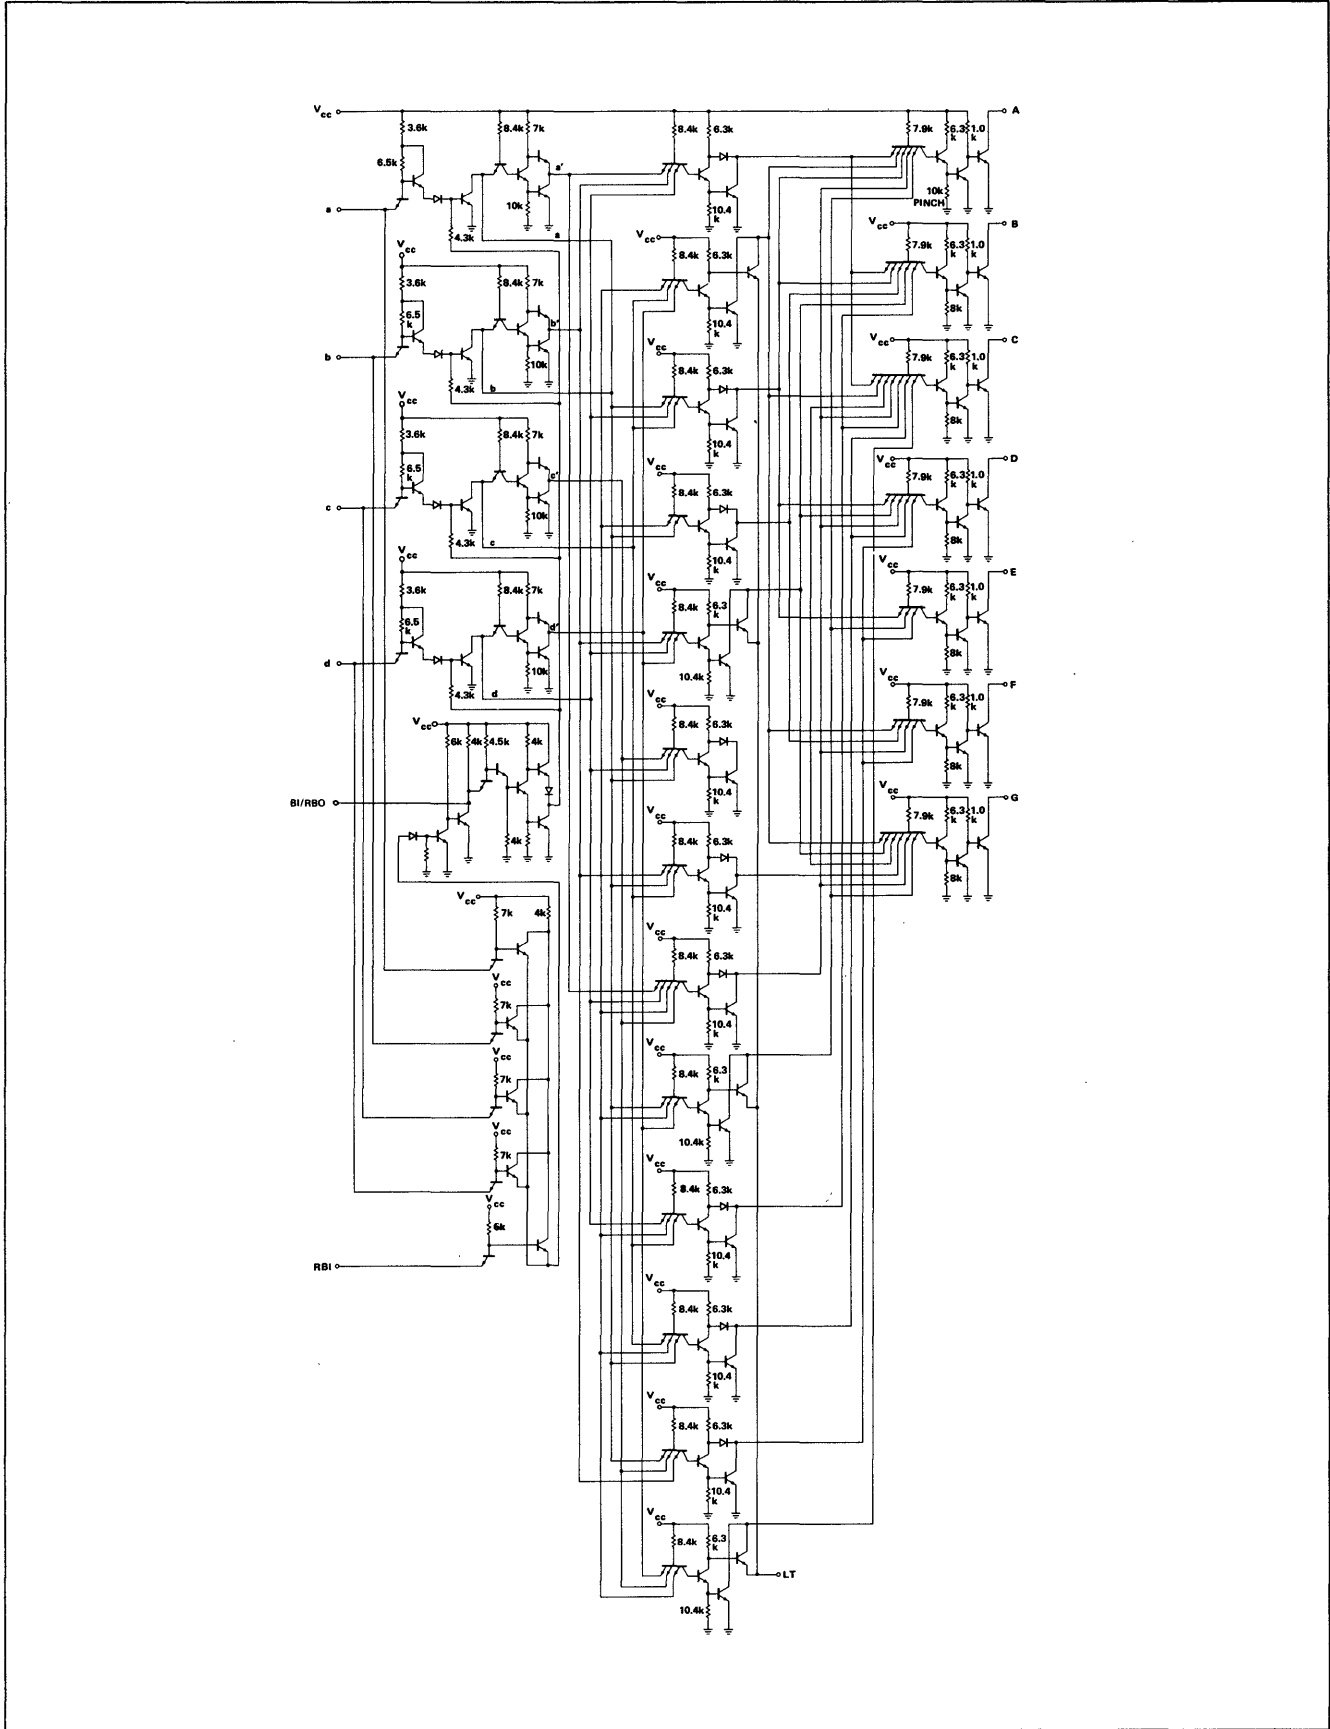

SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8T04

TRUTH TABLE


INPUTS				BI/RBO	OUTPUTS							DISPLAY CHARACTER		
INPUT CODE		LAMP TEST	RBI		OUTPUT STATE									
d	c	b	a	LT		NOTE	A	B	C	D	E	F	G	
X	X	X	X	0	X	X	0	0	0	0	0	0	0	8
X	X	X	X	1	X	0 (Note 1 & 2)	1	1	1	1	1	1	1	BLK
0	0	0	0	1	0	0 (Note 2)	1	1	1	1	1	1	1	BLK
0	0	0	0	1	1	1	0	0	0	0	0	0	1	0
0	0	0	1	1	X	1	1	0	0	1	1	1	1	1
0	0	1	0	1	X	1	0	0	1	0	0	1	0	2
0	0	1	1	1	X	1	0	0	0	0	1	1	0	3
0	1	0	0	1	X	1	1	0	0	1	1	0	0	4
0	1	0	1	1	X	1	0	1	0	0	1	0	0	5
0	1	1	0	1	X	1	1	1	0	0	0	0	0	6
0	1	1	1	1	X	1	0	0	0	1	1	1	1	7
1	0	0	0	1	X	1	0	0	0	0	0	0	0	8
1	0	0	1	1	X	1	0	0	0	1	1	0	0	9
1	0	1	0	1	X	1	1	1	1	1	1	1	0	1
1	0	1	1	1	X	1	1	1	1	1	1	1	1	BLK
1	1	0	0	1	X	1	0	0	0	1	0	0	0	8
1	1	0	1	1	X	1	1	1	0	1	1	1	1	1
1	1	1	0	1	X	1	1	1	1	0	0	0	1	7
1	1	1	1	1	X	1	1	1	1	1	1	1	1	BLK

\*COMMA

X = Don't care, either "1" or "0".  
 BI/RBO is an internally wired OR output.

NOTE:

1. BI/RBO used as input.
2. BI/RBO should not be forced high when a,b,c,d, RBI terminals are low, or damage may occur to the unit.



# SEVEN SEGMENT DECODER/TRANSISTOR DRIVER

# 8T05

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION

The 8T05 consists of the necessary logic to decode a 4-Bit BCD code to seven segment (0 through 9) readout as well as some selected signs and letters.


A Ripple Blanking input is provided to implement suppression of leading and/or trailing zeros. The suppression of all numerically insignificant zeros provides an easily read display.

Incorporated in the Ripple Blanking output (BI/RBO) is the facility to ground all the outputs. Blanking of the outputs allows for intensity modulation.

A Lamp Test input is provided which, when grounded forces all segment outputs high. This allows the viewer to check the validity of the display presentation by testing the integrity of the lamps.

The 8T05 has resistor pullups on the outputs to provide source current sufficient to drive interfacing elements. This allows the unit to drive high voltage transistors for neon displays. The 8T05 can also be used to drive common cathode LED displays at moderate light intensity levels.

### LOGIC DIAGRAM

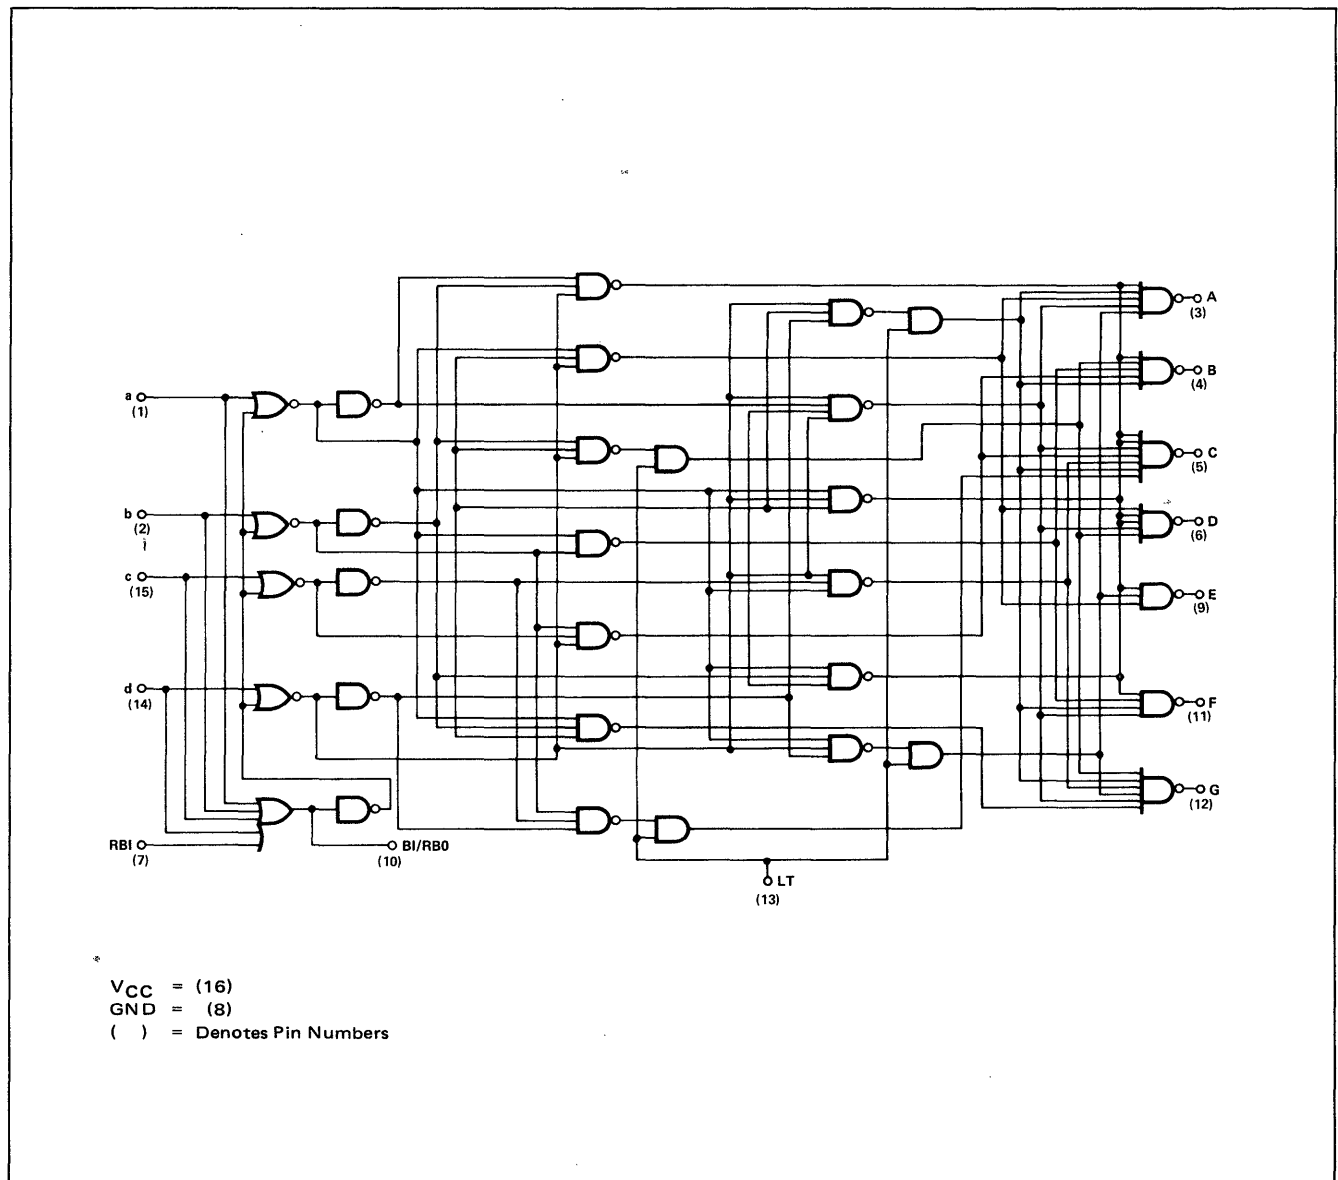

SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8T05


ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				LT	TEST CONDITIONS			OUTPUTS	NOTES
	MIN	TYP	MAX	UNITS		RBI	RBO BI	DRIVEN INPUTS		
A-G "1" Output Voltage	3.9			V	0.4V				-500 $\mu$ A	7, 9
A-G Output Source Current	-2.3			mA	0.4V				1.0V	
A-G "0" Output Voltage			0.3	V	4.5V	0.4V	0.4V		+500 $\mu$ A	8, 9
RBO "1" Output Voltage	3.1			V			-160 $\mu$ A			7, 9
RBO "0" Output Voltage			0.4	V		0.8V	4.8mA	0.8V		8, 9
"1" Input Current										
RBI			40	$\mu$ A		4.5V				
LT			160	$\mu$ A	4.5V					
All other Inputs			80	$\mu$ A		4.5V	4.5V	4.5V		
"0" Input Current										
RBI	-1		-1.2	mA		0.4V				
BI	-1		-2.2	mA			0.4V			
LT	-1		-1.0	mA	0.4V					
All Other Inputs	-1		-1.6	mA				0.4V		
Input Voltage Rating	5.5			V				10mA		10
Power/Current Consumption:										
"S" Temperature Range			394/75	mW/mA						12
"N" Temperature Range			110/85	mW/mA						12


NOTES:

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive NAND Logic Definition:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Measurements apply to each element independently.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- See truth table: "1" Threshold = 2.0V for a,b,c,d.  
"0" Threshold = 0.8V for a,b,c,d.
- This test guarantees operation free of input latch-up over the specified operating supply voltage range.
- Manufacturer reserves the right to make design and process changes and improvements.
- $V_{CC} = 5.25V$ .

TYPICAL CHARACTERISTIC CURVES

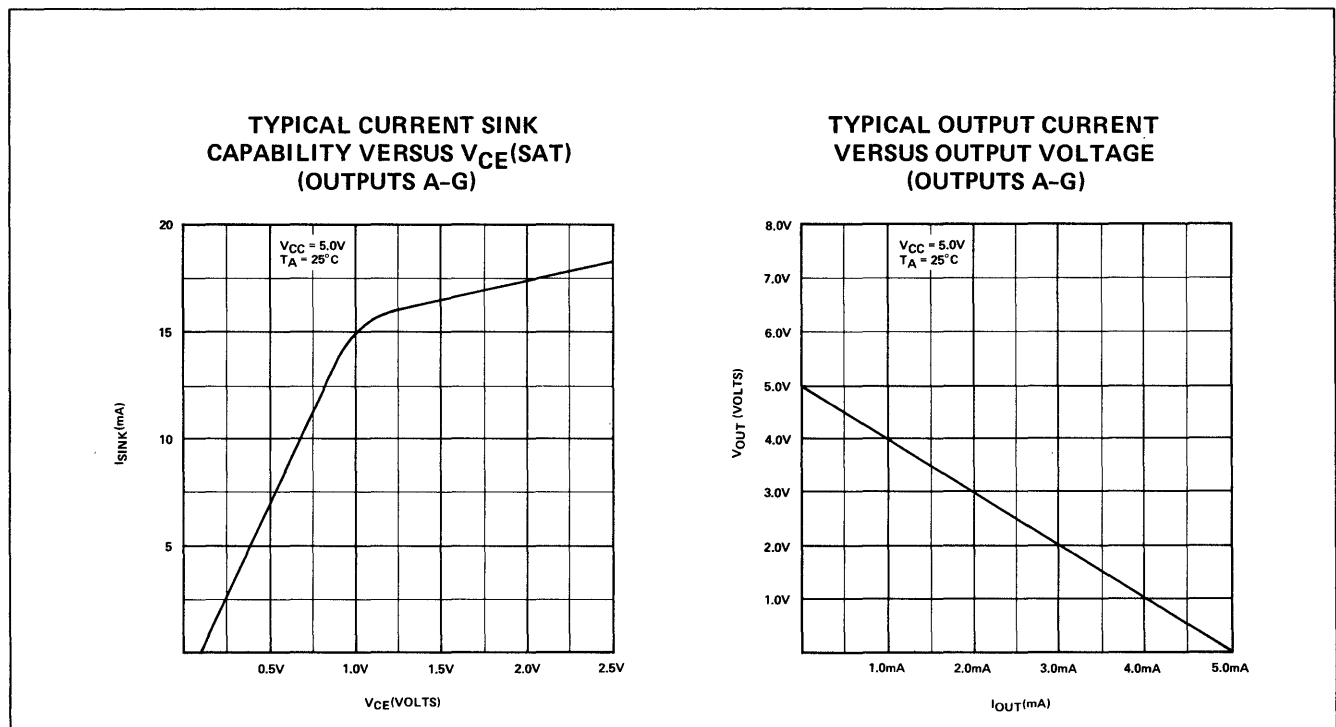

**SCHEMATIC DIAGRAM**

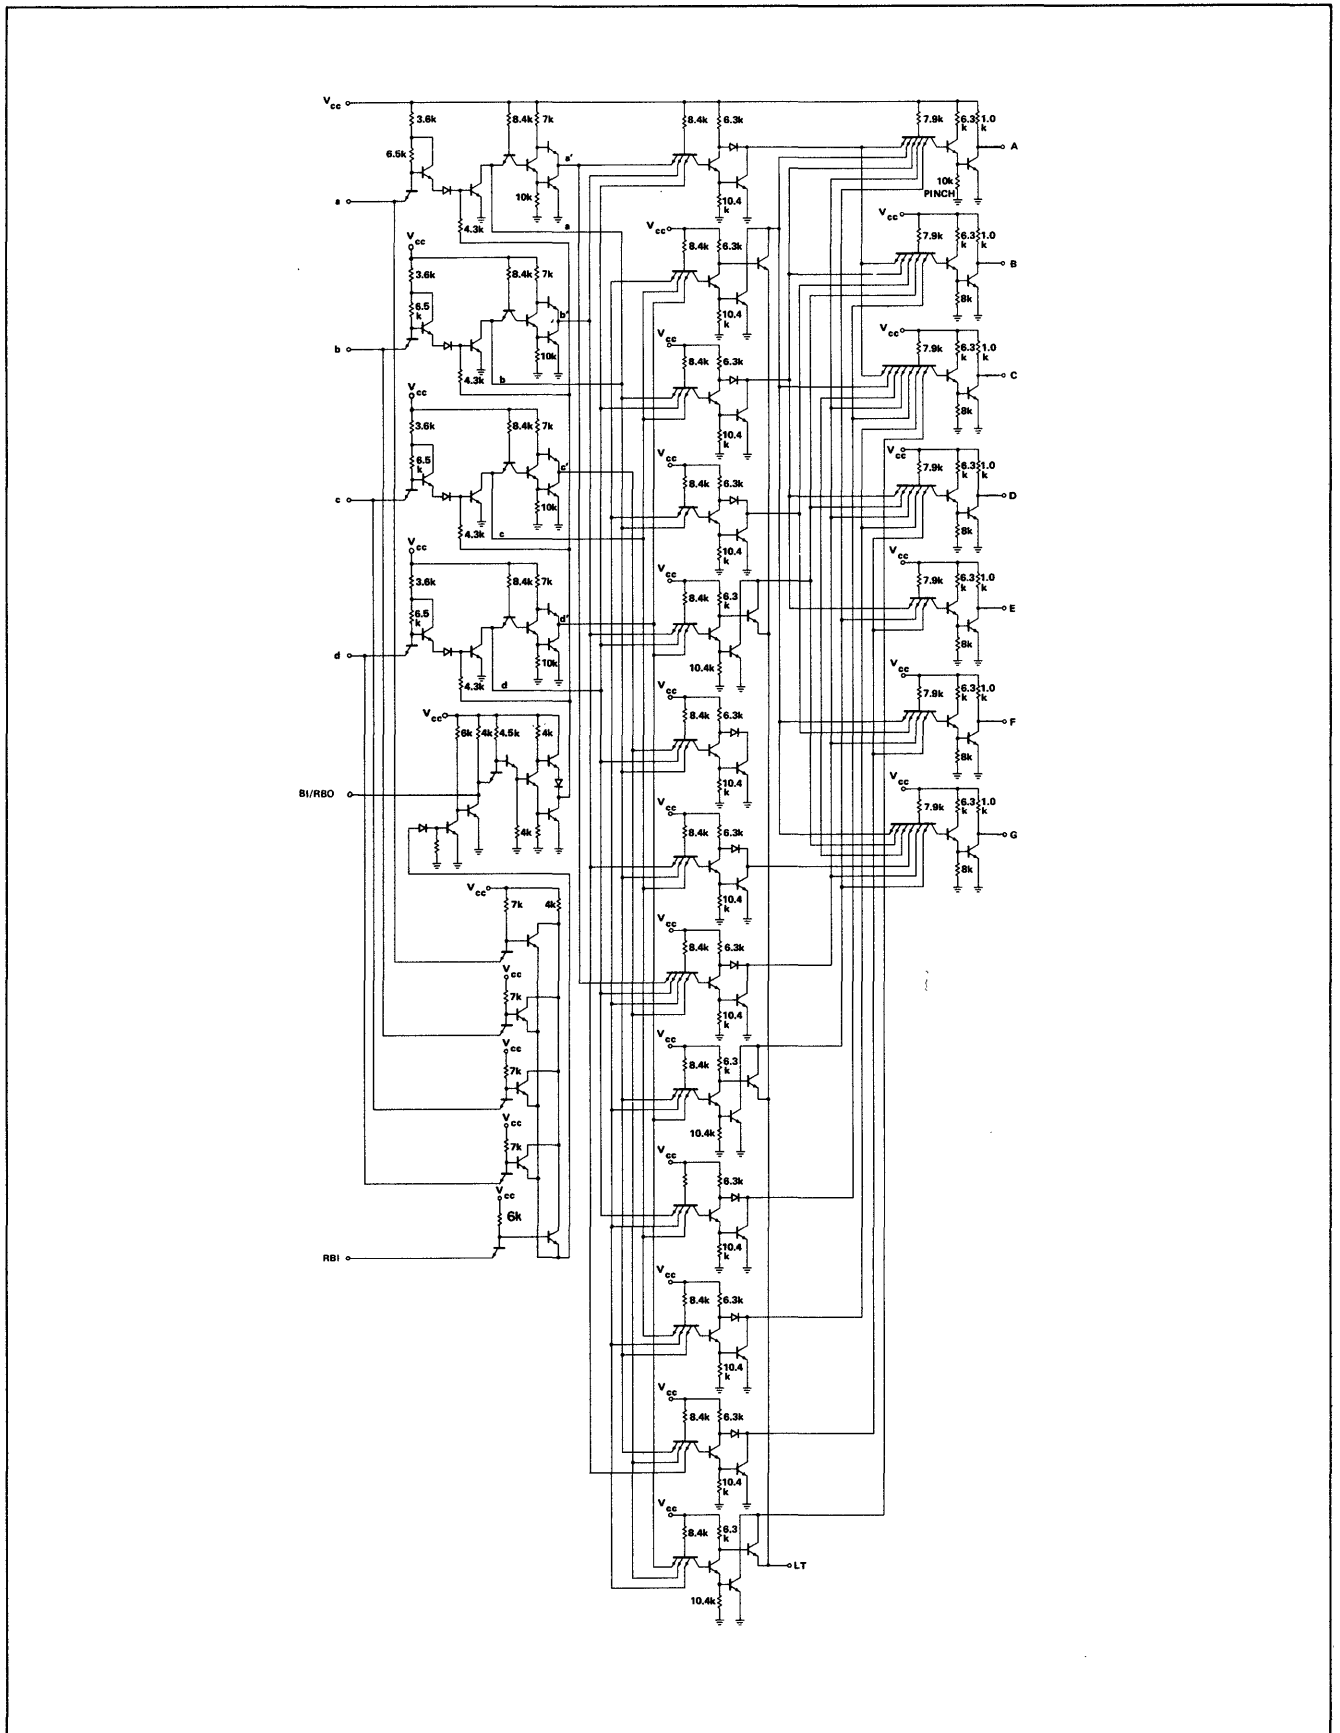

SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8T05


TRUTH TABLE

INPUTS					BI/RBO	OUTPUTS								
INPUT CODE				LAMP TEST		RBI	OUTPUT STATE							DISPLAY CHARACTER
d	c	b	a	LT		Note	A	B	C	D	E	F	G	
X	X	X	X	0	X	X	1	1	1	1	1	1	1	8
X	X	X	X	1	X	0 (Note 1 & 2)	0	0	0	0	0	0	0	BLK
0	0	0	0	1	0	0 (Note 2)	0	0	0	0	0	0	0	BLK
0	0	0	0	1	1	1	1	1	1	1	1	0	0	
0	0	0	1	1	X	1	0	1	1	0	0	0	0	1
0	0	1	0	1	X	1	1	1	0	1	1	0	1	2
0	0	1	1	1	X	1	1	1	1	1	0	0	1	3
0	1	0	0	1	X	1	0	1	1	0	0	1	1	4
0	1	0	1	1	X	1	1	0	1	1	0	1	1	5
0	1	1	0	1	X	1	0	0	1	1	1	1	1	6
0	1	1	1	1	X	1	1	1	1	0	0	0	0	7
1	0	0	0	1	X	1	1	1	1	1	1	1	1	8
1	0	0	1	1	X	1	1	1	1	0	0	1	1	9
1	0	1	0	1	X	1	0	0	0	0	0	0	1	1
1	0	1	1	1	X	1	0	0	0	0	0	0	0	BLK
1	1	0	0	1	X	1	1	1	1	0	1	1	1	8
1	1	0	1	1	X	1	0	0	1	0	0	0	0	1
1	1	1	0	1	X	1	0	0	0	1	1	1	0	7
1	1	1	1	1	X	1	0	0	0	0	0	0	0	BLK

\*COMMA

X = Don't care, either "1" or "0".  
 BI/RBO is an internally wired OR output.

- NOTE:
1. BI/RBO used as input.
  2. BI/RBO should not be forced high when a, b, c, d, RBI terminals are low, or damage may occur to the unit.



# SEVEN SEGMENT DECODER/DISPLAY DRIVER

# 8T06


## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION

The 8T06 is a monolithic MSI circuit consisting of the necessary logic to decode a 4-bit BCD code to drive 7-segment indicators directly. Open-collector outputs are used for high current source applications, such as driving common cathode LED displays and discrete active components. The 8T06 seven segment decoder/driver accepts a 4-bit binary code and decodes all possible inputs as decimals 0-9 or selected signs and letters. Auxiliary inputs are provided for

maximum versatility. The ripple blanking inputs (RBI) and the ripple blanking output (RBO) may be used for automatic leading and/or trailing-edge zero suppression. The RBO output also acts as an overriding blanking input (BI) which may be used for intensity modulation or strobing of the display. A lamp test (LT) input is provided to check the integrity of the display by activating all outputs independent of the input code.

### LOGIC DIAGRAM

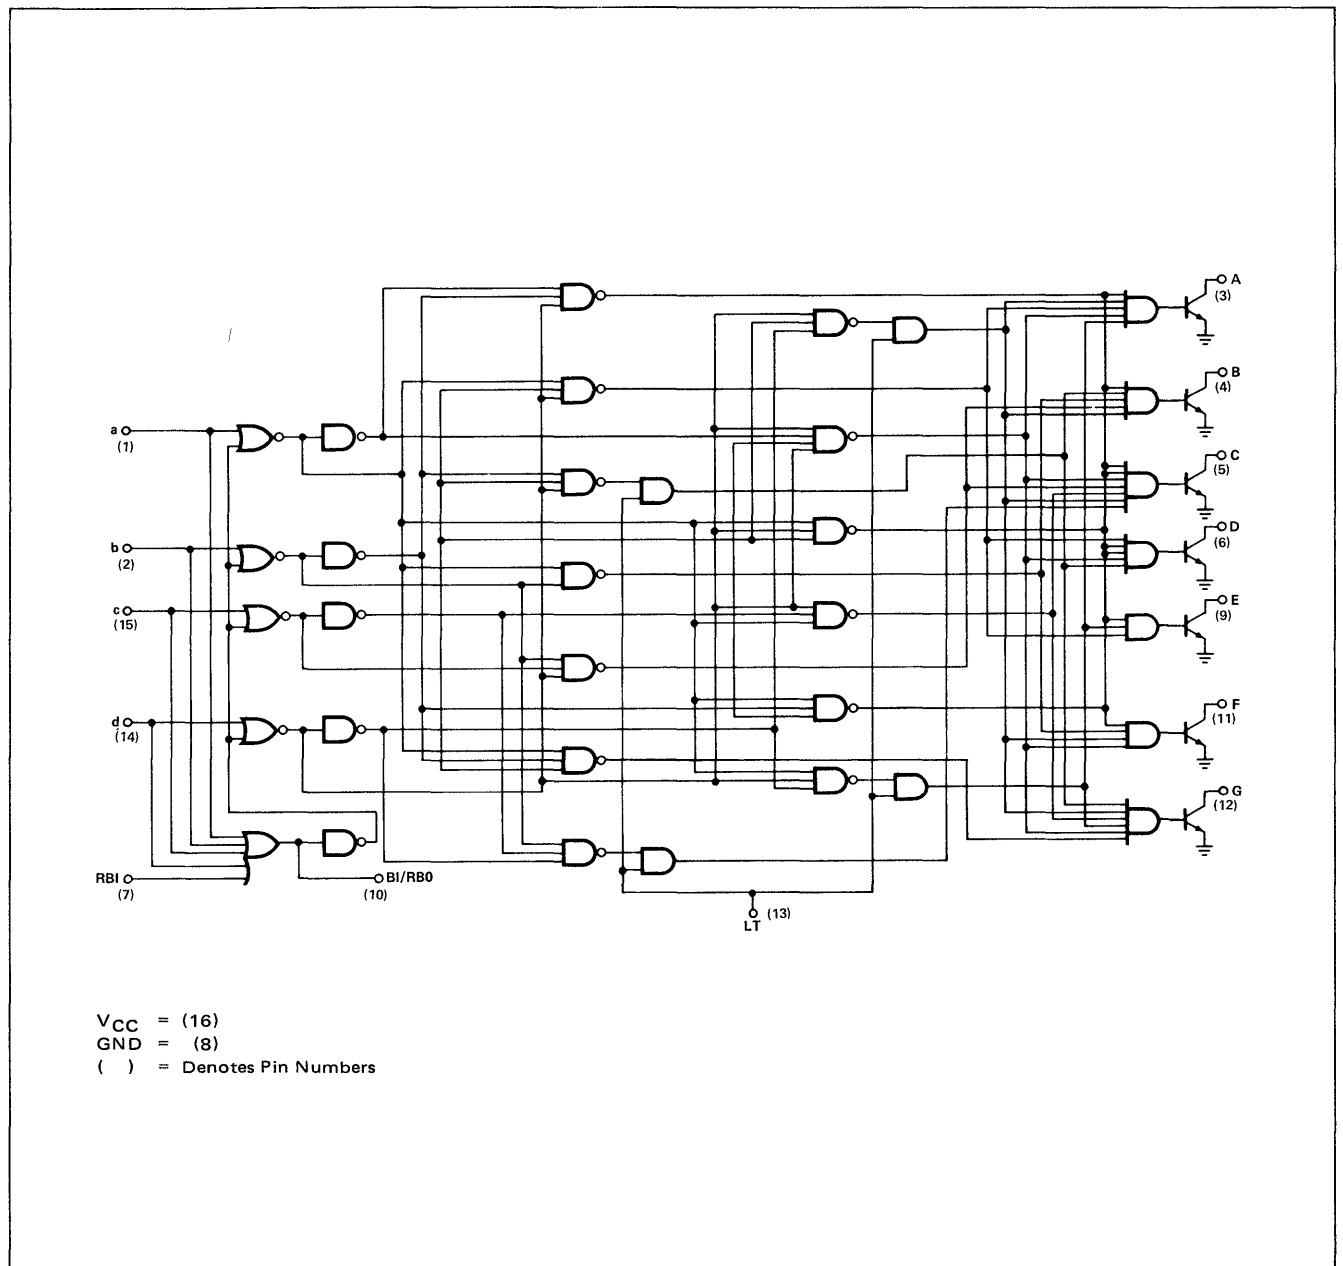



SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8T06


ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS					NOTES
	MIN.	TYP.	MAX.	UNITS	LT	RB1	RBO B1	DRIVEN INPUTS	OUTPUTS	
"1" Output Voltage RBO	3.1			V			-160 $\mu$ A			7, 9
"0" Output Voltage (A-G) RBO			0.5 0.4	V V	4.5V	0.4V 0.8V	0.4V 4.8mA	0.8V	40mA	8, 9 8, 9
"1" Output Leakage Current (A-G)			100	$\mu$ A	0.4V				6.0V	9, 10
"1" Input Current RBI LT All Other Inputs			40 160 80	$\mu$ A $\mu$ A $\mu$ A	4.5V 4.5V	4.5V	4.5V	4.5V		
"0" Input Current RBI BI LT All Other Inputs	-1 -1 -1 -1		-1.2 -2.2 -10 -1.6	mA mA mA mA	0.4V 0.4V	0.4V	0.4V 0.4V	0.4V		
Input Voltage Rating	5.5			V		10mA		10mA		11
Power/Current Consumption:										11
"S" Temperature Range			394/75	mW/mA						13
"N" Temperature Range			446/85	mW/mA						13


NOTES:

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive NAND Logic Definitions:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Measurements apply to each gate element independently.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- See truth table: "1" Threshold = 2.0V for a,b,c,d.  
"0" Threshold = 0.8V for a,b,c,d.
- Connect an external 1k  $\pm$ 1% resistor to the output for this test.
- This test guarantees operation free of input latch-up over the specified operation supply voltage range.
- Manufacturer reserves the right to make design and process changes and improvements.
- $V_{CC}$  = 5.25 volts.

TEST FIGURE FOR "0" OUTPUT VOLTAGE

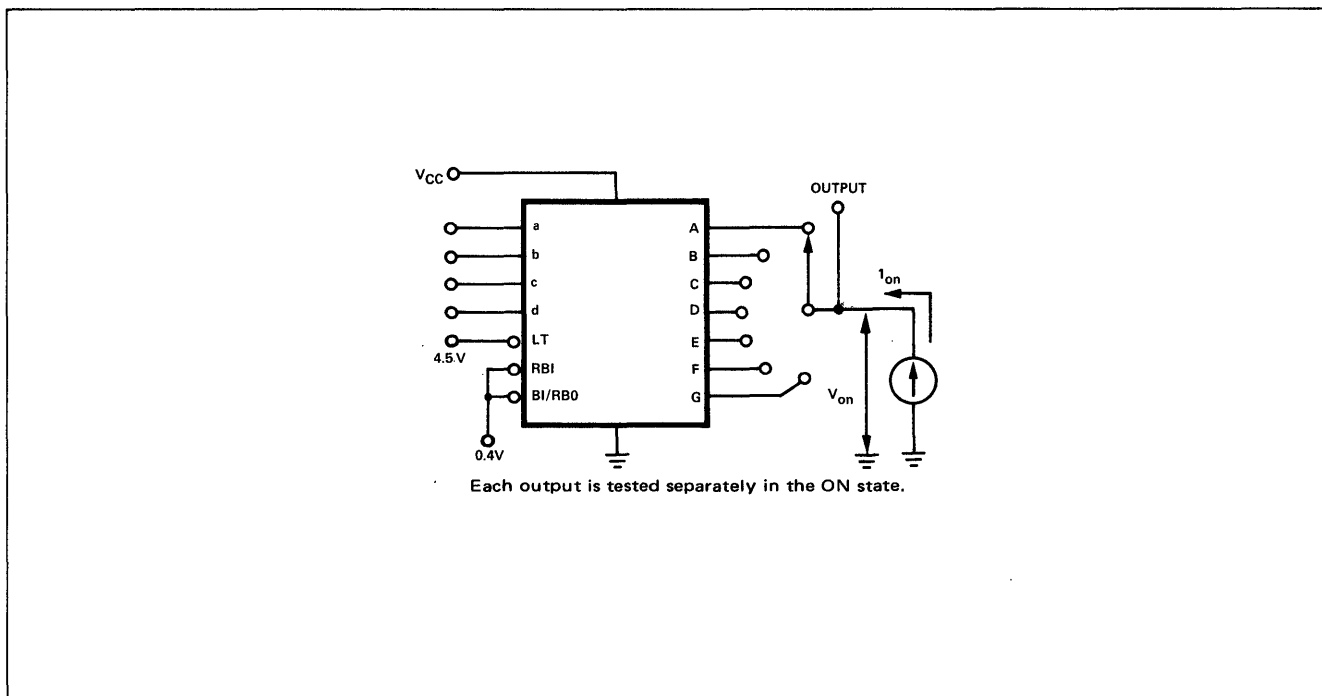

SCHEMATIC DIAGRAM

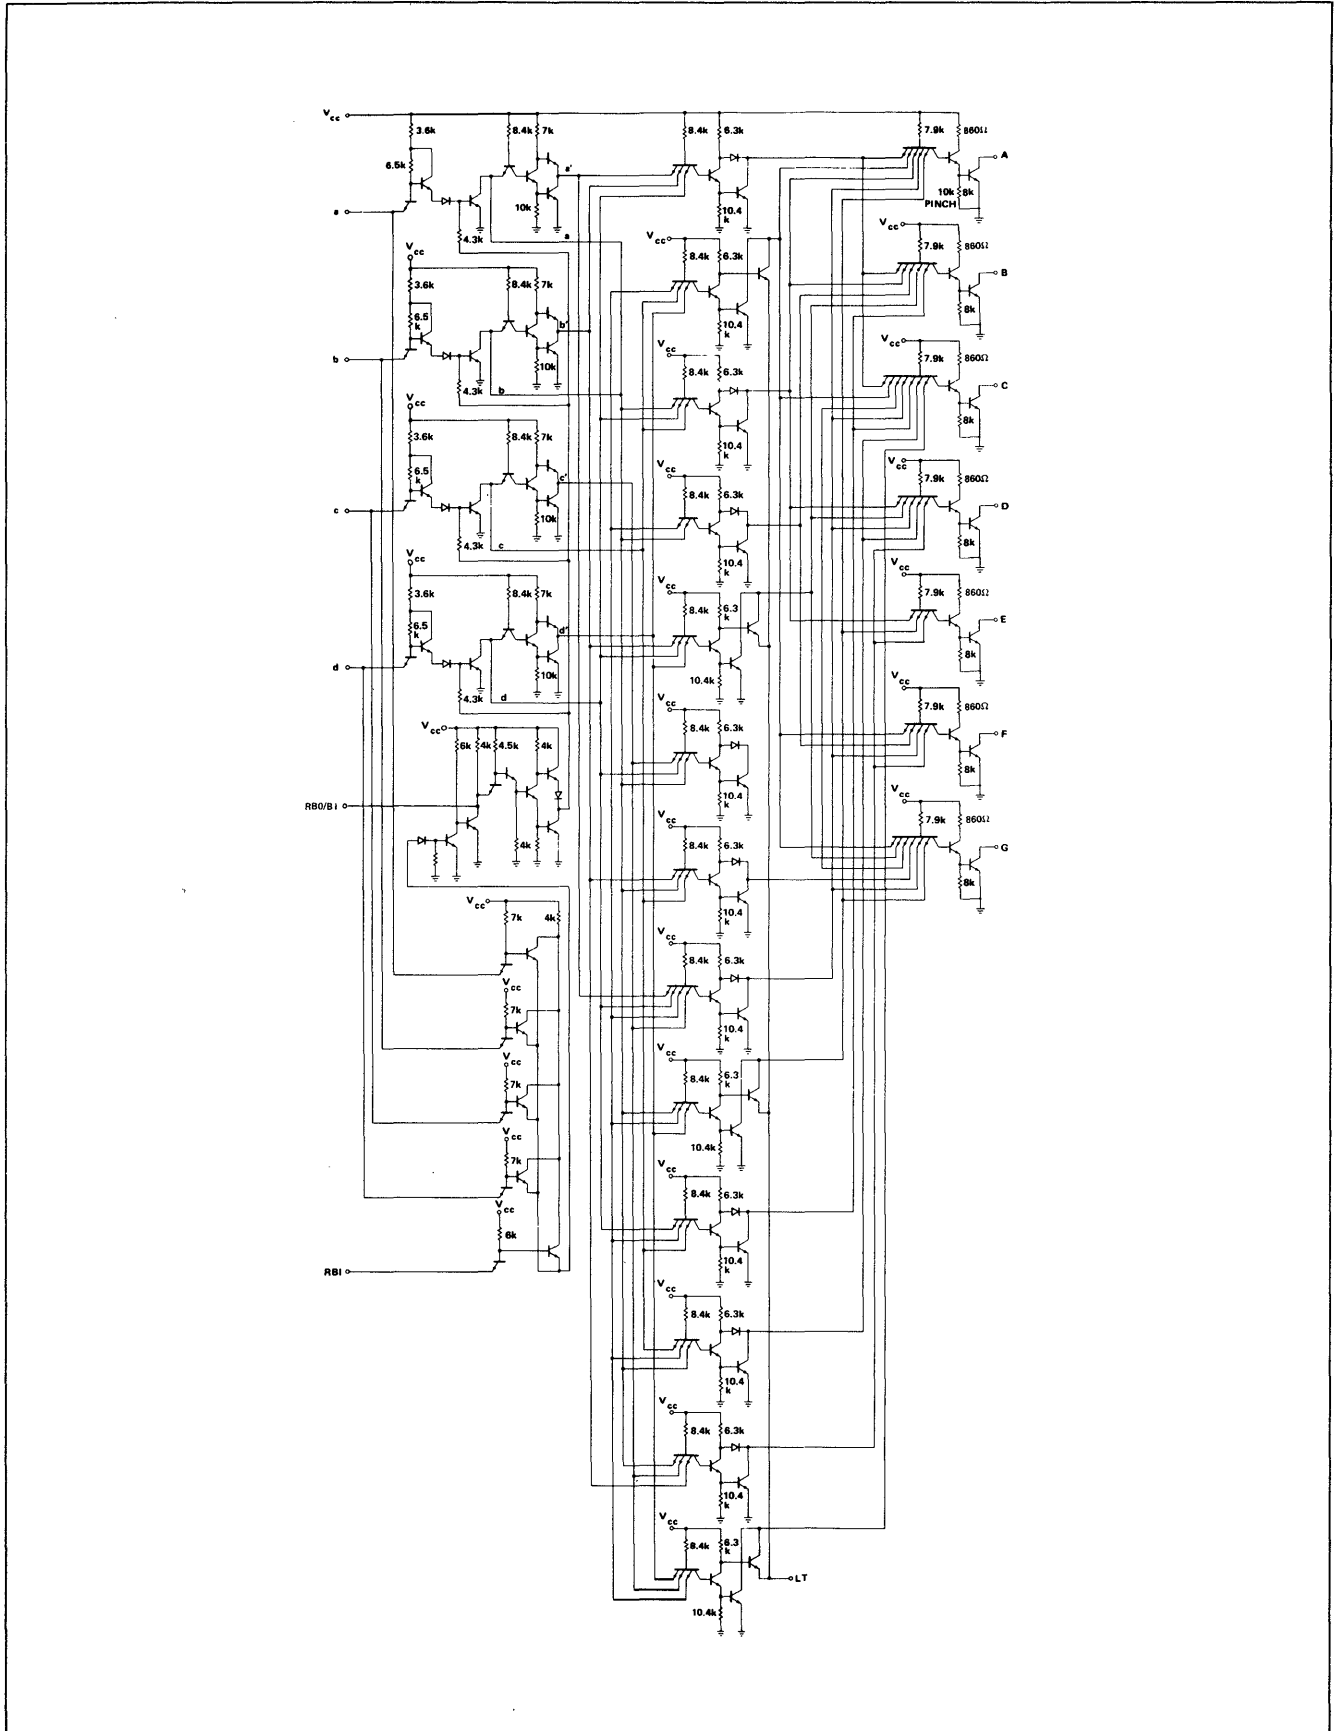

SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8T06

TRUTH TABLE


INPUTS					BI/RBO	OUTPUTS								
INPUT CODE				LAMP TEST		RBI	OUTPUT STATE							DISPLAY CHARACTER
d	c	b	a	LT		Note	A	B	C	D	E	F	G	
X	X	X	X	0	X	X	1	1	1	1	1	1	1	0
X	X	X	X	1	X	0	0	0	0	0	0	0	0	BLK
0	0	0	0	1	0	(Note 1 & 2) 0	0	0	0	0	0	0	0	BLK
0	0	0	0	1	1	(Note 2) 1	1	1	1	1	1	1	0	0
0	0	0	1	1	X	1	0	1	1	0	0	0	0	0
0	0	1	0	1	X	1	1	1	0	1	1	0	1	1
0	0	1	1	1	X	1	1	1	1	1	0	0	1	1
0	1	0	0	1	X	1	0	1	1	0	0	1	1	1
0	1	0	1	1	X	1	1	0	1	1	0	1	1	1
0	1	1	0	1	X	1	0	0	1	1	1	1	1	1
0	1	1	1	1	X	1	1	1	1	0	0	0	0	0
1	0	0	0	1	X	1	1	1	1	1	1	1	1	1
1	0	0	1	1	X	1	1	1	1	0	0	1	1	1
1	0	1	0	1	X	1	0	0	0	0	0	0	0	1
1	0	1	1	1	X	1	0	0	0	0	0	0	0	BLK
1	1	0	0	1	X	1	1	1	1	0	1	1	1	1
1	1	0	1	1	X	1	0	0	1	0	0	0	0	0
1	1	1	0	1	X	1	0	0	0	1	1	1	0	0
1	1	1	1	1	X	1	0	0	0	0	0	0	0	BLK

\*COMMA

X = Don't care, either "1" or "0".  
BI/RBO is an internally wired OR output.

NOTE:

1. BI/RBO used as input.
2. BI/RBO should not be forced high when a, b, c, d, RBI terminals are low, or damage may occur to the unit.



# QUAD BUS DRIVER | 8T09

## DIGITAL 8000 SERIES TTL/MSI


### DESCRIPTION

The 8T09 is a high speed quad bus driver device for applications requiring up to 25 loads interconnected on a single bus.


The outputs present a high impedance to the bus when disabled, (control input "1") and active drive when enabled

(control input "0"). This eliminates the resistor pull-up requirement while providing performance superior to open collector schemes. Each output can sink 40mA and drive 300pF loading with guaranteed propagation delay less than 22 nanoseconds.

### LOGIC DIAGRAM AND TRUTH TABLE

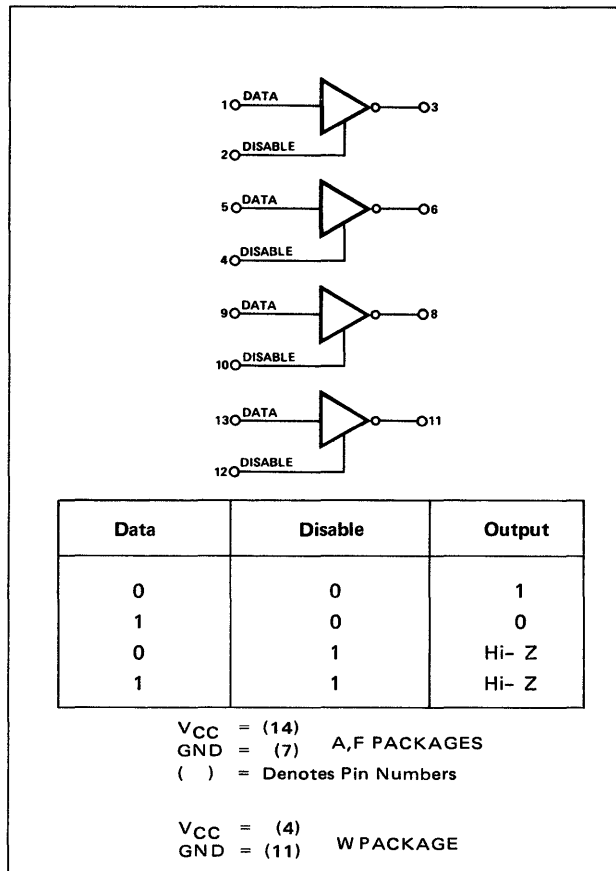

### SCHEMATIC DIAGRAM

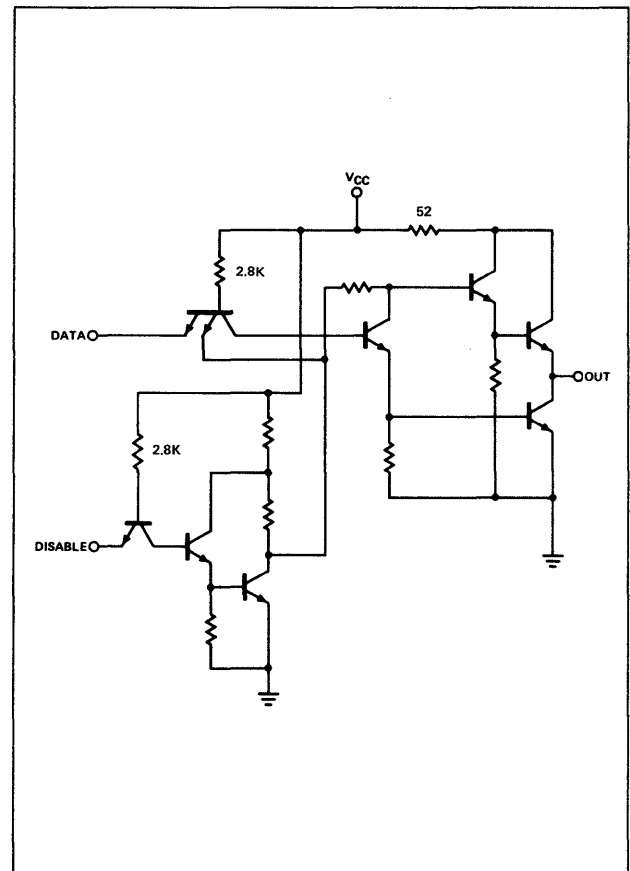

### ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS			NOTES
	MIN.	TYP.	MAX.	UNITS	DATA	DISABLE	OUTPUTS	
"1" Output Voltage	2.4	3.0		V	0.8V	0.8V	-5.2mA	7
"0" Output Voltage		0.2	0.4	V	2.0V	0.8V	40mA	8
Output Leakage Current	-40		+40	$\mu A$		2.0V	0.4V or 2.4V	3
"1" Input Current			40	$\mu A$		4.5V		
"0" Input Current			-2.0	mA	0.4V	0.4V		
Input Latch Voltage	5.5			V	10mA	10mA		
Power/Current Consumption		236/45	340/65	mW/mA				11
Output Short Circuit Current	-40		-120	mA	0V	0V	0V	

**SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8T09**


$T_A = 25^\circ\text{C}$  and  $V_{CC} = 5.0\text{V}$

CHARACTERISTICS	LIMITS				TEST CONDITIONS			NOTES
	MIN.	TYP.	MAX.	UNITS	DATA	DISABLE	OUTPUTS	
Propagation Delay Data to Output $t_{pd+}$ , $t_{pd-}$			10 20	ns ns			30pF load 300pF load	9 9
Disable to Output High Z to 0, 0 to High Z			14 22	ns ns			30pF load 300pF load	9 9
High Z to 1, 1 to High Z			14 22	ns ns			30pF load 300pF load	9 9

**NOTES:**

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive NAND Logic definition:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings
- should the isolation diodes become forward biased.
- Measurements apply to each output and the associated data input independently.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- Refer to AC Test Figures.
- Manufacturer reserves the right to make design and process changes and improvements.
- $V_{CC} = 5.25$  volts.

**AC TEST FIGURES AND WAVEFORMS**

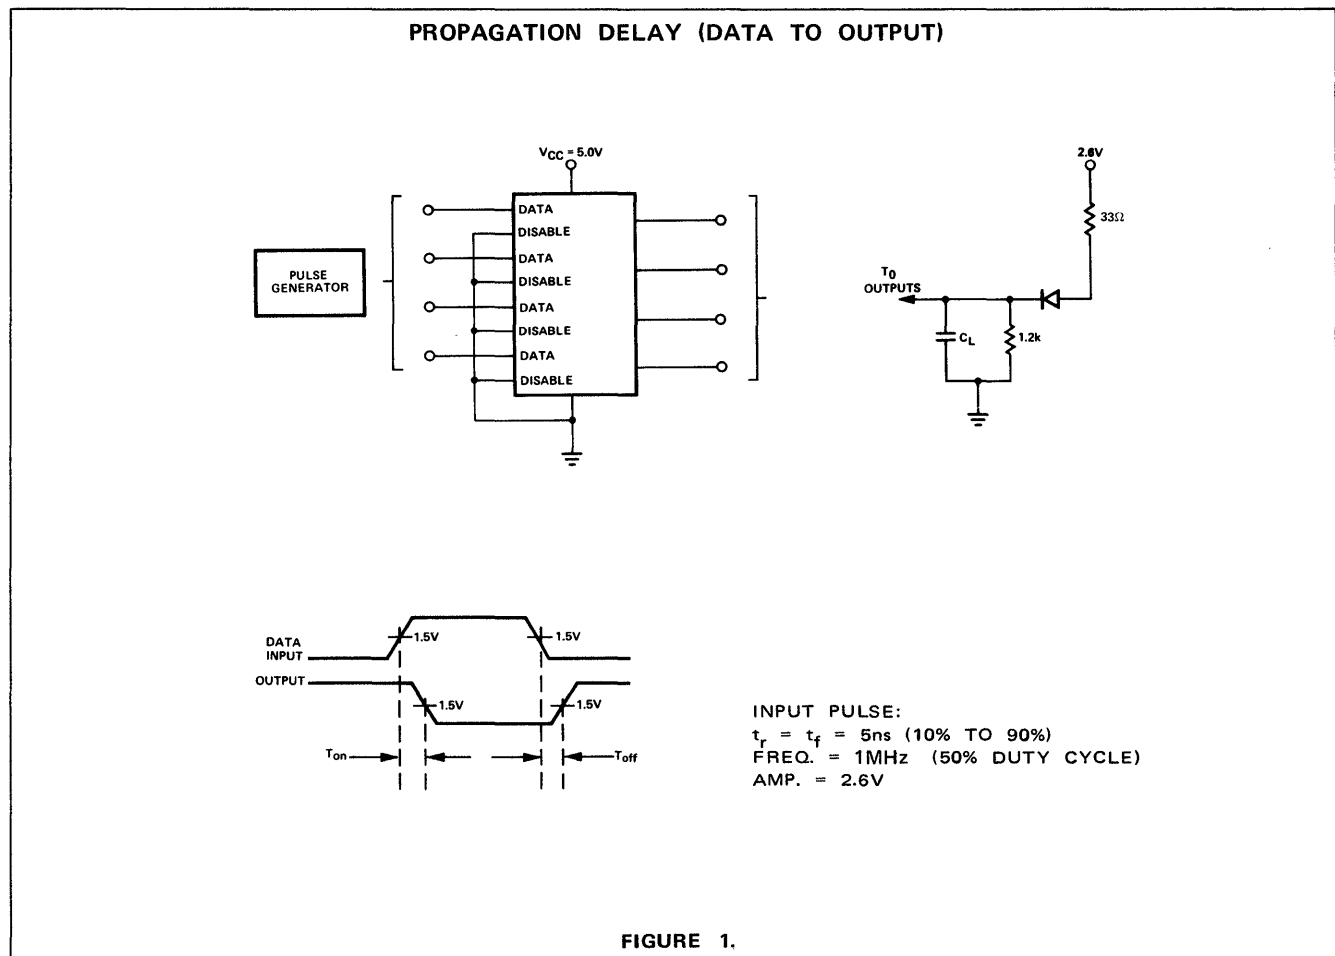

AC TEST FIGURES AND WAVEFORMS (Cont'd)

PROPAGATION DELAY ("0" TO HIGH Z)

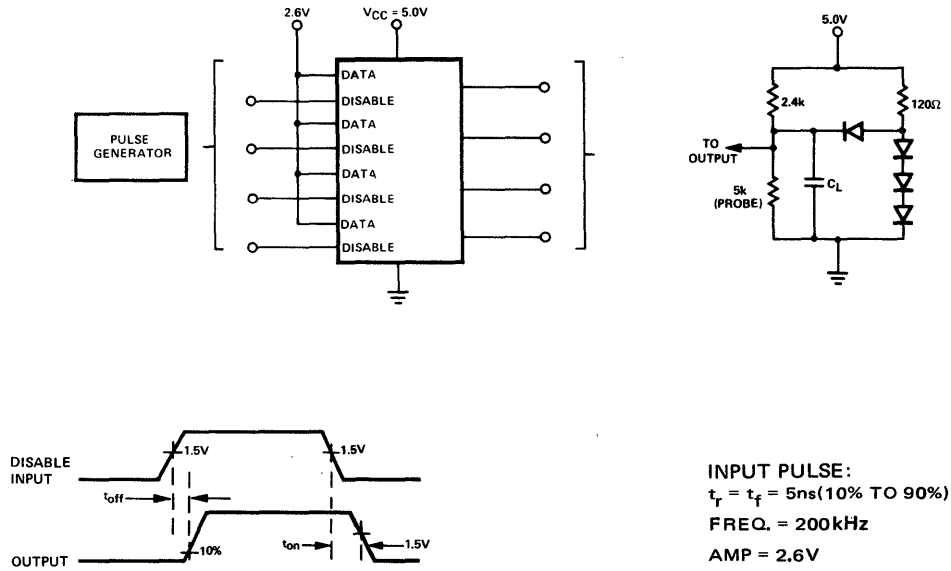


FIGURE 2.

PROPAGATION DELAY ("1" TO HIGH Z)


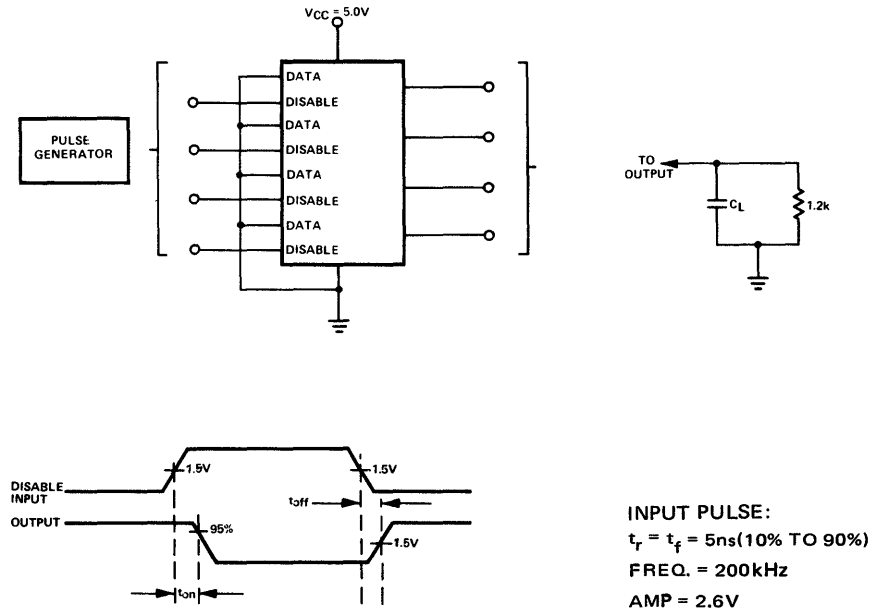


FIGURE 3.

TYPICAL APPLICATION

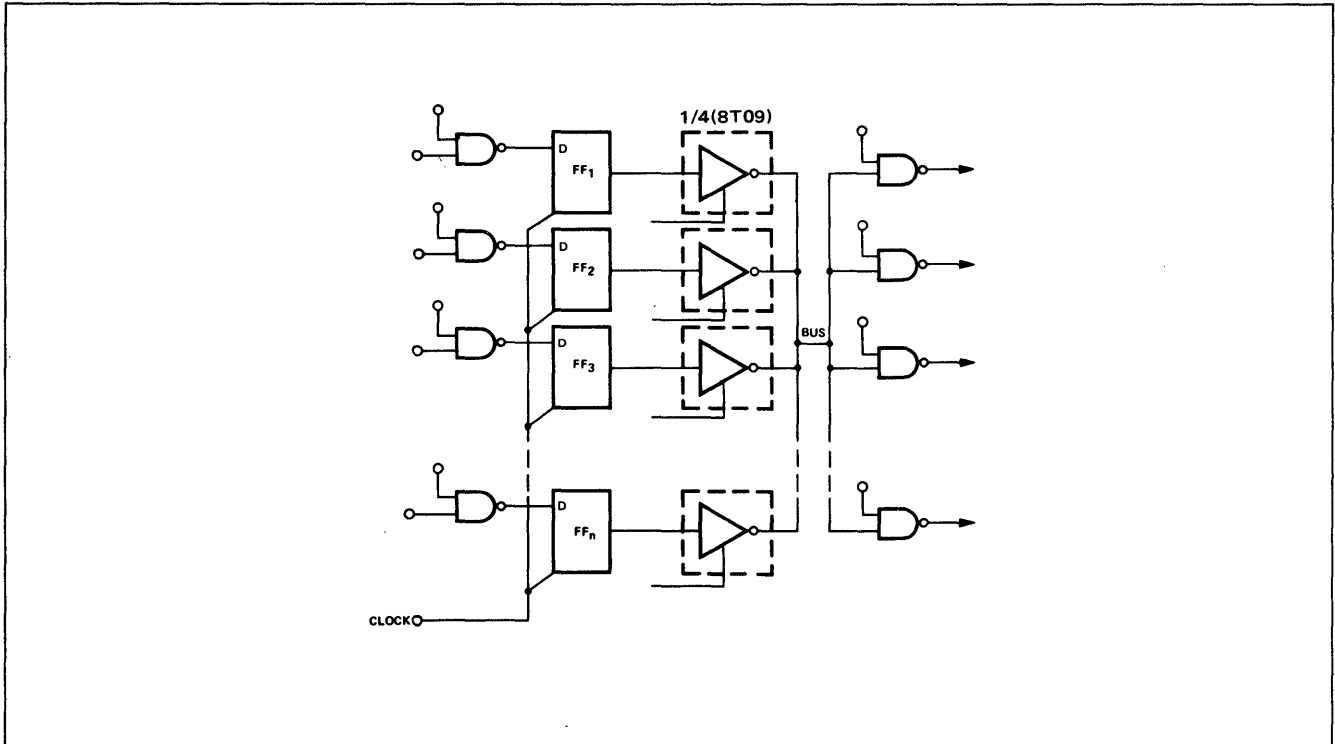

The above figure illustrates usage of the 8T09 in data processing logic. For example, FF<sub>1</sub> thru FF<sub>n</sub> may represent bit X in each of several functions in a minicomputer (accumulators, MQ register, index registers, indirect address

registers, etc.). Transfer from any source to any load, including transfers from one register to another, can take place along the single path labeled "BUS".

# QUAD D-TYPE BUS FLIP-FLOP

# 8T10

DIGITAL 8000 SERIES TTL/MSI

## DESCRIPTION

The 8T10 is a high speed Quad D flip-flop with a controlled impedance output for use in bus-organized systems. The high current sink capability permits up to 20 standard loads to be interconnected on a single bus. The outputs present a high impedance to the bus when disabled (Control Input "1") and active drive when enabled (Control Inputs "0").

All four D-type flip-flops operate from a common clock with data being transferred on the low-to-high transition of the pulse.

A common clear input resets all flip-flops upon application of a logic "1" level.

Data will be stored if either one or both inputs to the Input Disable NOR gate is a logic "1".


## TRUTH TABLE

$D_n$	$IN_{DIS}$	$OUT_{DIS}$	$Q_{n+1}$
0	0	0	0
1	0	0	1
X	1	0	$Q_n$
X	X	1	High Z

$Q_n$  refers to the output state before a clock pulse.

$Q_{n+1}$  refers to the output state after a clock pulse.

## LOGIC DIAGRAM

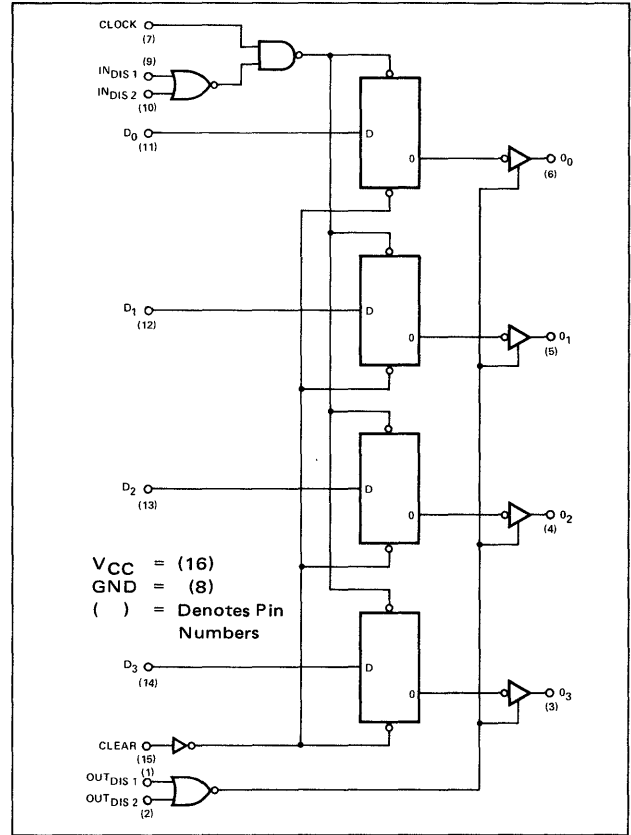

## ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS								NOTES
	MIN.	TYP.	MAX.	UNITS	$D_n$	IN DIS 1	IN DIS 2	OUT DIS 1	OUT DIS 2	CLEAR	CLOCK	OUTPUT	
"1" Output Voltage	2.4	3.0		V	2.0V	0.8V	0.8V	0.8V	0.8V	0.8V	Pulse	-5.2mA	6
"0" Output Voltage			0.4	V	0.8V	0.8V	0.8V	0.8V	0.8V	0.8V	Pulse	32mA	7
Output Leakage Current (High Impedance State)	-40		+40	$\mu$ A		0.8	0.8V	+2.0V	+2.0V	0.8V	Pulse	+0.4V/ +2.4V	
"1" Input Current													
$D_n$ Inputs			40	$\mu$ A	4.5V	0.4V	0.4V	0.4V	0.4V	0.4V			
All Other Inputs			50	$\mu$ A		4.5V	4.5V	4.5V	4.5V	4.5V	4.5V		
"0" Input Current													
$D_n$ Inputs	-100		-3.2	mA	0.4V								
All Other Inputs	-100		-2.0	mA		0.4V	0.4V	0.4V	0.4V	0.4V	0.4V		
Input Latch Voltage	+5.5V				10mA	10mA	10mA	10mA	10mA	10mA	10mA		



SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8T10


$T_A = 25^\circ\text{C}$  and  $V_{CC} = 5.0\text{V}$

CHARACTERISTICS	LIMITS				TEST CONDITIONS								NOTES
	MIN.	TYP.	MAX.	UNITS	$D_n$	IN DIS 1	IN DIS 2	OUT DIS 1	OUT DIS 2	CLEAR	CLOCK	OUTPUT	
Propagation Delay													
Clock to Output													
$C_L = 30\text{pf}$		18	25	ns									
$C_L = 300\text{pf}$		24	35	ns									
Disable to Output													
High Z to Logic 0													10
State ( $C_L = 300\text{pf}$ )		20	30	ns									
Logic 0 State to													
High Z ( $C_L = 300\text{pf}$ )		20	30	ns									11
Clear to Output													
$C_L = 30\text{pf}$		15	22	ns									
$C_L = 300\text{pf}$		21	30	ns									
Set Up Time													
Data	+5	-1		ns									
Input Disable		-6	0	ns									
Hold Time													
Data		-1	+5	ns									
Reset Pulse Width	15			ns									
Clock Frequency	35	50		MHz									
Clock Pulse Width													
Positive		8	12	ns									
Negative		8	12	ns									
Power Supply Current			118	mA	0.4V	0.4V	0.4V	4.5V	0.4V	0.4V	4.5V		8
Output Short Circuit Current	-40		-120	mA	4.5V	0.4V	0.4V	4.5V	0.4V	0.4V	4.5V	0.0V	

NOTES:



- All voltage and capacitance measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive logic definition: "UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings
- should the isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- $V_{CC} = 5.25\text{V}$ .
- Manufacturer reserves the right to make design and process changes and improvements.
- Measured to 1.5V level of output waveform.
- Measured to 10% level of output waveform.
- Refer to AC Test Circuits.

AC TEST CIRCUITS AND WAVEFORMS


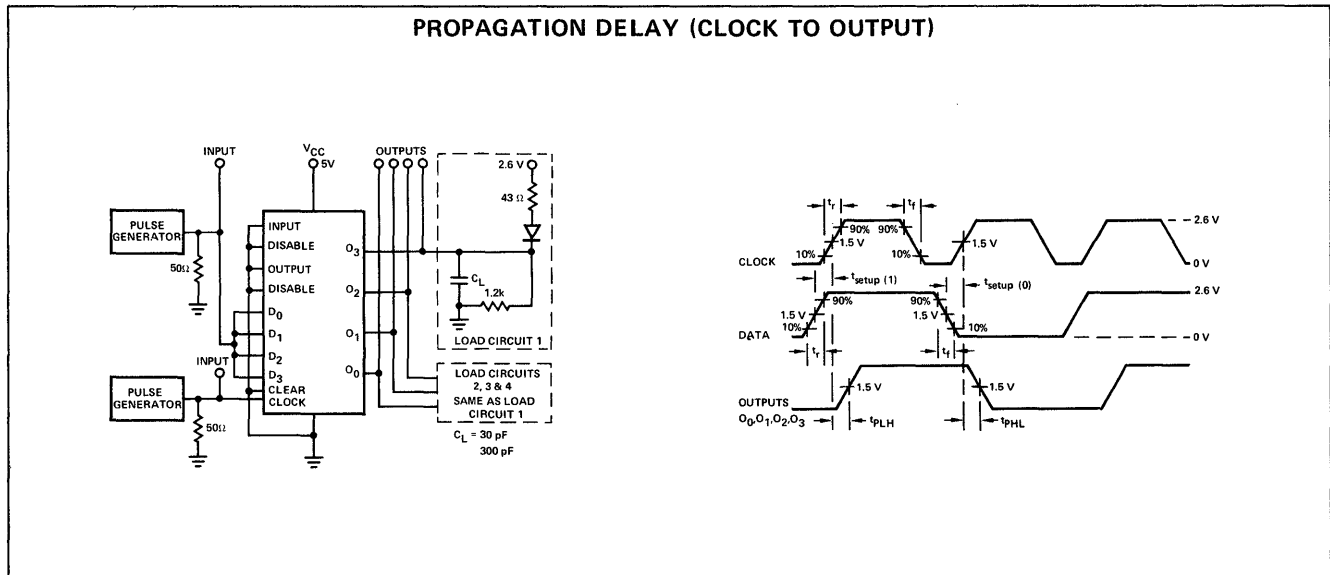


AC TEST CIRCUITS AND WAVEFORMS (Cont'd)



PROPAGATION DELAY (CLEAR TO OUTPUT)

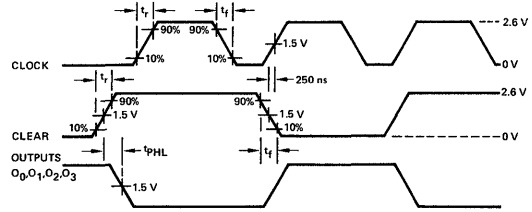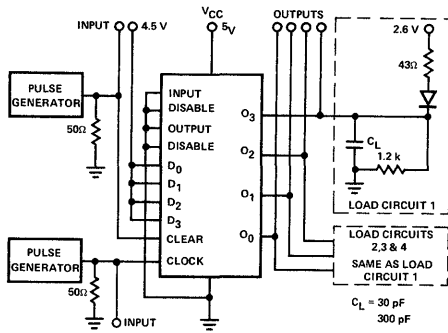



PROPAGATION DELAY (DATA HOLD TIME)

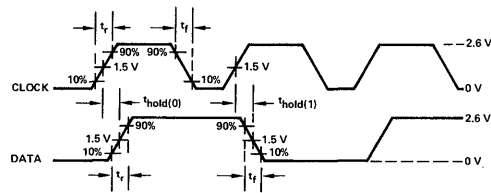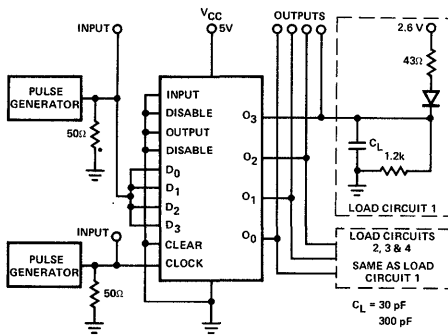

PROPAGATION DELAY (CLOCK FREQUENCY)

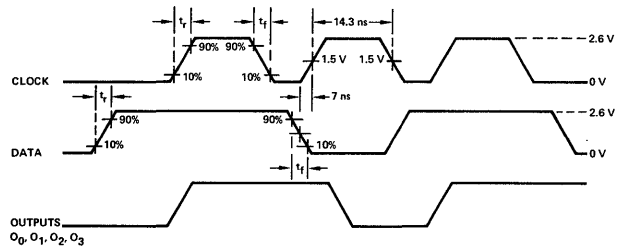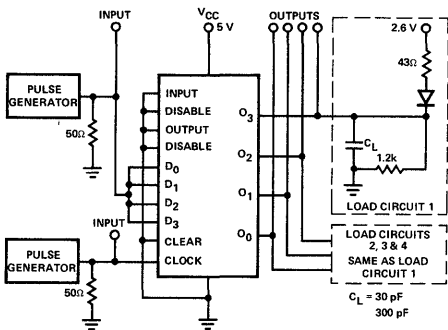


PROPAGATION DELAY (DISABLE TO OUTPUT)

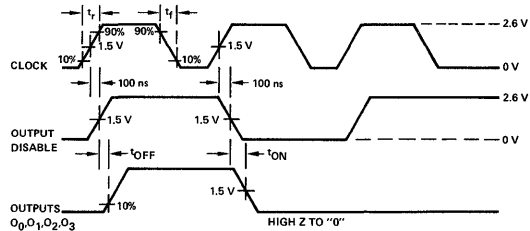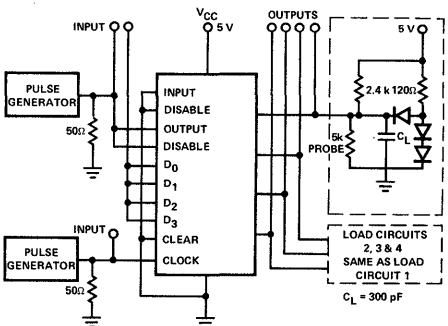


# SIGNETICS DIGITAL 8000 SERIES TTL/MSI-8T10

## TYPICAL APPLICATIONS

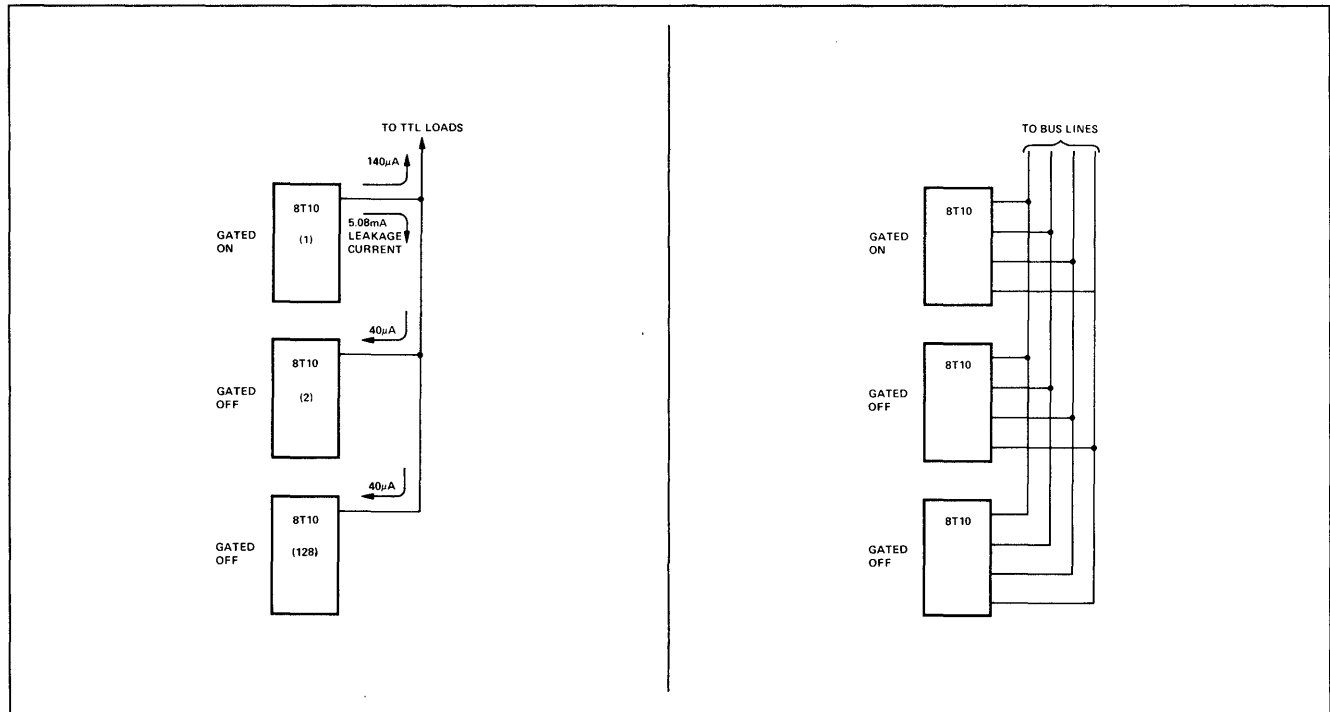

## MULTIPLEXING EIGHT LED DISPLAYS

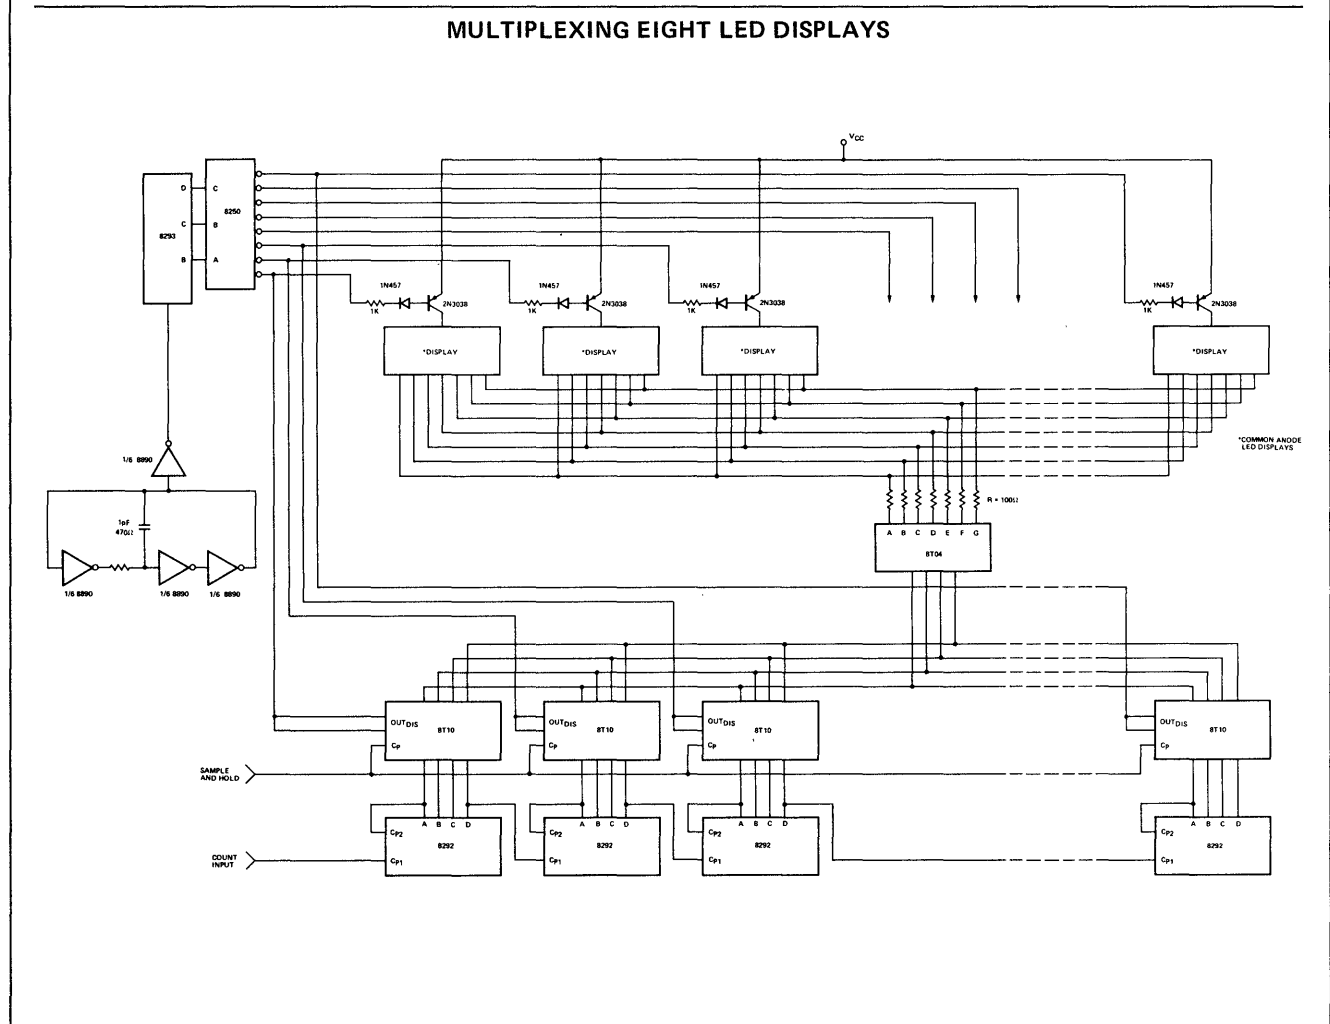

# DUAL LINE DRIVER | 8T13

## DESCRIPTION

The 8T13 is a monolithic Dual Line Driver designed to drive 50 ohm or 75 ohm coaxial transmission lines. TTL multiple emitter inputs allow this line driver to interface with stand-ard TTL or DTL systems. The outputs are designed to drive long lengths of coaxial cable, strip line, or twisted pair transmission lines with impedances of 50Ω to 500Ω.

### Key Design Benefits:


- High-Power Drive Capability:**  
Specified at -75mA sink current rating at 2.4 volts (V "1" out) at 25°C.
- Party-Line Operation:**  
Emitter-follower outputs enable two or more drivers to drive the same line. This permits multiple time-shared terminal connections since these drivers have no effect upon the transmission line unless activated.
- Input gating structure allows employment of the "OR" as well as the "AND" function.**
- High Speed:**  $t_{on} = t_{off} = 20ns$  (max).
- Input Clamp Diodes:** Protects inputs from line ringing.
- Single 5 Volt power supply.**

## DIGITAL 8000 SERIES TTL/MSI

### g. Short Circuit Protection:

Incorporates a latch-back short circuit protection feature which protects the device by limiting the current it may source when operating under conditions of zero load resistance.

### LOGIC DIAGRAM

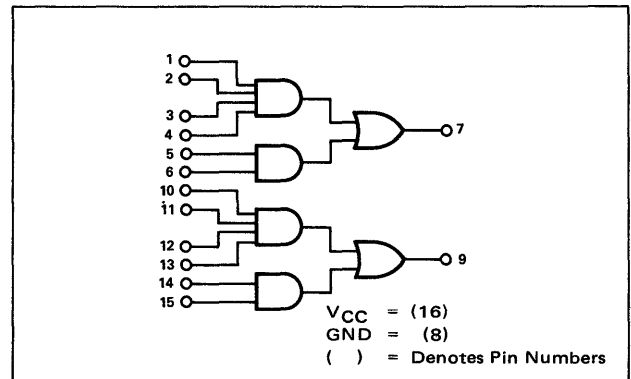

## ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS				NOTES
					AND GATE #1-		INPUTS OF #2 AND GATE	OUTPUTS	
	MIN.	TYP.	MAX.	UNITS	INPUT UNDER TEST	OTHER INPUTS			
"1" Output Voltage	2.4			V	2.0V	2.0V	0.8V	-75mA	6
"1" Output Leakage Current			80	μA	0V	0V	0V	3.0V	7
"0" Output Leakage Current			-800	μA	0.8V	4.5V	0V	0.4V	
"0" Input Current	-0.1		-1.6	mA	0.4V	4.5V			
"1" Input Current			40	μA	4.5V	0V			

$T_A = 25^\circ C$  and  $V_{CC} = 5.0V$


CHARACTERISTICS	LIMITS				TEST CONDITIONS				NOTES
					AND GATE NO. 1		INPUTS OF NO. 2 AND GATE	OUTPUTS	
	MIN.	TYP.	MAX.	UNITS	INPUT UNDER TEST	OTHER INPUTS			
Turn-On Delay		32	20	ns					8.13
Turn-Off Delay		22	20	ns					9.13
Power/Current Consumption:									
Output at "0"			315/60	mW/mA	0.8V	0.8V	0.8V		12.15
Output at "1"			150/28	mW/mA	2.0V	2.0V	2.0V		12.15
Input Latch Voltage	5.5			V	10mA	0V	0V		11
"1" Output Current	-100		-250	mA	4.5V	4.5V	0V	2.0V	14
Output Short Circuit			-30	mA	4.5V	4.5V	0V	0V	14
Input Clamp Voltage			-1.5	V	-12mA				

# SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8T13


## NOTES:

1. All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
2. All measurements are taken with ground pin tied to zero volts.
3. Positive current is defined as into the terminal referenced.
4. Positive logic definition: "UP" Level = "1", "DOWN" Level = "0".
5. Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
6. Output source current is supplied through a resistor to ground.
7. With forced output voltage of 3 volts no more than 500  $\mu$ A
8.  $R_L = 37\Omega$  to ground.
9. Load is  $37\Omega$  in parallel with 1000pF.
10. Manufacturer reserves the right to make design and process changes and improvements.
11. This test guarantees operation free of input latch-up over the specified operating supply voltage range.
12.  $I_{CC}$  is dependent upon loading.  $I_{CC}$  limit specified is for no-load test condition.
13. Reference AC Test Figure and Pulse Requirements.
14. Reference "Typical Output Current vs Output Voltage Curve."
15.  $V_{CC} = 5.25$  volts. Power Consumption specified for both drivers in package.


## SCHEMATIC DIAGRAM

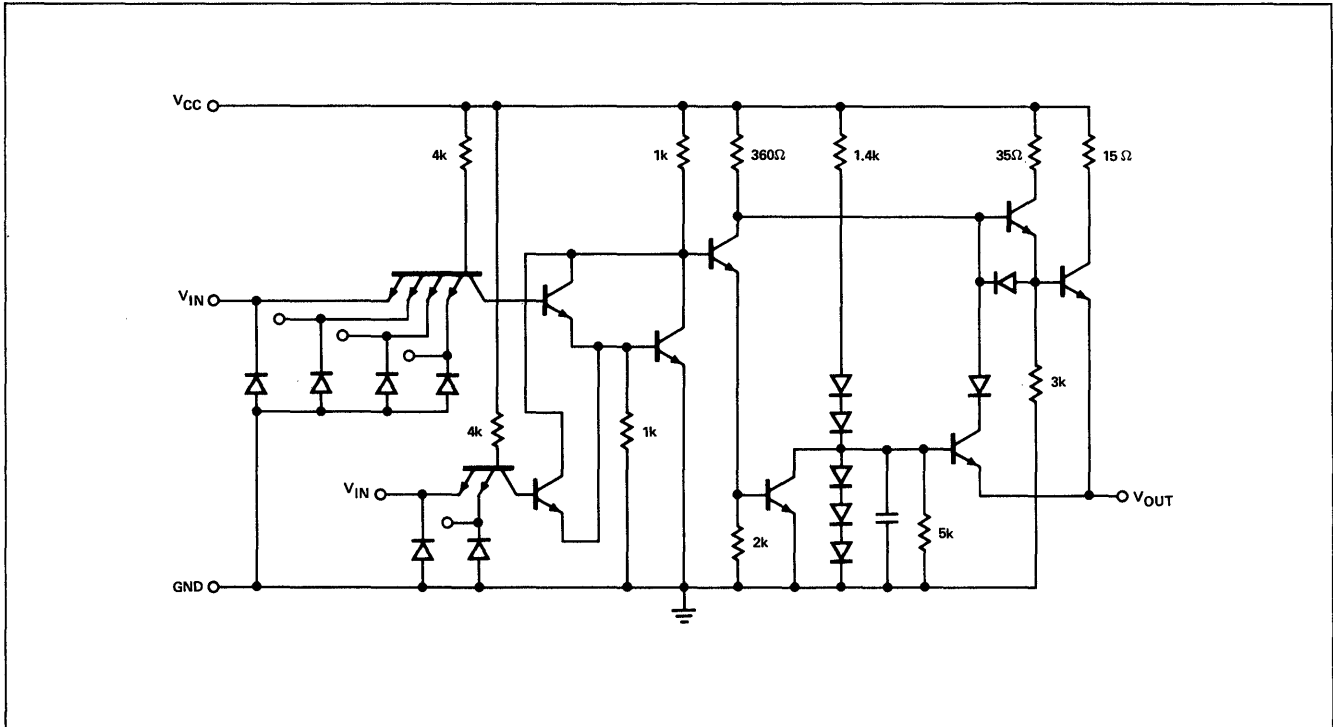

## AC TEST FIGURE AND WAVEFORMS

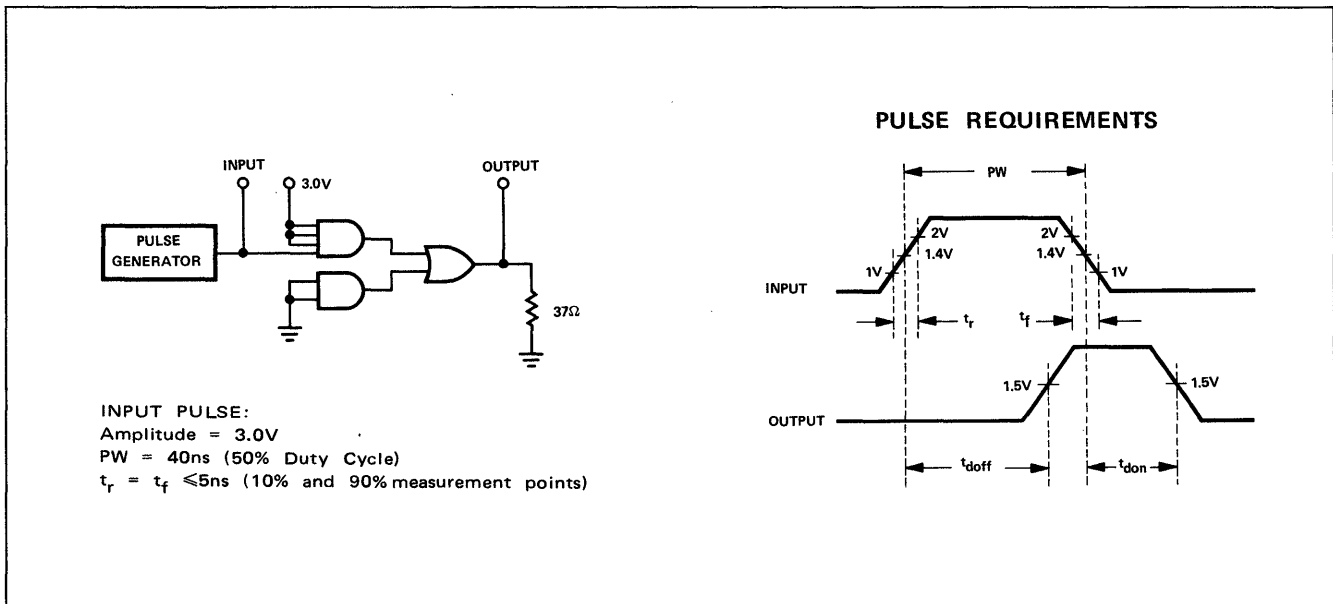

TYPICAL OUTPUT CURRENT VERSUS OUTPUT VOLTAGE CURVE

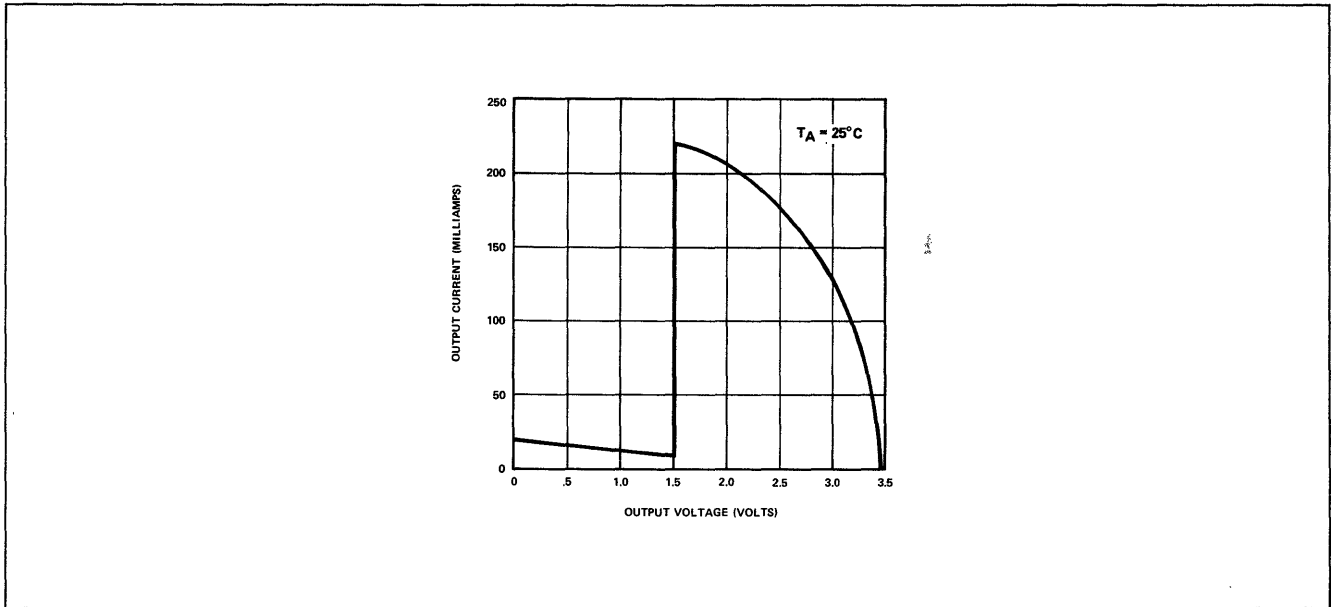

TYPICAL APPLICATIONS

A typical application for the 8T13 is shown in Figure 1. If only one line driver is to be used for each transmission

line, the line may be terminated with 50 ohms on the receiving end only. See Figure 2.

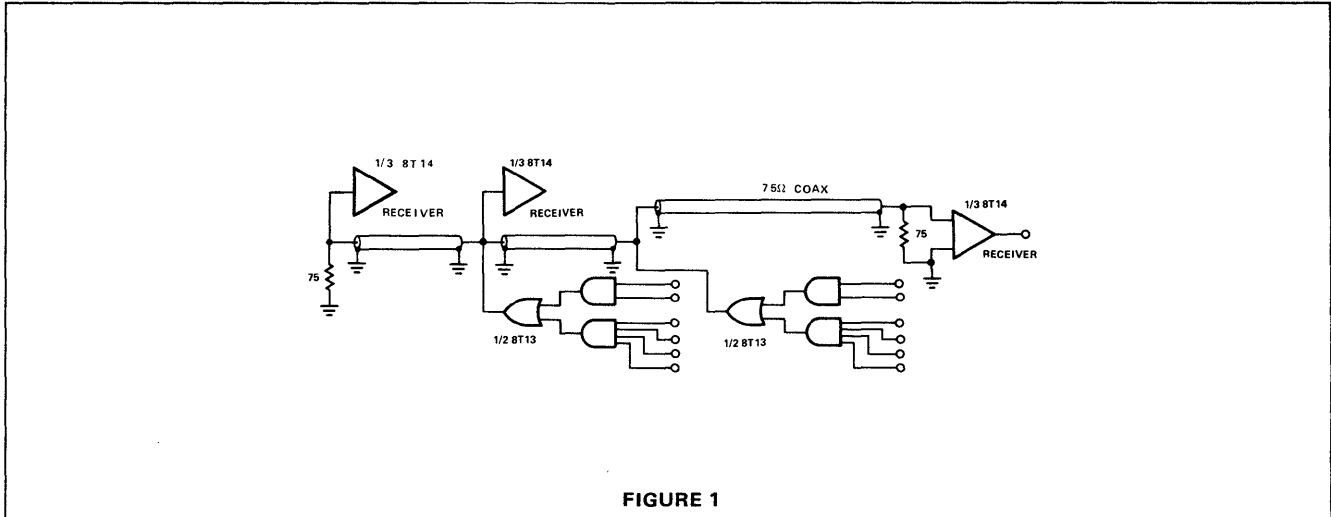


FIGURE 1

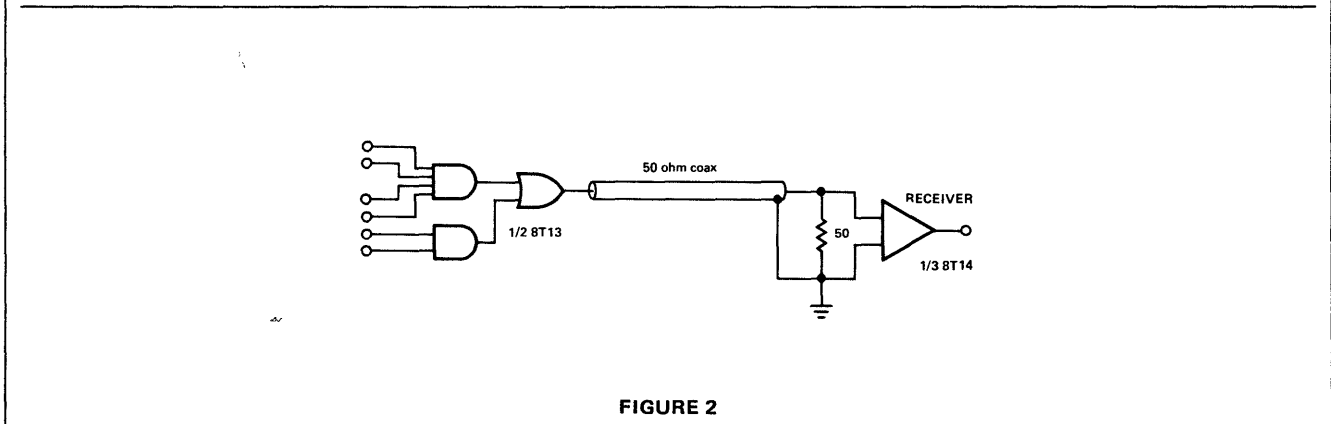


FIGURE 2



DIGITAL 8000 SERIES TTL/MSI

DESCRIPTION

The 8T14 is a Triple Line Receiver designed for applications requiring digital information to be transmitted over long lengths of coaxial cable, strip line, or twisted pair transmission lines. The Receiver's high impedance input structure ( $\approx 30k\Omega$ ) presents a minimal load to the driver circuit and allows the transmission line to be terminated in its characteristic impedance to minimize line reflections.


The built-in hysteresis characteristic of the 8T14 also makes it ideal for such applications as Schmitt triggers, one-shots and oscillators.

\*Hysteresis is defined as the difference between the input thresholds for the "1" and "0" output states. Hysteresis is specified at 0.5 volts typically and 0.3 volts minimum over the operating temperature range.

FEATURES

- BUILT-IN INPUT THRESHOLD HYSTERESIS\*
- HIGH SPEED:  $t_{on} = t_{off} = 20ns$  (Typical)
- EACH CHANNEL CAN BE STROBED INDEPENDENTLY
- FANOUT OF TEN (10) WITH STANDARD TTL INTEGRATED CIRCUITS
- INPUT GATING IS INCLUDED WITH EACH LINE RECEIVER FOR INCREASED APPLICATION FLEXIBILITY
- OPERATION FROM A SINGLE +5 VOLT LOGIC SUPPLY

LOGIC DIAGRAMS

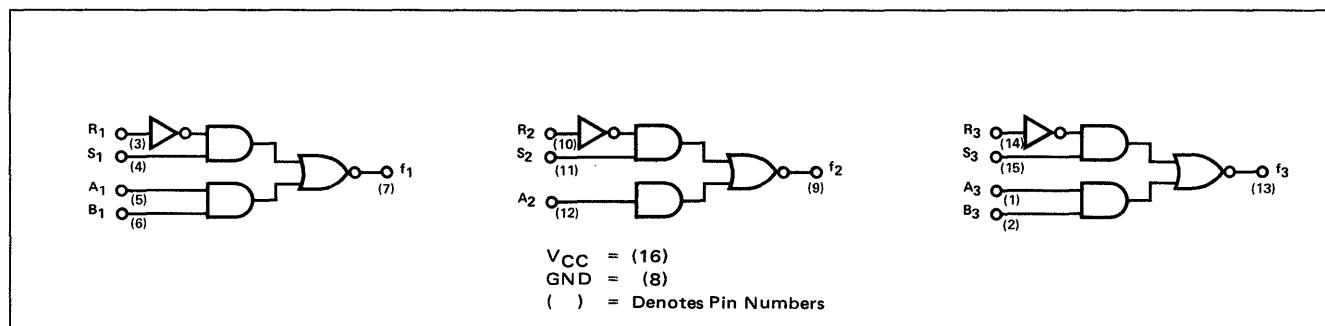

ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS					NOTES
	MIN.	TYP.	MAX.	UNITS	R	S	A	B	OUTPUTS	
"1" Output Voltage	2.6	3.5		V	2.0V	4.5V	0V	0V	-800 $\mu$ A	7, 13
	2.6	3.5		V	0V	0.8V	0V	0V	-800 $\mu$ A	7, 13
"0" Output Voltage			0.4	V	0.8V	2.0V	0V	0V	16mA	8, 12
			0.4	V	0V	0V	2.0V	2.0V	16mA	8, 12
"0" Input Current:										
$S_n$	-0.1		-1.6	mA	0V	0.4V				
$A_n$	-0.1		-1.6	mA	0V		0.4V			
$B_n$	-0.1		-1.6	mA				0.4V		
"1" Input Current										
$R_n$			0.17	mA	3.8V					
$S_n$			40	$\mu$ A	3.8V	4.5V				
$A_n$			40	$\mu$ A			4.5V	0V		
$B_n$			40	$\mu$ A			0V	4.5V		
Hysteresis	0.30	0.50		V		4.5V	0V	0V		10, 11



SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8T14


T<sub>A</sub> = 25° C and V<sub>CC</sub> = 5.0V

CHARACTERISTICS	LIMITS				TEST CONDITIONS					NOTES
	MIN.	TYP.	MAX.	UNITS	R	S	A	B	OUTPUTS	
Turn-On Propagation Delay		20	30	ns						
Turn-Off Propagation Delay		20	30	ns						
Power/Current Consumption		315/60	380/72	mW/mA						
Input Voltage Rating										
S	5.5			V	3.8V	10mA	0V	0V		
A	5.5			V	0V	0V	10mA	0V		
B	5.5			V	0V	0V	0V	10mA		
Output Short Circuit Current	-50		-100	mA	3.8V	0V	0V	0V	0V	
Input Clamp Voltage:										
S			-1.5	V		-12mA				
A			-1.5	V			-12mA			
B			-1.5	V				-12mA		


NOTES:

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive current flow is defined as into the terminal referenced.
- Positive Logic Definition:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Manufacturer reserves the right to make design and process changes and improvements.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V<sub>CC</sub>.
- This test guarantees operation free of input latch-up over the specified operating supply voltage range.
- Hysteresis is defined as voltage difference between R input level at which output begins to go from "0" to "1" state and level at which output begins to go from "1" to "0".
- V<sub>CC</sub> = 5.0V.
- Previous condition is a "1" output state.
- Previous condition is a "0" output state.
- V<sub>CC</sub> = 5.25 volts.

SCHEMATIC DIAGRAM

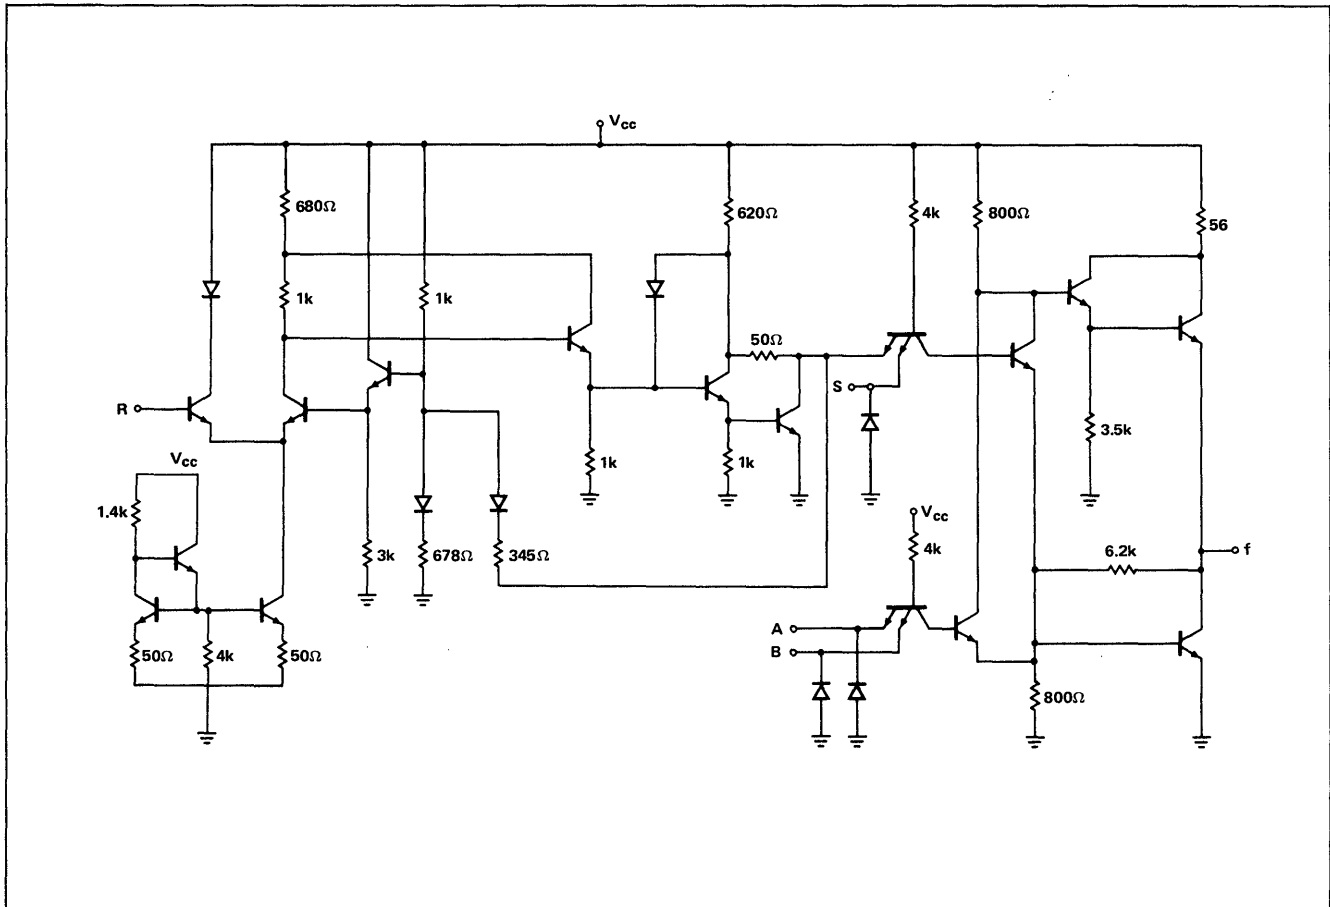

AC TEST CIRCUIT AND WAVEFORMS

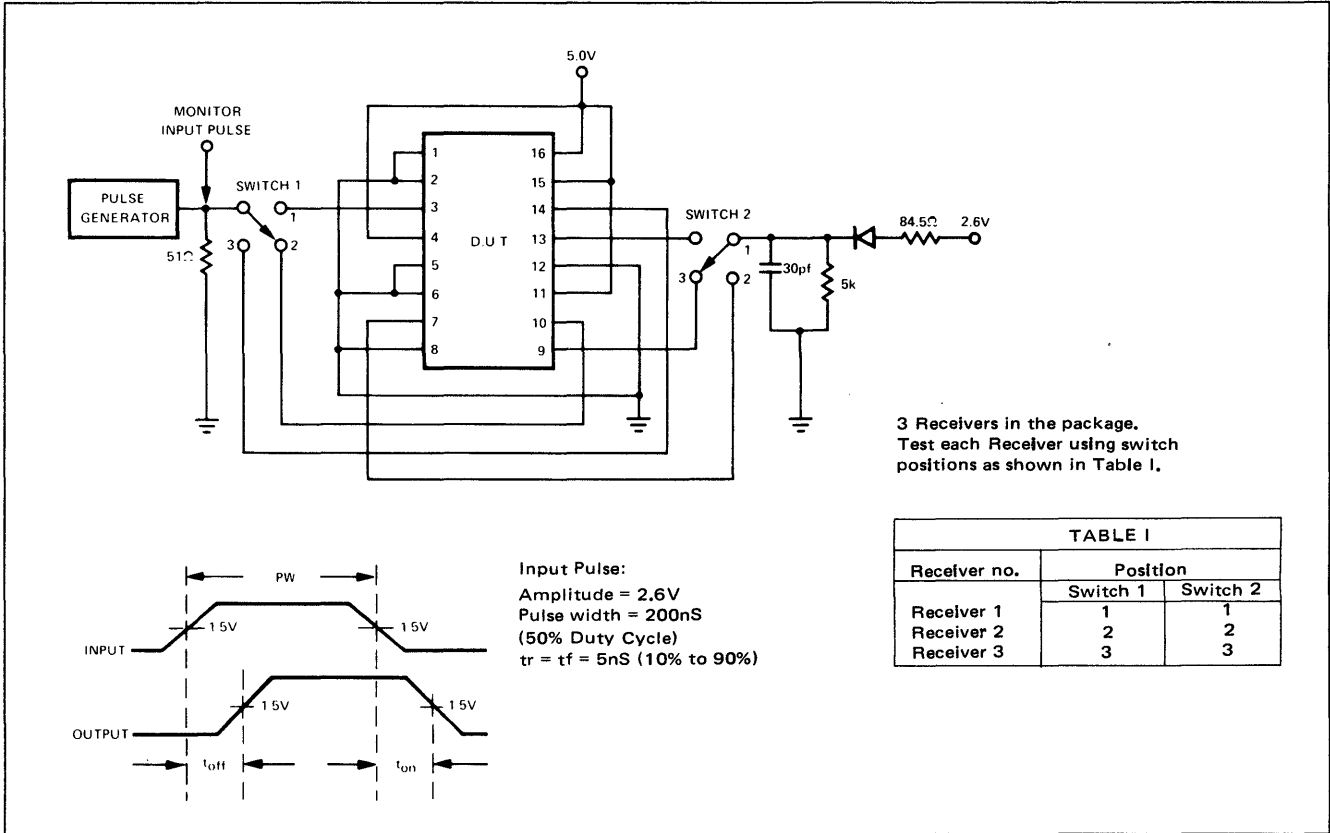

HYSTERESIS TEST CIRCUIT

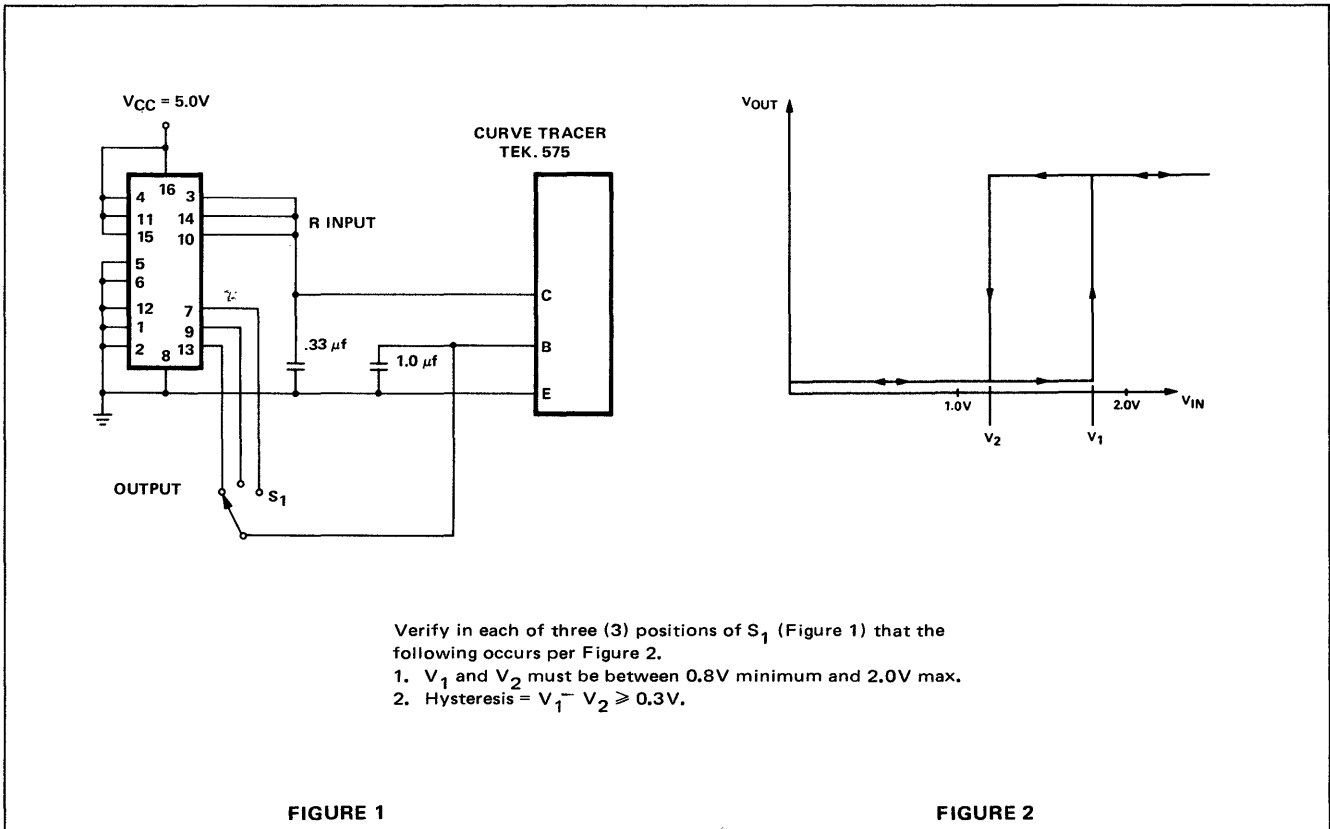


FIGURE 1

FIGURE 2

TYPICAL APPLICATIONS


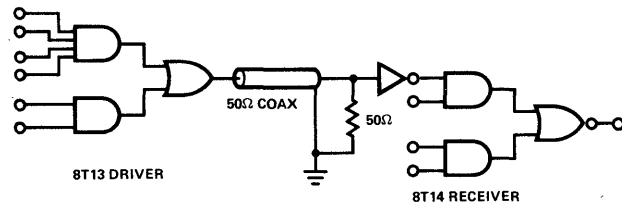



FIGURE 1

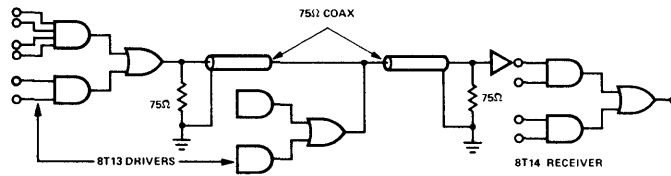

If more than one driver/receiver is to be used for each transmission line, the line should be terminated at both ends as shown in Fig. 2.

FIGURE 2

SCHMITT TRIGGER APPLICATION

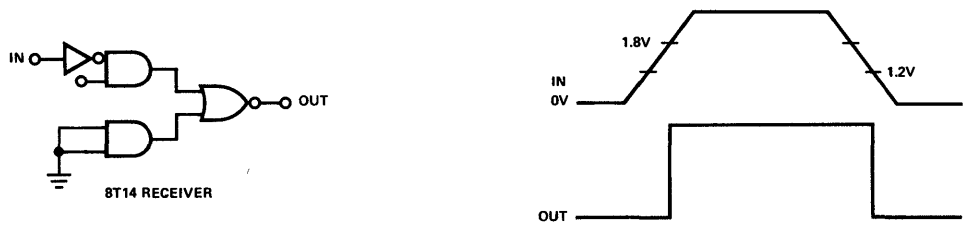

# DUAL COMMUNICATIONS EIA/MIL LINE DRIVER

# 8T15

PRODUCT AVAILABLE IN 0°C TO +75°C TEMPERATURE RANGE ONLY

DIGITAL 8000 SERIES TTL/MSI

## DESCRIPTION


The 8T15 Dual Communications Line Driver provides line driving capability for data transmission between Data Communication and Terminal Equipment. The device meets or exceeds the requirements of EIA Standard RS-232B and C, MIL STD-188B and CCITT V 24.

This dual 4-input NAND driver will accept standard TTL logic level inputs and will drive interface lines with nominal data levels of +6V and -6V. Output slew rate may be adjusted by attaching an external capacitor from the output terminal to ground. The outputs are protected against damage caused by accidental shorting to as high as  $\pm 25V$ .

## ABSOLUTE MAXIMUM RATINGS \*

Input Voltage	+5.5V
Output Voltage	$\pm 25V$
V <sub>CC</sub>	+15V
V <sub>EE</sub>	-15V
Storage Temperature	-65°C to +150°C
Operating Temperature	0°C to +75°C

## LOGIC DIAGRAM

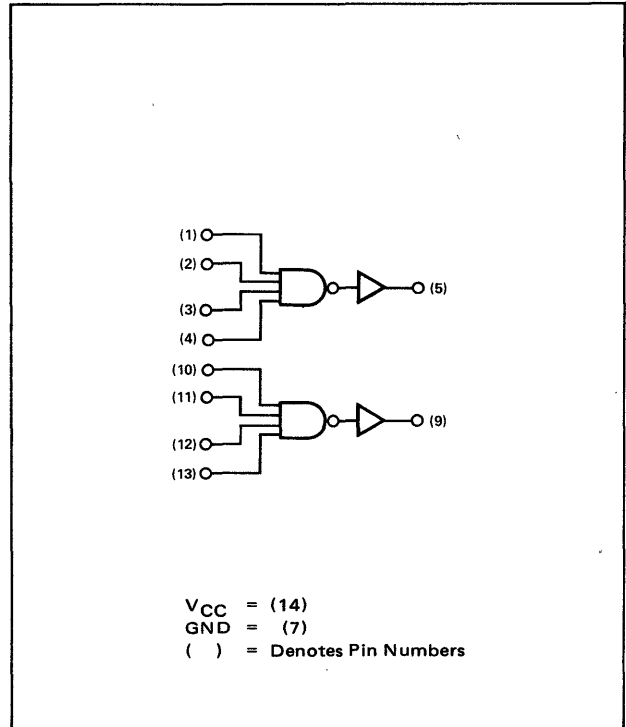

\*Limiting values above which serviceability may be impaired.

## ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS			NOTES
	MIN.	TYP.	MAX.	UNITS	INPUTS		OUTPUTS	
					DRIVEN	OTHER		
"1" Output Voltage	+5.0	+6.0	+7.0	V	0.8V		-4.0mA	
"0" Output Voltage	-5.0	-6.0	-7.0	V	2.0V		4.0mA	
"0" Input Current	-0.1	-0.8	-1.6	mA	0.4V			
"1" Input Current			40	$\mu A$	4.5V	0.0V		

**SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8T15**


$T_A = 25^{\circ}\text{C}$ ,  $V_{CC} = +12.0\text{V}$ ,  $V_{EE} = -12.0\text{V}$

CHARACTERISTICS	LIMITS				TEST CONDITIONS			NOTES
	MIN.	TYP.	MAX.	UNITS	INPUTS		OUTPUTS	
					DRIVEN	OTHER		
Output Rise Time			4	$\mu\text{s}$			Load A	8
Output Fall Time			4	$\mu\text{s}$			Load B	8
Output Rise Time	200			ns			Load C	8
Output Fall Time	200			ns			Load D	8
Power Consumption (per driver)			275	mW				10
Current from Positive Supply			16	mA				10
Current from Negative Supply			28	mA				10
Input Latch Voltage Rating	5.5			V	10mA	0.0V		7
Output Short Circuit Current			-25 +25	mA mA	0.0V		-25V +25V	9, 10 9, 10
Output Impedance (Power on)		95		ohms	0.0V		-3.5 $\pm$ 1mA	
Output Impedance (Power on)		95		ohms	0.0V		+3.5 $\pm$ 1mA	
Output Impedance (Power off)	300	2.5M		ohms			$\pm$ 2V	
Input Clamp Voltage			-1.5	V	-12.0mA			...


**NOTES:**

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive logic definition:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Manufacturer reserves the right to make design and process changes and improvements.
- This test guarantees operation free of input latch-up over the specified operating supply voltage range.
- Rise and fall times are measured between the +3V and -3V points on the output waveform.
- Test each driver separately.
- $V_{CC} = +12.6\text{V}$ ,  $V_{EE} = -12.6\text{V}$


**SCHEMATIC DIAGRAM**

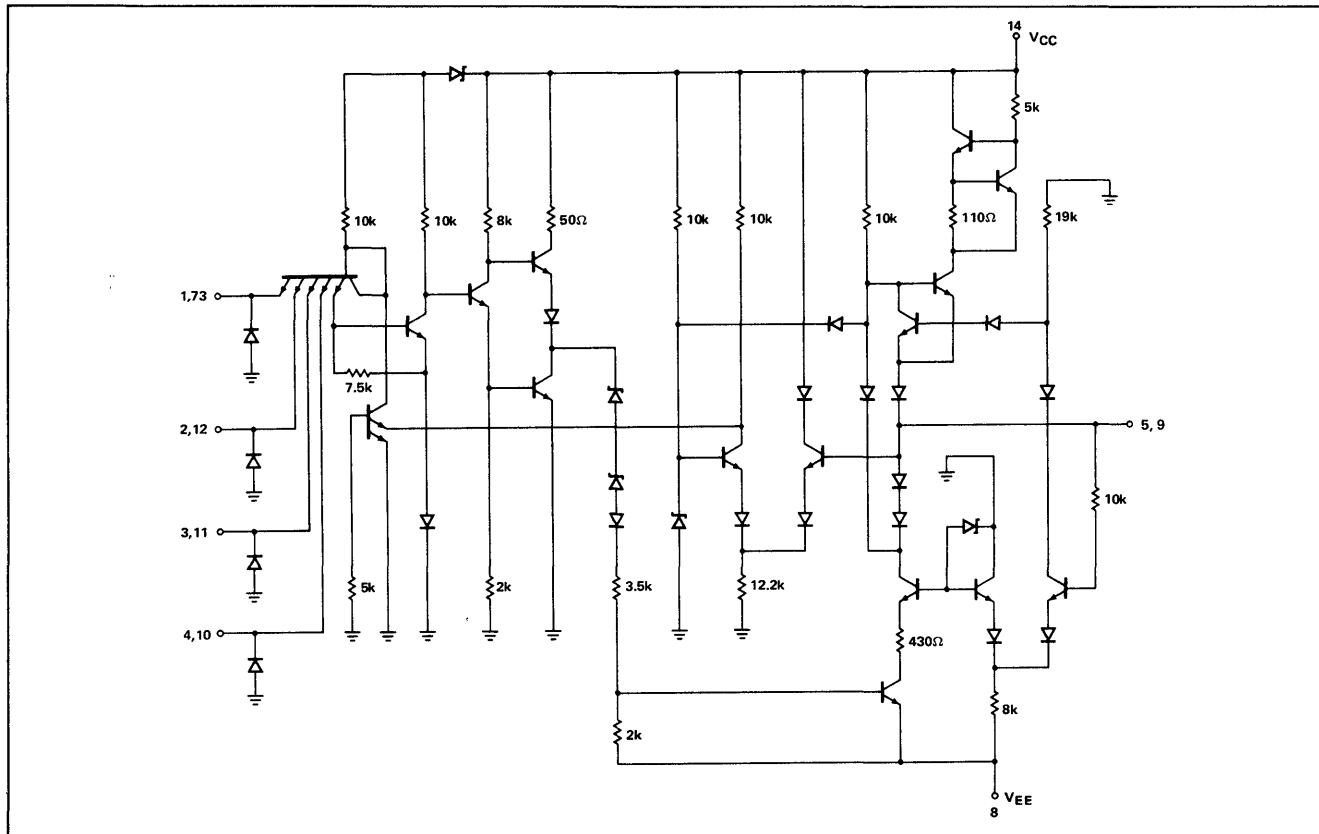


AC TEST FIGURES & WAVEFORMS

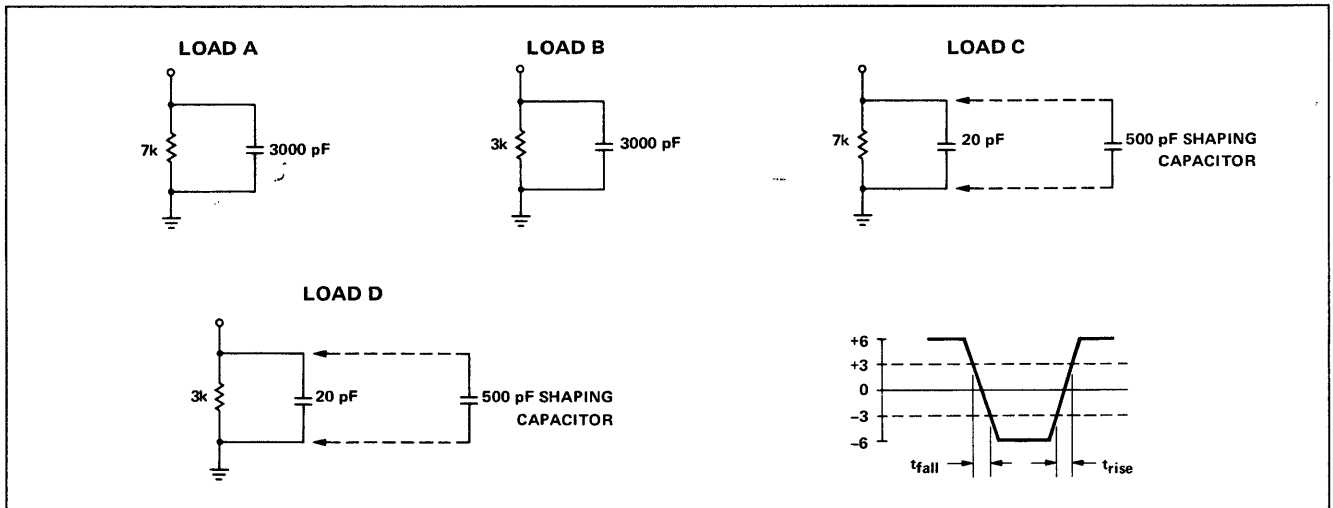

TYPICAL OUTPUT CHARACTERISTIC CURVE

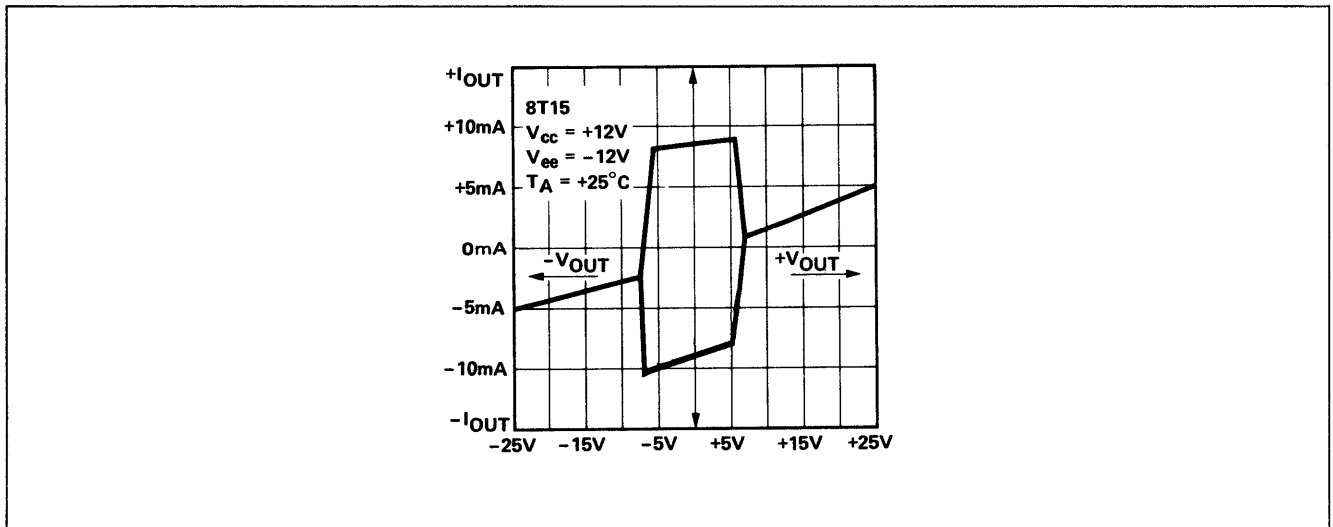

TYPICAL APPLICATIONS

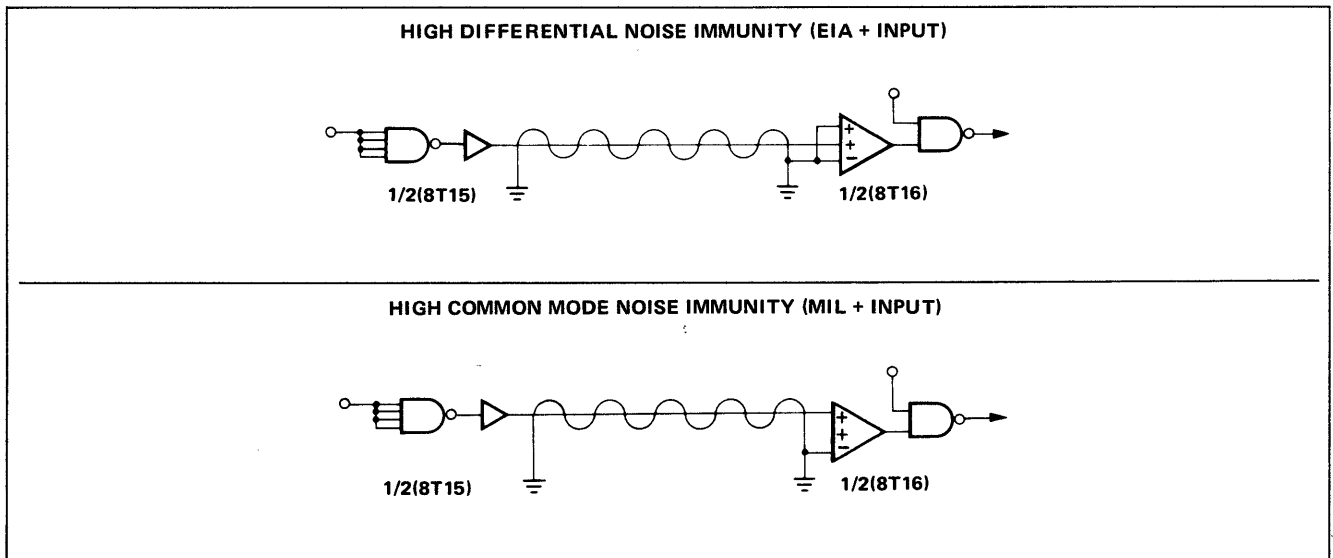



# DUAL COMMUNICATIONS EIA/MIL LINE RECEIVER

# 8T16

PRODUCT AVAILABLE IN 0° TO +75° C TEMP. RANGE ONLY.

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION

The 8T16 Dual Communications Line Receiver provides receiving capability for data lines between Data Communication and Terminal Equipment. The device meets or exceeds the requirements of EIA Standard RS-232B and C, MIL-STD-188B and CCITT V24.

The receivers accept single (EIA) or double ended (MIL) inputs and are provided with an output strobing control. Both EIA and MIL input standards are accommodated.


When using the EIA input terminal (with the Hysteresis terminal open), input voltage threshold levels are typically +2V and -2V with a guaranteed minimum Hysteresis of 2.4V. By grounding the "Hysteresis" terminal, the EIA input voltage threshold levels may be shifted to typically +1.0V and +2.1V with a minimum guaranteed Hysteresis of 0.75V. (Note that when using the EIA inputs, the MIL inputs—both positive and negative—must be grounded).

The MIL input voltage threshold levels are typically +0.6V and -0.6V with a minimum guaranteed Hysteresis of 0.7V. A MIL negative terminal is provided on each receiver per specification MIL-STD-188B to provide for common mode noise rejection.

Each receiver includes a strobe input so that:

- A "1" on the strobe input allows data transfer.
- A "0" on the strobe input holds the output high.

### LOGIC DIAGRAM

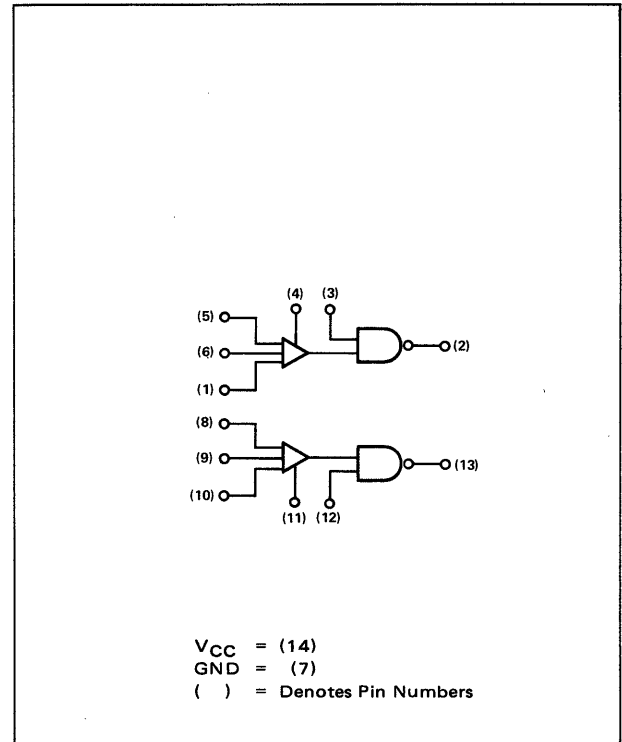

### ABSOLUTE MAXIMUM RATINGS\*

Input Voltage (EIA and MIL)	±25V
$V_{CC}$	+7.0V
Storage Temperature	-65° C to +175° C
Operating Temperature	0° C to +75° C

\* Limiting values above which serviceability may be impaired.

### ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS					OUTPUTS	NOTES
	MIN.	TYP.	MAX.	UNITS	INPUTS						
					EIA	MIL(+)	MIL(-)	HYS	STROBE		
"1" Output Voltage (EIA) ("Hysteresis" Open)	2.6	3.5		V	-3.0V	0V	0V		2.0V	-800μA	8, 12
"1" Output Voltage (EIA) ("Hysteresis" grounded)	2.6	3.5		V	+0.3V	0V	0V	0V	2.0V	-800μA	8, 10
"1" Output Voltage (MIL)	2.6	3.5		V		-0.1mA	0V		2.0V	-800μA	8, 11
	2.6	3.5		V		-0.9V	0V		2.0V	-800μA	8, 11
"1" Output Voltage (Strobe)	2.6	3.5		V	+3.0V	0V	0V		0.8V	-800μA	8
"0" Output Voltage (EIA) ("Hysteresis" Open)			0.4	V	+3.0V	0V	0V		2.0V	9.6mA	9, 12
			0.4	V	+3.0V	0V	0V	0V	2.0V	9.6mA	9, 12
"0" Output Voltage (MIL)			0.4	V		+0.1mA	0V		2.0V	9.6mA	9, 13
			0.4	V		+0.9V	0V		2.0V	9.6mA	9, 13



# SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8T16


$T_A = 25^\circ\text{C}$  and  $V_{CC} = 5.0\text{V}$  (Cont'd)

CHARACTERISTICS	LIMITS				TEST CONDITIONS					OUTPUTS	NOTES
	MIN.	TYP.	MAX.	UNITS	INPUTS						
					EIA	MIL(+)	MIL(-)	HYS	STROBE		
"1" Output Voltage (EIA) ("Hysteresis" open)	2.8	3.5		V	+1.2V	0V	0V		2.0V	-800 $\mu$ A	8, 12
"1" Output Voltage (MIL)	2.8	3.5		V		+0.35V	0V		2.0V	-800 $\mu$ A	8, 13
"0" Output Voltage (EIA) ("Hysteresis" open)		0.2	0.4	V	-1.2V	0V	0V		2.0V	9.6mA	9, 10
"0" Output Voltage (MIL)		0.2	0.4	V		-0.35V	0V		2.0V	9.6mA	9, 11
Input Resistance (EIA)	3	5	7	k $\Omega$	$\pm 25\text{V}$	0.0V	0.0V				
Input Resistance (MIL)	7.5	11.4		k $\Omega$	0.0V	$\pm 25\text{V}$	0.0V				
Power Consumption (per receiver)		44	75	mW	3.0V	0V	0V				17
Output Short Circuit Current	-10		-70	mA	-3.0V	0.0V	0.0V		5.00V	0.0V	16, 17
Propagation Delay		100	150	ns					5.00V		14
Signal Switching Acceptance	20			kHz					5.00V		


**NOTES:**

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive logic definition:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Manufacturer reserves the right to make design and process changes and improvements.
- This test guarantees operation free of latch-up over the specified input voltage range.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- Previous EIA input: +3V (See hysteresis curve).
- Previous MIL input: +0.9V (See hysteresis curve).
- Previous EIA input: -3V (See hysteresis curve).
- Previous MIL input: -0.9V (See hysteresis curve).
- Reference AC Test Figure.
- This test guarantees transfer of signals of up to 20kHz. Connect 1000pF between the output terminal and ground.
- Each receiver to be tested separately.
- $V_{CC} = 5.25\text{V}$ .


**SCHEMATIC DIAGRAM**

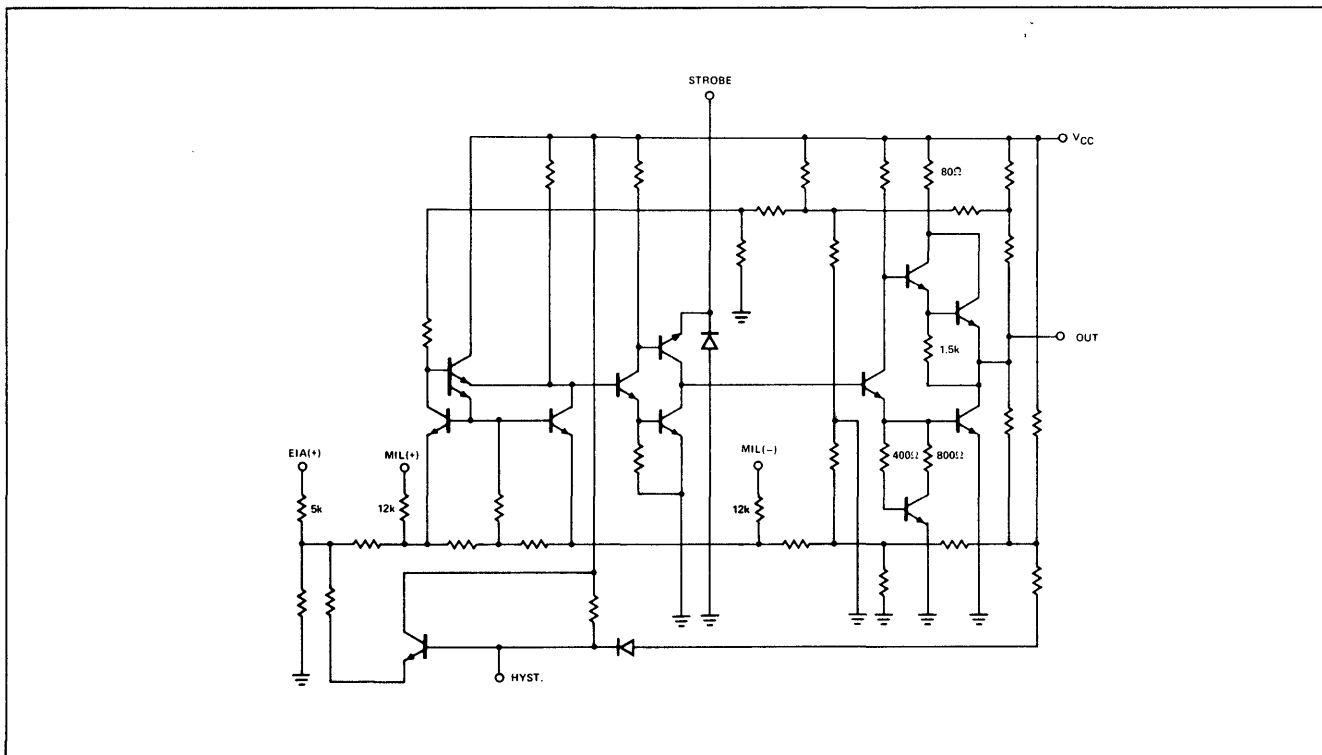


HYSTERESIS CURVES

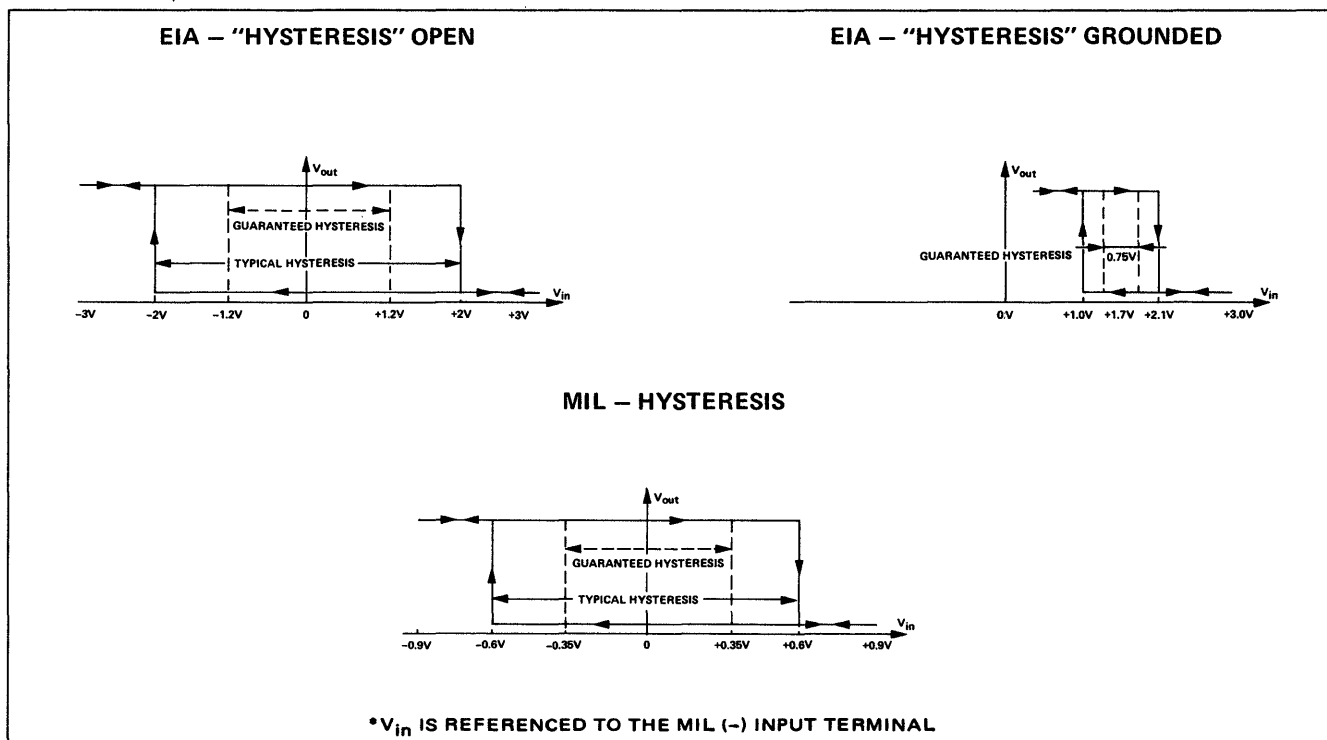


AC TEST FIGURE AND WAVEFORMS

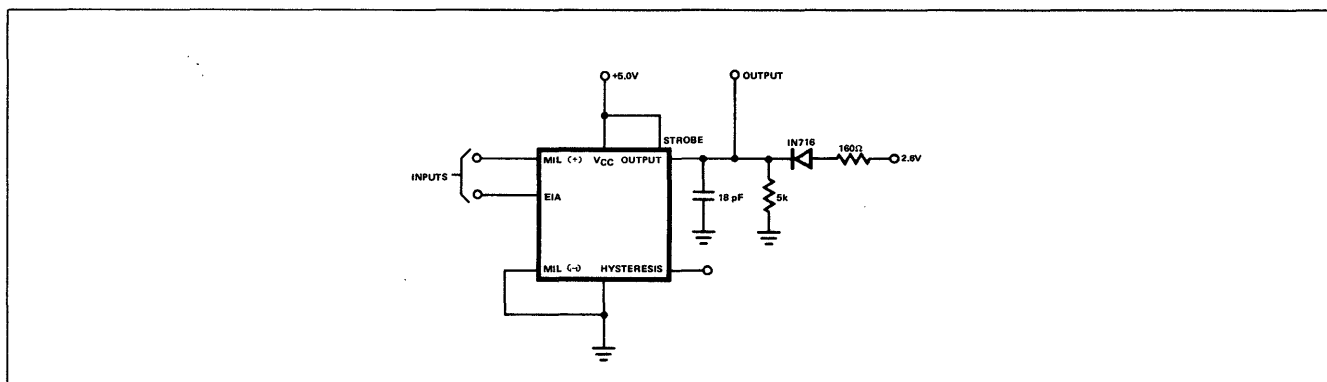

PROPAGATION DELAY

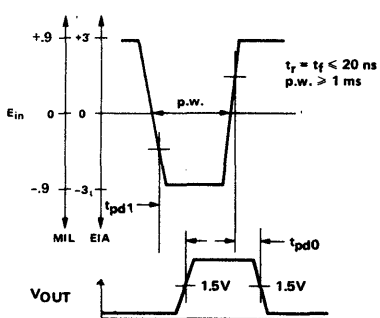


SIGNAL SWITCHING ACCEPTANCE

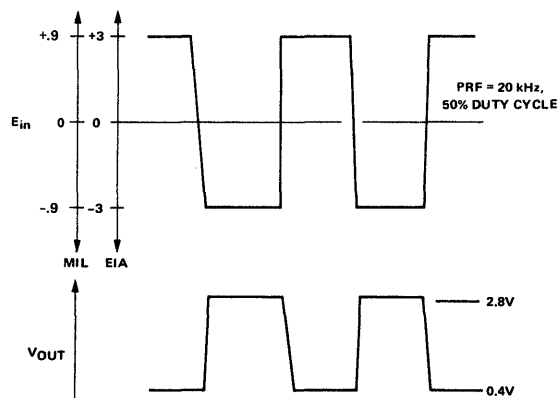


TYPICAL APPLICATIONS


**HIGH DIFFERENTIAL NOISE IMMUNITY  
(EIA + INPUT)**




**HIGH COMMON MODE NOISE IMMUNITY  
(MIL + INPUT)**




**EIA FAIL-SAFE OPERATION**

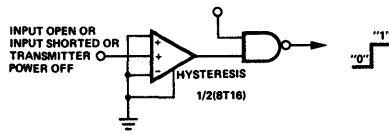


**AC COUPLED OPERATIONS**

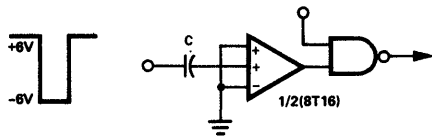

**SCHMITT TRIGGER**

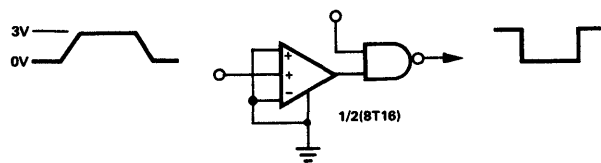

**SINE TO SQUARE WAVE CONVERTER**

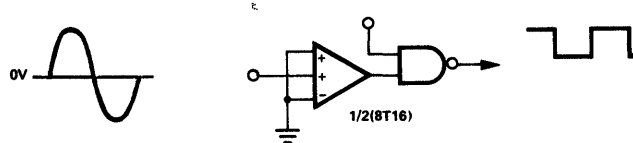

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION

The Bidirectional One Shot is intended for applications where high speed low level signal processing is required.

The 8T20 is a Monolithic Building Block, consisting of a high speed analog comparator, digital control circuitry, and a precision monostable multivibrator. The differential input threshold voltage is between  $\pm 4\text{mV}$  with respect to the input reference level which may range from  $-3.2\text{V}$  to  $+4.2\text{V}$ . For input frequencies up to  $8\text{MHz}$ , the device may be conditioned to act as a frequency doubler since it can trigger on both positive and negative input transitions.


Timing pins permit using this device in a variety of applications where external control over pulse width is desirable. Pulse width ( $t_w$ ) is defined by the relationship  $t_w = C_X R_X \text{Log}_e 2$ . Pulse width stability is internally compensated and virtually independent of temperature and  $V_{CC}$  variations, thus only limited by the accuracy of external timing components.

An internal resistive divider is available on the chip to provide a voltage of  $1.4\text{V}$  (typ.). This output can be connected directly to either of the comparator inputs as a reference voltage when interfacing with TTL outputs.

### ABSOLUTE MAX RATINGS

Input Voltage  
 $V_{CC}$ : +7  
 $V_{EE}$ : -7


### LOGIC DIAGRAM

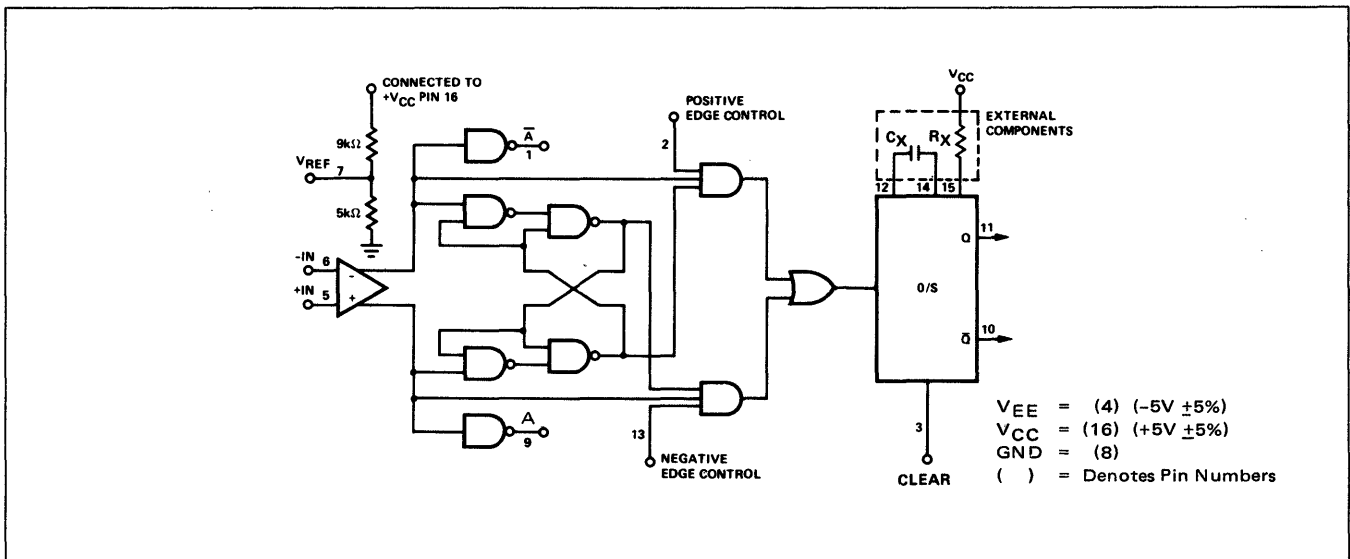

### APPLICATIONS

- DISC, TAPE AND DRUM READERS
- DIGITAL COMMUNICATIONS RECEIVERS
- SIGNAL CONDITIONERS
- TRANSITION DETECTORS

### INPUT/OUTPUT WAVEFORMS

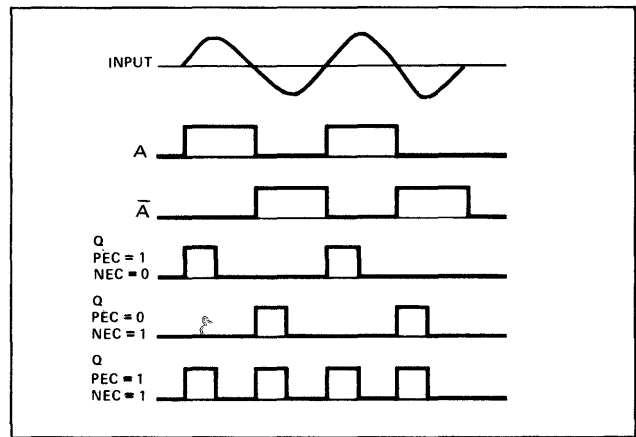

### FEATURES

- DIFFERENTIAL INPUT THRESHOLD =  $\pm 4\text{mV}$
- PULSE POSITION ERROR = TYPICALLY  $< 3\text{ns}$
- MAX. INPUT FREQUENCY =  $8\text{MHz}$
- TRIGGERS ON POSITIVE AND/OR NEGATIVE TRANSITIONS

# SIGNETICS BIDIRECTIONAL ONE SHOT 8T20

## ELECTRICAL CHARACTERISTICS (Over Recommended Temperature Range and Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS	NOTES
	MIN.	TYP.	MAX.	UNITS		
"1" Output Voltage (All Outputs)	2.6			V	$I_{out} = -800\mu A$	7
"0" Output Voltage (All Outputs)			0.4	V	$I_{out} = +16mA$	8
DIFFERENTIAL INPUTS						
Input Threshold Voltage ( $V_T$ )			$\pm 4$	mV		10
Input Bias Current			125	$\mu A$	Figure 5	
Input Offset Current		2		$\mu A$		
Common Mode Input Volt, Range	-3.2		+4.2	V		12
DIGITAL INPUTS						
"1" Input Current			40	$\mu A$	$V_{in} = 4.5V$	
"0" Input Current						
PEC. NEC						
Clear			-2.4	mA	$V_{in} = 0.4V$	
			-1.6	mA	$V_{in} = 0.4V$	
Input Latch Voltage	5.5			V	$I_{in} = 10mA$	9
Reference Voltage ( $V_{REF}$ )	0.8	1.4	2.0	V	Pin 7 tied to Pin 6	
Output Pulse Width, Fig. 1	10		40	ns	$R_x = 10K, C_x = \text{Open}$	11
Output Pulse Width, Fig. 3	600		800	ns	$R_x = 10K, C_x = 100pf$	11
Power Supply Current						
$I_{CC}$			55	mA	$V_{CC} = +5.25V$	
$I_{EE}$			-20	mA	$V_{CC} = -5.25V$	
Short Circuit Current ( $I_{SO}$ )	-20		-70	mA		



$$T_A = 25^\circ C, V_{CC} = +5.00V, V_{EE} = -5.00V$$

CHARACTERISTICS	LIMITS				TEST CONDITIONS	NOTES
	MIN.	TYP.	MAX.	UNITS		
Output Frequency	16			MHz	Fig. 1, $f_{in} = 8 \text{ MHz}$	11
Propagation Delay ( $t_{on}, t_{off}$ )						
Input to Q, $\bar{Q}$		30	50	ns	Fig. 2	11
Input to A, $\bar{A}$		30	50	ns	Fig. 4	11
Clear to Q, $\bar{Q}$		20	30	ns		

### NOTE:



- All Voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive logic definition: "UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Manufacturer reserves the right to make design and process changes and improvements.
- Output source current is applied through a resistor to ground.
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- This test guarantees operation free of Input latch up over the specified operating supply voltage range.
- The differential input threshold voltage ( $V_T$ ) is defined as the maximum DC voltage deviation from the reference level necessary to trigger the one-shot.
- Refer to AC test circuits.
- Common mode voltages that are confined within the dynamic range as specified will not cause false triggering of the one-shot.

AC TEST CIRCUITS

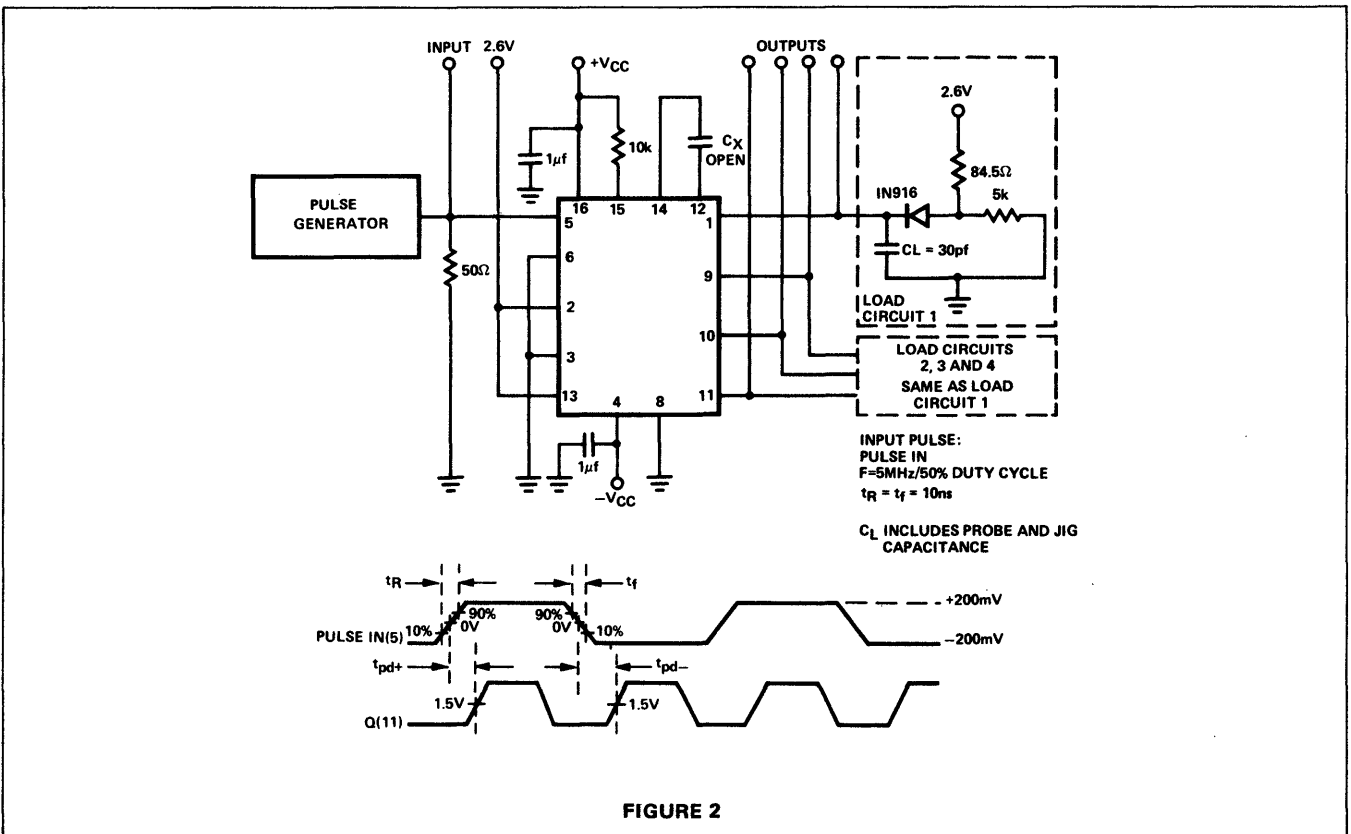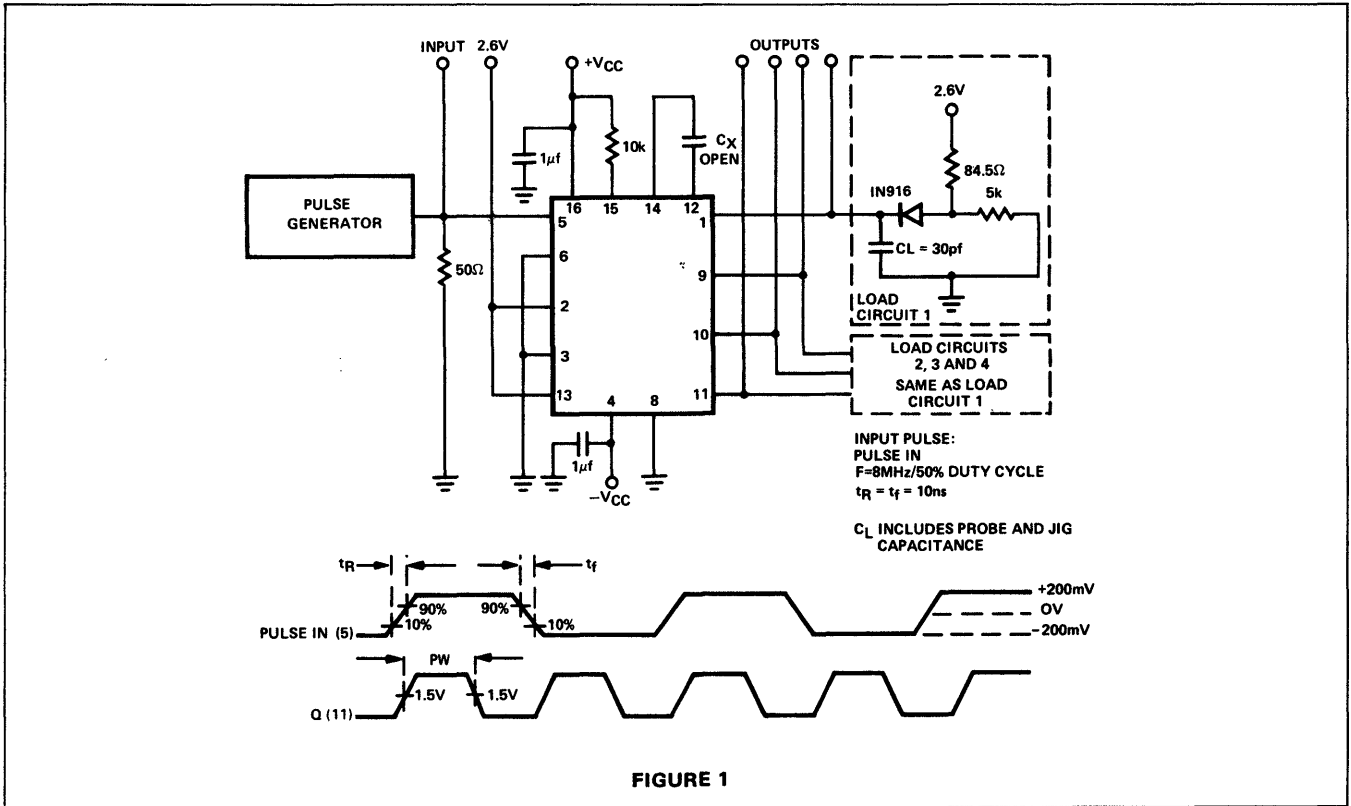

# SIGNETICS BIDIRECTIONAL ONE SHOT 8T20

## AC TEST CIRCUITS (Cont'd)

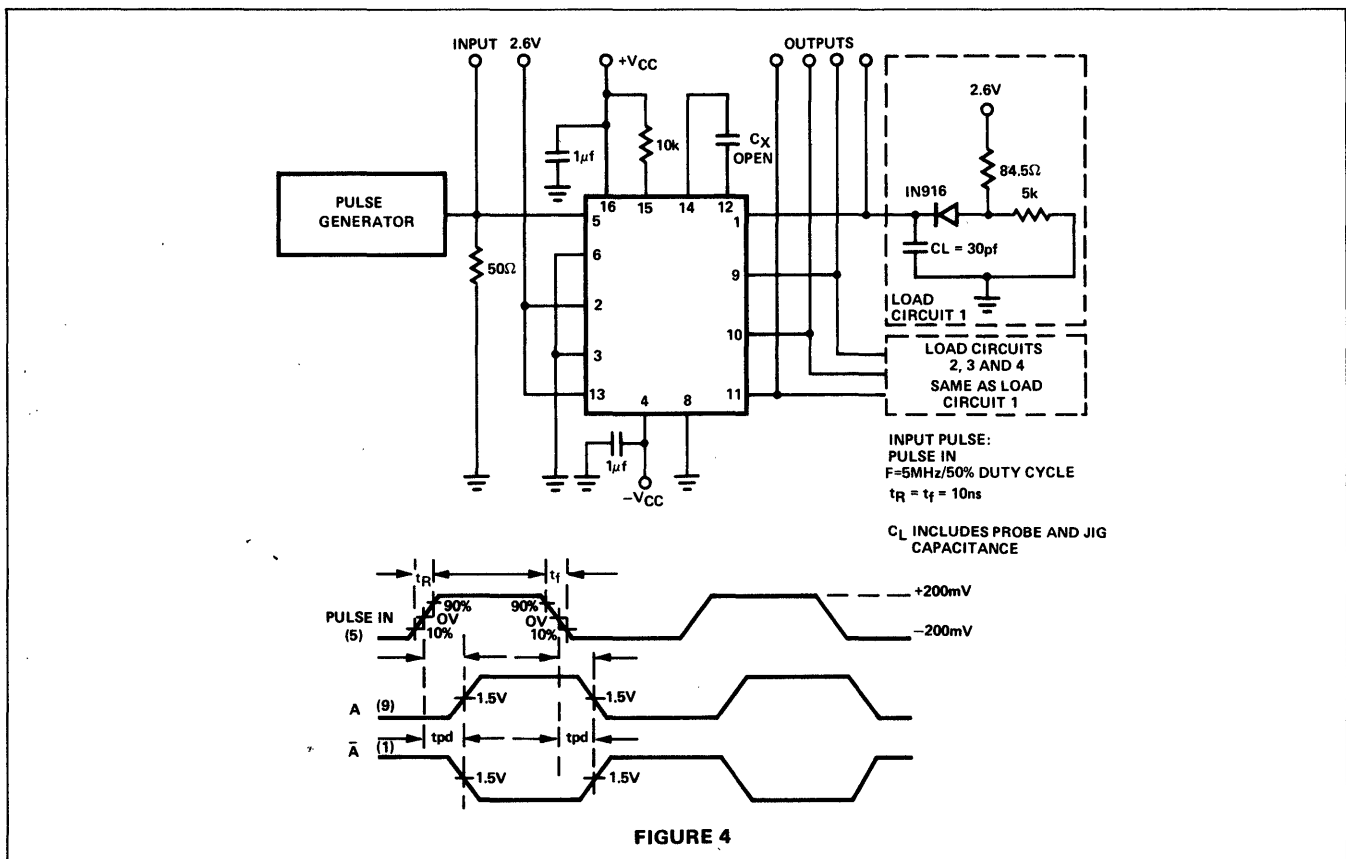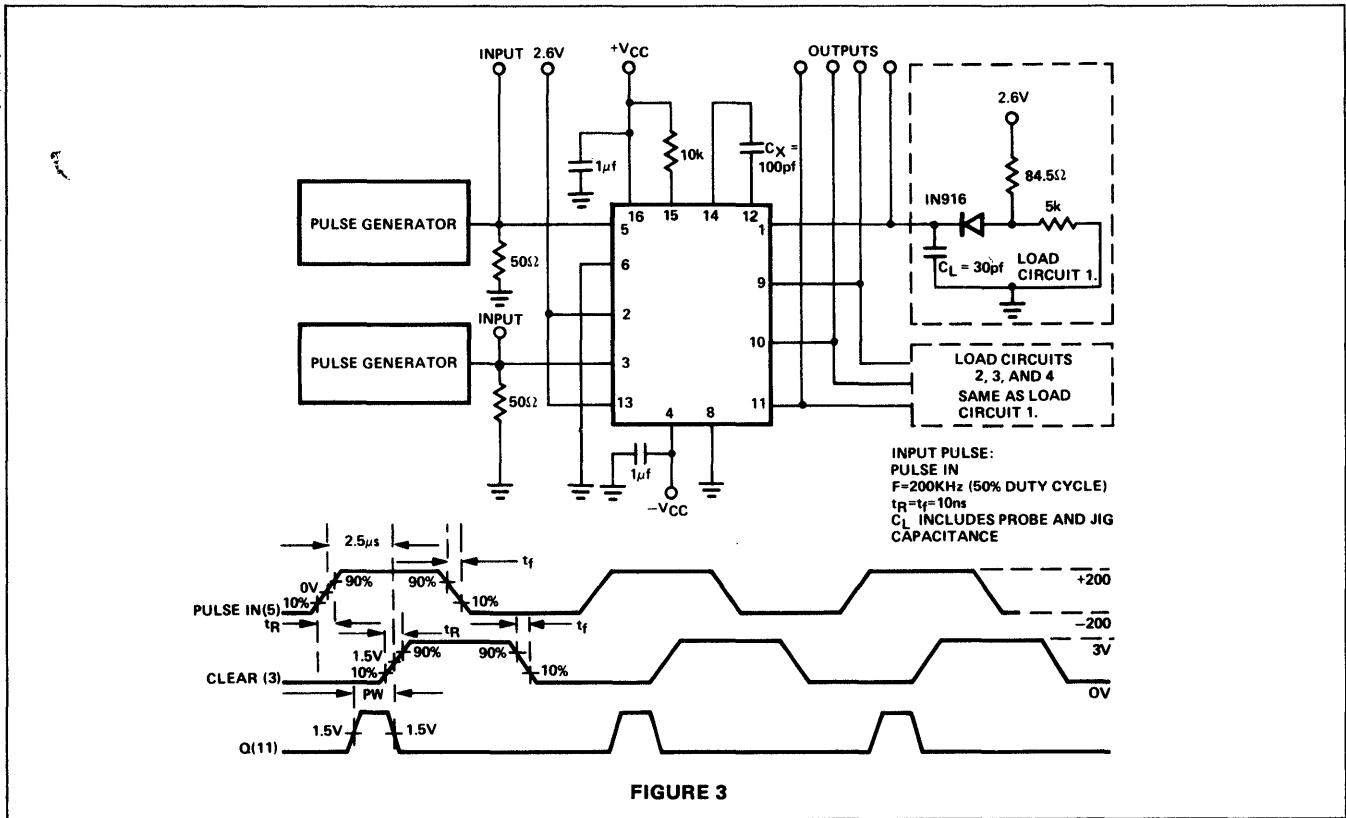

INPUT BIAS CURRENT TEST CIRCUIT




FIGURE 5





# RETRIGGERABLE ONE-SHOT

# 8T22

PRODUCT AVAILABLE IN 0°C TO +75°C TEMP. RANGE ONLY.


DIGITAL 8000 SERIES TTL/MSI

## DESCRIPTION

The Signetics N8T22A is a direct pin-for-pin replacement for the 9601 retriggerable one-shot. Triggering can be performed on either the leading or falling edge of the input signal through selection of the proper input terminal.

The inputs are level-sensitive making triggering independent of signal transition times. Output pulse width is determined by external timing components ( $R_X$  and  $C_X$ ) with each trigger pulse initiating a complete new timing cycle.

## LOGIC DIAGRAM

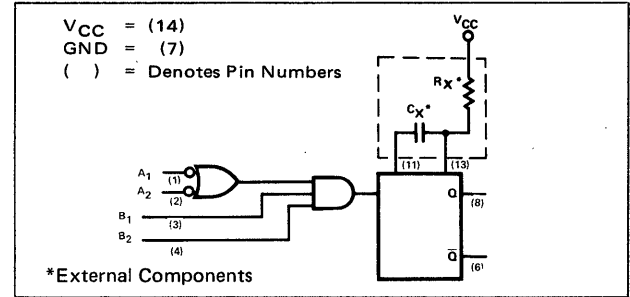

## ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS
	MIN.	TYP.	MAX.	UNITS	
"1" Output Voltage	2.4	3.4		V	$I_{out} = -960\mu A$
"0" Output Voltage		0.2	0.45	V	$I_{out} = 12.8mA$
Input HIGH Voltage	1.9			V	
Input LOW Voltage			0.9	V	
"0" Input Current			1.6	mA	$V_{in} = 0.45V$
"1" Input Current			60	$\mu A$	$V_{in} = 4.5V$
Timing Resistor	5.0		50	k $\Omega$	
$C_{Stray}$ - Maximum allowable wiring capacitance			50	pF	P13 to Ground

$T_A = 25^\circ C$  and  $V_{CC} = 5.0V$

CHARACTERISTICS	LIMITS				TEST CONDITIONS
	MIN.	TYP.	MAX.	UNITS	
Propagation Delay					
Negative Trigger Input to True Output ( $t_{pd+}$ )		25	40	ns	$R_X = 5.0k\Omega, C_X = 0$ $C_L = 15pF$
Negative Trigger Input to False Output ( $t_{pd-}$ )		25	40	ns	$R_X = 5.0k\Omega, C_X = 0$ $C_L = 15pF$
Min. True Output Pulse Width		45	65	ns	$R_X = 5.0k\Omega, C_X = 0$ $C_L = 15pF$
Pulse Width Variation	3.08	3.42	3.76	$\mu s$	$R_X = 10k\Omega, C_X = 1000pF$
Short Circuit Current	-10		-40	mA	$V_{out} = 0V$
Power Supply Current			25	mA	$V_{CC} = 5.25V$


# SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8T22

**NOTES:**

1. Positive current is defined as into the pin referenced.
2. Unless otherwise noted, 10kΩ resistor placed between Pin 13 and V<sub>CC</sub> (R<sub>X</sub>).
3. Manufacturer reserves the right to make design and process changes and improvements.

## AC TEST FIGURE AND WAVEFORMS

### TRIGGER INPUT/OUTPUT AND PULSE WIDTH

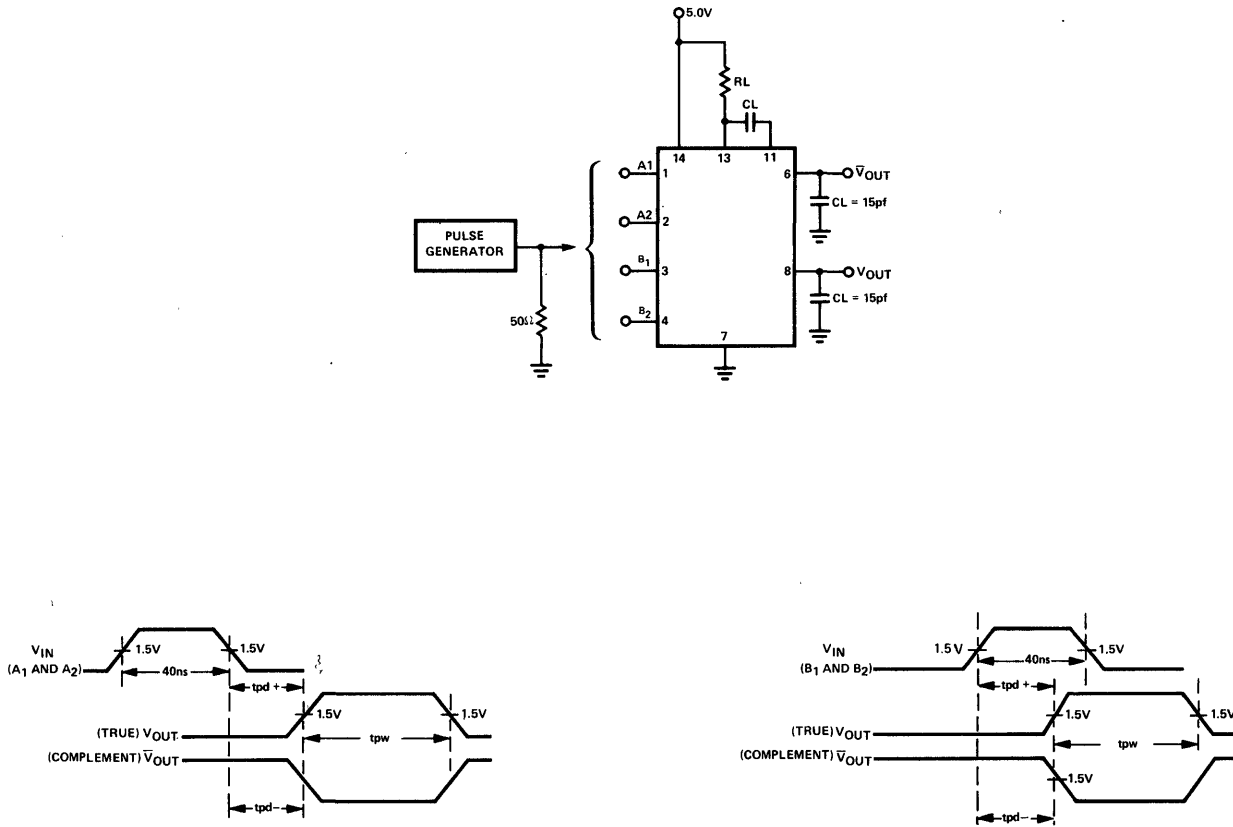

**WAVEFORM A.**

**WAVEFORM B.**

**NOTES:**

1. Pulse Generator has the following characteristics:  
 $t_r = t_f = 10\text{ns}$  (10% to 90%), AMP. = 3V.
2. C<sub>L</sub> includes probe and jig capacitance.
3. For tpd+, tpd- and tpw (min.)  
 RX = 5kΩ ± 1%, CX = OPEN, PRR = 1MHz.
4. For Δtpw: RX = 10kΩ ± 1%, CX = 1000pF ± 1%,  
 PRR = 200kHz.

0°C to +75°C

DIGITAL 8000 SERIES TTL MSI

## DESCRIPTION

The 8T23 is a Dual Line Driver designed to meet all of the requirements of the IBM System/360 I/O Interface Specification for interface drivers.

The low impedance emitter follower output will drive terminated lines such as coaxial cable or twisted pair. The output is protected against accidental shorting by an internal clamping network which turns on once the output voltage drops below approximately 1.5 volts. The uncommitted emitter output structure allows Dot-OR logic to be performed as in "Party-Line" operations.


Multiple emitter inputs allow the 8T23 to interface with standard TTL or DTL systems and the circuit operates from a single +5 volt power supply.

Additional logic incorporated in the 8T23 Dual Line Driver can be used during the power-up and power-down sequence to ensure that no spurious noise is generated on the line.


## FEATURES

- $I_{OUT} = 59.3\text{mA}$  AT 3.11 VOLTS
- UNCOMMITTED EMITTER OUTPUT STRUCTURE FOR PARTY-LINE OPERATION
- SHORT-CIRCUIT PROTECTION
- SINGLE 5 VOLT POWER SUPPLY
- AND-OR LOGIC CONFIGURATION

## LOGIC DIAGRAM WITH PIN LAYOUT

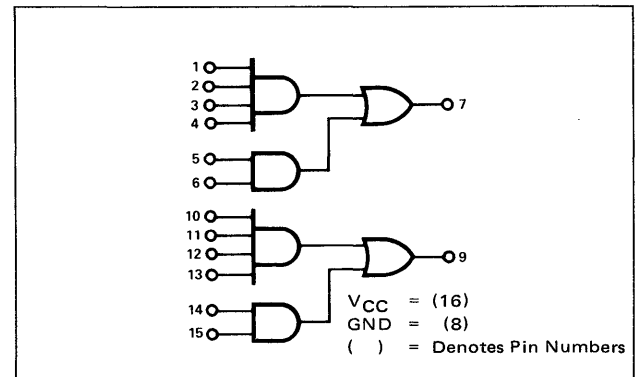

## CIRCUIT SCHEMATIC

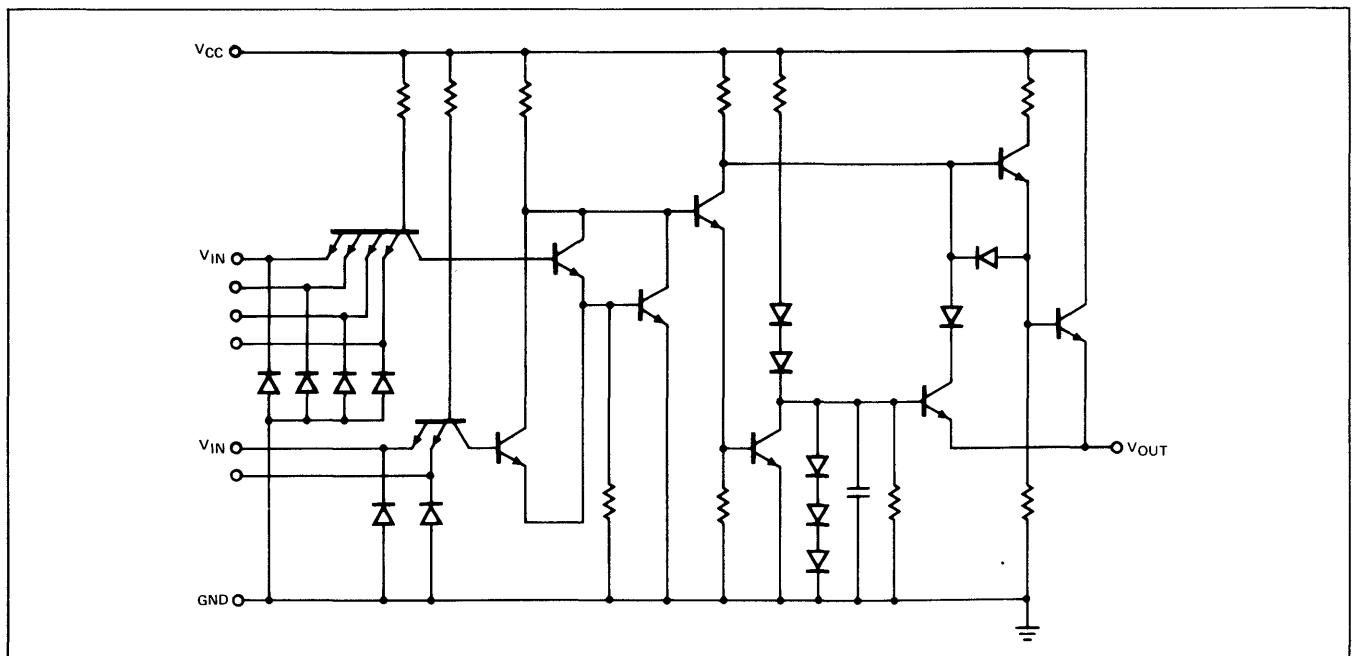

## DIGITAL 8000 SERIES TTL/MSI – 8T23

### ELECTRICAL CHARACTERISTICS ( $V_{CC} = 5.0V \pm 5\%$ , $T_A = 0^\circ C$ TO $+75^\circ C$ )

CHARACTERISTICS	LIMITS				TEST CONDITIONS				NOTES
	MIN	TYP	MAX	UNITS	AND GATE # 1		INPUTS OF # 2 AND GATE	OUTPUT	
					INPUT UNDER TEST	OTHER INPUT			
"0" Output Voltage			+0.15	V	0.8V	4.5V	0V	-240 $\mu$ A	7
"1" Output Leakage Current			40	$\mu$ A	0V	0V	0V	3.0V	1, 15
"0" Input Current	-0.1		-1.6	mA	0.4V	4.5V			
"1" Input Current			40	$\mu$ A	4.5V	0V			



### ELECTRICAL CHARACTERISTICS ( $V_{CC} = 5.0V$ , $T_A = 25^\circ C$ )

CHARACTERISTICS	LIMITS				TEST CONDITIONS				NOTES
	MIN	TYP	MAX	UNITS	AND GATE # 1		INPUTS OF # 2 AND GATE	OUTPUT	
					INPUT UNDER TEST	OTHER INPUT			
"1" Output Voltage	3.11			V	2.0V	2.0V	0.8V	59.3mA	
Turn-on Delay		12 15	20 25	nS nS					8, 13 9, 13
Turn-off Delay		12 20	20 35	nS nS					8, 13 9, 13
Power/Current Consumption Output at "0"			315/ 60	mW/ mA	0.8V	0.8V	0.8V		12, 16
Output at "1"			150/ 28	mW/ mA	2.0V	2.0V	2.0V		12, 16
Input Latch Voltage	5.5			V	10mA	0V	0V		11
"1" Output Current	-100		-250	mA	4.5V	4.5V	0V	2.0V	14
Input Clamp Voltage			-1.5	V	-12mA				14


#### NOTES:

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive logic definition: "UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- With forced output current of 240 $\mu$ A the output voltage must not exceed 0.15V.
- RL = 50 $\Omega$  to ground.
- Load is 50 $\Omega$  in parallel with 100pF.
- Manufacturer reserves the right to make design and process changes and improvements.
- This test guarantees operation free of input latch-up over the specified operating supply voltage range.
- $I_{CC}$  is dependent upon loading.  $I_{CC}$  limit specified is for no-load test condition for both drivers.
- Reference AC Test Circuit and Pulse Requirements.
- Reference "Typical Output Current vs. Output Voltage Curve".
- $V_{CC} = 0.00V$ .
- $V_{CC} = 5.25V$ .


AC TEST FIGURE AND WAVEFORMS

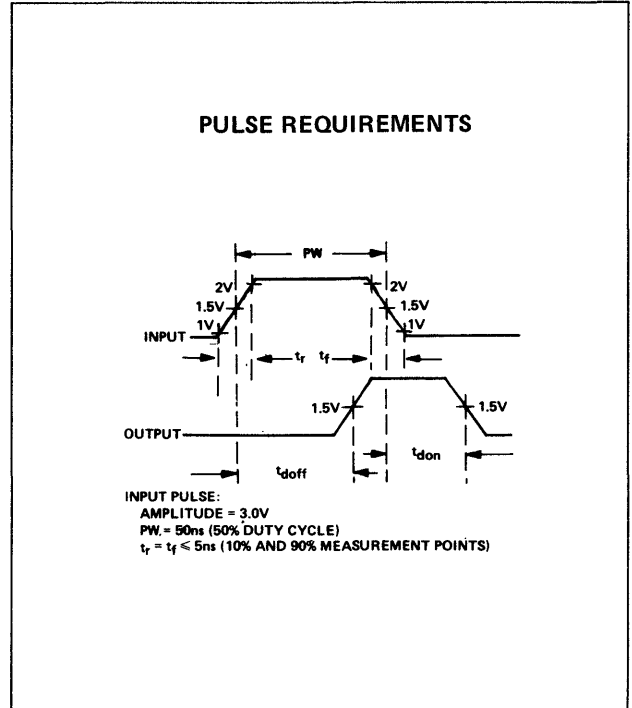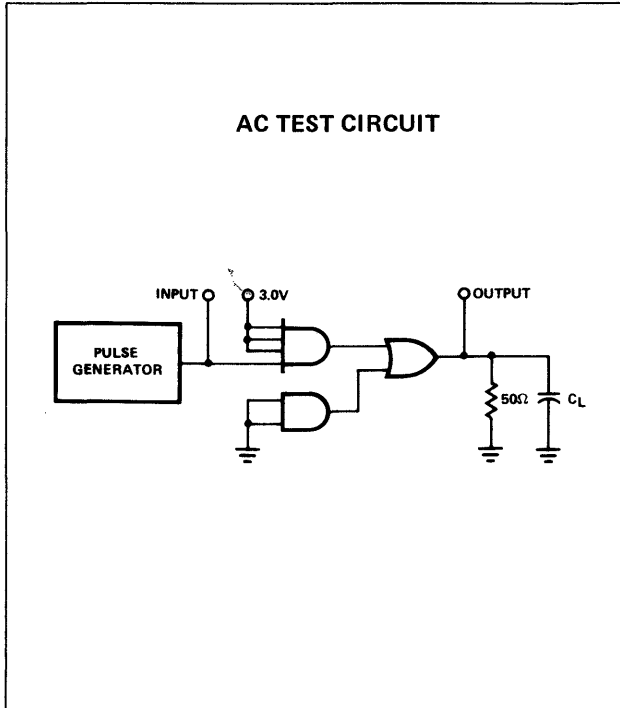

TYPICAL OUTPUT CHARACTERISTICS

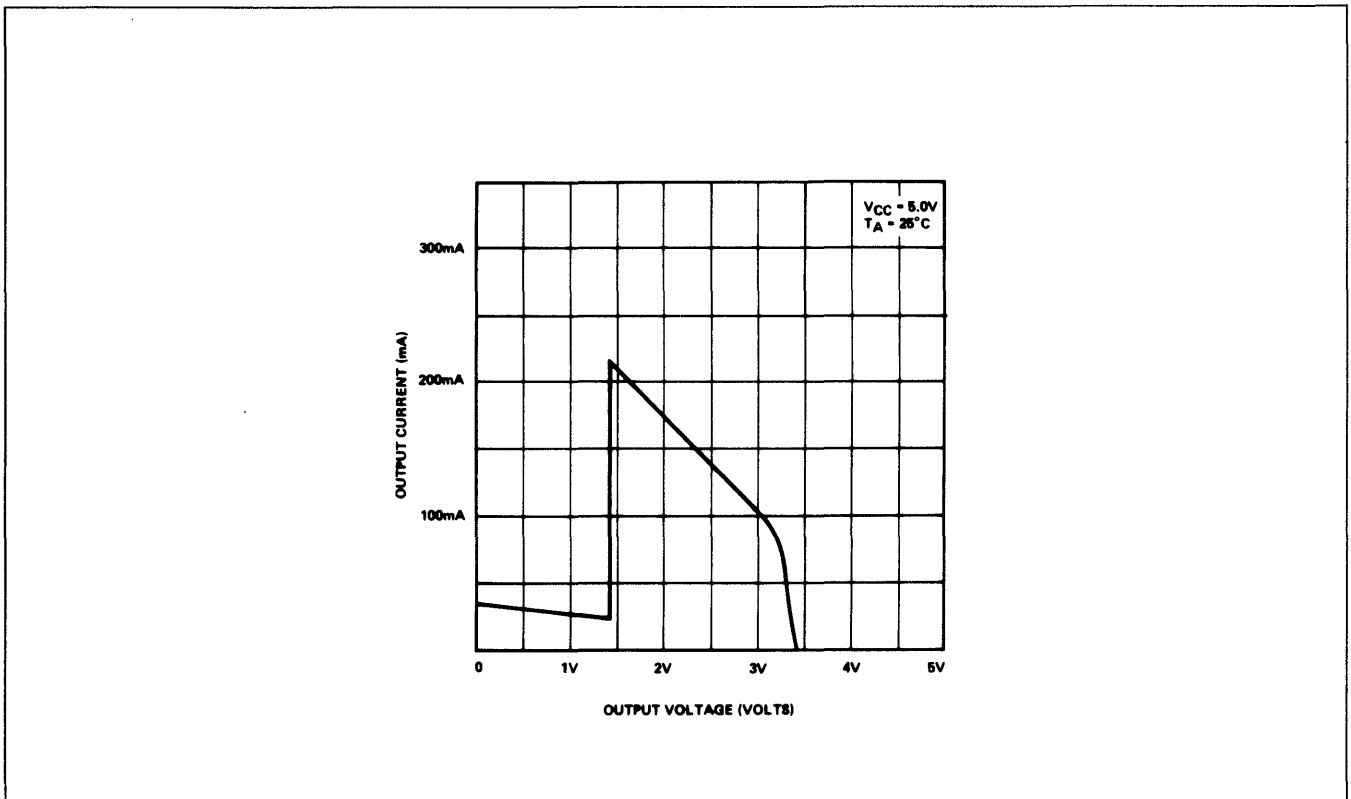

TYPICAL APPLICATIONS

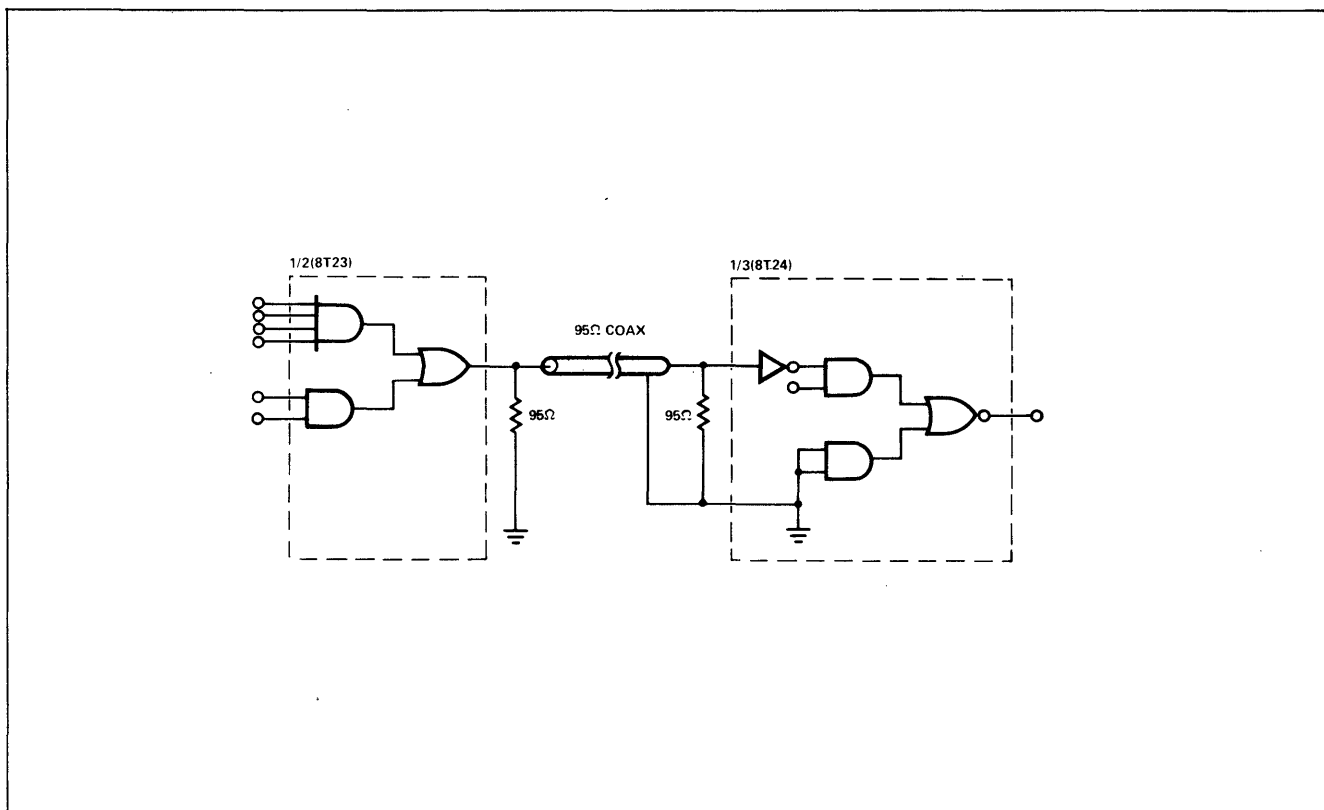

**DESCRIPTION**

The 8T24 is a Triple Line Receiver designed specifically to meet the IBM System/360 I/O Interface Specification (File No. S360-19). Each receiver incorporates hysteresis to provide high noise immunity and high input impedance to minimize loading on the driver circuit.

An input voltage of 1.7 volts or more is interpreted as a logical one; an input of 0.70 volts or less is interpreted as a logical zero as is an open circuited input.

The receiver input (R) of the 8T24 will not be damaged by a DC input of +7.0 volts with power on or by a DC input of +6.0 volts with power off in the receiver. The 8T24 will also withstand an input of -0.15V with power on or off.


The 8T24 is fully compatible with TTL and DTL systems and operates from a single 5 volt power supply.

**FEATURES**

- BUILT-IN INPUT THRESHOLD HYSTERESIS\*
- HIGH SPEED:  $T_{ON} = T_{OFF} = 20ns$  (TYPICAL)
- EACH CHANNEL CAN BE STROBED INDEPENDENTLY
- FANOUT OF TEN (10) WITH STANDARD TTL INTEGRATED CIRCUITS
- INPUT GATING IS INCLUDED WITH EACH LINE RECEIVER FOR INCREASED APPLICATION FLEXIBILITY
- OPERATION FROM A SINGLE +5V POWER SUPPLY

\* Hysteresis is defined as the difference between the input thresholds for the "1" and "0" output states. Hysteresis is specified at 0.4V typically and 0.2V minimum over the operating temperature range.

**LOGIC DIAGRAM WITH PIN LAYOUT**

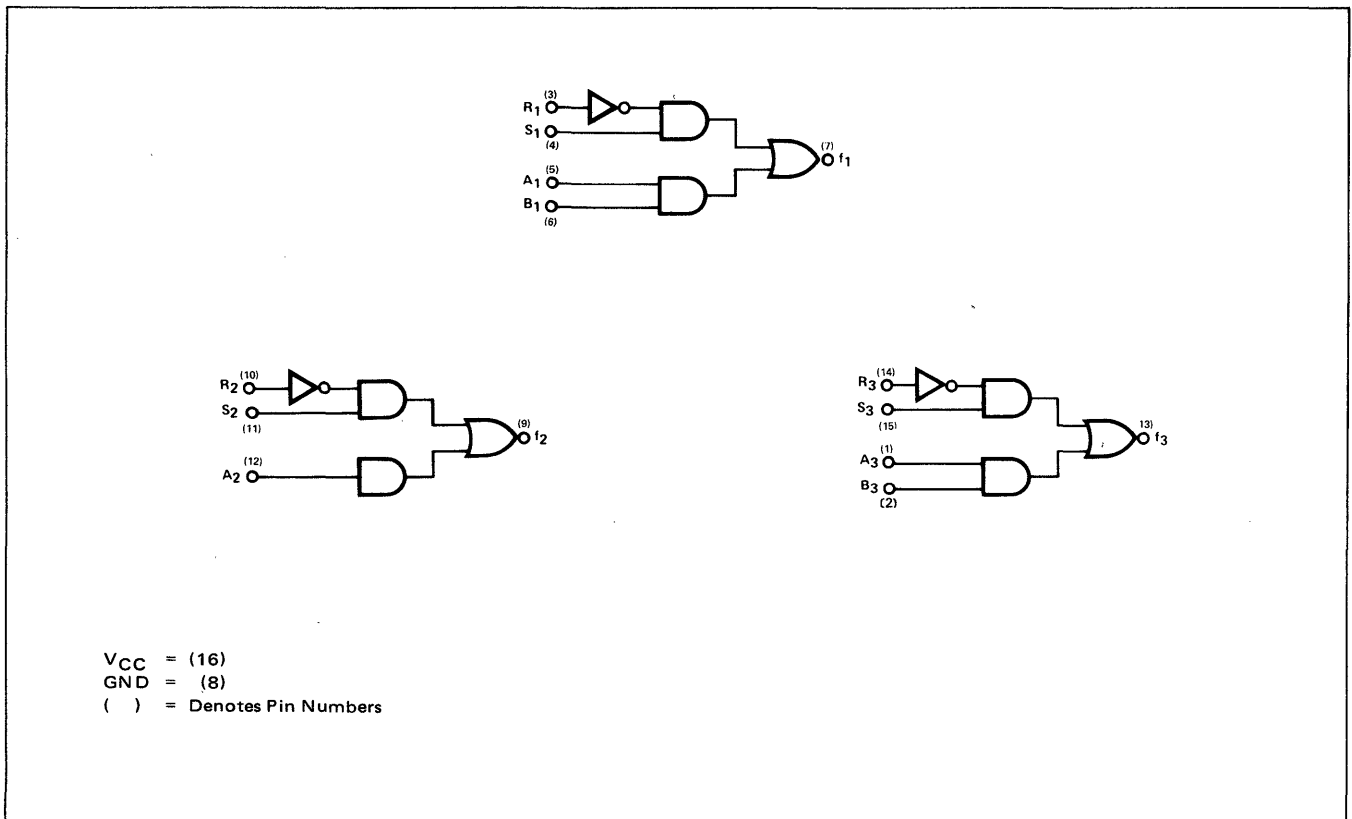



## DIGITAL 8000 SERIES TTL/MSI – 8T24

### ELECTRICAL CHARACTERISTICS ( $V_{CC} = 5.0V \pm 5\%$ , $T_A = 0^\circ C$ TO $+75^\circ C$ )

CHARACTERISTICS	LIMITS				TEST CONDITIONS					NOTES
	MIN.	TYP.	MAX.	UNITS	R	S	A	B	OUTPUTS	
"1" Output Voltage	2.6	3.4		V	1.70V	4.5V	0V	0V	-800 $\mu$ A	7
	2.6	3.4		V	0V	0.7V	0V	0V	-800 $\mu$ A	7
"0" Output Voltage		0.2	0.4	V	0.70V	1.7V	0V	0V	16mA	8
		0.2	0.4	V	0V	0V	1.7V	1.7V	16mA	8
"0" Input Current	$S_n$	-0.1	-1.6	mA	0V	0.4V	0.4V	0.4V		
	$A_n$	-0.1	-1.6	mA	0V					
	$B_n$	-0.1	-1.6	mA						
"1" Input Current	$R_n$		0.17	mA	3.11V	4.5V				9
	$R_n$		5.0	mA	7.0V					
	$R_n$		5.0	mA	6.0V					
	$S_n$		40	$\mu$ A	3.11V	4.5V	4.5V	0V	0V	
	$A_n$		40	$\mu$ A		0V	4.5V	4.5V		
	$B_n$		40	$\mu$ A						


### ELECTRICAL CHARACTERISTICS (AT $V_{CC} = 5.0V$ AND $T_A = 25^\circ C$ )

CHARACTERISTICS	LIMITS				TEST CONDITIONS					NOTES
	MIN.	TYP.	MAX.	UNITS	R	S	A	B	OUTPUTS	
Turn-on Propagation Delay		20	30	nS						13
Turn-off Propagation Delay		20	30	nS						13
Hysteresis	0.2	0.4		V		4.5V	0V	0V		11, 12
Power/Current Consumption		315	380	mW						14
		60	72	mA						
Input Latch Voltage:	S	5.5		V	3.11V	10mA	0V	0V		10
	A	5.5		V	0V	0V	10mA	0V		10
	B	5.5		V	0V	0V	0V	10mA		10
Output Short Circuit Current	-50		-100	mA	3.11V	0V	0V	0V		
Input Clamp Voltage	S		-1.5	V		-12mA	-12mA	-12mA		
	A		-1.5	V						
	B		-1.5	V						


#### NOTES:

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive logic definition: "UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Manufacturer reserves the right to make design and process changes and improvements.
- Output source current is applied through a resistor to ground.
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- $V_{CC} = 0.00V$
- This test guarantees operation free of Input latch up over the specified operating supply voltage range.
- Hysteresis is defined as the voltage difference between the R input level at which the output begins to go from "0" to "1" state and the level at which the output begins to go from "1" to "0".
- See Hysteresis test circuit.
- Refer to AC test circuits.
- $V_{CC} = 5.25V$ .


CIRCUIT SCHEMATIC

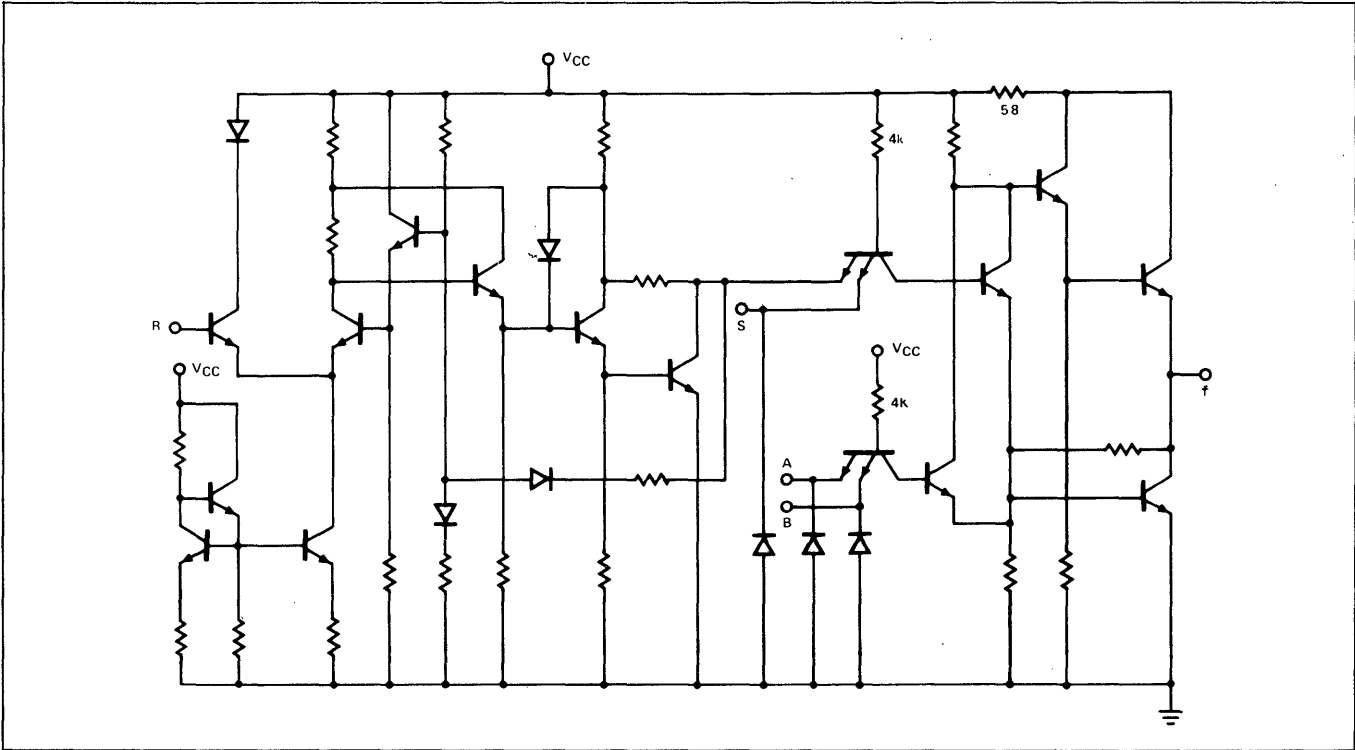


AC TEST CIRCUIT AND WAVEFORMS

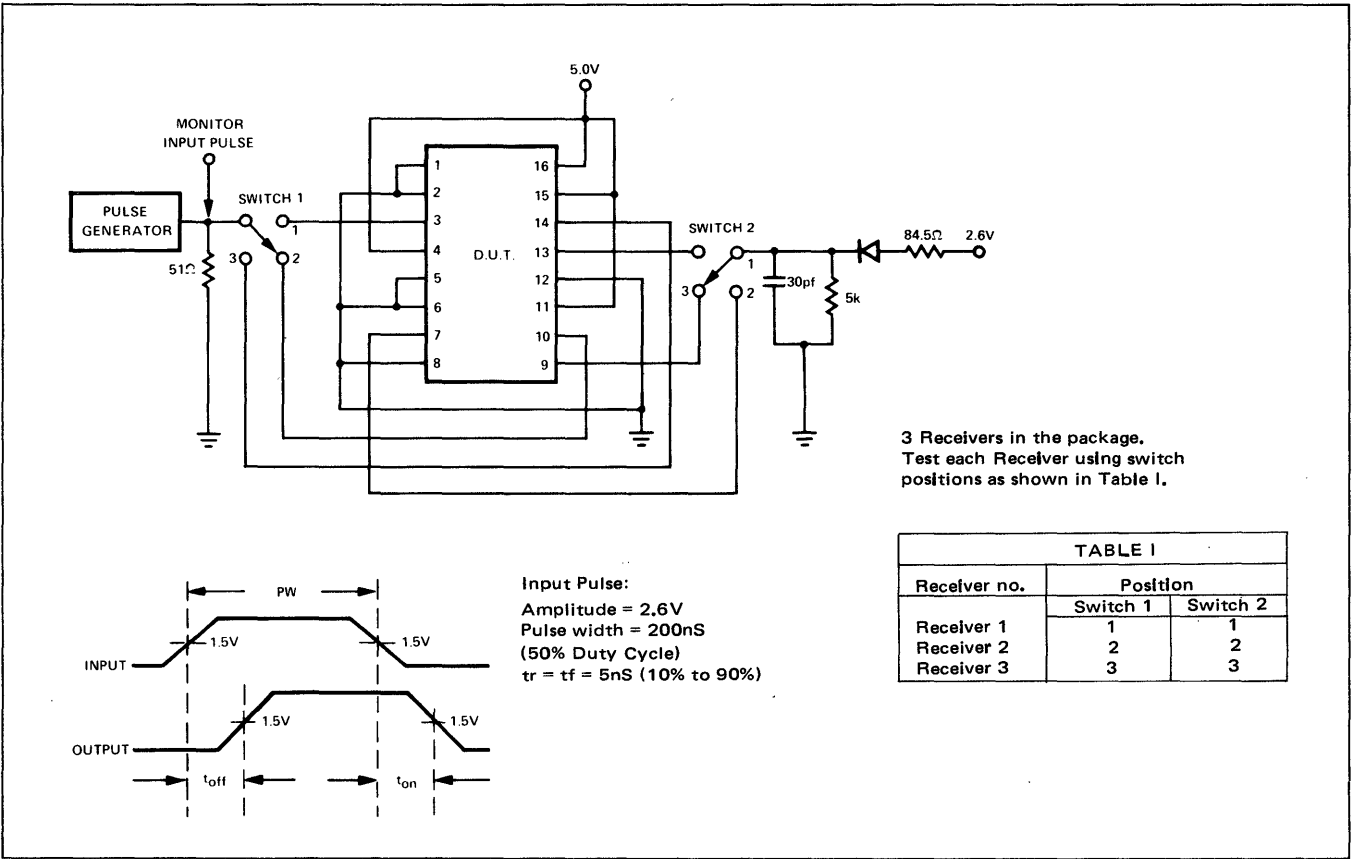

HYSTERESIS TEST CIRCUIT

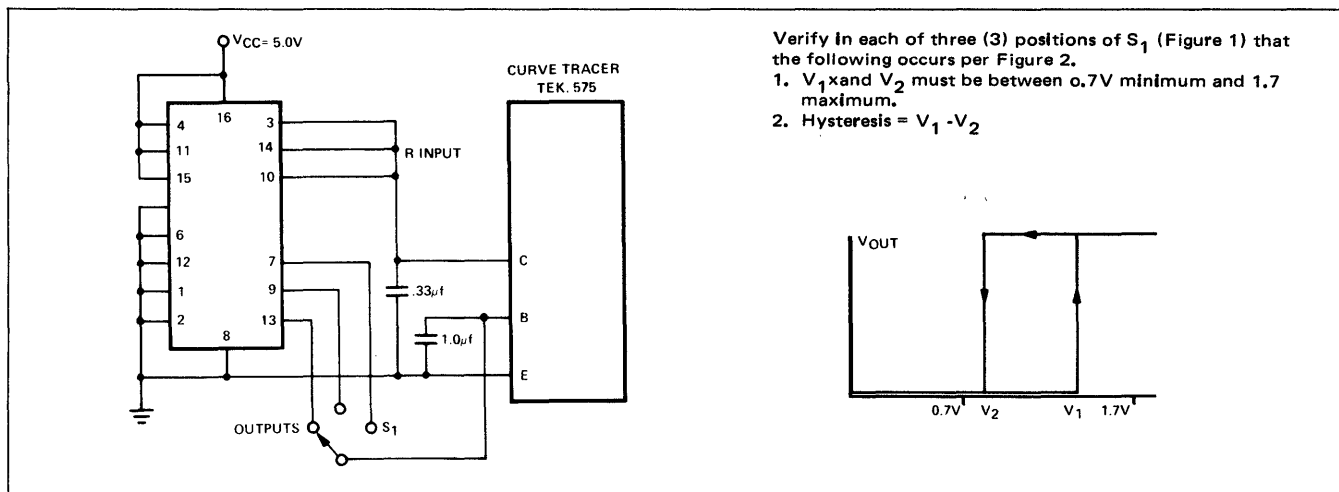

TYPICAL APPLICATION

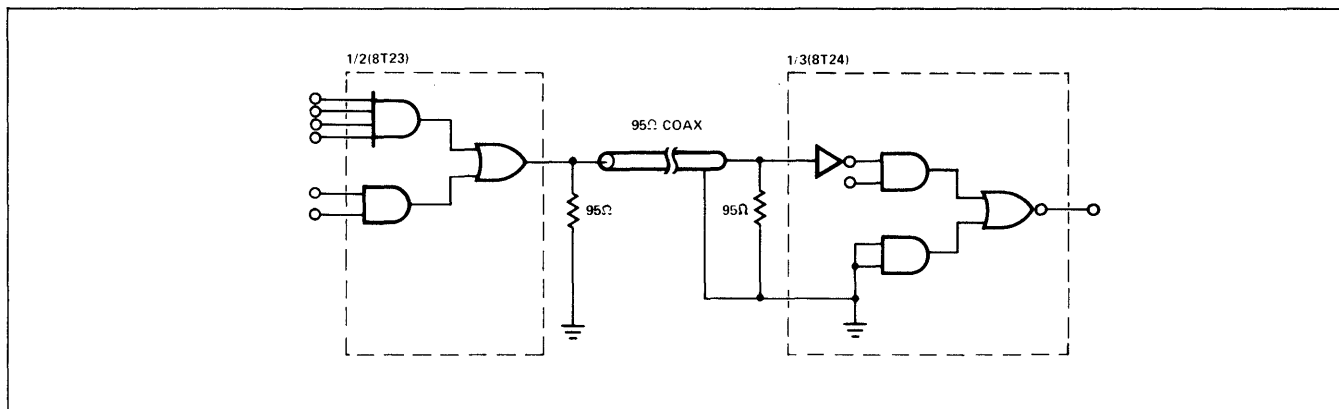

# QUAD BUS DRIVER/RECEIVER

# 8T26

0°C TO +75°C

DIGITAL 8000 SERIES TTL/MSI

## DESCRIPTION

The 8T26 bus driver/receiver contains four pair of inverting logic gates along with two buffered common enable lines.

Both the driver and receiver gates have tri-state outputs and PNP inputs. Tri-state outputs provide the high switching speeds of totem pole TTL circuits while offering the bus capability of open collector gates. PNP inputs reduce input loading to 200  $\mu$ A maximum.

A logic "1" on the bus enable (B/E) input allows input data to be transferred to the output of the driver, while a logic "0" will force the output to a high impedance state and will also disable the PNP resulting in negligible input load current. The driver gate will sink 50mA of current with a maximum  $V_{CE}$  of 0.45V.

The receiver gate is enabled by a logic "0" on the input enable (I/E) pin and provides 16mA current sink capability;


## FEATURES

- SCHOTTKY-CLAMPED TTL
- PROPAGATION DELAY = 17nS (MAX.)
- TRI-STATE OUTPUTS
- PNP INPUTS
- 40mA CURRENT SINK CAPABILITY
- SBD\* INPUT CLAMPS
- \*SCHOTTKY-BARRIER-DIODE

## APPLICATIONS

- HALF-DUPLEX DATA TRANSMISSION
- ROUTING DATA IN BUS-ORIENTED SYSTEMS
- HIGH CURRENT DRIVERS

## LOGIC DIAGRAM

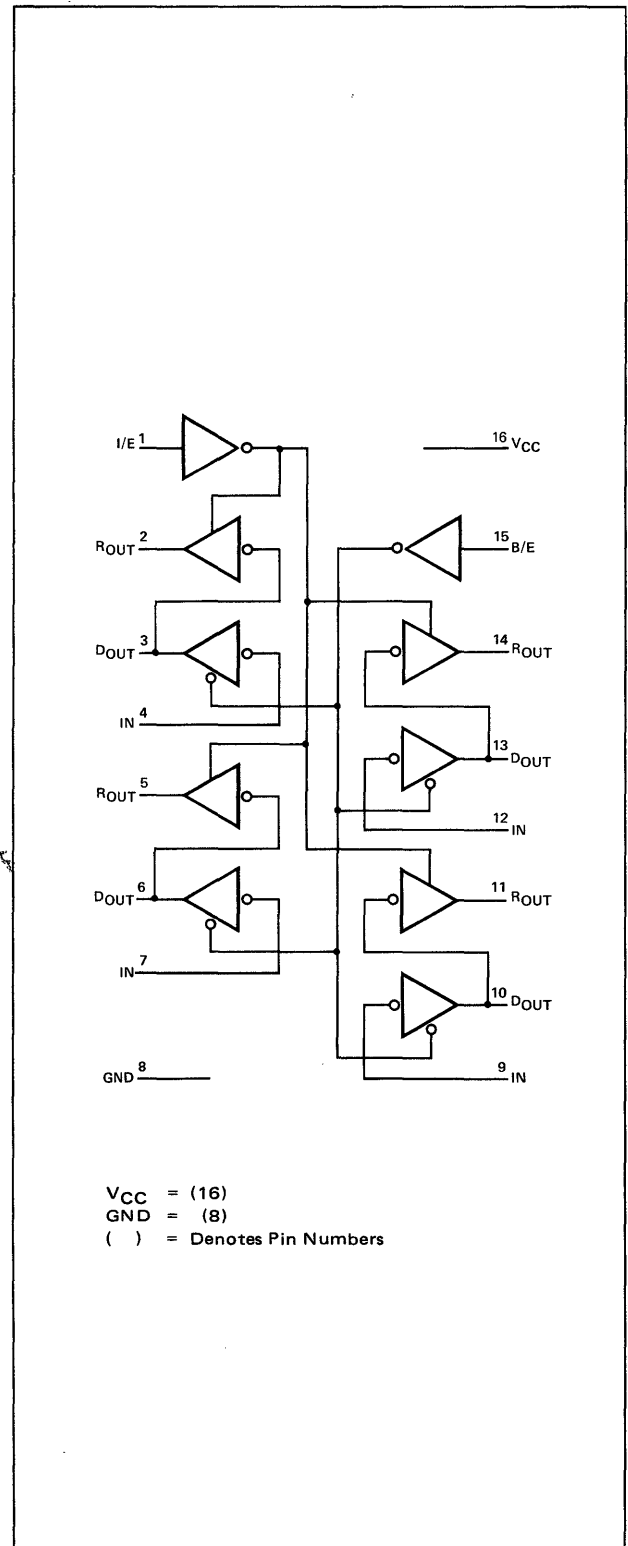

# SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8T26

## ELECTRICAL CHARACTERISTICS (V<sub>CC</sub> = 5.0V ±5%, T<sub>A</sub> = 0°C to 75°C)


SYMBOL	PARAMETER	MIN.	TYP.	MAX.	UNITS	CONDITION
I(0) <sub>in</sub>	Input "0" current (All Inputs)			-200	μA	V <sub>in</sub> = 0.4
I(1) <sub>in</sub>	Input "1" current Pins 1, 4, 7, 9, 12, 15			25	μA	V <sub>in</sub> = 5.25
V(0) <sub>in</sub>	Input (0) Threshold voltage	0.85			Volts	
V(1) <sub>in</sub>	Input (1) Threshold voltage			2	Volts	
V(1) <sub>out</sub>	Output (1) voltage Pins 3, 6, 10, 13	2.6	3.3		Volts	I <sub>out</sub> = -10.0mA
V(1) <sub>out</sub>	Output (1) voltage Pins 2, 5, 11, 14	2.6	3.3		Volts	I <sub>out</sub> = -2.0mA
V(0) <sub>out</sub>	Output (0) voltage Pins 3, 6, 10, 13		0.2	0.45	Volts	I <sub>out</sub> = 50mA
V(0) <sub>out</sub>	Output (0) voltage Pins 2, 5, 11, 14		0.2	0.45	Volts	I <sub>out</sub> = 16mA
I(1) <sub>off</sub>	Output (1) off/Leakage current			100	μA	V <sub>out</sub> = 2.6V
I(0) <sub>off</sub>	Output (0) off/Leakage current			-100	μA	V <sub>out</sub> = 0.45V
V <sub>cin</sub>	Input/Clamp/Voltage			-1.0	Volts	I <sub>in</sub> = -5mA
I <sub>so</sub>	Output (1) short circuit current -- Pins 3, 6, 10, 13	-50		-150	mA	V <sub>O</sub> = 0 Volts*
I <sub>so</sub>	Output (1) short circuit current -- Pins 2, 5, 11, 14	-30		-75	mA	V <sub>O</sub> = 0 Volts*
I <sub>CC</sub>	Power supply current			80	mA	V <sub>CC</sub> = 5V

T<sub>A</sub> = 25°C, V<sub>CC</sub> = 5.00V

SYMBOL	PARAMETER	MIN.	TYP.	MAX.	UNITS	CONDITION
T <sub>on</sub>	Turn on delay Pins 2, 5, 11, 14			10	nsec	30 pF, 300 ohm
T <sub>off</sub>	Turn off delay Pins 2, 5, 11, 14			15	nsec	30 pF, 300 ohm
T <sub>on</sub>	Turn on delay Pins 3, 6, 10, 13			17	nsec	150 pF, 100 ohm
T <sub>off</sub>	Turn off delay Pins 3, 6, 10, 13			17	nsec	150 pF, 100 ohm

\*Do not ground more than one output at a time.

## TYPICAL APPLICATION

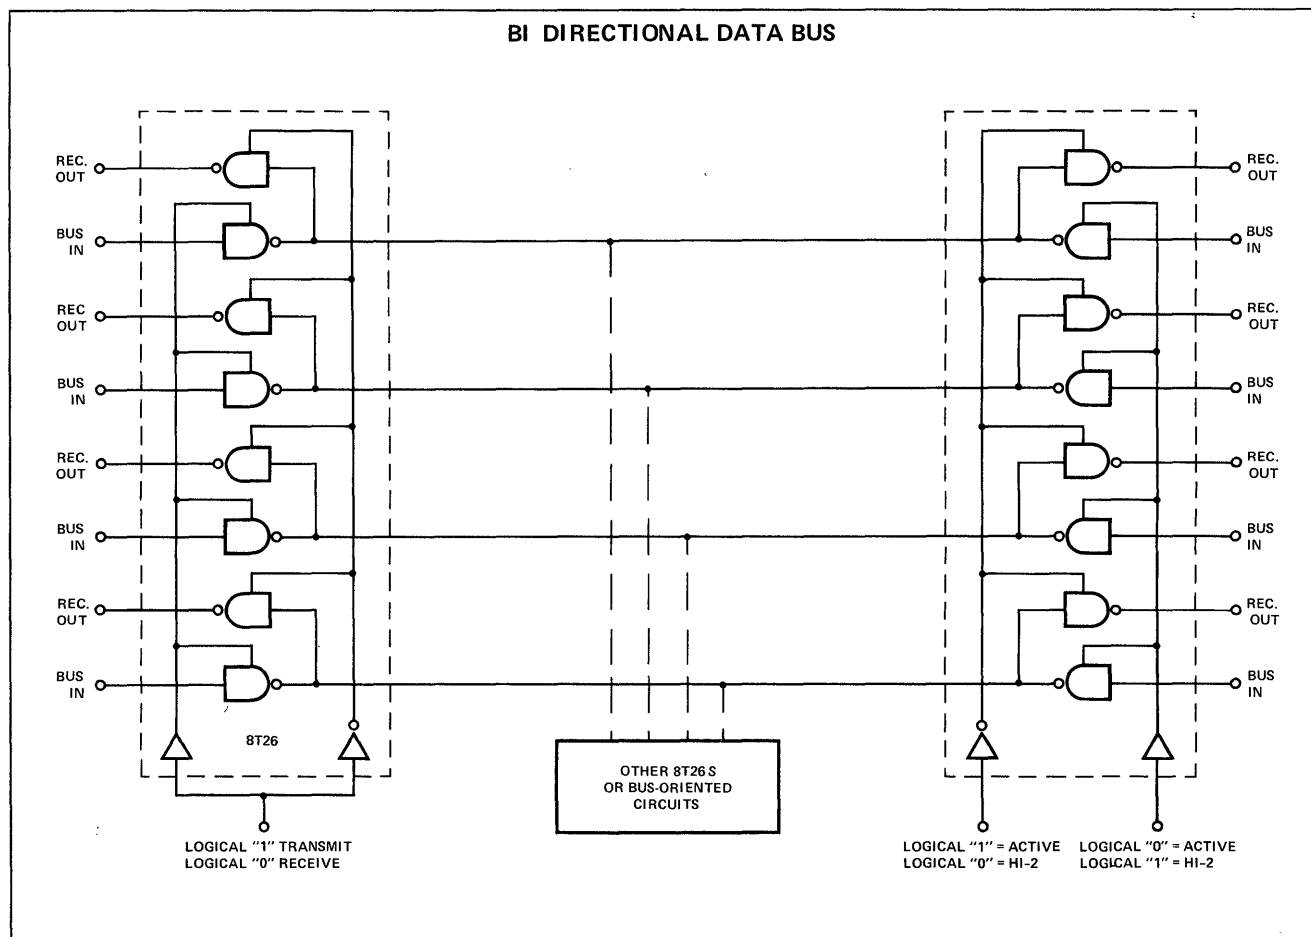

## DESCRIPTION

Series 82S Schottky TTL circuits are implemented with Schottky-barrier-diode clamping to achieve ultra-high speeds previously obtainable only with emitter-coupled logic, yet they retain the desirable features of, and are completely compatible with, most of the popular saturated logic circuits. Schottky TTL circuits currently offer the best speed-power product of any high-speed logic family.

Schottky-barrier-diode clamping prevents transistors from achieving classic saturation and thereby effectively eliminates excess charge storage and subsequent recovery times. These recovery times contribute significantly to overall propagation delays experienced with saturated digital-logic circuits.

The Schottky-clamped transistors are formed by using Schottky-barrier-diodes in parallel with the base-collector junctions. This is realized physically by depositing metal over the base and N region of the collector forming a metal-silicon diode. The effect of this diode, which has a lower forward voltage than the collector-base junction is to hold the transistor out of saturation by diverting most of the excess base current. The reduction in stored-charge plus the use of smaller geometries results in a major improvement of switching characteristics.

By eliminating gold-doping normally employed in conventional TTL processing to reduce storage time, PNP transistors can be used to advantage by the circuit designers.


In 82S MSI, PNP transistors are used to reduce input loading as illustrated in Fig. 1. Maximum low level input current is specified at 400  $\mu$ A which allows the systems designer to upgrade existing designs without encountering fanout limitations.

## FEATURES

- 3ns TYPICAL GATE PROPAGATION DELAY
- 20mW PER-GATE TYPICAL POWER DISSIPATION
- LOW LEVEL INPUT CURRENT (PER UNIT LOAD = .4mA (MAX.))

## EASE OF SYSTEM DESIGN

- FULLY COMPATIBLE WITH SERIES 8000, 54/74 TTL, AND MOST DTL
- SCHOTTKY-DIODE-CLAMPED INPUTS SIMPLIFY SYSTEM DESIGN
- TERMINATED, CONTROLLED-IMPEDANCE LINES NOT NORMALLY REQUIRED
- LOW OUTPUT IMPEDANCE: PROVIDES LOW AC NOISE SUSCEPTABILITY AND DRIVES HIGHLY CAPACITIVE LOADS

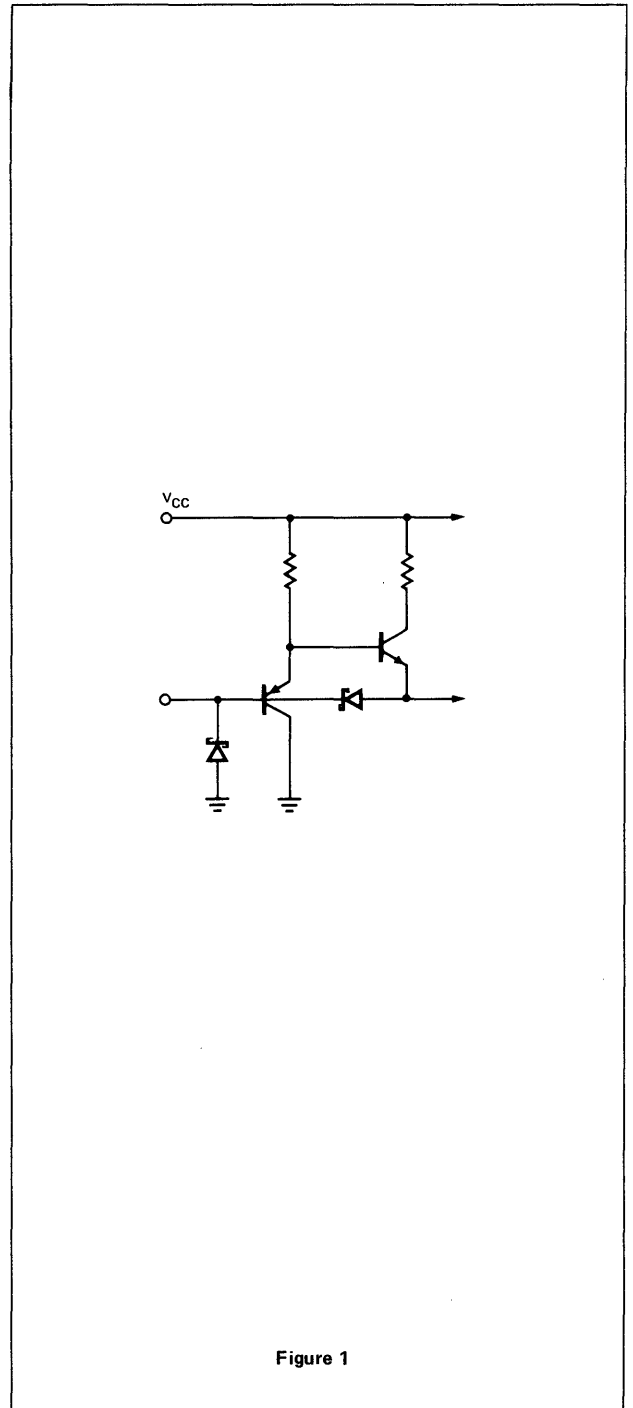

**ABSOLUTE MAXIMUM RATINGS** (Over operating free-air temperature range unless otherwise noted)

SUPPLY VOLTAGE $V_{CC}$	+7V
INPUT VOLTAGE	+6V
OUTPUT VOLTAGE	+7V
OPERATING FREE-AIR TEMPERATURE RANGE	$0^{\circ}\text{C}$ to $75^{\circ}\text{C}$



# 8-INPUT DIGITAL MULTIPLEXER

# 82S30

## DIGITAL 8000 SERIES SCHOTTKY TTL/MSI

### DESCRIPTION

The 8-Input Digital Multiplexer is the logical equivalent of a single-pole, 8 position switch whose position is specified by a 3-bit input address.

The 82S30 incorporates an INHIBIT input which, when low, allows the one-of-eight inputs selected by the address to appear on the f output and, in complement, on the  $\bar{f}$  output. With the INHIBIT input high, the f output is unconditionally low and the  $\bar{f}$  output is unconditionally high.

### FEATURES


- SCHOTTKY-CLAMPED TTL STRUCTURE
- PNP INPUTS
- DIRECT OUTPUT INHIBIT
- 82S30 CAN REPLACE 9312 FOR HIGHER SPEED

### TRUTH TABLE

ADDRESS			DATA INPUT								OUTPUT		
A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>	I <sub>7</sub>	I <sub>6</sub>	I <sub>5</sub>	I <sub>4</sub>	I <sub>3</sub>	I <sub>2</sub>	I <sub>1</sub>	I <sub>0</sub>	INH	f	82S30 f
0	0	0	x	x	x	x	x	x	x	1	0	1	0
0	0	1	x	x	x	x	x	x	1	x	0	1	0
0	1	0	x	x	x	x	x	1	x	x	0	1	0
0	1	1	x	x	x	x	1	x	x	x	0	1	0
1	0	0	x	x	x	1	x	x	x	x	0	1	0
1	0	1	x	x	1	x	x	x	x	x	0	1	0
1	1	0	x	1	x	x	x	x	x	x	0	1	0
1	1	1	1	x	x	x	x	x	x	x	0	1	0
0	0	0	x	x	x	x	x	x	x	0	0	0	1
0	0	1	x	x	x	x	x	x	0	x	0	0	1
0	1	0	x	x	x	x	x	0	x	x	0	0	1
0	1	1	x	x	x	x	0	x	x	x	0	0	1
1	0	0	x	x	x	0	x	x	x	x	0	0	1
1	0	1	x	x	0	x	x	x	x	x	0	0	1
1	1	0	x	0	x	x	x	x	x	x	0	0	1
1	1	1	0	x	x	x	x	x	x	x	0	0	1
x	x	x	x	x	x	x	x	x	x	x	1	0	1

x = don't care

### LOGIC DIAGRAM

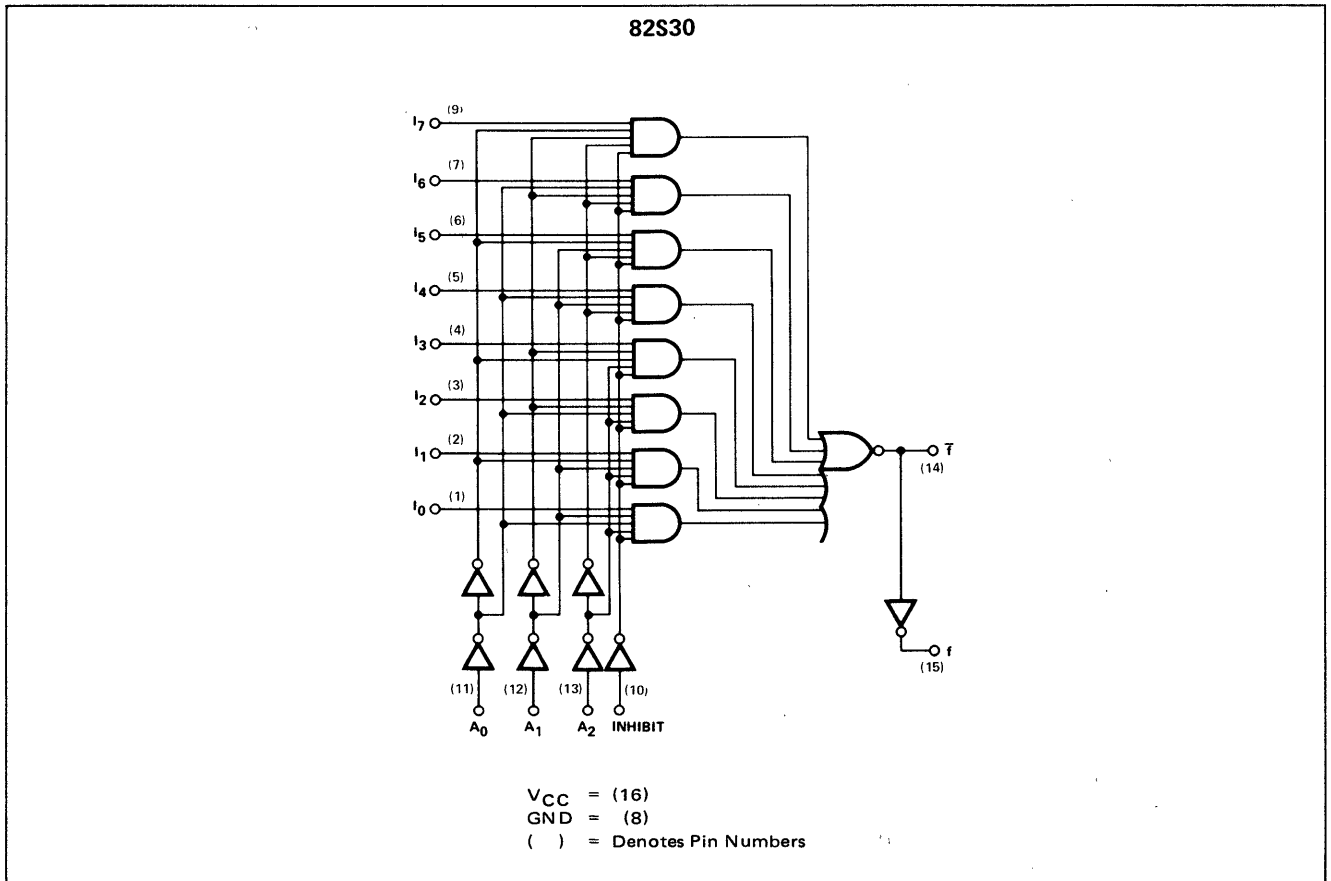



# SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 82S30

## ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature and Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS						NOTES
	MIN	TYP	MAX	UNITS	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	INH	DATA INPUT I <sub>n</sub>	OUTPUTS	
"1" Output Voltage, Output f	2.7			V	*	*	*	0.8V	2.0V	-1.0mA	6,11
Output $\bar{f}$	2.7			V	*	*	*	2.0V	*	-1.0mA	6,11
"0" Output Voltage			0.5	V	0.8V	0.8V	0.8V	0.8V	0.8V	20mA	7,14
"1" Input Current			10	$\mu$ A	4.5V	4.5V	4.5V		4.5V		
Inputs A <sub>n</sub> , I <sub>n</sub>			10	$\mu$ A				4.5V			
Input INH											
"0" Input Current			-400	$\mu$ A	0.5V	0.5V	0.5V		0.5V		
A <sub>n</sub> , I <sub>n</sub> , INH											

T<sub>A</sub> = 25°C and V<sub>CC</sub> = 5.0V


CHARACTERISTICS	LIMITS				TEST CONDITIONS						NOTES
	MIN	TYP	MAX	UNITS	A	A	A	INH	DATA INPUT I <sub>n</sub>	OUTPUTS f $\bar{f}$	
Propagation Delay			20	ns							
A <sub>n</sub> to f											8
A <sub>n</sub> to $\bar{f}$			17	ns							8
I <sub>n</sub> to $\bar{f}$			12	ns							8
INH to $\bar{f}$			16	ns							11
Power Consumption/Supply Current			62	mA	4.5V	4.5V	4.5V	4.5V	0V		
Output Short Circuit Current											
Output f	-40		-100	mA	0V	0V	0V	0V	4.5V	0V	
Output $\bar{f}$	-40		-100	mA	0V	0V	0V	0V	0V	0V	
Input Clamp Voltage	-1.2			V	-18	-18	-18	-18			12

\*See Truth Table for Logical Conditions

### NOTES:

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive logic definition: "UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V<sub>CC</sub>.
- Refer to AC Test Figures.
- Manufacturer reserves the right to make design and process changes and improvements.
- By DC tests per the truth table, all inputs have guaranteed thresholds at 0.8V for logical "0" and 2.0V for logical "1".
- All I<sub>n</sub> data inputs are at 0V, V<sub>CC</sub> = 5.25V.
- Connect an external 1K resistor from V<sub>CC</sub> to the output terminal for this test.

## AC TEST FIGURE AND WAVEFORMS

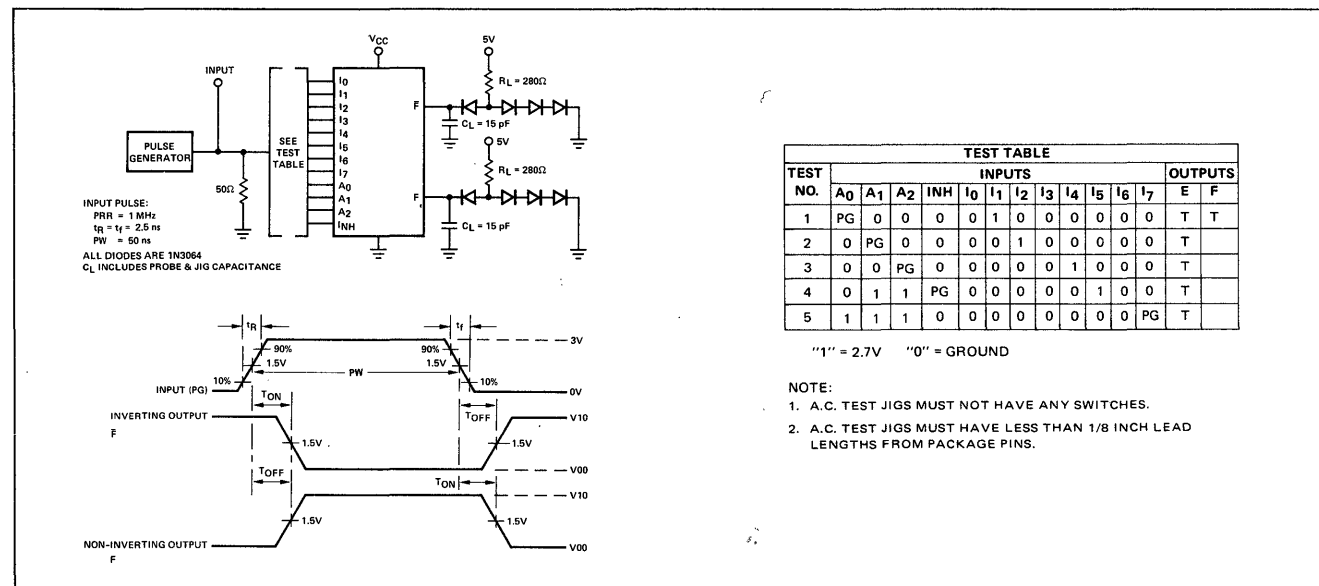

# 2-INPUT 4-BIT DIGITAL MULTIPLEXER

# 82S33 82S34

## DIGITAL 8000 SERIES SCHOTTKY TTL/MSI

### DESCRIPTION

These devices are 2-input, 4-Bit Digital Multiplexers designed for general purpose data-selection applications.

The 82S33 features non-inverting data paths; and, the 82S34 features inverting data paths.


The 82S34 has open collector outputs which permit direct wiring to other open collector outputs (collector logic) to yield "free" four-bit words. As many as forty four-bit words can be multiplexed by using twenty 82S34's in the WIRED-AND mode.

The inhibit state  $S_0 = S_1 = 1$  can be used to facilitate transfer operations in an arithmetic section.

### FEATURES

- SCHOTTKY-CLAMPED TTL STRUCTURE
- PNP INPUTS
- OPEN COLLECTOR OUTPUTS (82S34)
- INHIBIT STATE

### LOGIC DIAGRAM

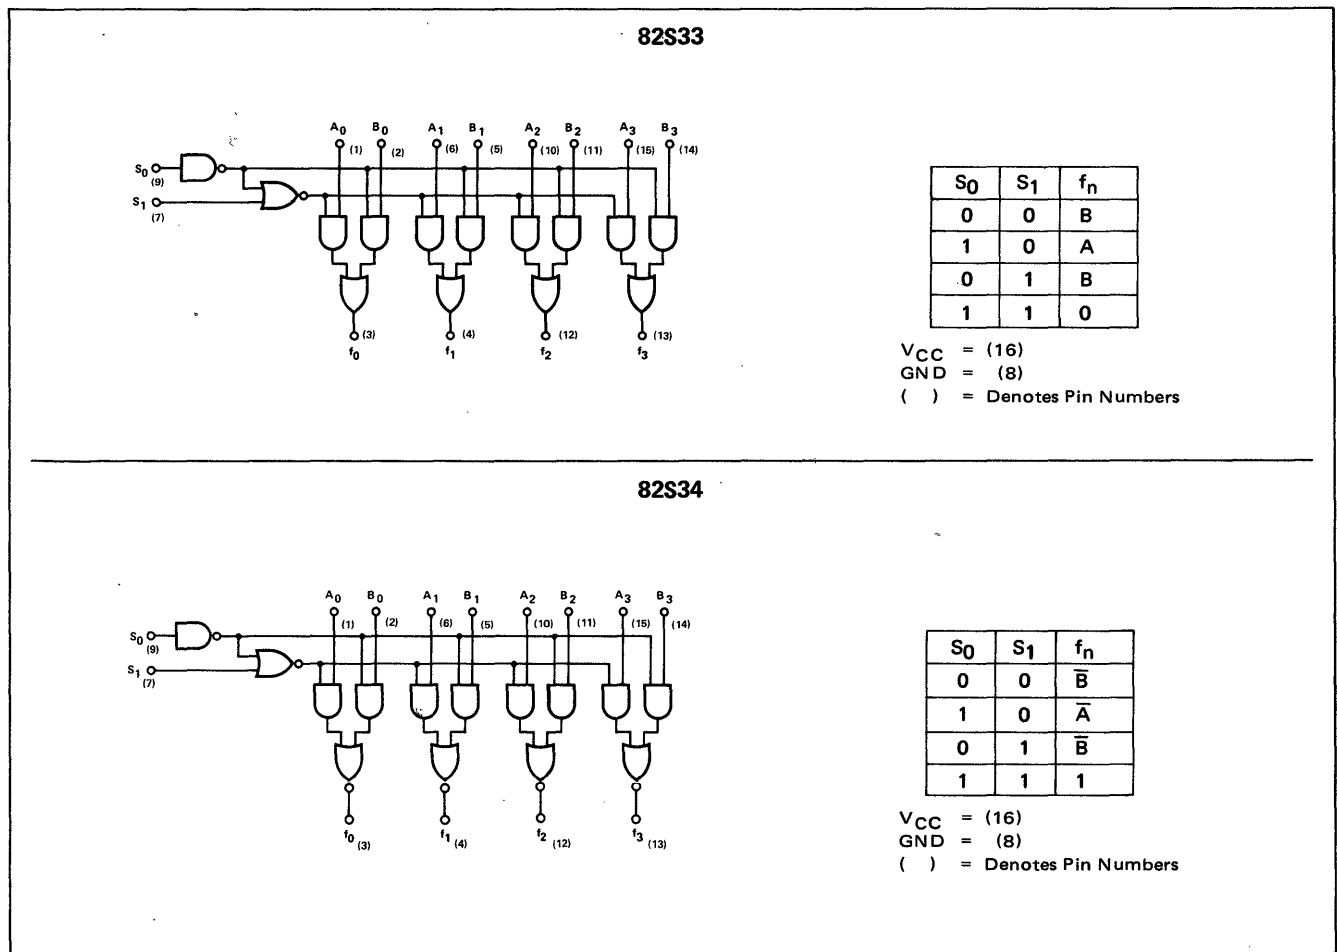

# SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 82S33/34


## ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature and Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS				OUTPUTS	NOTES
					INPUTS					
	MIN	TYP	MAX	UNITS	A <sub>n</sub>	B <sub>n</sub>	S <sub>0</sub>	S <sub>1</sub>		
"1" Output Voltage (82S33)	2.7			V	2.0V	2.0V	0.8V	0.8V	-1mA	
"0" Output Voltage (82S33)			0.5	V	0.8V	2.0V	2.0V	0.8V	20mA	
"0" Output Voltage (82S34)			0.5	V	0V	2.0V	0.8V	0.8V	20mA	
"1" Output Leakage Current (82S34)			250	μA	2.0V	2.0V	2.0V	2.0V	5.5V	
"0" Input Current (ALL)			400	μA	0.5V	0.5V	0.5V	0.5V		
"1" Input Current (ALL)			-10	μA	4.5V	4.5V	4.5V	4.5V		
Output Short Circuit Current (82S33)	-40		-100	mA	5V	5V	0V	0V	0V	
Input Clamp Voltage (ALL)			-1.2V	V	-18mA	-18mA	-18mA	-18mA		

T<sub>A</sub> = 25°C and V<sub>CC</sub> = 5.0V

CHARACTERISTICS	LIMITS				TEST CONDITIONS				OUTPUTS	NOTES
					INPUTS					
	MIN	TYP	MAX	UNITS	A <sub>n</sub>	B <sub>n</sub>	S <sub>0</sub>	S <sub>1</sub>		
Power/Current Consumption:										
82S33			305/58	mW/mA		0V		0V		14
82S34			265/50	mW/mA		0V		0V		14
82S33/34 Turn-On/Turn-Off Times										
A <sub>n</sub> , B <sub>n</sub> to f <sub>n</sub>			12	ns						8,13
S <sub>0</sub> to f <sub>n</sub>			20	ns						8,13
S <sub>1</sub> to f <sub>n</sub>			18	ns						8,13

## AC TEST FIGURE AND WAVEFORMS

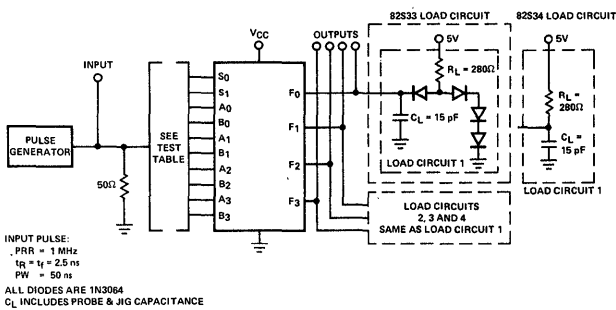


TEST NO.	INPUTS									OUTPUTS				
	S <sub>0</sub>	S <sub>1</sub>	A <sub>0</sub>	B <sub>0</sub>	A <sub>1</sub>	B <sub>1</sub>	A <sub>2</sub>	B <sub>2</sub>	A <sub>3</sub>	B <sub>3</sub>	F <sub>0</sub>	F <sub>1</sub>	F <sub>2</sub>	F <sub>3</sub>
1	PG	0	1	0	1	0	1	0	1	0	T			
2	PG	0	1	0	1	0	1	0	1	0	T	T	T	T
3	PG	0	0	1	0	1	0	1	0	1		T		
4	1	PG	1	0	1	0	1	0	1	0			T	
5	0	0	0	PG	0	0	0	0	0	0	T			
6	0	1	0	0	0	PG	0	0	0	0		T		
7	1	0	0	0	0	0	PG	0	0	0			T	
8	1	0	0	0	0	0	0	0	PG	0				T

"1" = 2.7V "0" = GROUND

### NOTE:

- A.C. TEST JIG'S MUST NOT HAVE ANY SWITCHES.
- A.C. TEST JIG'S MUST HAVE LESS THAN 1/8 INCH LEAD LENGTH FROM PACKAGE PINS.

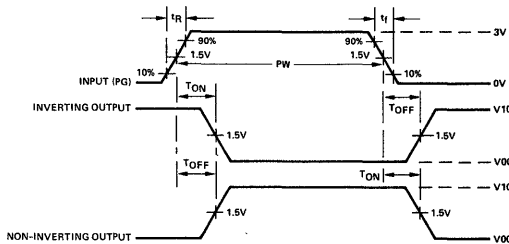

# QUAD EXCLUSIVE-OR ELEMENT

# 82S41

## DIGITAL 8000 SERIES SCHOTTKY TTL/MSI

### DESCRIPTION


The 82S41 contains four independent gating structures to perform the Exclusive-OR function on two input variables. The output of the 82S41 employs the totem-pole structure characteristic of TTL devices.

### FEATURES

- SCHOTTKY-CLAMPED TTL STRUCTURE
- PNP INPUTS

### LOGIC DIAGRAMS

82S41 QUAD EXCLUSIVE-OR

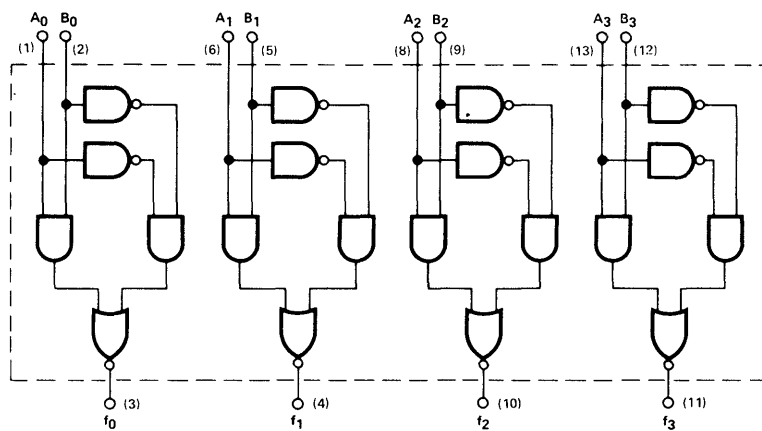

A	B	f
0	0	0
1	0	1
0	1	1
1	1	0

V<sub>CC</sub> = (14)  
 GND = (7)  
 ( ) = Denotes Pin Numbers

NOTE: Pin-Out for Dual In-Line Package Only

SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 82S41

ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	LIMITS				TEST CONDITIONS			NOTES
	MIN.	TYP	MAX	UNITS	INPUTS		OUTPUTS	
					A	B		
Output "1" Voltage	2.7			V	2.0V	0.8V	-1mA	11
Output "0" Voltage			0.5	V	2.0V	2.0V	20mA	
Input "1" Current			10	μA	4.5V	4.5V		
Input "0" Current			-800	μA	0.5V	0.5V		
Power/Current Consumption			290/55	mW/mA				
Output Short Circuit Current	-40		-100	mA		-18mA	0V	13
Input Clamp Voltage	-1.2			V	-18mA			

TA = 25°C and VCC = 5.0V

CHARACTERISTICS	LIMITS				TEST CONDITIONS			NOTES
	MIN	TYP	MAX	UNITS	INPUTS		OUTPUTS	
					A	B		
Turn-On/Turn-Off Times			10	ns				9

NOTES:

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive NAND logic definition:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Measurements apply to each gate element independently.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to VCC. Refer to AC Test Figure.
- Manufacturers reserves the right to make design and process changes and improvements.
- A and B are tested separately. When A is 4.5V, B is 0V, and vice versa.
- A and B are tested separately. When A is 0.4V, B is 5.25V, and vice versa.
- VCC = 5.25V.

AC TEST FIGURE AND WAVEFORMS

The diagram shows the AC test setup for the 82S41 chip. A pulse generator provides a 1 MHz input pulse with a 2.5 ns rise time and 50 ns pulse width through a 50Ω resistor to the input pins (A0-A3, B0-B3). The chip is powered by VCC and ground. The outputs (F0-F3) are connected to a load circuit consisting of a 280Ω resistor and a 15 pF capacitor. The waveforms show the input pulse (PG) and the resulting output signals for inverting and non-inverting gates, with timing parameters like TON, TOFF, tr, and tf indicated.

**TEST TABLE**

TEST NO.	INPUTS								OUTPUTS			
	A0	B0	A1	B1	A2	B2	A3	B3	F0	F1	F2	F3
1	0	0	0	PG	0	0	0	0		T		
2	0	PG	0	0	0	0	0	0	T			
3	0	0	0	PG	0	0	0	0		T		
4	0	0	0	0	0	PG	0	0			T	
5	0	0	0	0	0	0	0	PG				T
6	PG	0	0	0	0	0	0	0	T			
7	0	0	0	0	0	0	PG	0				T

"1" = 2.7V "0" = GROUND

NOTE:  
1. A.C. TEST JIGS MUST NOT HAVE ANY SWITCHES.  
2. A.C. TEST JIGS MUST HAVE LESS THAN 1/8 INCH LEAD LENGTH FROM PACKAGE PINS.

# BINARY-TO-OCTAL DECODER BCD-TO-DECIMAL DECODER

# 82S50 82S52

## DIGITAL 8000 SERIES SCHOTTKY TTL/MSI

### DESCRIPTION

The 82S50 and 82S52 are gate arrays for decoding and logic conversion applications.

The 82S50 converts 3 lines of input to a one-of-eight output. The fourth input line (D) is utilized as an inhibit to allow use in larger decoding networks.


The 82S52 converts a 4 line input code (with 1-2-4-8 weighting) to a one-of-ten output as shown in the Truth Table.

The 82S52 is a direct replacement for the 9301 with all outputs being forced high when a binary code greater than nine is applied to the inputs. The selected output is a logic "0".

### FEATURES

- SCHOTTKY-CLAMPED TTL STRUCTURE
- PNP INPUTS
- INHIBIT INPUT FORCES ALL OUTPUTS HIGH (82S50)
- 82S52 CAN REPLACE 9301 FOR HIGHER SPEED

### LOGIC DIAGRAMS

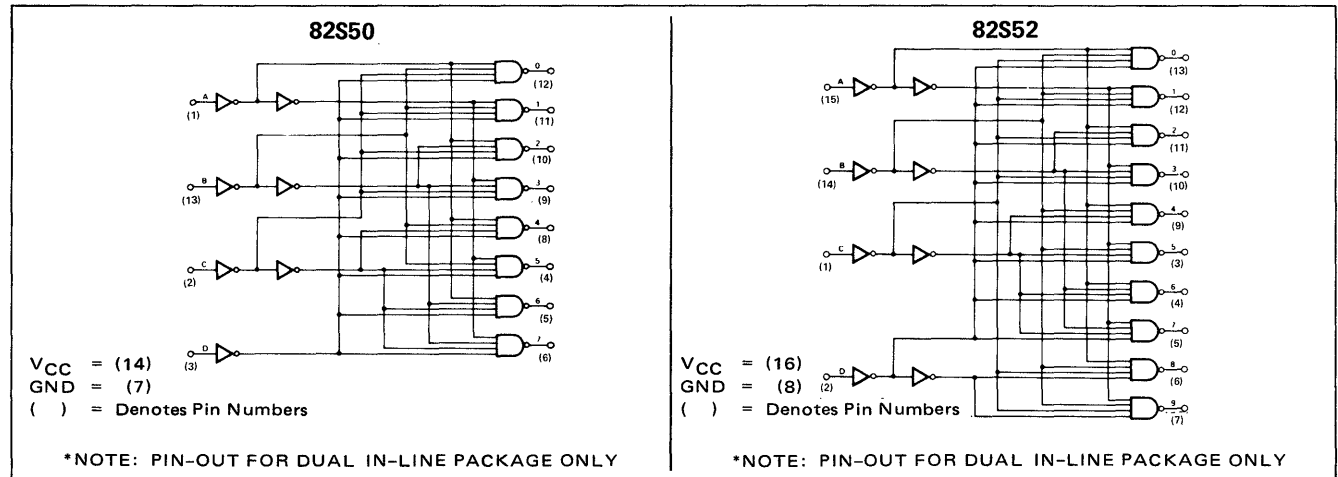

### TRUTH TABLE

INPUT STATE				OUTPUT STATES										
A	B	C	D	82S50								82S52		
				0	1	2	3	4	5	6	7	8	9	
0	0	0	0	0	1	1	1	1	1	1	1	1	1	1
1	0	0	0	1	0	1	1	1	1	1	1	1	1	1
0	1	0	0	1	1	0	1	1	1	1	1	1	1	1
1	1	0	0	1	1	1	0	1	1	1	1	1	1	1
0	0	1	0	1	1	1	1	0	1	1	1	1	1	1
1	0	1	0	1	1	1	1	1	0	1	1	1	1	1
0	1	1	0	1	1	1	1	1	1	0	1	1	1	1
1	1	1	0	1	1	1	1	1	1	1	0	1	1	1
0	0	0	1	1	1	1	1	1	1	1	1	0	1	1
1	0	0	1	1	1	1	1	1	1	1	1	1	0	1
0	1	0	1	1	1	1	1	1	1	1	1	1	1	1
1	1	0	1	1	1	1	1	1	1	1	1	1	1	1
0	0	1	1	1	1	1	1	1	1	1	1	1	1	1
1	0	1	1	1	1	1	1	1	1	1	1	1	1	1
0	1	1	1	1	1	1	1	1	1	1	1	1	1	1
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

**SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 82S50/82S52**

**ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature and Voltage)**

CHARACTERISTICS	LIMITS				A	B	C	D	OUTPUTS	NOTES
	MIN	TYP	MAX	UNITS						
"1" Output Voltage	2.7			V					-1mA	10
"0" Output Voltage			0.5	V					20mA	10
"1" Input Current A, B, C, D			10	$\mu$ A	4.5V	4.5V	4.5V	4.5V		
"0" Input Current (ALL)			-400	$\mu$ A	0.5V	0.5V	0.5V	0.5V		

**T<sub>A</sub> = 25°C and V<sub>CC</sub> = 5.0V**

CHARACTERISTICS	LIMITS				A	B	C	D	OUTPUTS	NOTES
	MIN	TYP	MAX	UNITS						
Turn-on Delay t <sub>ON</sub>			16	ns						8
Turn-off Delay t <sub>OFF</sub>			16	ns						8
Power/Current Consumption (82S50 Only)			380/72	mW/mA	5.25V	5.25V	5.25V	0V		11
(82S52 Only)			450/85	mW/mA						
Input Clamp Voltage			-1.2	V	-18mA	-18mA	-18mA	-18mA		
Output Short Circuit Current (ALL)	-40		-100		4.0V	4.0V	4.0V	4.0V	0V	11

**NOTES:**

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive logic definition:  
"UP" Level = "1". "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V<sub>CC</sub>.
- Refer to AC Test Figure.
- Manufacturer reserves the right to make design and process changes and improvements.
- Inputs for "1" and "0" output voltage test is per TRUTH table with threshold levels of 0.8V for logical "0" and 2.0V for logical "1".
- V<sub>CC</sub> = 5.25V.

**AC TEST FIGURE AND WAVEFORMS**

**82S50**

INPUT PULSE:  
PRR = 1 MHz  
t<sub>q</sub> = t<sub>r</sub> = 2.5 ns  
PW = 50 ns  
ALL DIODES ARE 1N3064  
C<sub>L</sub> INCLUDES PROBE & JIG CAPACITANCE

**TEST TABLE**

TEST NO.	INPUTS				OUTPUTS							
	A	B	C	D	0	1	2	3	4	5	6	7
1	1	1	PG	0								T
2	1	1	PG	0				T				T
3	PG	1	0	0			T	T				
4	0	PG	1	0					T			T
5	0	0	0	PG	T							
6	1	0	PG	0	T						T	

"1" = 2.7V "0" = GROUND

**82S52**

**TEST TABLE**

TEST NO.	INPUTS				OUTPUTS									
	A	B	C	D	0	1	2	3	4	5	6	7	8	9
1	0	0	PG	0					T					
2	PG	1	0	0			T	T						
3	0	0	0	PG	T									T
4	1	0	PG	0	T				T					
5	1	PG	0	1										T
6	PG	1	1	0										

"1" = 2.7V "0" = GROUND

**NOTE:**

- A.C. TEST JIGS MUST NOT HAVE ANY SWITCHES.
- A.C. TEST JIGS MUST HAVE LESS THAN 1/8 INCH LEAD LENGTH FROM PACKAGE PINS.

# 9-BIT PARITY GENERATOR AND CHECKER

# 82S62

## DIGITAL 8000 SERIES SCHOTTKY TTL/MSI

### DESCRIPTION

The 82S62 9-Input Parity Generator/Parity Checker is a versatile MSI device commonly used to detect errors in data transmission or in data retrieval. Two outputs (EVEN and ODD) are provided for versatility. An INHIBIT input is provided to disable both outputs of the 82S62. (A logic 1 on the INHIBIT input forces both outputs to a logic 0.)


When used as a Parity Generator, the 82S62 supplies a parity bit which is transmitted together with the data word.

At the receiving end, the 82S62 acts as a Parity Checker and indicates that data has been received correctly or that an error has been detected.

### FEATURES

- SCHOTTKY-CLAMPED TTL STRUCTURE
- EVEN/ODD PARITY OUTPUTS
- INHIBIT INPUT
- PNP INPUTS

### LOGIC DIAGRAM

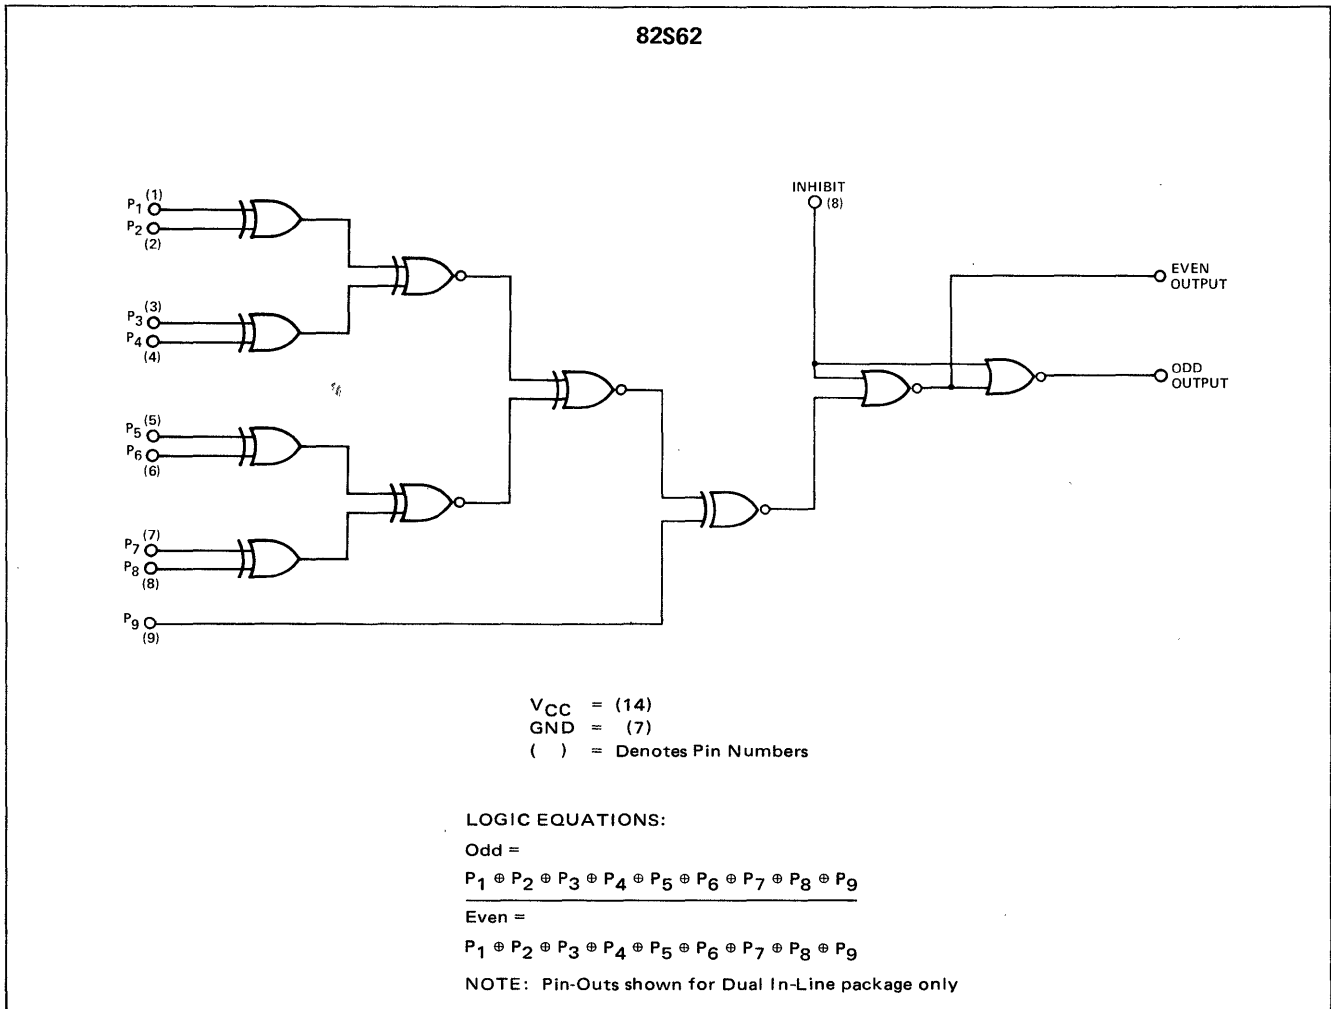



**SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 82S62**

**ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature and Voltage)**

CHARACTERISTICS	LIMITS				TEST CONDITIONS	INHIBIT	OUTPUTS UNDER TEST	NOTES
	MIN	TYP	MAX	UNITS	DATA INPUT UNDER TEST			
"1" Output Voltage								
Even	2.7			V	0V	.8V	-1mA	
Odd	2.7			V	2.0V	.8V	-1mA	
"0" Output Voltage								
Even			0.50	V	2.0V	.8V	20mA	
Odd			0.50	V	0V	.8V	20mA	
"0" Input Current								
Data Inputs P <sub>1</sub> -P <sub>8</sub>			-800	μA	0.5V			
Data Input P <sub>9</sub>			-1.2	mA	0.5V			
Inhibit			-800	μA		0.5V		
"1" Input Current								
Data Inputs			10	μA	4.5V			
Inhibit			10	μA		4.5V		
Power/Current Consumption			355/67	mW/mA				11
Output Short Circuit Current			-100					
Even	-40		-100	mA	0V	0V	0V	11
Odd	-40		-100	mA	4.0V	0V	0V	11

T<sub>A</sub> = 25°C and V<sub>CC</sub> = 5.0V

CHARACTERISTICS	LIMITS				TEST CONDITIONS	INHIBIT	OUTPUTS UNDER TEST	NOTES
	MIN	TYP	MAX	UNITS	UNDER TEST			
Turn-on/Turn-off Times								
P <sub>1</sub> - P <sub>8</sub> to Even			23	ns	Pulse			8
P <sub>1</sub> - P <sub>8</sub> to Odd			28	ns	Pulse			8
P <sub>9</sub> to Even			12	ns	Pulse			8
P <sub>9</sub> to Odd			18	ns	Pulse			8
Inhibit to Even			9	ns		Pulse		8
Inhibit to Odd			9	ns		Pulse		8

**NOTES:**

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive logic: "UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V<sub>CC</sub>. Refer to AC Test Figure.
- Manufacturer reserves the right to make design and process changes and improvements.
- This test guarantees operation free of input latch-up over the specified operating power supply voltage range.
- V<sub>CC</sub> = 5.25V.

**AC TEST FIGURE AND WAVEFORMS**

INPUT PULSE:  
 PRR = 1 MHz  
 t<sub>r</sub> = t<sub>f</sub> = 2.5 ns  
 PW = 50 ns  
 ALL DIODES ARE 1N3064  
 C<sub>L</sub> INCLUDES PROBE & JIG CAPACITANCE

**TEST TABLE**

TEST NO.	INPUTS									OUTPUTS		
	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>	P <sub>4</sub>	P <sub>5</sub>	P <sub>6</sub>	P <sub>7</sub>	P <sub>8</sub>	P <sub>9</sub>	INH	EVEN	ODD
1	PG	0	0	0	0	0	0	0	0	0	T	T
2	PG	0	0	0	0	0	0	0	0	0	T	T
3	0	0	PG	0	0	0	0	0	0	0	T	T
4	0	0	0	0	PG	0	0	0	0	0	T	T
5	0	0	0	0	0	0	0	PG	0	0	T	T
6	0	0	0	0	0	0	0	0	PG	0	T	T
7	0	0	0	0	0	0	0	0	0	PG	T	T

"1" = 2.7V    "0" = GROUND

**NOTE:**  
 1. A.C. TEST JIGS MUST NOT HAVE ANY SWITCHES.  
 2. A.C. TEST JIGS MUST HAVE LESS THAN 1/8 INCH LEAD LENGTH FROM PACKAGE PINS.

# 2-INPUT, 4-BIT DIGITAL MULTIPLEXER

# 82S66 82S67

## DIGITAL 8000 SERIES SCHOTTKY TTL/MSI

### DESCRIPTION

The 82S66/82S67 2-Input, 4-Bit Digital Multiplexer is a monolithic array utilizing Schottky TTL circuit structures. The 82S67 features a bare-collector output to allow expansion with other devices.

The multiplexer is intended for use at the inputs to adders, registers and in other parallel data handling applications.


The multiplexer is able to choose from two different input sources, each containing 4 bits:  $A = (A_0, A_1, A_2, A_3)$ ,  $B = (B_0, B_1, B_2, B_3)$ . The selection is controlled by the input  $S_0$ , while the second control input,  $S_1$ , is held at zero.

For conditional complementing, the two inputs ( $A_n, B_n$ ) are tied together to form the function TRUE/COMPLEMENT, which is needed in conjunction with adder elements to perform ADDITION/SUBTRACTION. Further, the inhibit state  $S_0 = S_1 = 1$  can be used to facilitate transfer operations in an arithmetic section.

### FEATURES

- SCHOTTKY-CLAMPED TTL STRUCTURE
- PNP INPUTS
- OPEN COLLECTOR OUTPUTS (82S67)
- INHIBIT STATE

### LOGIC DIAGRAM AND TRUTH TABLE

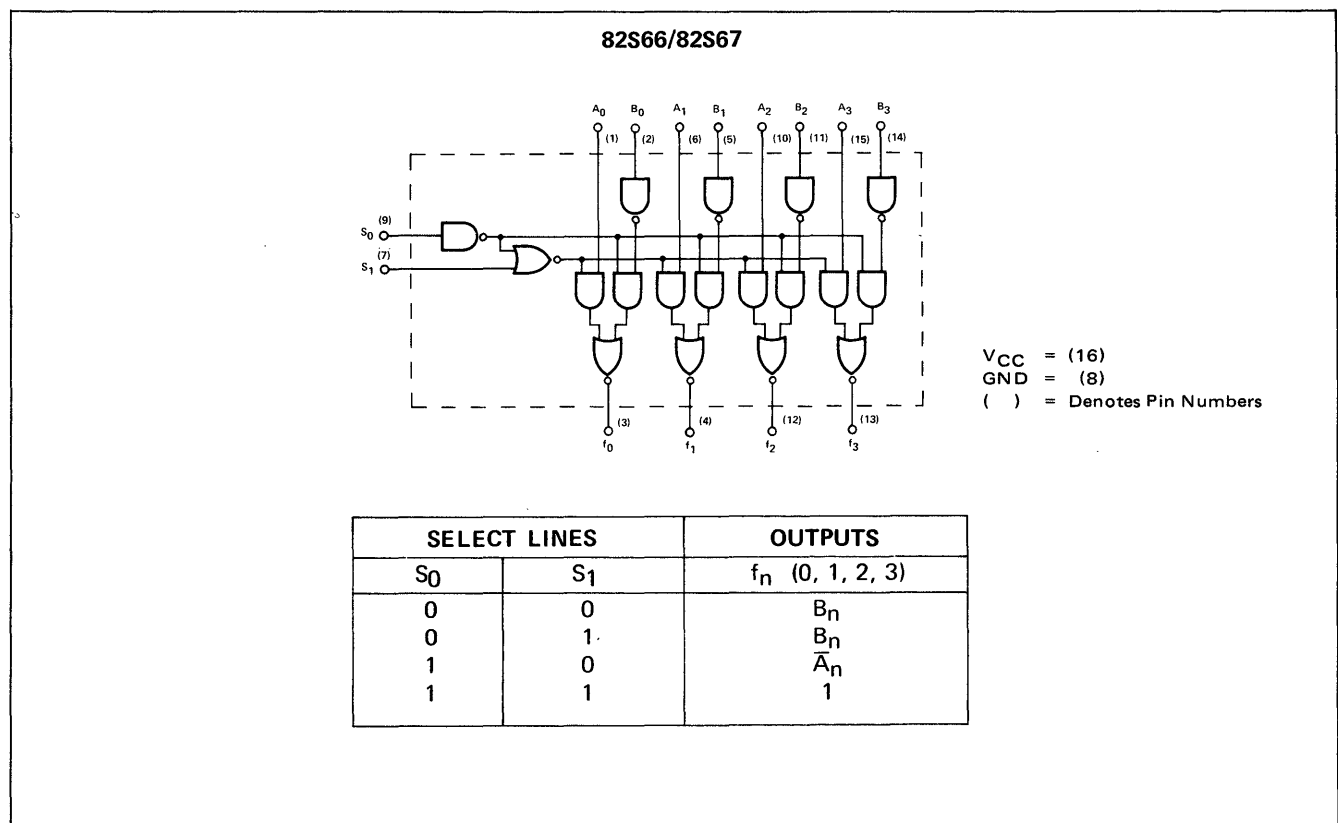

**SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 82S66/67**

**ELECTRICAL CHARACTERISTICS** (Over Recommended Operating Temperature and Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS				OUTPUTS	NOTES
	MIN	TYP	MAX	UNITS	A <sub>n</sub>	B <sub>n</sub>	S <sub>0</sub>	S <sub>1</sub>		
"1" Output Voltage (82S66)	2.7	3.5		V	0.8V	2.0V	0.8V	0.8V	-1mA	12
"0" Output Voltage			0.5	V	2.0V	2.0V	2.0V	0.8V	20mA	
"1" Output Leakage Current (82S67)			250	μA	0.8V	2.0V	2.0V	0.8V	5.5V	
"0" Input Current										
A <sub>n</sub> , B <sub>n</sub>			-400	μA	0.5V	0.5V	0V	0V		
S <sub>0</sub> , S <sub>1</sub>			-400	μA			0.5V	0.5V		
"1" Input Current										
A <sub>n</sub> , B <sub>n</sub>			10	μA	4.5V	4.5V		2.0V		
S <sub>0</sub> , S <sub>1</sub>			10	μA			4.5V	4.5V		
Output Short Circuit Current (82S66)	-40		-100	mA						

T<sub>A</sub> = 25°C and V<sub>CC</sub> = 5.0V

CHARACTERISTICS	LIMITS				TEST CONDITIONS				OUTPUTS	NOTES
	MIN	TYP	MAX	UNITS	A <sub>n</sub>	B <sub>n</sub>	S <sub>0</sub>	S <sub>1</sub>		
Turn-on/Turn-off Times (82S66)										
S <sub>1</sub> to f <sub>n</sub>			15	ns						9
S <sub>0</sub> to f <sub>n</sub>			18	ns						9
A <sub>n</sub> to f <sub>n</sub>			10	ns						9
B <sub>n</sub> to f <sub>n</sub>			12	ns						9
Propagation Delay (82S67)										
S <sub>1</sub> to f <sub>n</sub>			18	ns						9
S <sub>0</sub> to f <sub>n</sub>			20	ns						9
A <sub>n</sub> to f <sub>n</sub>			12	ns						9
B <sub>n</sub> to f <sub>n</sub>			15	ns						9
Power/Current Consumption			365/69	mW/mA	4.5V	0V	4.5V	0V		12

**NOTES:**

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive NAND logic definition:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Measurements apply to each gate element independently.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V<sub>CC</sub>. Refer to AC Test Figure.
- This test guarantees operation free of input latch-up over the specified operating power supply voltage range.
- Manufacturer reserves the right to make design and process changes and improvements.
- V<sub>CC</sub> = 5.25 V.

**AC TEST FIGURE AND WAVEFORMS**

**TEST TABLE**

TEST NO.	INPUTS									OUTPUTS				
	S <sub>0</sub>	S <sub>1</sub>	A <sub>0</sub>	B <sub>0</sub>	A <sub>1</sub>	B <sub>1</sub>	A <sub>2</sub>	B <sub>2</sub>	A <sub>3</sub>	B <sub>3</sub>	F <sub>0</sub>	F <sub>1</sub>	F <sub>2</sub>	F <sub>3</sub>
1	1	PG	1	1	1	1	1	1	1	1	T	T	T	T
2	1	PG	1	1	1	1	1	1	1	1	T	T	T	T
3	PG	0	1	1	1	1	1	1	1	1	T	T	T	T
4	0	0	0	0	0	PG	0	0	0	0	T	T	T	T
5	0	0	0	0	0	0	PG	0	0	0	T	T	T	T
6	1	0	PG	1	0	1	0	1	0	1	T	T	T	T
7	1	0	0	1	0	1	0	1	0	1	T	T	T	T

"1" = 2.7V "0" = OUTPUT

**NOTE:**

- A.C. TEST JIGS MUST NOT HAVE ANY SWITCHES.
- A.C. TEST JIGS MUST HAVE LESS THAN 1/8 INCH LEAD LENGTH FROM PACKAGE PINS.

# 8-INPUT DIGITAL MULTIPLEXER

# 82S31 82S32

## ADVANCED INFORMATION

### DIGITAL 8000 SERIES SCHOTTKY TTL/MSI

#### DESCRIPTION


The 8-Input Digital Multiplexer is the logical equivalent of a single-pole, 8 position switch whose position is specified by a 3-bit input address.

The 82S31 is a variation of the 82S30 that provides open collector output  $\bar{f}$  for expansion of input terms. The 82S32 is similar to the 82S30 except in the effect of the INHIBIT input on the  $\bar{f}$  output. With the INHIBIT low, the selected input appears at the  $f$  output and, in complement, on the  $\bar{f}$  output. With the INHIBIT input high, both the  $f$  and the  $\bar{f}$  output are unconditionally low.

#### FEATURES

- SCHOTTKY-CLAMPED TTL STRUCTURE
- PNP INPUTS
- OPEN COLLECTOR OUTPUT (82S31)
- DIRECT OUTPUT INHIBIT (82S32)

#### LOGIC DIAGRAMS

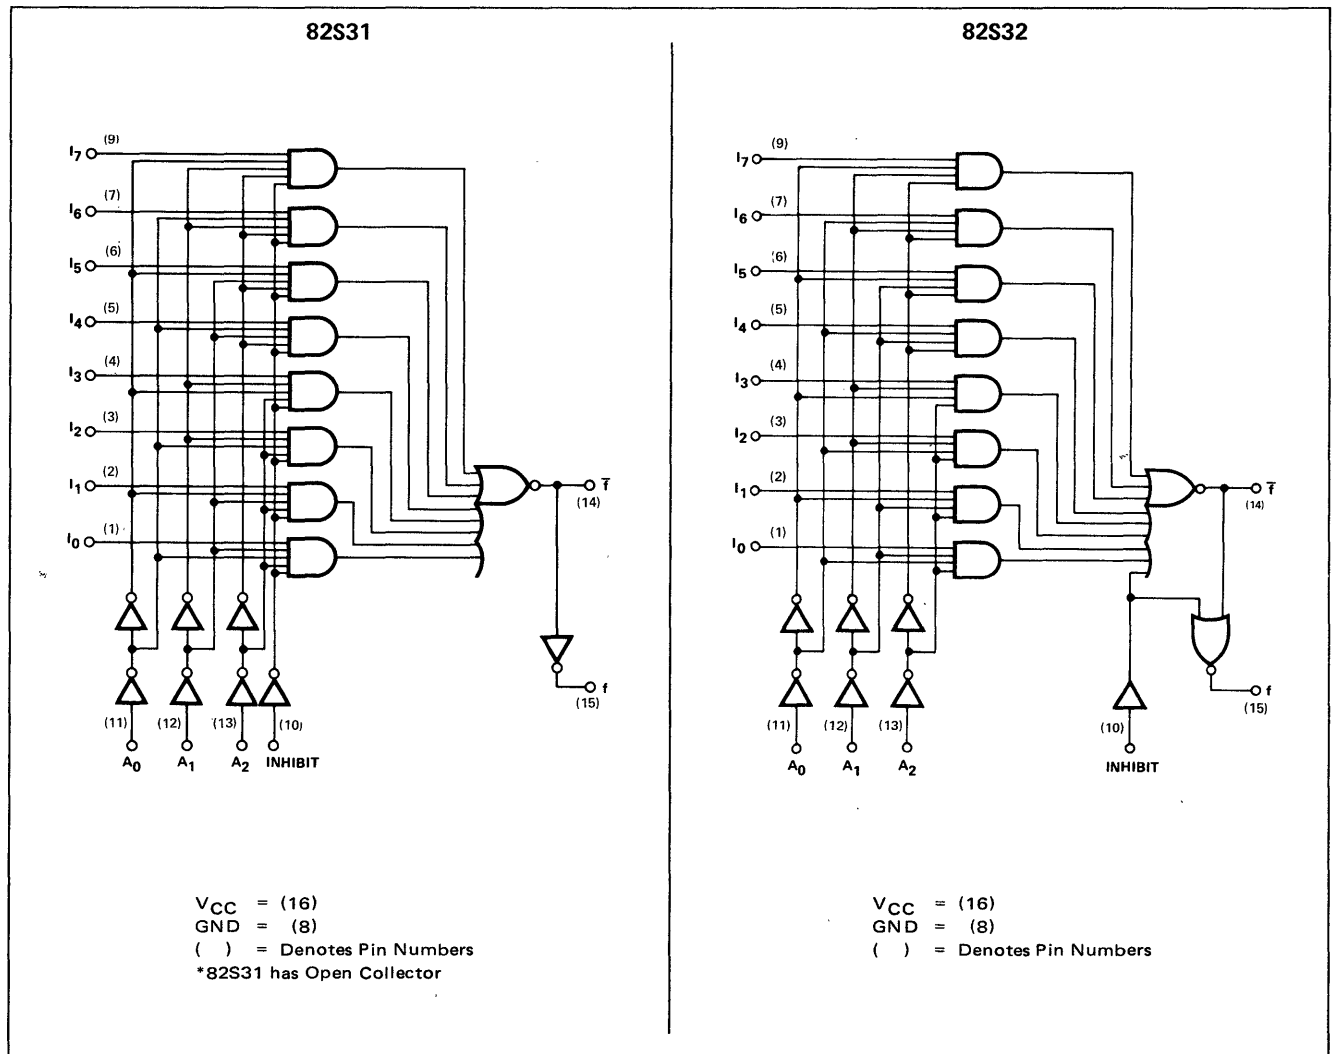

#### ELECTRICAL CHARACTERISTICS

Propagation Delay (Typ)

	82S32	82S31
$A_n$ to $\bar{f}$	12ns	14ns
$I_n$ to $\bar{f}$	7ns	9ns
Input Load Current (Max)		
$I_{in}''0''$		400 $\mu$ A
$I_{in}''1''$		10 $\mu$ A
Output Current		
$I_{out}''0''$	20mA @ 0.5V	
$I_{out}''1''$	1mA @ 2.7V (82S30/32)	

# 82S42 | 4-BIT QUAD EXCLUSIVE-NOR

## ADVANCED INFORMATION DIGITAL 8000 SERIES SCHOTTKY TTL/MSI

### DESCRIPTION

The 82S42 contains four independent Exclusive-NOR gates which may be used to implement digital comparison functions. The 82S42 outputs are bare collector to facilitate implementation of multiple-bit comparisons; a 4-bit comparison is made by connecting the outputs of the four independent gates together.

### FEATURES


- SCHOTTKY-CLAMPED TTL STRUCTURE
- PNP INPUTS
- OPEN COLLECTOR OUTPUTS

### ELECTRICAL CHARACTERISTICS

Propagation Delay (Typ)	$A_n, B_n$ to $f_n$	9ns (82S42)
Input Load Current (Max)	$I_{In}''0''$	800 $\mu$ A
	$I_{In}''1''$	20 $\mu$ A
Output Current (Min)	$I_{out}''0''$	30mA @ 0.5V (82S42)

### LOGIC DIAGRAM

82S42 QUAD EXCLUSIVE-NOR

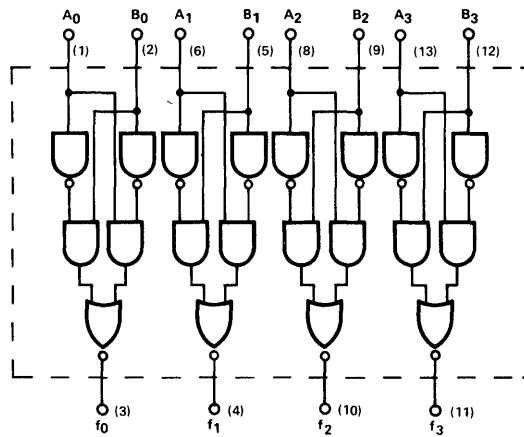

A	B	f
0	0	1
1	0	0
0	1	0
1	1	1

$V_{CC}$  = (14)  
 GND = (7)  
 ( ) = Denotes Pin Numbers

ADVANCED INFORMATION  
DIGITAL 8000 SERIES SCHOTTKY TTL/MSI

DESCRIPTION

The 82S70 is a 4-bit Shift Register with both serial and parallel data entry capability.

The data input lines are single-ended true input data lines which condition their specific register bit location after an enabled clocking transition. Since data transfer is synchronous with clock, data may be transferred in any serial/parallel input/output relationship.

Mode control logic is available to determine three possible control states. These register states are serial shift right mode, parallel enter mode, and no change or hold mode. These states accomplish logical decoding for system control.

The 82S71 provides a direct reset ( $R_D$ ), and a  $\overline{D}_{out}$  line in addition to the available outputs of the 82S70 element.


FEATURES

- SCHOTTKY-CLAMPED TTL STRUCTURE
- PNP INPUTS
- SYNCHRONOUS LOAD
- SHIFT RIGHT/LEFT CAPABILITY
- HOLD MODE

ELECTRICAL CHARACTERISTICS

Transfer Rate	60 MHz (Typ)
Input Load Current (Max)	
$I_{In} "0"$	400 $\mu$ A
$I_{In} "1"$	25 $\mu$ A
Output Current	
$I_{out} "0"$	20mA @ 0.5V
$I_{out} "1"$	1mA @ 2.7V

LOGIC DIAGRAM

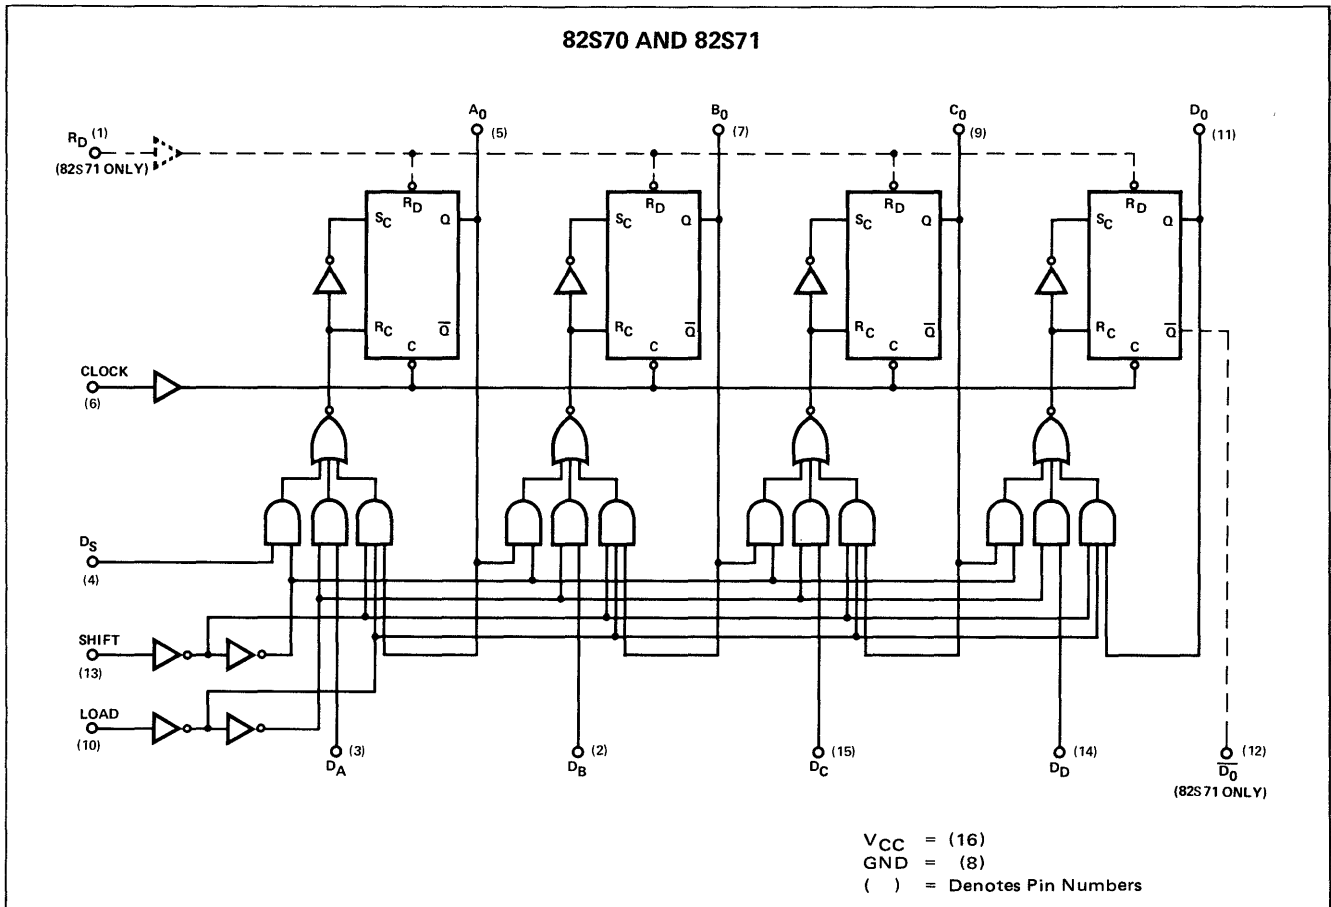

# 82S90 PRESETTABLE HIGH SPEED DECADE/BINARY COUNTER

# 82S91 ADVANCED INFORMATION DIGITAL 8000 SERIES SCHOTTKY TTL/MSI

## DESCRIPTION

The 82S90 Decade Counter and 82S91 Binary Counter are high speed devices providing a wide variety of counter/storage register applications with a minimum number of packages.

The 82S91 Binary Counter may be connected as a divide-by-two; four, eight, or sixteen counter.

Both devices have strobed parallel-entry capability so that the counter may be set to any desired output state. A "1" or "0" at a data input will be transferred to the associated output when the strobe input is put at the "0" level. For additional flexibility, both units are provided with a reset input which is common to all four bits. A "0" on the reset lines produces "0" at all four outputs.


## FEATURES

- SCHOTTKY-CLAMPED TTL STRUCTURE
- PNP INPUTS
- CLOCK FREQUENCY = 100 MHz (Typ)
- PARALLEL LOAD CAPABILITY
- ASYNCHRONOUS RESET

## ELECTRICAL CHARACTERISTICS

Clock Frequency	100 MHz (Typ)
Strobe/Reset Hold Time	10ns (Typ)
Output Current (Min)	
I <sub>out</sub> "0"	20mA @ 0.5V
I <sub>out</sub> "1"	1mA @ 2.7V

## LOGIC DIAGRAMS AND TRUTH TABLES

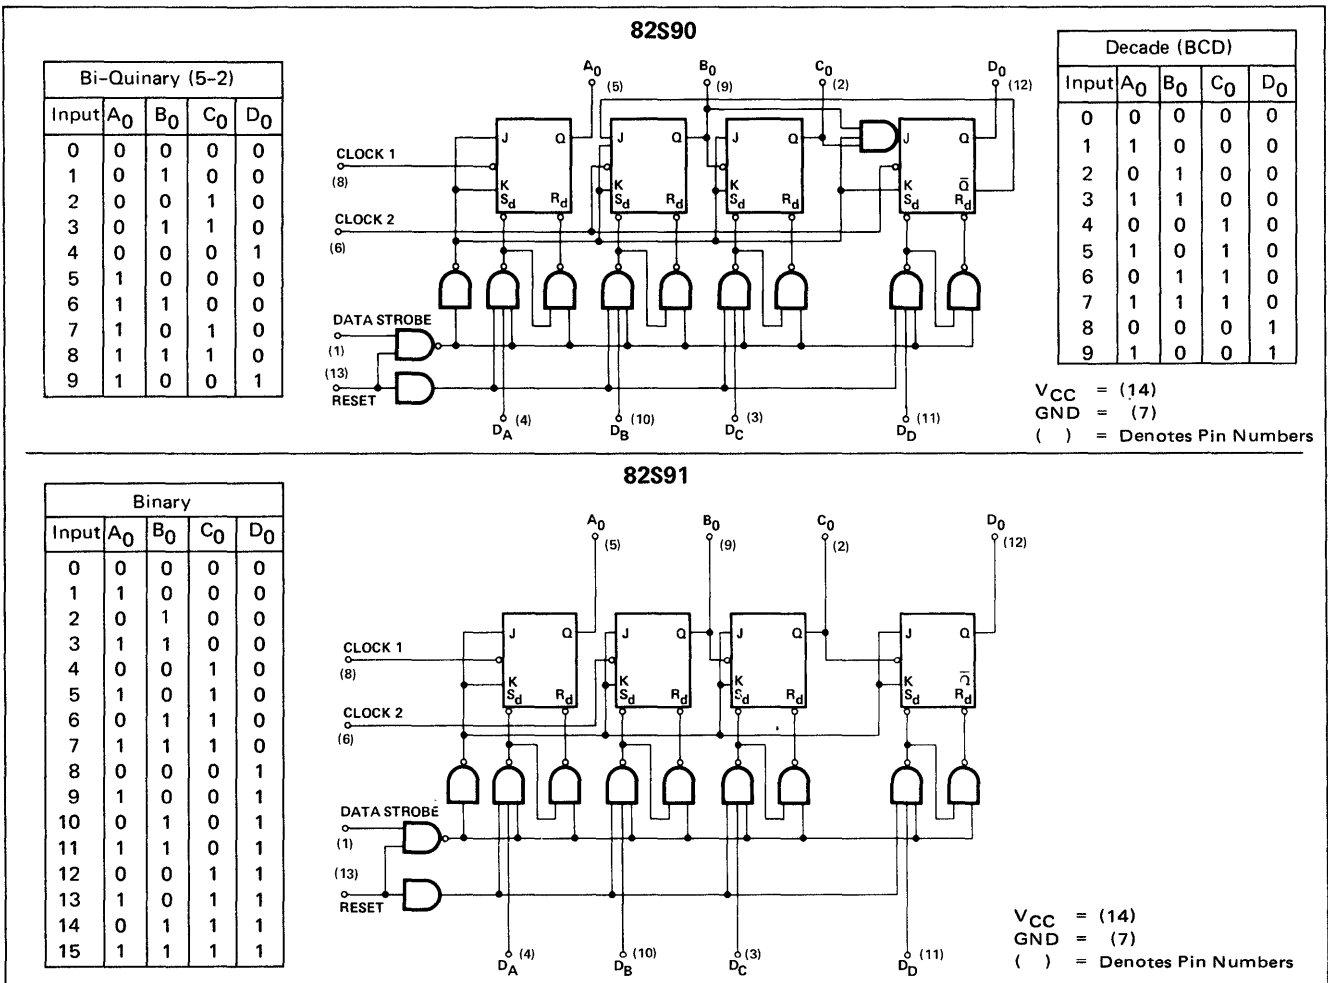

**SECTION 8**  
**BIPOLAR MEMORIES**

---





# 2048 BIT BIPOLAR ROM (256x8 ROM) 4096 BIT BIPOLAR ROM (512x8 ROM)

# 8204 8205

THIS PRODUCT AVAILABLE IN 0°C TO 75°C TEMPERATURE RANGE ONLY

DIGITAL 8000 SERIES TTL/MSI

## DESCRIPTION

The 8205 and 8204 are high performance bipolar ROM's incorporating the storage output or memory data register into the chip. Data is addressed by applying address information to the address lines. After valid data appears at the output of the memory array, (typically 35ns after the address is applied) and if the circuit is enabled, the strobe pulse will enter data into the 8 bit output latch register. A D-type latch (L) is used to enable the tri-state output drivers. If the circuit enable signals are valid, the strobe will set the latch. This turns on the output stage. The latch will remain set and keep the output enabled until the chip is disabled and the next strobe pulse occurs. If the strobe line is held high, the ROM will function in a conventional mode. The output will be controlled solely by the chip enable and the output latches will be bypassed.

See page 241 for ASCII (ADDRESS) to EBCDIC (DATA) and EBCDIC (ADDRESS) to ASCII (DATA) and 246/248 for ORDERING BLANKS.


## FEATURES

- MICROPROGRAMMING
- HARDWARE ALGORITHMS
- CHARACTER GENERATION
- CONTROL STORE

## APPLICATIONS

- BUFFERED ADDRESS LINES
- ON THE CHIP DECODING
- ON THE CHIP STORAGE LATCHES
- TRI-STATE OUTPUT
- PROTECTED INPUTS

## BLOCK DIAGRAM

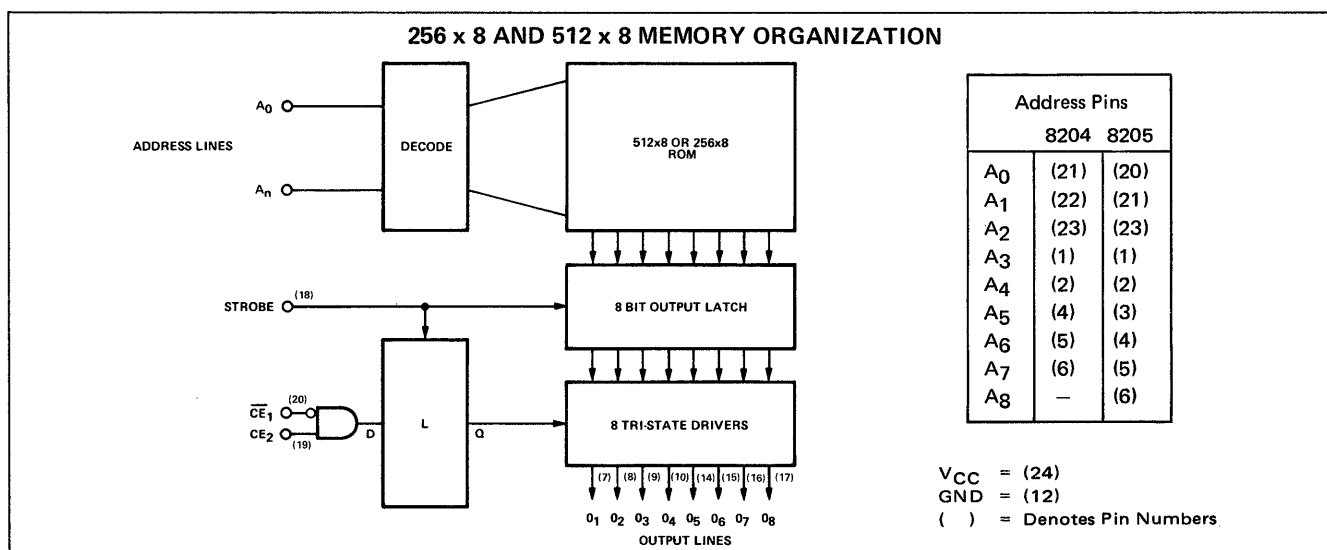

## ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature and Voltage)

CHARACTERISTICS	LIMITS			UNIT	TEST CONDITIONS	NOTES
	MIN.	TYP.	MAX.			
Input "0" Current			-100	μA	V <sub>in</sub> = 0.5V	
Input "1" Current			25	μA	V <sub>in</sub> = 5.25V	
Input (0) Threshold Voltage	0.85			V		
Input (1) Threshold Voltage		2		V		
Input Clamp Voltage	-1.0			V	I <sub>in</sub> = -5.0mA	
Output (0) Current		0.2	0.5	V	I <sub>out</sub> = 9.6 mA	
Output (1) Current	2.7	3.3		V	I <sub>out</sub> = -2.0mA	
Output (1) Short Circuit Current	-20	-35	-70	mA	V <sub>out</sub> = 0V, V <sub>CC</sub> = 5.0V	2
Input Capacitance		5		pF	V <sub>IH</sub> = 2.0V, V <sub>CC</sub> = 5.0V	
Output Capacitance		8		pF	V <sub>out</sub> = 2.0V; V <sub>CC</sub> = 5.0V	5
Power Supply Current		135	170	mA	V <sub>CC</sub> = 5.0V	
Output (1) off Leakage Current (Chip Disabled)			100	μA	V <sub>in</sub> = 2.7V	
Output (0) off Leakage Current (Chip Disabled)			-100	μA	V <sub>in</sub> = 0.5V	

SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8204/05

$T_A = 25^\circ\text{C}$  and  $V_{CC} = 5.0\text{V}$



CHARACTERISTICS	LIMITS			UNIT	TEST CONDITIONS	NOTES
	MIN.	TYP.	MAX.			
Address Access Time $T_A$		35	60	ns	Read Mode I or Read Mode II	6
Address Hold Time $T_{ADS}$	0	-10		ns	Read Mode 2 Only	6
Chip Enable Access Time $T_{CE}$		20	45	ns	Read Mode I or Read Mode II	6
Chip Enable Hold Time $T_{CDS}$	12	5		ns	Read Mode II Only	6
Output Disable Time $T_O$		20	45	ns	Read Mode I or Read Mode II	6
Strobe Pulse Width $T_{SW}$	33	20		ns	Read Mode II Only	6
Strobe Set-Up Time $T_S$		30	60	ns	Read Mode II Only	6
Output Disable Time $T_R$		18	32	ns	Read Mode I Only	6

NOTES:

1. Positive current is defined as into the terminal referenced.
2. No more than one output should be grounded at the same time and strobe should be disabled. Strobe is in "1" state.
3. Manufacturer reserves the right to make design and process changes and improvements.
4. Applied voltages must not exceed 5.5V. Input currents must not exceed  $\pm 30\text{ mA}$ . Output currents must not exceed  $\pm 100\text{ mA}$ . Storage temperature must be between  $-60^\circ\text{C}$  to  $+150^\circ\text{C}$ .
5. Chip disabled.
6. Rise and fall times for tests must be less than 5ns. Input amplitudes are 2.8V and all measurements are made at 1.5V.



MEMORY TIMING

READ MODE I (OUTPUT LATCHES NOT USED)

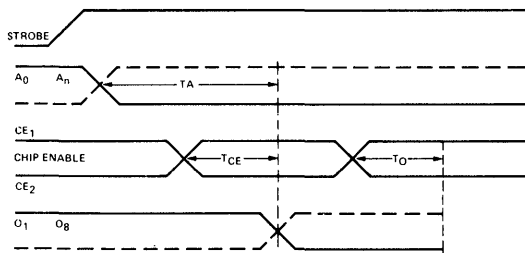

If the strobe is high, the device functions in a manner identical to conventional bipolar ROM's. The timing diagram shows valid data will appear  $T_A$  nanoseconds after the address has changed and  $T_{CE}$  nanoseconds after the output circuit is enabled.  $T_O$  is the time required to disable the output and switch it to an 'off' or high impedance state after it has been enabled.

READ MODE II (OUTPUT LATCHES USED)

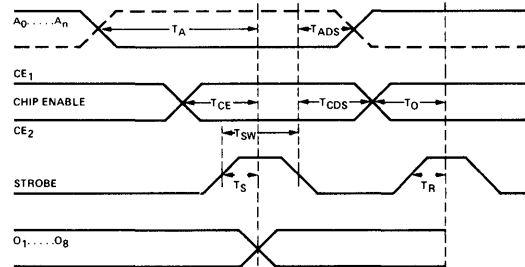

In Read Mode II, the address is applied to the memory element  $T_A$  ns before output details desired. Applying the chip enable does not directly enable the outputs. When the strobe is applied  $T_S$  nanoseconds before the output, data from the memory array is copied into the output latches and the chip enable signal is copied into the delay latch L. The latch L in turn enables the output. After the strobe reaches the strobe level, both the chip enable and address lines may be altered but the output data stored in the latches will remain unchanged and the output of the circuit will remain enabled. The output will stay enabled until another strobe copies a Not chipenable signal into the latch L. The switching of the output to the "off" or high impedance state occurs  $T_R$  nanoseconds after the strobe.

# 8-BIT CONTENT ADDRESSABLE MEMORY (4x2 CAM)

# 8220

PRODUCT AVAILABLE IN 0°C TO 75°C TEMPERATURE ONLY

DIGITAL 8000 SERIES TTL/MSI

## DESCRIPTION

The 8220 CAM Element is a high speed monolithic array, incorporating the necessary addressing logic and eight identical memory cells organized as four words, each being two bits long. In reference to data-in/data-stored, the 8220 can be conditioned to perform the following functions: associate, write-in only, and read-out only.

When addressed into the "ASSOCIATE" mode, this element offers the novel capability of data association, where each cell ( $M_{nj}$ ) will respond with a "Match" or "Mismatch" answer ( $Y_n$ ) to each bit presented to the data inputs ( $I_j$ ), depending on presence or absence of an alike bit stored within the cell.

Write-in can be simultaneously done to all bits, or one bit at a time. Read-out of stored information is performed on

one word at a time. Cell-selection for read and write is performed by proper addressing of  $Y_n$  and  $A_n$  lines.

The element's output structures ( $Y_n$  and  $D_j$ ) are of the "bare collector" variety and can be mutually connected, thus allowing direct expansion when multiple packages are employed. Expansion of the CAM may be implemented in

both directions, i.e., in the word length and in the number of words.

The CAM circuit structure is the familiar TTL type (DCL Family) and fully compatible with TTL and DTL input/output structures.


## FEATURES

- WRITE ENABLE CONTROL LINES
- ASSOCIATE CONTROL LINES
- ADDRESS SELECT CONTROL LINES
- ASSOCIATES IN 20nsec TYP.
- 16 PIN PACKAGE (1/3 SIZE OF 24 PIN PACKAGE)
- OPEN COLLECTOR OUTPUTS
- DIODE PROTECTED INPUTS

## APPLICATIONS

- DATA-TO-MEMORY COMPARISON
- PATTERN RECOGNITION
- HIGH SPEED INFORMATION RETRIEVAL
- CACHE MEMORY
- AUTO CORRELATION
- VIRTUAL MEMORY
- LEARNING MEMORY

## LOGIC DIAGRAM

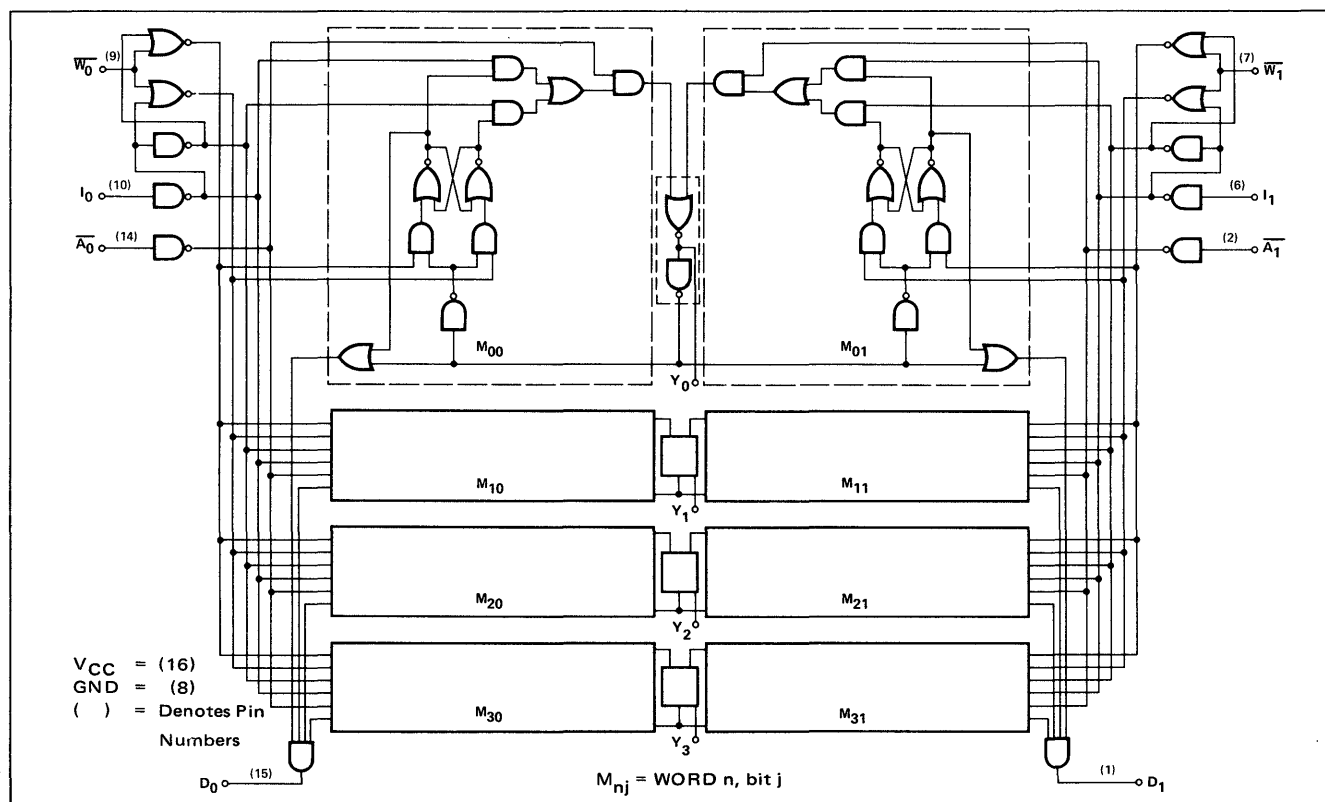

SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8220

ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				$\bar{W}_j$	$\bar{A}_j$	$I_j$	$Y_i$	$Y_k$	$D_j$	NOTES
	MIN.	TYP.	MAX.	UNITS							
"0" Output Voltage											
Yn			0.4	V	2.0V	0.8V	2.0V	30mA			8, 9
			0.6	V	2.0V	0.8V	2.0V	60mA			
Dj			0.4	V	2.0V	2.0V			0.8V	20mA	8, 9
			0.6	V	2.0V	2.0V			0.8V	40mA	
"1" Output Leakage Current											
Yn			125	$\mu$ A		2.0V					10
Dj			100	$\mu$ A			0V	0V			10
"1" Input Current											
$I_j$ and $\bar{A}_j$			40	$\mu$ A		4.5V	4.5V				
$\bar{W}_j$			80	$\mu$ A	4.5V						
"0" Input Current											
$I_j$ , Yn and $\bar{A}_j$	-0.1		-1.2	mA		0.4V	0.4V	0.4V			

$T_A = 25^\circ\text{C}$  and  $V_{CC} = 5.0V$

CHARACTERISTICS	LIMITS				$W_j$	$A_j$	$T_j$	$Y_i$	$Y_k$	$D_j$	NOTES
	MIN.	TYP.	MAX.	UNITS							
Delay Time											
Associate ( $\bar{A}_j$ to Yn)		20	30	ns							8, 11
Associate ( $I_j$ to Yn)		35	45	ns							8, 11
Read-Out (Yn to Dj)		30	40	ns							8, 11
Write-In to Read-Out ( $\bar{W}_j$ to Dj)		45	60	ns							
Write Pulse Width		20	35	ns							
Power Consumption			590/ 118	mW/mA							

NOTES:


- All voltage and capacitance measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive NAND logic definition: "UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Measurements apply to each gate element independently.
- Manufacturer reserves the right to make design and process changes and improvements.
- Prior to this test write in a "0" in all or desired Memory cells as follows:  $W_j = I_j = 0V$ ,  $A_j = V_{CC}$ .
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- Connect an external 1K ohm + 1% resistor from  $V_{CC}$  to the output terminal for this test.
- See AC test Figures on the following pages.

MODE OF OPERATION


FUNCTION	$\overline{W}_0 \overline{W}_1 \overline{A}_0 \overline{A}_1 I_0 I_1$	REMARKS (Ref. Definitions & Glossary)	FUNCTION	$\overline{W}_0 \overline{W}_1 \overline{A}_0 \overline{A}_1 I_0 I_1$	REMARKS (Ref. Definitions & Glossary)																				
HOLD	1 1 1 1 x x	NO OPERATION	HOLD	1 1 1 1 x x	NO OPERATION																				
ASSOCIATE	1 1 1 0 x x	<table border="1"> <tr> <th>Question</th> <th>Answer</th> <th>Output State</th> </tr> <tr> <td><math>I_1 = M_{i1}</math> ?</td> <td>YES — <math>Y_i = 1, Y_k = 0</math></td> <td></td> </tr> <tr> <td></td> <td>NO — <math>Y_i = Y_k = 0</math></td> <td></td> </tr> </table>	Question	Answer	Output State	$I_1 = M_{i1}$ ?	YES — $Y_i = 1, Y_k = 0$			NO — $Y_i = Y_k = 0$		WRITE-IN	1 0 1 1 x x 0 1 1 1 x x 0 0 1 1 x x	<table border="1"> <tr> <th colspan="2">Forced</th> <td rowspan="2">WRITE <math>I_1</math> into <math>M_{i1}</math></td> </tr> <tr> <th><math>Y_i</math></th> <th><math>Y_k</math></th> </tr> <tr> <td>1</td> <td>0</td> <td>WRITE <math>I_0</math> into <math>M_{i0}</math></td> </tr> <tr> <td>1</td> <td>0</td> <td>WRITE <math>I_1</math> and <math>I_0</math> into <math>M_{i1}</math> and <math>M_{i0}</math></td> </tr> </table>	Forced		WRITE $I_1$ into $M_{i1}$	$Y_i$	$Y_k$	1	0	WRITE $I_0$ into $M_{i0}$	1	0	WRITE $I_1$ and $I_0$ into $M_{i1}$ and $M_{i0}$
		Question	Answer	Output State																					
		$I_1 = M_{i1}$ ?	YES — $Y_i = 1, Y_k = 0$																						
	NO — $Y_i = Y_k = 0$																								
Forced		WRITE $I_1$ into $M_{i1}$																							
$Y_i$	$Y_k$																								
1	0	WRITE $I_0$ into $M_{i0}$																							
1	0	WRITE $I_1$ and $I_0$ into $M_{i1}$ and $M_{i0}$																							
1 1 0 1 x x	<table border="1"> <tr> <th>Question</th> <th>Answer</th> <th>Output State</th> </tr> <tr> <td><math>I_0 = M_{i0}</math> ?</td> <td>YES — <math>Y_i = 1, Y_k = 0</math></td> <td></td> </tr> <tr> <td></td> <td>NO — <math>Y_i = Y_k = 0</math></td> <td></td> </tr> </table>	Question	Answer	Output State	$I_0 = M_{i0}$ ?	YES — $Y_i = 1, Y_k = 0$			NO — $Y_i = Y_k = 0$		READ-OUT	1 1 1 1 x x 1 1 1 1 x x 1 1 1 1 x x	$D_0 = 1 - \text{IF } M_{i0} = 1$ $0 - \text{IF } M_{i0} = 0$ $D_1 = 1 - \text{IF } M_{i1} = 1$ $0 - \text{IF } M_{i1} = 0$ $D_0 = D_1 = 1$												
Question	Answer	Output State																							
$I_0 = M_{i0}$ ?	YES — $Y_i = 1, Y_k = 0$																								
	NO — $Y_i = Y_k = 0$																								
1 1 0 0 x x	<table border="1"> <tr> <th>Question</th> <th>Answer</th> <th>Output State</th> </tr> <tr> <td><math>I_1 = M_{i1}</math> and <math>I_0 = M_{i0}</math> ?</td> <td>YES — <math>Y_i = 1, Y_k = 0</math></td> <td></td> </tr> <tr> <td></td> <td>NO — <math>Y_i = Y_k = 0</math></td> <td></td> </tr> </table>	Question	Answer	Output State	$I_1 = M_{i1}$ and $I_0 = M_{i0}$ ?	YES — $Y_i = 1, Y_k = 0$			NO — $Y_i = Y_k = 0$																
Question	Answer	Output State																							
$I_1 = M_{i1}$ and $I_0 = M_{i0}$ ?	YES — $Y_i = 1, Y_k = 0$																								
	NO — $Y_i = Y_k = 0$																								

AC TEST FIGURES AND WAVEFORMS

ASSOCIATE DELAY AND INPUT DELAY

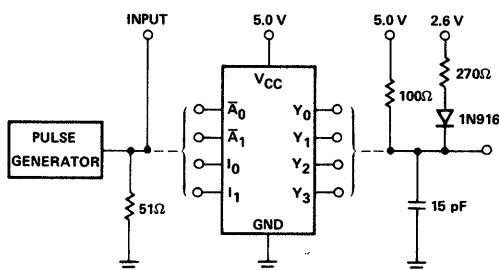


ASSOCIATE DELAY

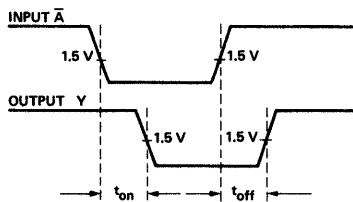

NOTES:

- When checking  $\overline{A}_0$  let  $\overline{A}_1 = "1"$  and when checking  $\overline{A}_1$  let  $\overline{A}_0 = "1"$ .
- $\overline{W}_0 = \overline{W}_1 = "1"$ .

INPUT DELAY


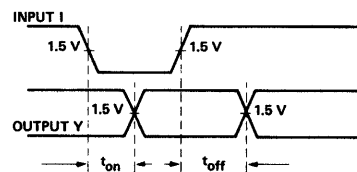


NOTES:

- When checking  $I_1$ ,  $\overline{A}_1 = "0"$  and  $\overline{A}_0 = "1"$  and when checking  $I_0$ ,  $\overline{A}_0 = "0"$  and  $\overline{A}_1 = "1"$
- $\overline{W}_0 = \overline{W}_1 = "1"$ .

AC TEST FIGURES AND WAVEFORMS (Cont'd)



WRITE DELAY

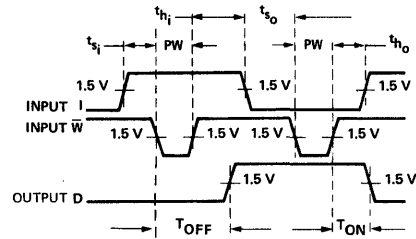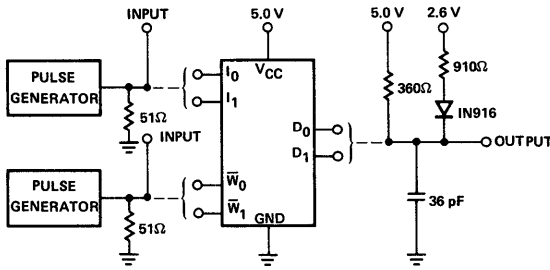

tsj = "1" set-up time.  
 ts0 = "0" set-up time.  
 thj = "1" hold time.  
 th0 = "0" hold time.  
 PW = Pulse width

NOTES:  
 1. A<sub>0</sub> = A<sub>1</sub> = "1".  
 2. Let all non-selected Y's = "0".  
 3. W's pulse width is 40ns @50% points.

READ DELAY

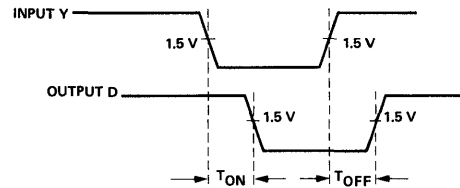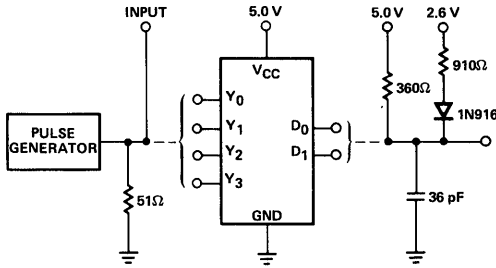

NOTES:  
 1. A tested bit must store a "0".  
 2. W<sub>0</sub> = W<sub>1</sub> = "1".  
 3. A<sub>0</sub> = A<sub>1</sub> = "1".  
 4. All non-tested Y's = "0".

GENERAL NOTES FOR AC TESTING:

- Use 5k Probes for all AC tests TEK 169 or equivalent.
- The Pulse Generator signal should consist of the following  
 Frequency: 10 MHz ± 5 MHz  
 Amplitude: 0V to 3V  
 Rise & Fall Times: 5 ns ± 2ns
- i = bit number (i = 0, 1). j = word number (j = 0, 1, 2, 3).

INPUT/OUTPUT DEFINITIONS

- I<sub>j</sub> – Data Inputs  
 Data entering these terminals are either compared with stored information at the cell(s) in the "associate" mode or stored in the cell(s) in the "write-in" mode.
- A<sub>j</sub> – Associate Controls  
 A logical "0" at this pin enables Data-Cell association to result into a defined logical level at the Y<sub>n</sub> lines (e.g. Y<sub>n</sub> = "1" = Match, Y<sub>n</sub> = "0" = Mismatch). A logical "1" at this pin forces all Y<sub>n</sub> to a "1".
- W<sub>j</sub> – Write Enable  
 A logical "0" at this control pin opens the gates of the selected word, allowing data-in to be stored. A logical "1" locks the gates such that data-in can no longer disturb the cell(s).
- Y<sub>n</sub> – "Associate" Output and Address Selection Control  
 During "Associate" mode these "bare collector" lines provide output results of match or mismatch between input and stored

data (logical "1" = Match, logical "0" = Mismatch).

In the read and write modes these terminals act as input controls and word-select lines Y lines (Y<sub>1</sub>) associated with words desired to accept writing of data or read-out are to be kept in the logical "1" state and the remaining Y lines (Y<sub>k</sub>) to be forced to a logical "0" state. (Note that A = 1 forces all Y<sub>n</sub> = 1).

D<sub>j</sub> – Data Output  
 These are "bare collector" output lines indicating the state of one or more selected cells. Cell-Selection is accomplished as defined under "Y<sub>n</sub>" above.

GLOSSARY OF TERMS – SUBSCRIPTS

- A. n = Word number = 0, 1, 2 and 3  
 j = Bit number = 0 or 1  
 i = Input/Output number(s) associated with cell(s) upon which a "Write-in", "Read-out" or other function is being performed.  
 k = Input/Output number(s) other than "i" above.  
 M = Designation of Memory Cell (word) = eight identical cells in each package.
- B. Examples  
 1. I<sub>j</sub> for bit "1" equals I<sub>1</sub>.  
 2. M<sub>nj</sub> = M<sub>10</sub> = word "1" bit "0".  
 3. Y<sub>i</sub> = 0, Y<sub>k</sub> = 1: for i = words 1 and 3; then k = words 0 and 2: Y<sub>1,3</sub> = 0 and Y<sub>0,2</sub> = 1.

**APPLICATION: LEARNING MEMORY**

This system is a CAM array with peripheral IC circuitry designed to operate as a learning memory. It is organized in two sections of equal capacity, the total memory size (both sections) being 8 ten bit words. Either section can be selected through the section SELECT line, and the memory is easily expandable in the number of words and in word length.


By activating the COMPARE line, a new word is loaded into the buffer and is presented to the memory. Through the novel feature of data association, which is unique with CAM elements, the buffer's content is compared with the words stored in memory. If the input word, with which the memory was presented, is already contained in storage, no need for "learning" i.e. data acquisition, exists. This fact is indicated by a match from one of the  $Y_n$  lines ( $Y_i = 1$ ) and thus

no write command is initiated.

Before a WRITE operation is initiated, a location select has to be made such that the word to be written into the memory will go to the proper place. For this reason, a tag CAM is employed to keep track of memory locations, both empty and full. When a word is written into memory, a "1" is simultaneously written into the tag CAM. Thus, it is possible to keep track of the filled memory locations.

By monitoring the  $Y_n$  lines of the tag CAM, a convenient way of decoding an available address exists. Here exclusive OR circuitry is used which ensures that memory locations are filled successively when the need for "learning" exists. The quad latch is enabled before the write command is available to the CAM array. Thus the Y lines of unavailable memory locations are forced low ( $Y_k = 0$ ).

**APPLICATION: LEARNING MEMORY**

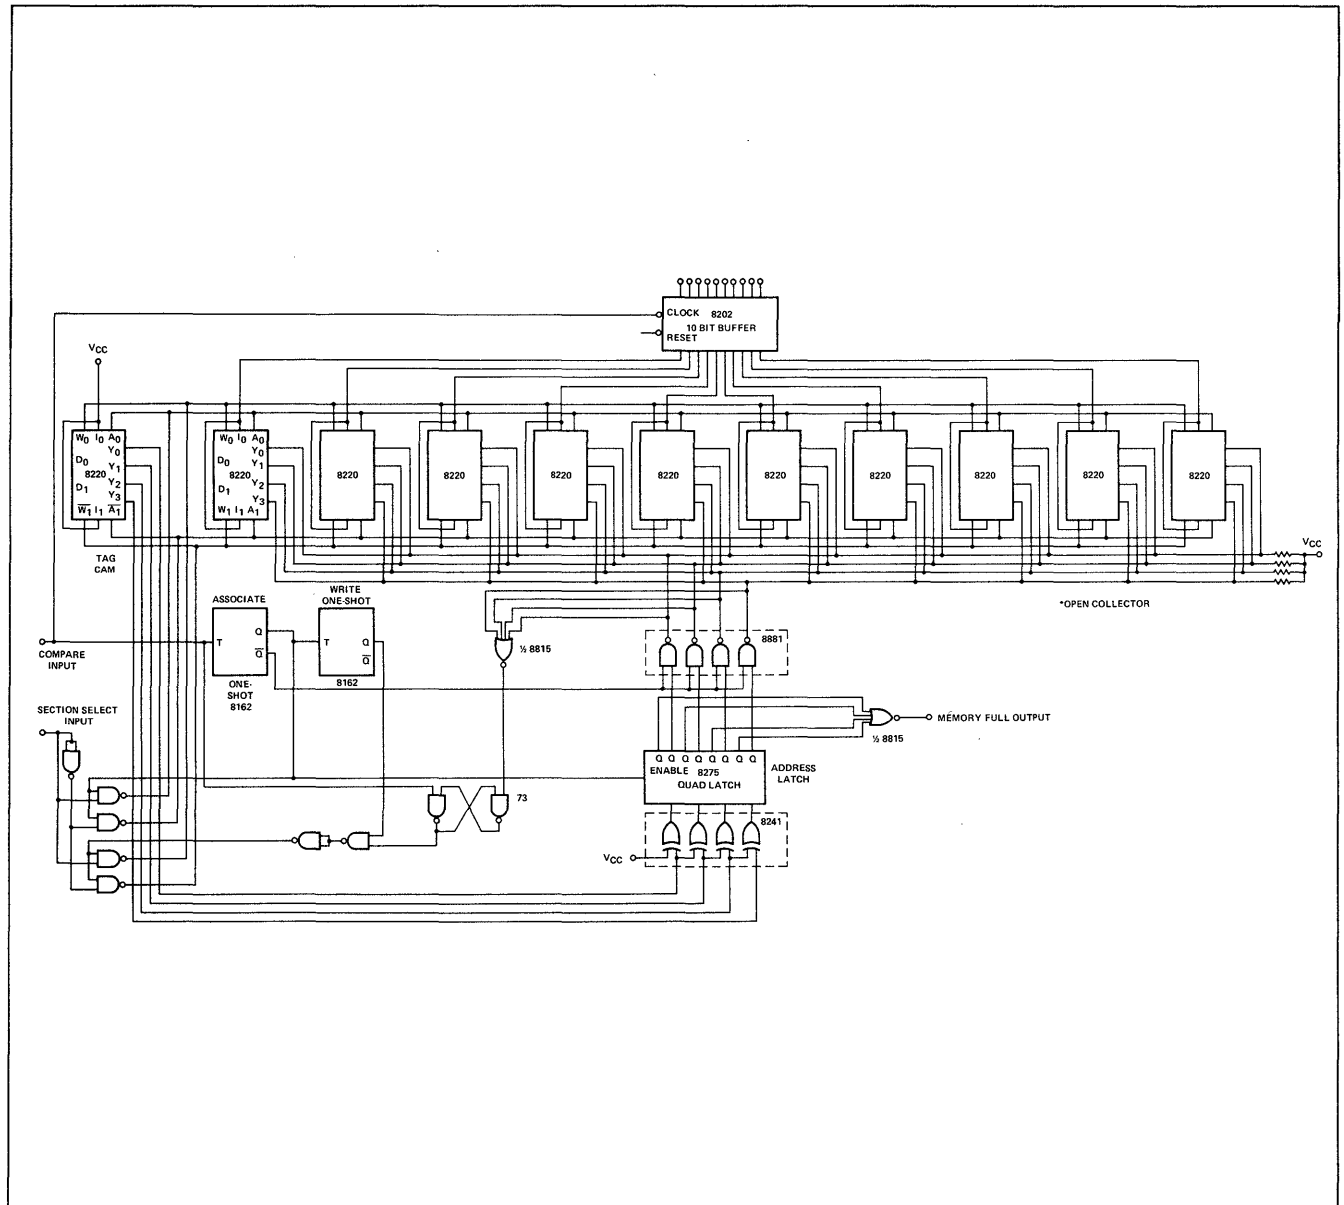





# 256 BIT-BIPOLAR FIELD-PROGRAMMABLE ROM (32x8 PROM)

# 8223

## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION

The 8223 is a TTL 256-Bit Read Only Memory organized as 32 words with 8 bits per word. The words are selected by five binary address lines; full word decoding is incorporated on the chip. A chip enable input is provided for additional decoding flexibility, which causes all eight outputs to go to the high state when the chip enable input is high.

This device is fully TTL or DTL compatible. The outputs are uncommitted collectors, which permits wired AND operation with the outputs of other TTL or DTL devices. These outputs are capable of sinking twelve standard DCL loads. Propagation delay time is 50ns maximum. Power dissipation is 310 milliwatts with 400 milliwatts maximum. The 8223 may be programmed to any desired pattern by the user. (See fusing procedure.) This feature is ideal for prototype hardware and systems requiring propriety codes. A Truth Table/Order Blank is included on page 199 for ordering custom patterns.


### FEATURES

- BUFFERED ADDRESS LINES
- ON THE CHIP DECODING
- CHIP ENABLE CONTROL LINE
- OPEN COLLECTOR OUTPUTS
- DIODE PROTECTED INPUTS
- NO SEPARATE FUSING PINS
- BOARD LEVEL PROGRAMMABLE

### APPLICATIONS

- PROTOTYPING
- VOLUME PRODUCTION
- MICROPROGRAMMING
- HARDWIRED ALGORITHMS
- CONTROL STORE

### LOGIC DIAGRAM

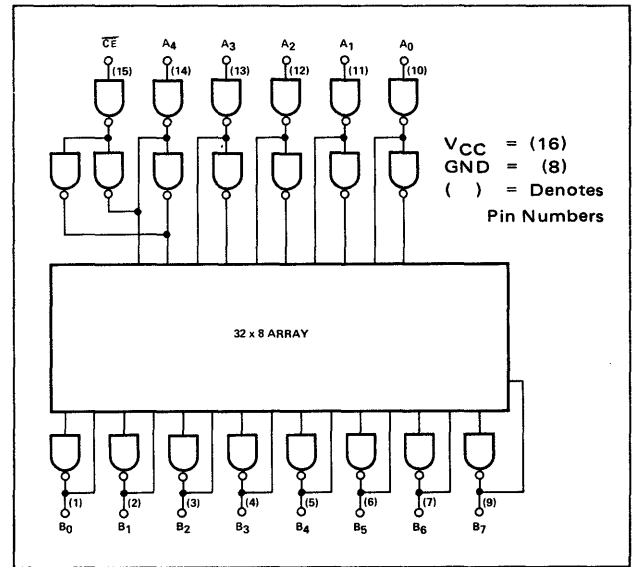

### ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				"0" A <sub>n</sub>	"1" A <sub>n</sub>	CHIP ENABLE	OUTPUTS	NOTES
	MIN.	TYP.	MAX.	UNITS					
"1" Output Leakage Current (N8223-)			100	μA			2.0V		13
(S8223-)			250	μA					
"0" Output Voltage (N8223-)			0.4	V	0.8V	2.0V	0.8V	9.6mA	6,10
(S8223-)			0.5	V	0.8V	2.0V	0.8V	16mA	6,10
"1" Input Current									
A <sub>n</sub> , Address			40	μA		4.5V			
Chip Enable Input			80	μA			4.5V		
"0" Input Current									
A <sub>n</sub> , Chip Enable	-0.1		-1.6	mA	0.4V		0.4V		

# SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8223


$T_A = 25^\circ\text{C}$  and  $V_{CC} = 5.0\text{V}$

CHARACTERISTICS	LIMITS				"0" $A_n$	"1" $A_n$	CHIP ENABLE	OUTPUTS	NOTES
	MIN.	TYP.	MAX.	UNITS					
Propagation Delay									
An to Bn		35	50	ns				DC F.O.=12	7,12
Chip Enable to B <sub>n</sub>		35	50	ns		4.5V		DC F.O.=12	7,12
Power Consumption		310/62	400/77	mW/mA		4.5V	4.5V		14
Input Latch Voltage	5.5			V			10mA		11

**NOTES:**

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive logic definition: "UP" Level = "1" "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- One DC fan-out is defined as 0.8mA.
- One AC fan-out is defined as 50pF.
- Manufacturer reserves the right to make design and process changes and improvements.
- By DC tests per the truth table, all inputs have guaranteed thresholds of 0.8V for logical "0" and 2.0V for logical "1".
- This test guarantees operation free of input latch-up over the specified operating power supply voltage range.
- For detailed test conditions, see AC testing.
- Connect an external 1k resistor from  $V_{CC}$  to the output terminal for this test.
- $V_{CC} = 5.25\text{V}$ .

## AC TEST FIGURE AND WAVEFORMS

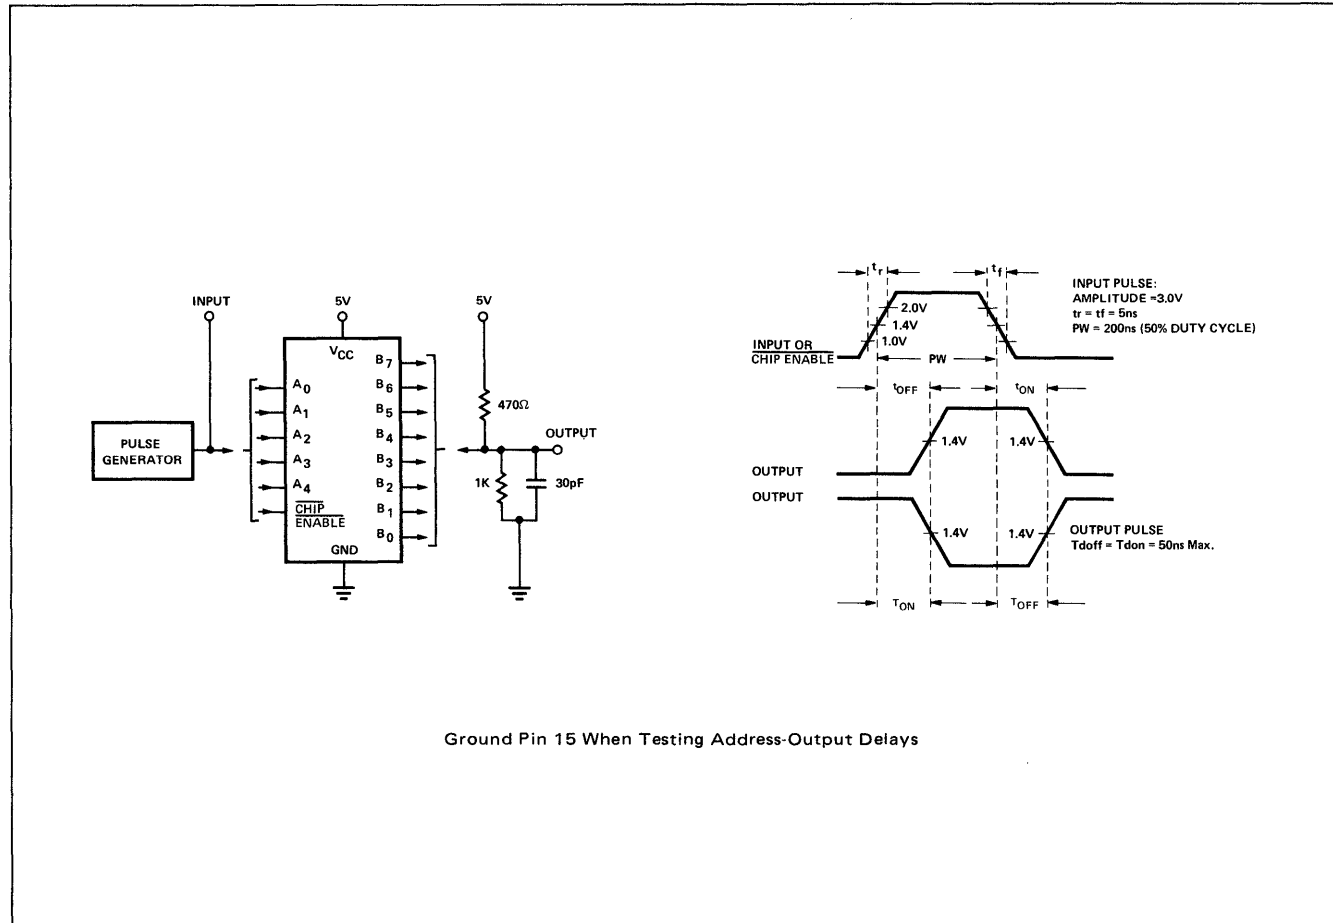

**8223 PROGRAMMING PROCEDURE**

The 8223 may be programmed by using Curtis Electro Devices PR 23 Series or Spectrum Dynamics 300, 400 or 500 Series Programmers. Each performs the procedure outlined.

The 8223 Standard part is shipped with all outputs at logical "0". To write a logical "1" proceed as follows:

**Programming Procedure A**

**Simple Programming Procedure using "bench" Equipment**

1. Start with pin 8 grounded and V<sub>CC</sub> removed from pin 16.
2. Remove any load from the outputs.
3. Ground the Chip Enable.
4. Address the desired location by applying ground (i.e., 0.4V maximum) for a "0", and +5.0V (i.e., +2.8V minimum) for a "1" at the address input lines.
5. Apply +12.5V to the output to be programmed through a 390 ohm ±10% resistor. Program one output at a time.
6. Apply +12.5V to V<sub>CC</sub> (pin 16) for up to 1.0 second. If 1.0 second is exceeded, the duty cycle should be limited to a maximum of 25%. The V<sub>CC</sub> overshoot should be limited to 1.0V maximum. If necessary, a clamping circuit should be used. The V<sub>CC</sub> current requirement is 400 mA maximum at +12.5V. Several fuses can be programmed in sequence until 1.0 sec of high V<sub>CC</sub> time is accumulated before imposing the duty cycle restriction.  
NOTE: Normal practice in test fixture layout should be followed. Lead lengths, particularly to the power supply, should be as short as possible. A capacitor of 10 microfarads minimum, connected from the +12.5V to ground, should be located close to the unit being programmed.
7. Remove the programming voltage from pin 16.
8. Open the output.
9. Proceed to the next output and repeat, or change address and repeat procedure.
10. Continue until the entire bit pattern is programmed into your custom 8223.

**Fast Programming Procedure – Programming Procedure B**


1. Remove V<sub>CC</sub> (open or ground pin 16).
2. Remove any load from the output.
3. Ground CE (pin 15).
4. Address the word to be programmed by applying 5 volts of a "1" and ground for a "0" to the address lines. (Solid TTL logic levels are ok, but we suggest buffer drivers or Utilogic OR/NOR gates for the addressing).

5. Apply 12.5V to the output to be programmed through 390 ohm ±10% resistor. Program one output at a time.
6. Apply +12.5V to V<sub>CC</sub> (pin 16) for 25-50mS. Limit the V<sub>CC</sub> overshoot to 1.0 volts max.
7. Reduce V<sub>CC</sub> to ground (or open) and remove the load from the output.
8. Immediately repeat steps 5 and 6 for other outputs of the same word, or repeat 4 through 6 for a different word. Continue programming for a max of 1 second. Then remove power for 4 seconds and continue until the entire bit pattern is programmed.

After programming the 8223, the unit should be checked to insure the code is correct. If additional fuses must be opened, they may be programmed during verification.

**Fast Programming Procedure – Programming Procedure C**

- Steps 1 through 5 are the same as in Procedure B.
6. Apply a 5mS pulse to V<sub>CC</sub> (pin 16). Limit the V<sub>CC</sub> overshoot.
  7. Reduce V<sub>CC</sub> to 5 volts for 10-15uS and verify the fuse opened (output is now a "1". If the bit programmed goes on to the next bit to be programmed. If the bit did not program, then reduce V<sub>CC</sub> to ground (or open) for 1-5uS and repeat step 6 and 7 until the fuse programs (1 second total time max).
  8. Continue programming at this rate for 1 second. Remove all power from the device for 4 seconds then continue programming procedure.




**BOARD LEVEL PROGRAMMING PROCEDURE FOR THE 8223**

The chip select controls which 8223 is being programmed when several PROMS are collector OR'd. To program in this manner, the only changes required are:

1. The 390 ohm resistor is reduced to  $\frac{200 \text{ ohm}}{N}$  where N is the number of outputs tied together ( $2 \leq N \leq 12$ ).
2. Reduce max fuse pulse width from 1 second max to 0.92 sec max.

**MANUAL PROGRAMMER DIAGRAM**

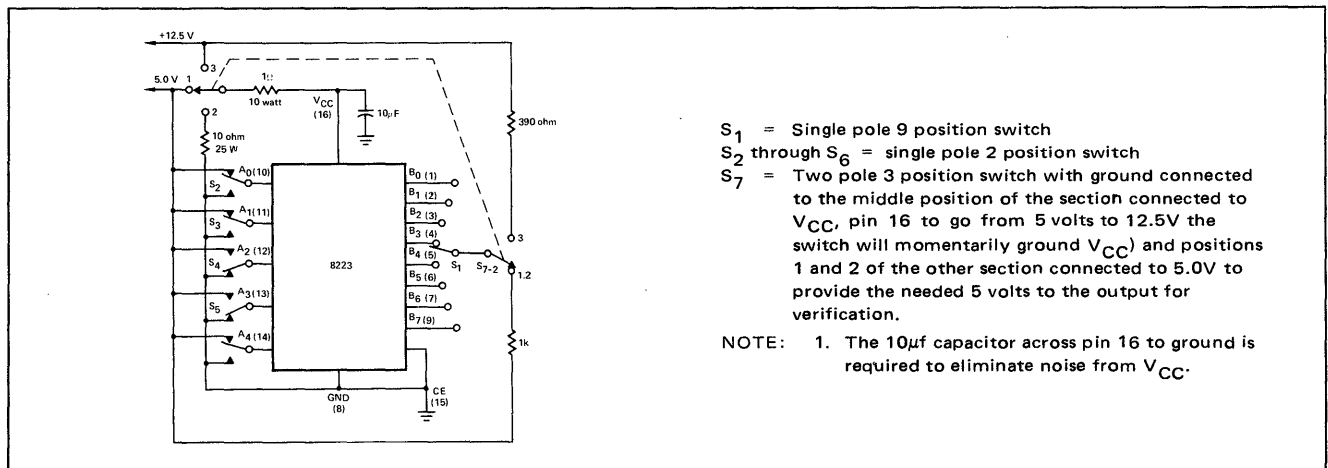



## DIGITAL 8000 SERIES TTL/MSI

### DESCRIPTION

The 8224 is a TTL 256 Bit Read Only Memory organized as 32 words with 8 bits per word. The words are selected by five binary address lines with full word decoding incorporated on the chip. A Chip Enable input is provided for additional decoding flexibility, which will cause all eight outputs to go to the high state when the Chip Enable input is taken high.

This device is fully TTL or DTL compatible. The outputs are uncommitted collectors, which allows wired-AND operation with the outputs of other TTL or DTL devices. These outputs are capable of sinking twelve standard DCL loads. Propagation delay time is 50ns maximum. Power dissipation is 310 milliwatts with 400 milliwatts maximum.

The 8224-CB180 has been programmed to convert the seven bit ASC II alphabet code to the 8 bit EBCDIC Alphabet code. The conversion includes the letters A through Z. With the addition of gating circuitry, the 8224-CB180 will convert both upper case and lower case letters.

Customer specified patterns are also available as custom products. Refer to page 250 for Truth Table/Order Blank.


### FEATURES

- BUFFERED ADDRESS LINES
- ON THE CHIP DECODING
- CHIP ENABLE CONTROL LINE
- OPEN COLLECTOR OUTPUTS
- DIODE PROTECTED INPUTS

### APPLICATIONS

MICROPROGRAMMING  
 HARDWIRED ALGORITHMS  
 CHARACTER RECOGNITION  
 CHARACTER GENERATOR  
 CONTROL STORE

### LOGIC DIAGRAM

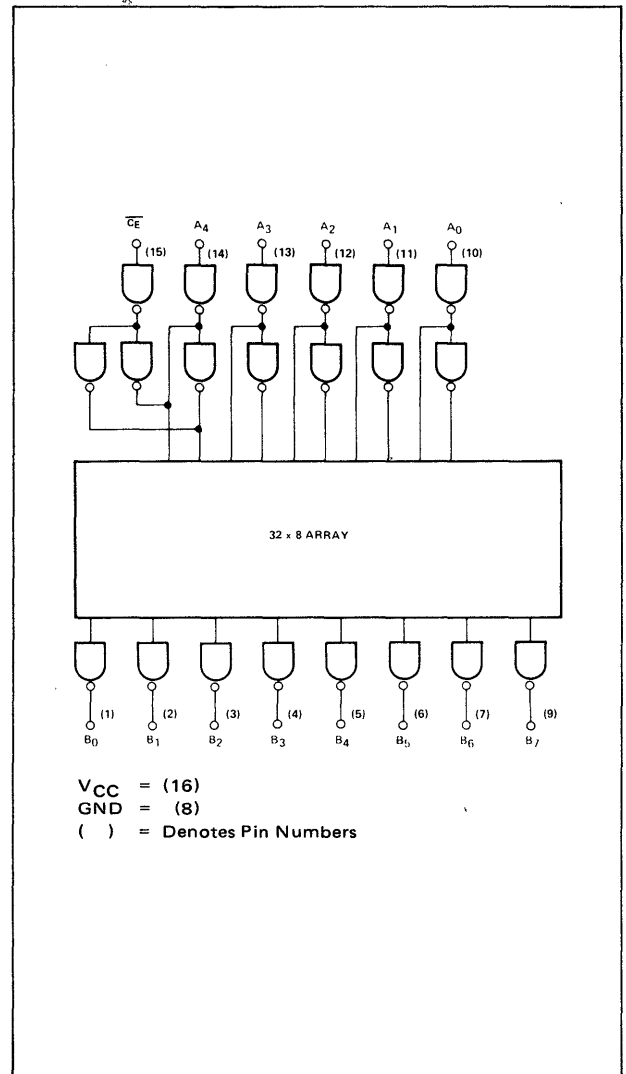

### ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS			TEST CONDITIONS				OUTPUTS	NOTES
	MIN.	MAX.	UNITS	$V_{CC}$	$A_n$ "0"	$A_n$ "1"	CHIP ENABLE		
"1" Output Leakage Current		100	$\mu A$	5.00			2.0V		13
"0" Output Voltage		0.4	V	4.75	0.8V	2.0V	0.8V	9.6mA	6,10
		0.4	V	5.00	0.8V	2.0V	0.8V	9.6mA	6,10
		0.4	V	4.75	0.8V	2.0V	0.8V	9.6mA	6,10
"1" Input Current						4.5V	4.5V		
$A_n$ , Address		40	$\mu A$	5.25			4.5V		
Chip Enable Input		80	$\mu A$	5.25			4.5V		
"0" Input Current									
$A_n$ , Chip Enable	-0.1	-1.6	mA	5.25	0.4V		0.4V		

# SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8224


$T_A = 25^\circ\text{C}$  and  $V_{CC} = 5.0\text{V}$

CHARACTERISTICS	LIMITS			TEST CONDITIONS			OUTPUTS	NOTES
	MIN.	MAX.	UNITS	$V_{CC}$	$A_n$ "0"	$A_n$ "1"		
Propagation Delay								
$A_n$ to $B_n$		50	ns	5.00				DC F.O.=12    7,12
Chip Enable to $B_n$		50	ns	5.00		4.5V		DC F.O.=12    7,12
Power Consumption		400	mW	5.25		4.5V	4.5V	
Input Latch Voltage	5.5		V	5.00	10mA		10mA	11

**NOTES:**

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive logic definition:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- One DC fan-out is defined as 0.8mA.
- One AC fan-out is defined as 50pF.
- Manufacturer reserves the right to make design and process changes and improvements.
- By DC tests per the truth table, all inputs have guaranteed thresholds of 0.8V for logical "0" and 2.0V for logical "1".
- This test guarantees operation free of input latch-up over the specified operating power supply voltage range.
- For detailed test conditions, see AC testing.
- Connect an external 1k resistor from  $V_{CC}$  to the output terminal for this test.

**SCHEMATIC DIAGRAM**

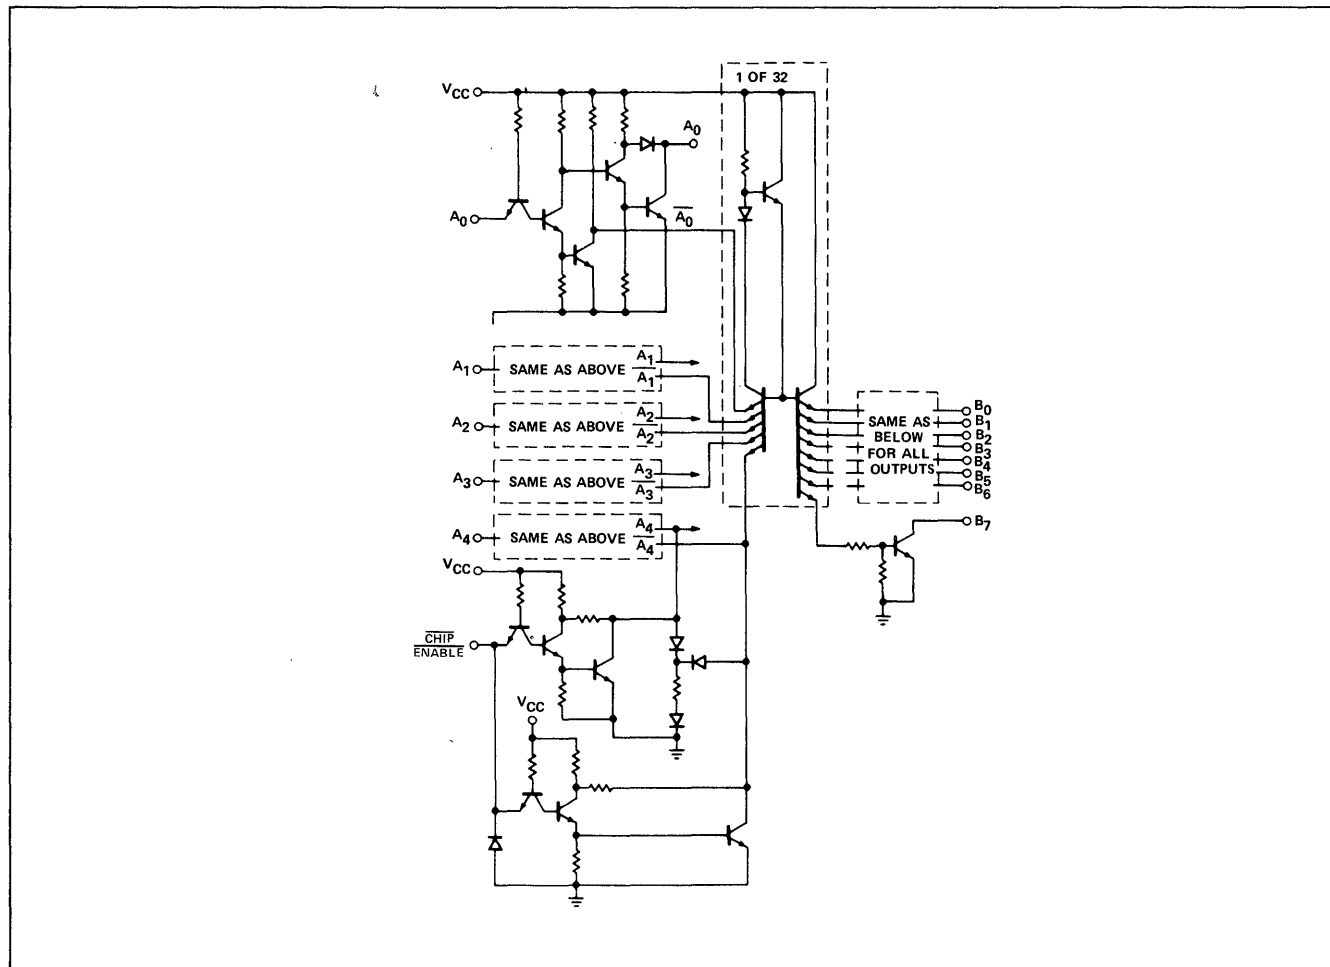

CODE CONVERSION ASCII TO EBCDIC  
(UPPER & LOWER CASE LETTERS ONLY) 8224-CB180

ASC II CODE	CHARACTER	EBCDIC CODE
B7 B6 B5 B4 B3 B2 B1		0 1 2 3 4 5 6 7
0 0 0 X X X X	--	Not Decoded
0 0 1 X X X X	--	Not Decoded
0 1 0 X X X X	--	Not Decoded
0 1 1 X X X X	--	Not Decoded
1 0 0 0 0 0 0	--	Not Decoded
1 0 0 0 0 0 1	A	1 1 0 0 0 0 0 1
1 0 0 0 0 1 0	B	1 1 0 0 0 0 1 0
1 0 0 0 0 1 1	C	1 1 0 0 0 0 1 1
1 0 0 0 1 0 0	D	1 1 0 0 0 1 0 0
1 0 0 0 1 0 1	E	1 1 0 0 0 1 0 1
1 0 0 0 1 1 0	F	1 1 0 0 0 1 1 0
1 0 0 0 1 1 1	G	1 1 0 0 0 1 1 1
1 0 0 1 0 0 0	H	1 1 0 0 1 0 0 0
1 0 0 1 0 0 1	I	1 1 0 0 1 0 0 1
1 0 0 1 0 1 0	J	1 1 0 1 0 0 0 1
1 0 0 1 0 1 1	K	1 1 0 1 0 0 1 0
1 0 0 1 1 0 0	L	1 1 0 1 0 0 1 1
1 0 0 1 1 0 1	M	1 1 0 1 0 1 0 0
1 0 0 1 1 1 0	N	1 1 0 1 0 1 0 1
1 0 0 1 1 1 1	O	1 1 0 1 0 1 1 0
1 0 1 0 0 0 0	P	1 1 0 1 0 1 1 1
1 0 1 0 0 0 1	Q	1 1 0 1 1 0 0 0
1 0 1 0 0 1 0	R	1 1 0 1 1 0 0 1
1 0 1 0 0 1 1	S	1 1 1 0 0 0 1 0
1 0 1 0 1 0 0	T	1 1 1 0 0 0 1 1
1 0 1 0 1 0 1	U	1 1 1 0 0 1 0 0
1 0 1 0 1 1 0	V	1 1 1 0 0 1 0 1
1 0 1 0 1 1 1	W	1 1 1 0 0 1 1 0
1 0 1 1 0 0 0	X	1 1 1 0 0 1 1 1
1 0 1 1 0 0 1	Y	1 1 1 0 1 0 0 0
1 0 1 1 0 1 0	Z	1 1 1 0 1 0 0 1
1 0 1 1 0 1 1	--	1 Not Decoded
1 0 1 1 1 0 0	--	1 Not Decoded
1 0 1 1 1 0 1	--	1 Not Decoded
1 0 1 1 1 1 0	--	1 Not Decoded
1 0 1 1 1 1 1	--	1 Not Decoded
1 1 0 0 0 0 0	--	1 Not Decoded
1 1 0 0 0 0 1	a	1 0 0 0 0 0 0 1
1 1 0 0 0 1 0	b	1 0 0 0 0 0 1 0
1 1 0 0 0 1 1	c	1 0 0 0 0 0 1 1
1 1 0 0 1 0 0	d	1 0 0 0 0 1 0 0
1 1 0 0 1 0 1	e	1 0 0 0 0 1 0 1
1 1 0 0 1 1 0	f	1 0 0 0 0 1 1 0
1 1 0 0 1 1 1	g	1 0 0 0 0 1 1 1
1 1 0 1 0 0 0	h	1 0 0 0 1 0 0 0
1 1 0 1 0 0 1	i	1 0 0 0 1 0 0 1
1 1 0 1 0 1 0	j	1 0 0 1 0 0 0 1
1 1 0 1 0 1 1	k	1 0 0 1 0 0 1 0
1 1 0 1 1 0 0	l	1 0 0 1 0 0 1 1
1 1 0 1 1 0 1	m	1 0 0 1 0 1 0 0
1 1 0 1 1 1 0	n	1 0 0 1 0 1 0 1
1 1 0 1 1 1 1	o	1 0 0 1 0 1 1 0
1 1 1 0 0 0 0	p	1 0 0 1 0 1 1 1
1 1 1 0 0 0 1	q	1 0 0 1 1 0 0 0
1 1 1 0 0 1 0	r	1 0 0 1 1 0 0 1
1 1 1 0 0 1 1	s	1 0 1 0 0 0 1 0
1 1 1 0 1 0 0	t	1 0 1 0 0 0 1 1
1 1 1 0 1 0 1	u	1 0 1 0 0 1 0 0
1 1 1 0 1 1 0	v	1 0 1 0 0 1 0 1
1 1 1 0 1 1 1	w	1 0 1 0 0 1 1 0
1 1 1 1 0 0 0	x	1 0 1 0 0 1 1 1
1 1 1 1 0 0 1	y	1 0 1 0 1 0 0 0
1 1 1 1 0 1 0	z	1 0 1 0 1 0 0 1
1 1 1 1 0 1 1	--	Not Decoded
1 1 1 1 1 0 0	--	Not Decoded
1 1 1 1 1 0 1	--	Not Decoded
1 1 1 1 1 1 0	--	Not Decoded
1 1 1 1 1 1 1	--	Not Decoded

TRUTH TABLES FOR 8224-CB180

INPUT PINS						OUTPUT PINS									
15	14	13	12	11	10	9	7	6	5	4	3	2	1		
$\overline{CE}$	A <sub>4</sub>	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>	B <sub>7</sub>	B <sub>6</sub>	B <sub>5</sub>	B <sub>4</sub>	B <sub>3</sub>	B <sub>2</sub>	B <sub>1</sub>	B <sub>0</sub>		
0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0	0	0	0	0	1	1	0	0	0	0	0	1	1		
0	0	0	0	1	0	0	1	0	0	0	0	1	1		
0	0	0	0	1	1	1	1	0	0	0	0	1	1		
0	0	0	1	0	0	0	0	1	0	0	0	1	1		
0	0	0	1	1	0	0	1	1	0	0	0	1	1		
0	0	0	1	1	1	1	1	1	0	0	0	1	1		
0	0	1	0	0	0	0	0	0	1	0	0	1	1		
0	0	1	0	0	1	1	0	0	1	0	0	1	1		
0	0	1	0	1	0	1	1	0	0	1	0	1	1		
0	0	1	0	1	1	1	1	0	0	1	0	1	1		
0	0	1	1	0	0	1	0	1	0	0	1	0	1	1	
0	0	1	1	0	1	1	0	1	1	0	0	1	0	1	1
0	0	1	1	1	0	1	0	1	0	1	0	1	0	1	1
0	0	1	1	1	1	0	1	0	1	0	0	1	0	1	1
0	1	0	0	0	0	1	1	1	1	0	1	0	1	1	1
0	1	0	0	0	1	0	0	0	1	1	0	1	0	1	1
0	1	0	0	1	0	0	1	0	0	1	1	0	1	1	1
0	1	0	0	1	1	0	0	1	0	0	1	1	0	1	1
0	1	0	1	0	0	0	1	1	0	0	0	1	1	1	1
0	1	0	1	0	1	0	0	1	1	0	0	1	1	1	1
0	1	0	1	1	0	0	0	1	1	1	0	0	1	1	1
0	1	0	1	1	1	0	0	1	1	1	0	0	1	1	1
0	1	1	0	0	0	1	0	0	0	0	0	0	0	0	0
0	1	1	0	0	1	0	0	0	0	0	0	0	0	0	0
0	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0
0	1	1	0	1	1	0	0	0	0	0	0	0	0	0	0
0	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
0	1	1	1	0	0	1	0	0	0	0	0	0	0	0	0
0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0
0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
1	x	x	x	x	x	1	1	1	1	1	1	1	1	1	1

TYPICAL APPLICATIONS


To select the ROM only when addressed by an upper or lower case alphabet character, the following truth table applies:

	Upper Case	Lower Case
ASCII	0 0 1 1	
ASCII	0 1 0 1	
CHIP ENABLE = B <sub>7</sub>	1 1 0 0	
EBCDIC #1 OUTPUT = B <sub>6</sub> · B <sub>7</sub>	1 1 1 0	


Thus, the ASCII to EBCDIC ROM standard product plus gating as shown performs the complete conversion.



TYPICAL APPLICATIONS (Cont'd)

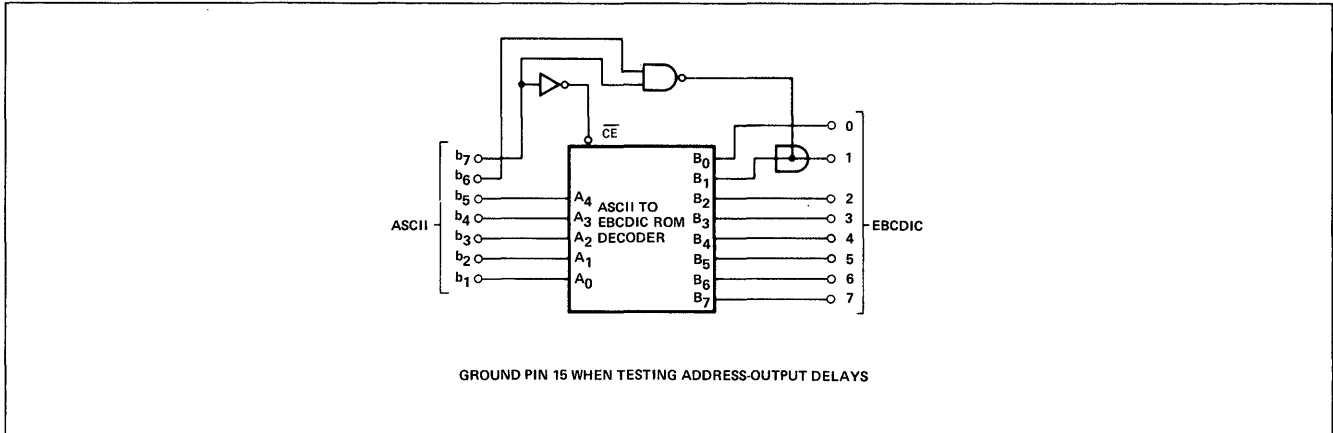

AC TEST FIGURE AND WAVEFORMS

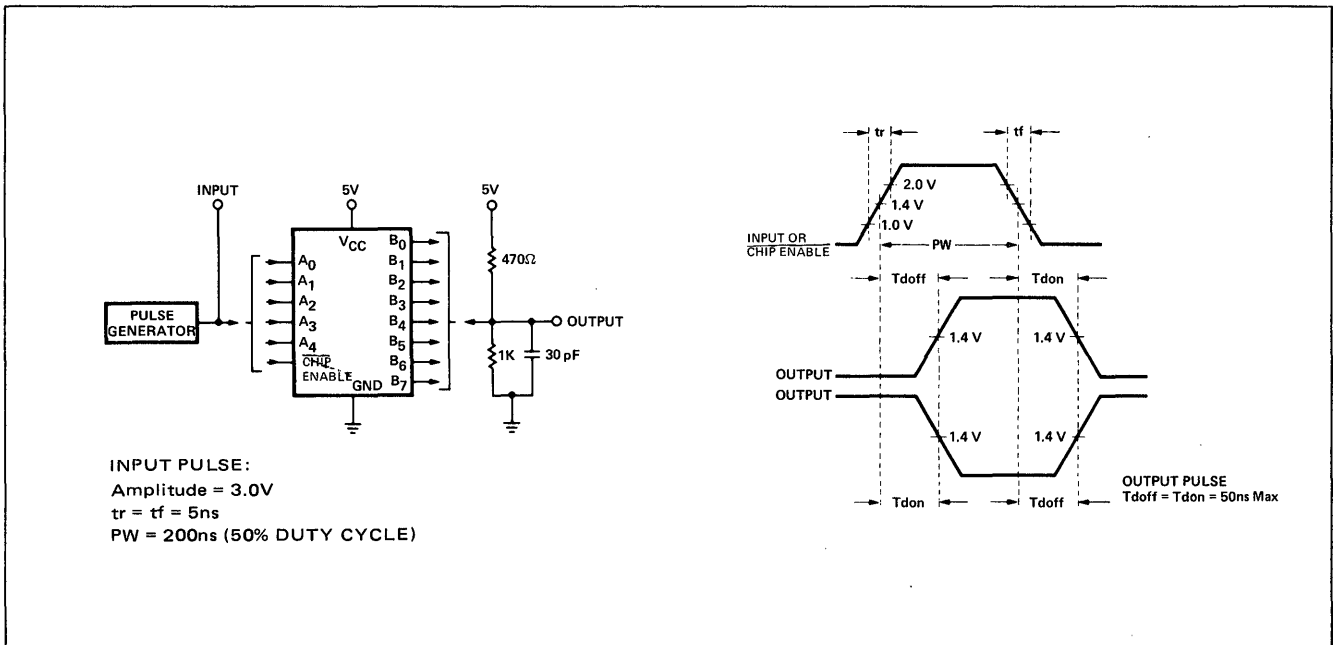

# 64-BIT BIPOLAR SCRATCH PAD MEMORY (16x4 RAM)

# 8225

THIS PRODUCT AVAILABLE IN 0°C TO 75°C TEMP RANGE ONLY.

DIGITAL 8000 SERIES TTL/MSI

## DESCRIPTION

The 8225 is a TTL 64-bit Read-Write Random Access Memory organized as 16-words of 4 bits each. The 8225 is ideally suited for application in scratch pads and high-speed buffer memories.

Words are selected through a 4-input binary decoder when the chip enable input ( $\overline{CE}$ ) is at logic "0". Data is written into the memory when Read Enable ( $RE$ ) is at logic "0" and read from the memory when  $RE$  is at logic "1".

The outputs of the 8225 are logical "1" during write operation, therefore, inputs and outputs can be commoned in busses to reduce the number of I/O leads. Output collectors are uncommitted.

## FEATURES

- CHIP ENABLE LINE FOR EXPANSION
- OPEN COLLECTOR OUTPUTS FOR EXPANSION
- ON THE CHIP DECODING
- ALL OUTPUTS "1" DURING WRITING
- DIODE PROTECTED INPUTS

## APPLICATIONS


SCRATCH PAD MEMORY  
 BUFFER MEMORY  
 PUSH DOWN STACKS (First in-first out)  
 CONTROL STORE

## TRUTH TABLE

RE	$\overline{CE}$ (Chip Enable)	MODE	OUTPUTS
0	0	Write	"1"
1	0	Read	Information
X	1	Chip Disable	"1"

X = Either State

## BLOCK DIAGRAM

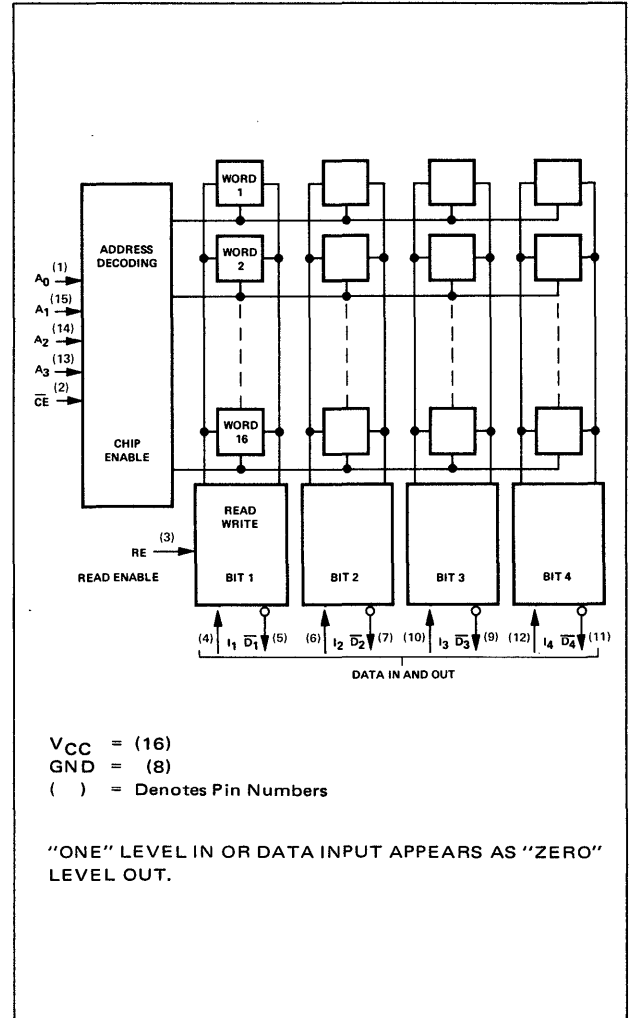

## ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				CHIP ENABLE	INPUTS		DATA INPUTS	OUTPUTS	NOTES
	MIN.	TYP.	MAX.	UNITS		WRITE	ADDRESS			
"0" Output Voltage			.4	V	.8V	Pulse			16mA	8, 11, 12
"1" Output Leakage Current			100	$\mu A$	.8V	Pulse		.8V	5.25V	11, 12
"0" Input Current	-.1		-1.6	mA	.4V	.4V	.4V	.4V		16
"1" Input Current										
Chip Enable			80	$\mu A$	4.5V					
Write, Address, Data			40	$\mu A$	4.5V	4.5V	4.5V	4.5V		16

**SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8225**


$T_A = 25^\circ\text{C}$  and  $V_{CC} = 5.0\text{V}$

CHARACTERISTICS	LIMITS				CHIP ENABLE	INPUTS		DATA INPUTS	OUTPUTS	NOTES
	MIN.	TYP.	MAX.	UNITS		WRITE	ADDRESS			
Minimum Write Pulse Width ( $W_{PW}$ )		18	30	ns						
Input Setup Time ( $I_{SU}$ )		18	20	ns						
Input Hold Time ( $I_{HO}$ )		0	5	ns						
Address Setup Time ( $A_{SU}$ )			5	ns						
Address Hold Time ( $A_{HO}$ )			5	ns						
Access Time ( $T_A$ )	20	35	50	ns						17
Read Recovery Time ( $T_{RR}$ )	20	35	50	ns						17
Data Pulse Width ( $D_{PW}$ )	20			ns						
Write Recovery Time ( $T_{WR}$ )		25	40	ns						
Write Access Time ( $T_{WA}$ )		25	40	ns						
Chip Enable Recovery Time ( $T_{CR}$ )		20	30	ns						
Chip Enable Access Time ( $T_{CA}$ )		20	30	ns						
Input Clamp Voltage			-1.5	V	-12mA	-12mA	-12mA	-12mA		16
Input Latch Voltage - except Data			5.5	V	10mA	10mA	10mA			16
Data			5.5	V	5V	5V		10mA		16
Power Consumption		400	552	mW	0V	5V	0V	0V		14


**NOTES:**

- All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current is defined as into the terminal referenced.
- Positive logic definition:  
"UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
- Capacitance is measured on Boonton Electronic Corporation Model 75A-53 Capacitance Bridge or equivalent.  $f = 1\text{ MHz}$ ,  $V_{ac} = 25\text{m V}_{rms}$ .
- All pins not specifically referenced are tied to ground for capacitance tests. Output pins are left open.
- Output sink current is supplied through a resistor to  $V_{CC}$ .
- One DC fan-out is defined as 0.8mA.
- Manufacturer reserves the right to make design and process changes and improvements.
- By DC tests per the truth table, all inputs have guaranteed thresholds of 0.8V for logical "0" and 2.0V for logical "1".
- For any given binary code on the Address Inputs the Write input must be momentarily brought to a logical "0" level. See AC test circuits on following pages.
- All sense outputs in "0" state.
- This test guarantees operation free of input latch-up over the specified operating power supply voltage range.
- Test each input one at a time.
- Address Pulse Width ( $A_{PW}$ ) is 40ns for this test.

**FUNCTIONAL DIAGRAM**

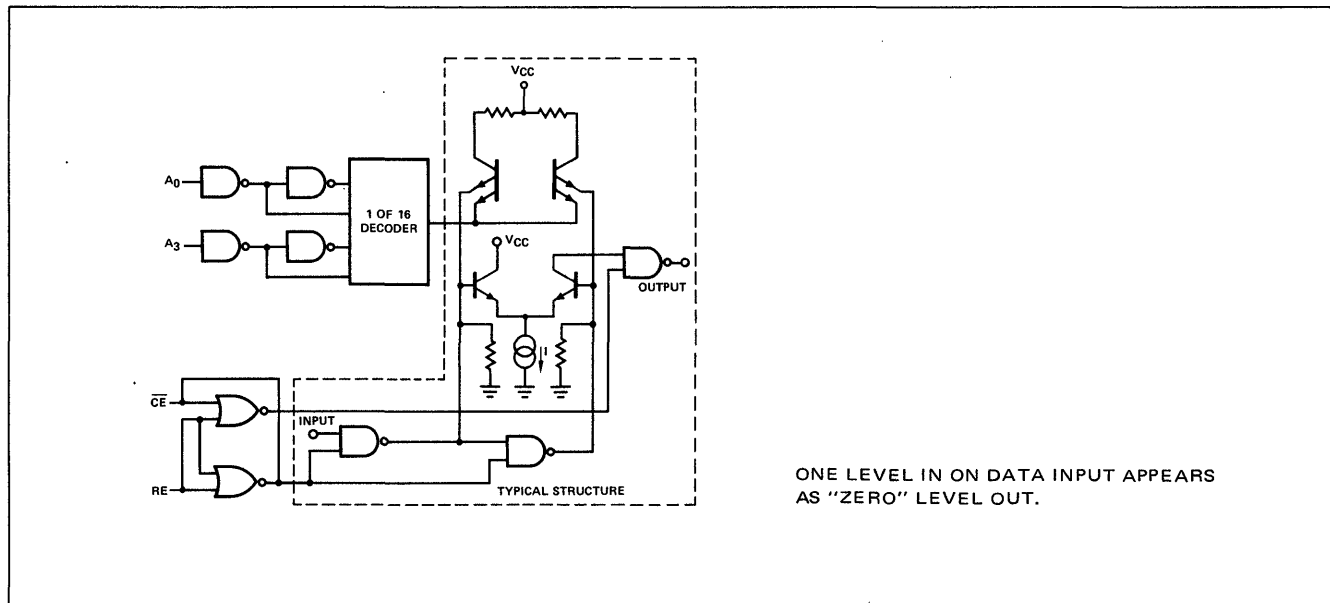

AC TEST FIGURES AND WAVEFORMS

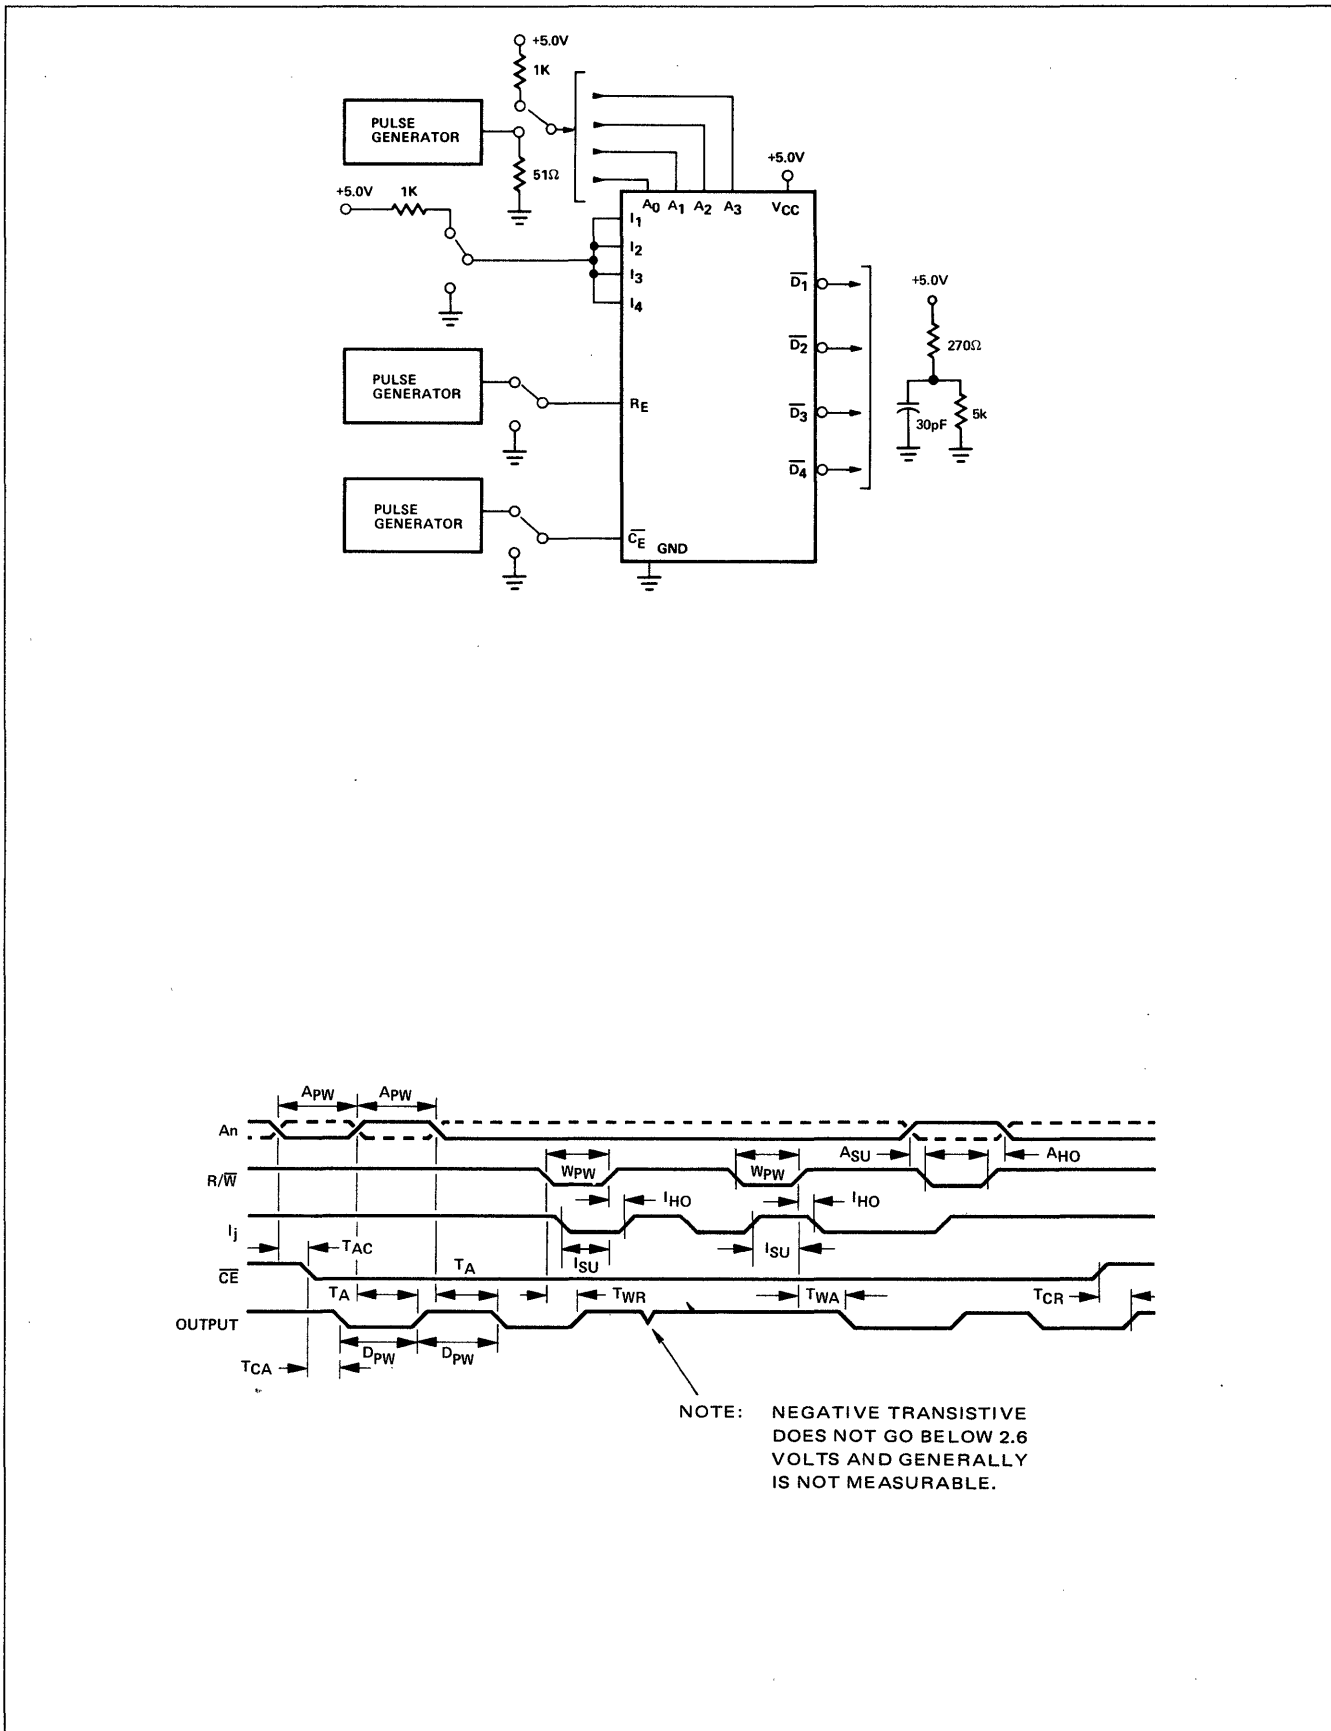



# 4096 BIT BIPOLAR ROM (1024x4 ROM)

# 8228

THIS PRODUCT AVAILABLE IN 0°C TO 75°C TEMPERATURE RANGE ONLY

DIGITAL 8000 SERIES TTL/MSI

## DESCRIPTION

The 8228 is a 4096 Bit Bipolar Read Only Memory organized as 1024 words by 4 bits per word. Available in a 16 pin dual in-line package, the 8228 can provide very high bit packing density by replacing four standard 256X4 ROMS.

The 8228 is fully TTL compatible and includes on-the-chip decoding. Typical access time is 50ns with a power consumption of only .125mW per bit.

The standard 8228 ROM pattern is the USASCII Row Character Generator code; however, custom patterns are also available. The standard pattern is specified as the N8228I - CD162, while custom circuits are identified as N8228I - CXXX. A truth table/order blank is included on page 254 for ordering custom patterns.

See page 242 for CD162 Pattern and USASCII Row Character Generator.


## FEATURES

- BUFFERED ADDRESS LINES
- ON THE CHIP DECODING
- TOTEM POLE OUTPUTS
- DIODE PROTECTED INPUTS
- 16 PIN PACKAGE (1/3 SIZE OF 24 PIN PACKAGE)

## APPLICATIONS

MICROPROGRAMMING  
HARDWIRED ALGORITHMS  
CHARACTER RECOGNITION  
CHARACTER GENERATION  
CONTROL STORE

## BLOCK DIAGRAM

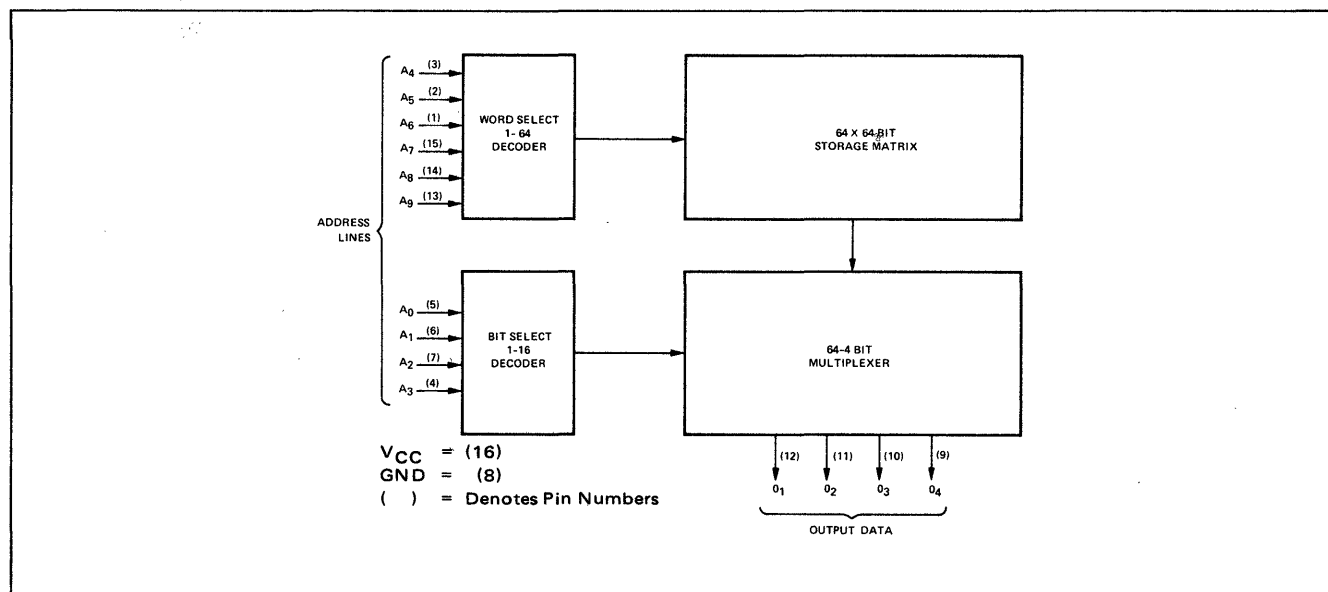

## ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS	NOTES
	MIN.	TYP.	MAX.	UNITS		
"0" Output Voltage	2.7		0.5	V	I <sub>out</sub> = 11.2 mA I <sub>out</sub> = -1.0 mA V <sub>in</sub> = 0.5V V <sub>in</sub> = 5.25V	
"1" Output Voltage			V			
"0" Input Current		-10	-200	μA		
"1" Input Current		1	25	μA		
Input Threshold Voltage						
"0" Level	.85			V		
"1" Level			2.0	V		
Propagation Delay		50	90	ns		

# SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8228

## ELECTRICAL CHARACTERISTICS (Cont'd)

CHARACTERISTICS	LIMITS				TEST CONDITIONS	NOTES
	MIN.	TYP.	MAX.	UNITS		
Input Clamp Voltage	-1.0		140	V	$I_{in} = 5.0\text{mA}$ $O_1$ to $O_3 = "0"$	
Power Consumption		100		mA		
Output Short Circuit Current	-20		-70	mA		


## ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ and $V_{CC} = 5.0\text{V}$ )

CHARACTERISTICS	LIMITS				TEST CONDITIONS	NOTES
	MIN.	TYP.	MAX.	UNITS		
Access Time—Address to Output		50	75	ns		5

### NOTES:

1. Positive current is defined as into the terminal referenced.
2. No more than one output should be grounded at the same time.
3. Manufacturer reserves the right to make design and process changes and improvements.
4. Applied voltages must not exceed 5.5V  
Input currents must not exceed  $\pm 30\text{mA}$   
Output currents must not exceed  $\pm 100\text{mA}$   
Storage temperature must be between  $-60^\circ\text{C}$  to  $+150^\circ\text{C}$
5. Rise and fall time for this test must be less than 5ns. Input amplitudes are 2.8V and all measurements are made at 1.5V.

## AC TEST FIGURE AND WAVEFORM

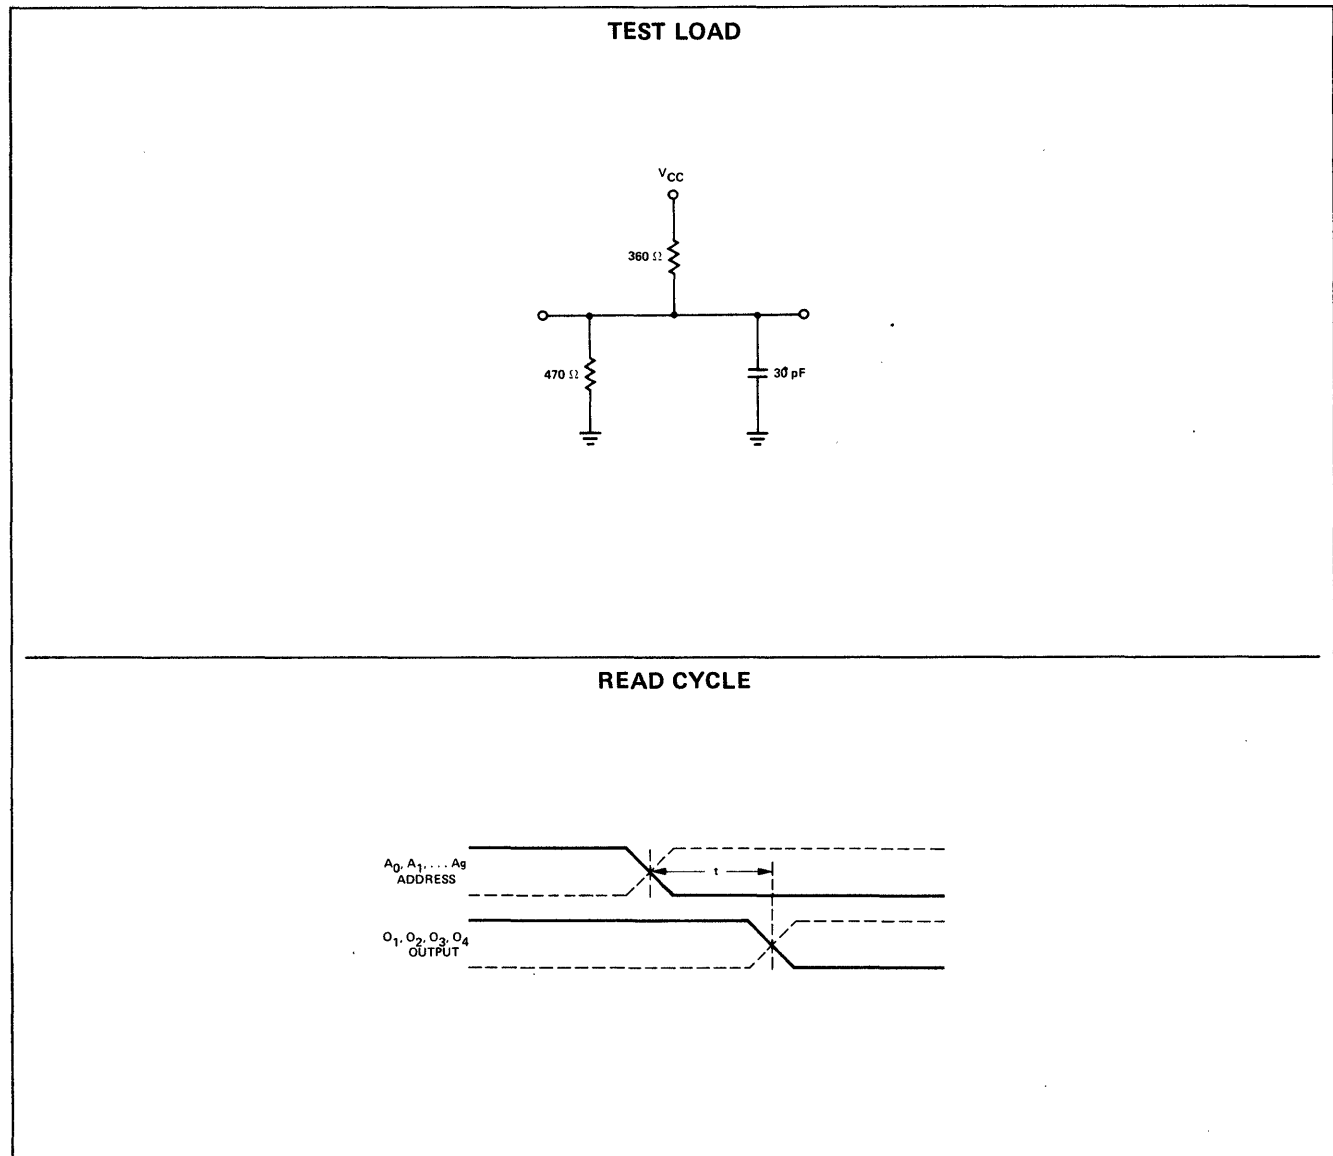

256 BIT BIPOLAR RAM (256x1 RAM)  
 (82S06 TRI-STATE) (82S07 OPEN COLLECTOR)

82S06  
 82S07

THESE PRODUCTS ARE AVAILABLE IN 0°C to 70°C TEMPERATURE RANGE ONLY  
 OBJECTIVE SPECIFICATION

DIGITAL INTEGRATED CIRCUITS

AVAILABLE SOON

**DESCRIPTION**


The 82S06 and 82S07 are ideal devices for use in Control Stores, small buffers, scratch pads, "cache" type buffer stores, memory maps, etc. The typical read time (the time between applying an address and obtaining valid output data) is 30ns. The typical write time (the time between applying one address and storing data) is 30ns. The circuit has 3 chip enable inputs which greatly simplifies the circuit configuration when used in large memories. The 82S06 and 82S07 also feature very low input loadings, 25 microamperes for a "1" state and -100 microamperes for "0".

The memories are TTL compatible and operate from single 5 volt supply.

**FEATURES**

- 256 X 1 ORGANIZATION
- 30 NANOSECOND ACCESS TIME TYPICAL
- LOW 1.5 mw/BIT POWER DISSIPATION TYPICAL
- LOW 100 µA INPUT LOADING
- TRI-STATE (82S06) OR OPEN COLLECTOR (82S07) OUTPUT
- ON CHIP DECODING

**BLOCK DIAGRAM**

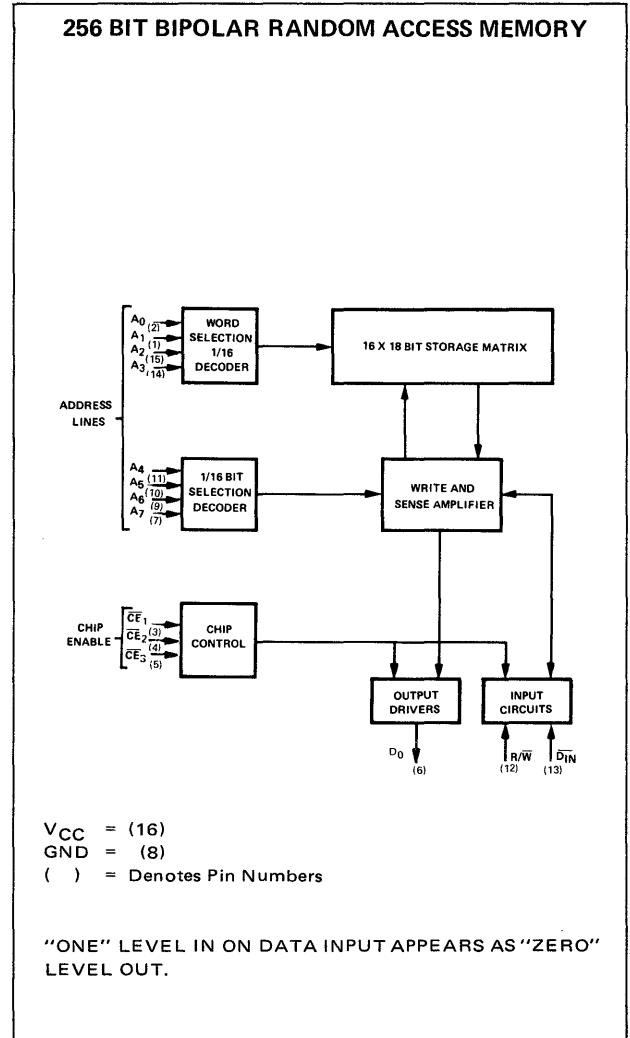

**OBJECTIVE ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 0 to 75°C, V<sub>CC</sub> = 5.0V ±5%) Note 1, 2, 3**

CHARACTERISTICS	LIMITS				TEST CONDITIONS	NOTES
	MIN.	TYP.	MAX.	UNITS		
"0" Input Current		-10	-100	µA	V <sub>in</sub> = 0.5V	
"1" Input Current		<1.0	25	µA	V <sub>in</sub> = 5.25V	
"0" Output Voltage		.25	.5	V	I <sub>out</sub> = 16mA	
Output Leakage Current (82S07)		<1.0	100	µA	CE <sub>1</sub> , CE <sub>2</sub> , CE <sub>3</sub> = "1", V <sub>out</sub> = 2.7V	
Output "off" Current (82S06)		<1.0	±100	µA	CE <sub>1</sub> , CE <sub>2</sub> , CE <sub>3</sub> = "1", 0.5 ≤ V <sub>out</sub> ≤ 2.7V	
"0" Input Threshold	.85			V		
"1" Input Threshold			2.0	V		
Power Supply Drain		75	100	mA	V <sub>CC</sub> = 5.00V	
Input Clamp Voltage	-1.0	-5		V	I <sub>in</sub> = -5.0mA	
Input Capacitance		5		pF		
Output Capacitance		8		pF		



SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 82S06/07

OBJECTIVE ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C, V<sub>CC</sub> = 5.0V)


CHARACTERISTICS	LIMITS				TEST CONDITIONS	NOTES	
	MIN.	TYP.	MAX.	UNITS			
Access Time—Address to Output		30		ns		4	
Address Set-Up Time (read)	t <sub>1</sub>	10		ns			
Propagation Delay		20		ns		4	
Chip Enable to Output Enable	t <sub>2</sub>	20		ns			
Propagation Delay		15		ns		4	
Chip Enable to Output Disable	t <sub>3</sub>	15		ns			
Address to Write Enable		5		ns		4	
Set-Up Time	t <sub>4</sub>	5		ns			
Chip Enable to Write Enable		0				4	
Set-Up Time	t <sub>5</sub>	0		ns			
Data Input to Write Enable		0				4	
Set-Up Time	t <sub>6</sub>	0		ns			
Write Enable Plus Width	t <sub>7</sub>	15		ns		4	
Address Hold Time	t <sub>8</sub>	0		ns		4	
Chip Enable Hold Time	t <sub>9</sub>	0		ns		4	
Data Input Hold Time	t <sub>10</sub>	0		ns		4	
Write Enable Propagation Delay	t <sub>11</sub>	30		ns		4	
Output Short Circuit Current (82S06)		-20		-100	mA	V <sub>out</sub> = 0V	4

NOTES:

1. Positive current is defined as into the terminal referenced.
2. Manufacturer reserves the right to make design and process changes and improvements.
3. Applied voltages must not exceed 6.0V,

4. Input currents must not exceed ±30mA, Output currents must not exceed ±100mA, Storage temperature must be between -60°C to +150°C.
5. Refer to Timing Diagram for definition of terms and test load.

TIMING DIAGRAM

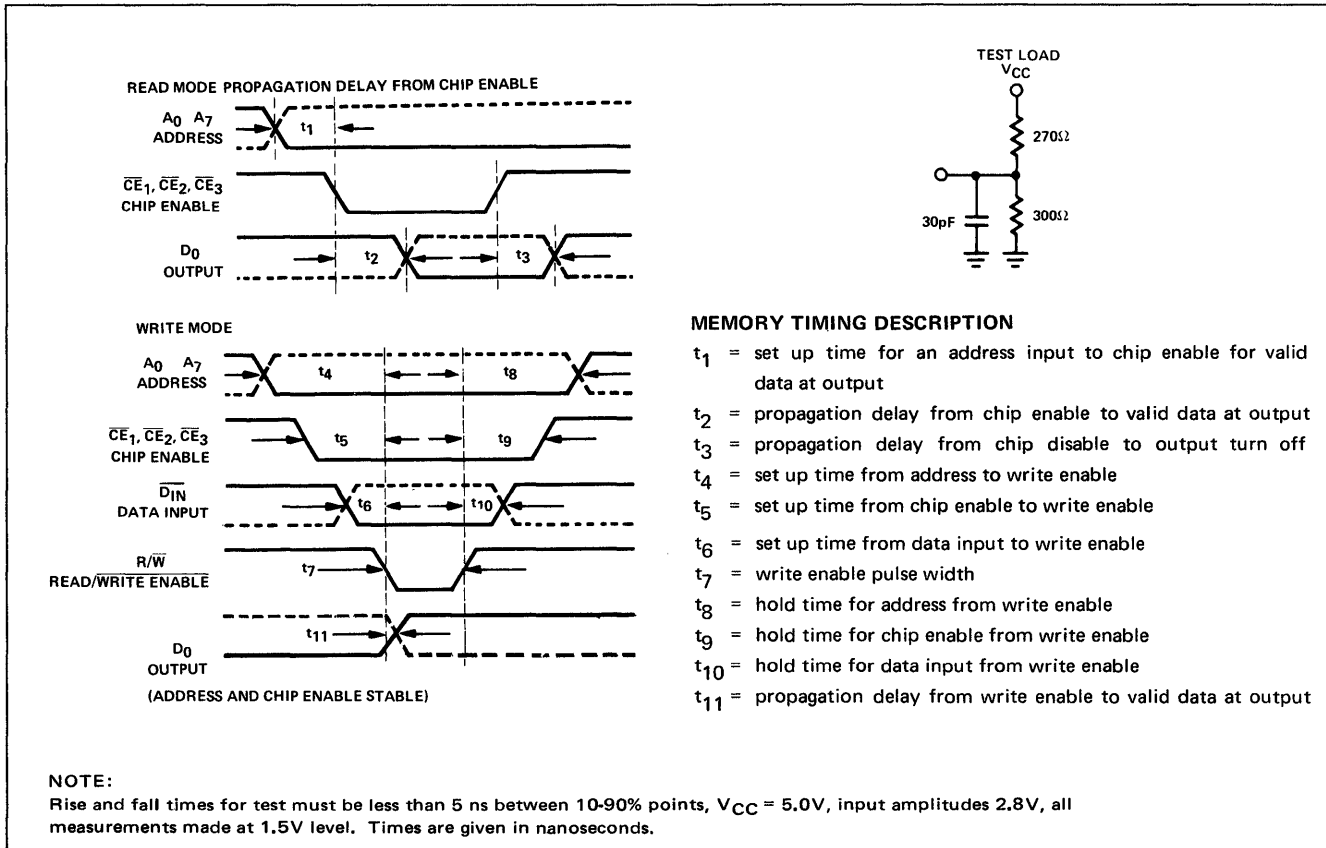

# HIGH SPEED WRITE-WHILE-READ 64-BIT BIPOLAR RAM (32x2 RAM)

# 82S21

THIS PRODUCT AVAILABLE IN 0°C TO 75°C TEMPERATURE RANGE ONLY

AVAILABLE SOON

OBJECTIVE SPECIFICATION

## DESCRIPTION

The 82S21 is a TTL 64 bit Write-While-Read Random Access Memory organized in 32 words of 2 bits each. The 82S21 is ideally suited for high speed buffers and as the memory element in high speed accumulators.

Words are selected through a 5 input decoder when the Read-Write enable input,  $\overline{CE}$  is at logic "1".  $\overline{W_0}$  and  $\overline{W_1}$  are the write inputs for bit 0 and bit 1 of the word selected.  $\overline{C}$  is the write control input. When  $\overline{W_X}$  and  $\overline{C}$  are both at logic "0" data on the  $I_0$  and  $I_1$  data lines are written into the addressed word. The read function is enabled when either  $\overline{W_X}$  or  $\overline{C}$  is at logic "1".

An internal latch is on the chip to provide the Write-While-Read capability. When the latch control line,  $\overline{L}$ , is logic "1" and data is being read from the 82S21, the latch is effectively bypassed. The data at the output will be that of the addressed word. When  $\overline{L}$  goes from a logic "1" to logic "0" the outputs are latched and will remain latched regardless of the state of any other address or control line. When  $\overline{L}$  goes from "0" to "1" the outputs unlatch and the outputs will be that of the present address word.


## FEATURES

- BUFFERED ADDRESS LINES
- ON CHIP LATCHES
- ON CHIP DECODING
- BIT MASKING CONTROL LINES
- ENABLE CONTROL LINE
- OPEN COLLECTOR OUTPUTS WITH 48 mA CAPABILITY
- PROTECTED INPUTS
- VERY HIGH SPEEDS (25ns TYP)

## APPLICATIONS

- SCRATCH PAD MEMORY
- BUFFER MEMORY
- ACCUMULATOR REGISTER
- CONTROL STORE

## LOGIC DIAGRAM

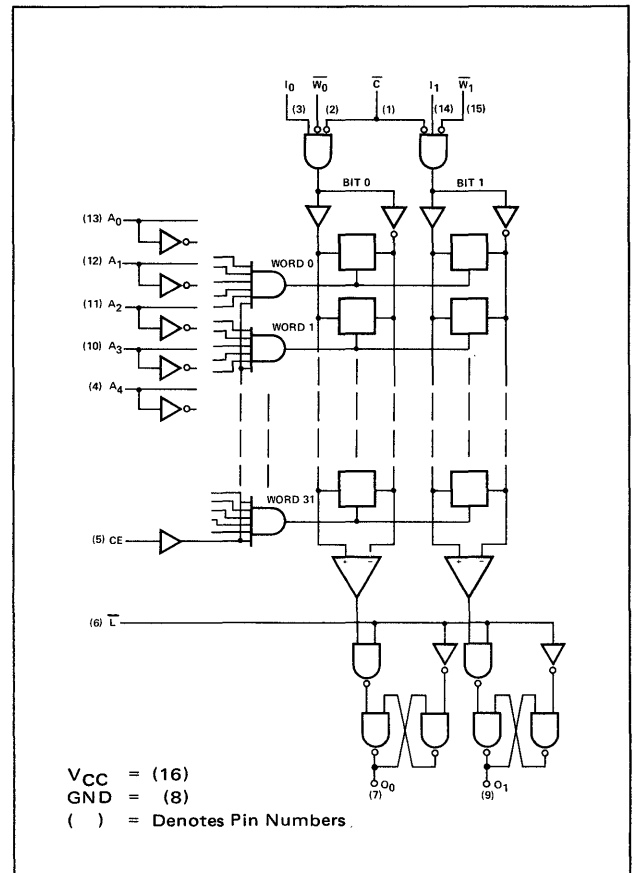

## TRUTH TABLE

CE	$\overline{C}$	$\overline{W_0}$	$\overline{W_1}$	$\overline{L}$	Mode	Outputs
X	X	X	X	0	Output Hold	Data from last addressed word when CE = "1"
0	X	X	X	1	Read & Write Disabled	Disabled logic "1"
1	1	X	X	X	Read	Data stored in addressed word
1	0	1	1	X	Read	Data stored in addressed word
1	0	0	0	0	Write Data	Data from last word address when L went from "1" to "0"
1	0	0	0	1	Write Data	Data being written into memory
1	0	1	0	X	Write Data into Bit 0 Only	If $\overline{L}$ = 0: Data from last word address when L went from "1" to "0"
1	0	0	1	X	Write Data into Bit 1 Only	If $\overline{L}$ = 1: Data being written into the selected bit location and stored in other addressed location

# SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 82S21

## OBJECTIVE ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ and $V_{CC} = 5.0\text{V}$ )

CHARACTERISTICS	LIMITS				TEST CONDITIONS	NOTES
	MIN.	TYP.	MAX.	UNITS		
"0" Output Voltage			.5	V	$V_{out} = 40\text{mA}$ $V_{out} = 5.5\text{V}$ $V_{in} = 0.5\text{V}$ $V_{in} = 2.4\text{V}$	
"1" Output Leakage Current			250	$\mu\text{A}$		
"0" Input Current (All Inputs)			-1.6	$\text{mA}$		
"1" Input Current (All Inputs)			40	$\mu\text{A}$		
Input "0" Threshold Voltage			0.85	V		
Input "1" Threshold Voltage	2.0			V		
Power Supply Current			150	$\text{mA}$		
Read Access Time Address to Output	$t_1$	25		ns		
Address Set-Up Time						
Address to Latest C(-) or W(-)	$t_2$	8		ns		5
Data Set-Up Time to Latest						
C(-) or W(-)	$t_3$	8		ns	5	
Address Hold Time Earliest						
C(+) or W(+) to Address	$t_4$	0		ns	5	
Control or Write Pulse Width	$t_5$	20		ns		
Write Access Time Latest $I_x$ or W(-)						
or C(-) to Output	$t_6$	25		ns	5	
Latch Output Set-Up Time Output to L(-)	$t_7$	0		ns	5	
Latch Address Hold Time L(-)						
to Address	$t_8$	10		ns	5	
Delatch Access Time L(+) to Output	$t_9$	15		ns	5	
Data Hold Time Earliest C(+) or W(+) to $I_x$	$t_{10}$	5		ns	5	

### NOTES:

1. Positive current is defined as into the Terminal.
2. No more than one output should be grounded at the same time.
3. Applied voltages must not exceed 5.5V. Input current must not exceed  $\pm 12\text{ mA}$ .
4. Output current must not exceed  $\pm 100\text{ mA}$ . Storage temperature must be within the  $-60^\circ\text{C}$  to  $+150^\circ\text{C}$  range.
5. Manufacturer reserves the right to make design and process changes and improvements.  
(+) means positive going transition of the voltage signal.  
(-) means negative going transition of the voltage signal.

## AC WAVEFORMS

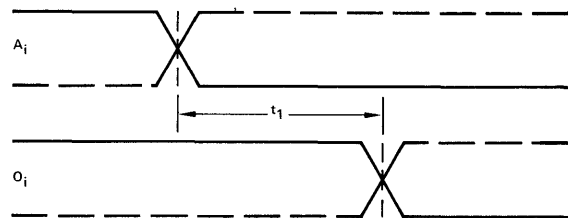


Fig. 1 Read Access Time



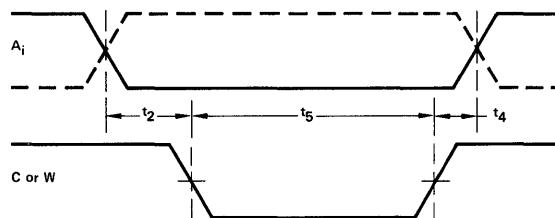


Fig. 2 Address Setup and Hold Time

AC WAVEFORMS

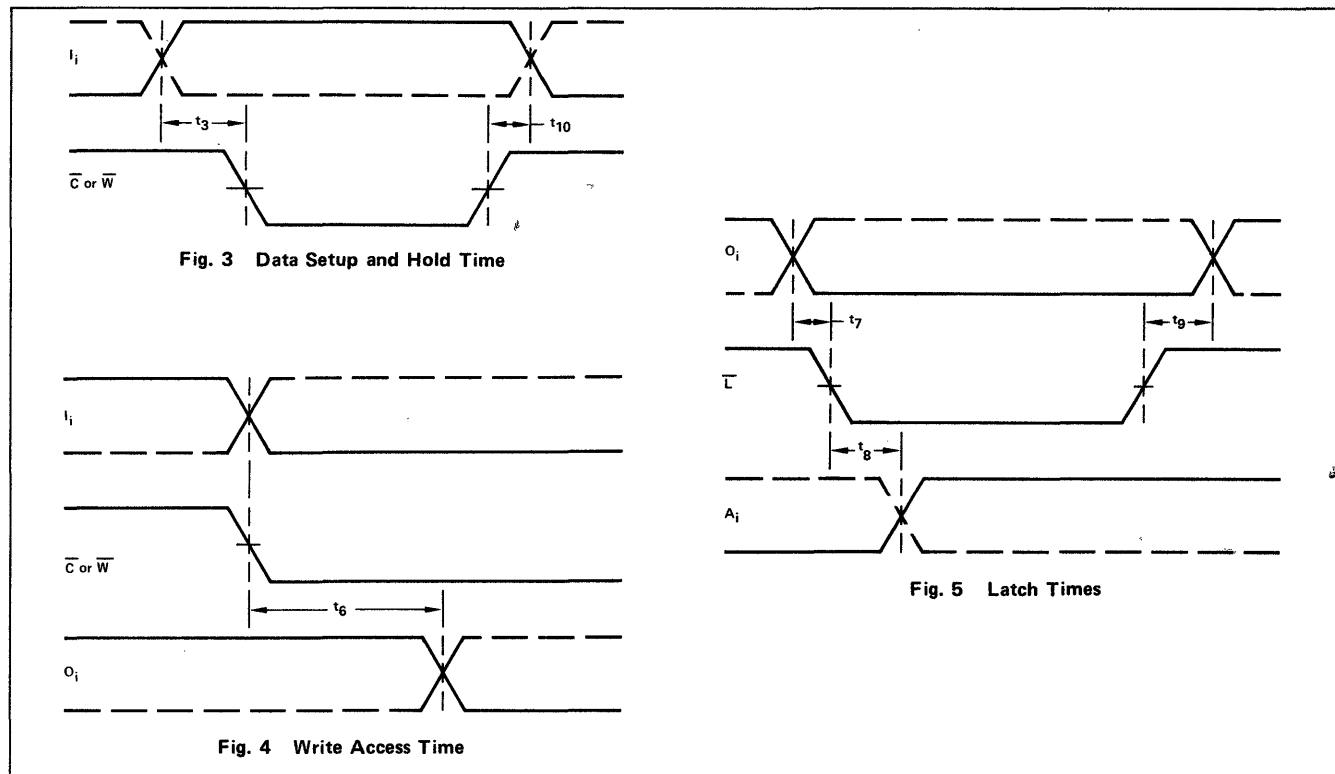

TYPICAL APPLICATION

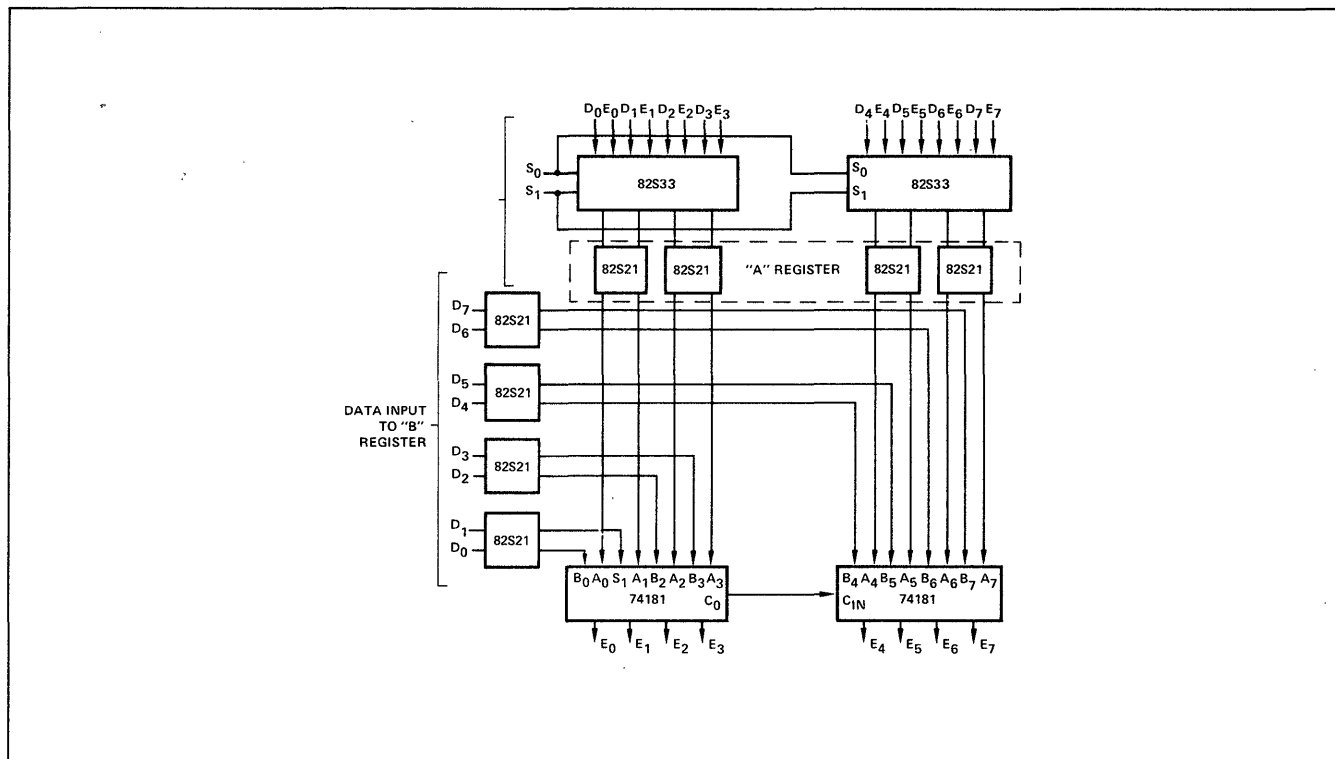

BASIC 8 BIT FULLY BUFFERED ACCUMULATOR

By use of the control lines  $S_0$  and  $S_1$  data is loaded into the "A" register through inputs  $D_X$  or from the outputs of the 74181's ( $E_X$ ) to the 82S33's and stored in the 82S21's organized as a 32 x 8 RAM register. Data is loaded directly into the "B" register. With this arrangement, the function  $A+B \rightarrow A$  (A plus B into A) can be performed in 70ns, typically, starting from data stored in the 82S21's.



# 1024 BIT BIPOLAR PROGRAMMABLE ROM (256x4 PROM) (82S26 OPEN COLLECTOR) (82S29 TRI-STATE)

# 82S26 82S29

AVAILABLE IN 0°C TO 75°C TEMPERATURE RANGE ONLY

AVAILABLE SOON

OBJECTIVE SPECIFICATION

## DESCRIPTION

The 82S26 (open Collector Outputs) and the 82S29 (tri State Outputs) are Bipolar 1024 Bit Read Only Memories organized as 256 words by 4 bits per word. They are Field-Programmable, which means that custom patterns are immediately available by following the simple fusing procedure given in this data sheet. Two chip enable lines are provided and the outputs are bussable to allow for memory expansion capability.

The 82S26 and 82S29 are fully TTL compatible and include on-the-chip decoding. Typical access time is 35ns.

The standard 82S26 and 82S29 are supplied with all outputs at a logical "0". If a programmed unit is required the Truth Table/Order Blank on page 252/253 can be used.


## FEATURES

- BUFFERED ADDRESS LINES
- ON THE CHIP DECODING
- TWO CHIP ENABLE LINES
- OPEN COLLECTOR OR TRI STATE OUTPUTS
- DIODE PROTECTED INPUTS
- NO SEPARATE "FUSING" PINS
- UNPROGRAMMED OUTPUTS ARE "0" LEVEL
- BOARD LEVEL PROGRAMMABLE


## APPLICATIONS

PROTOTYPING  
VOLUME PRODUCTION  
MICROPROGRAMMING  
HARDWARE ALGORITHMS  
CONTROL STORE

## BLOCK DIAGRAM

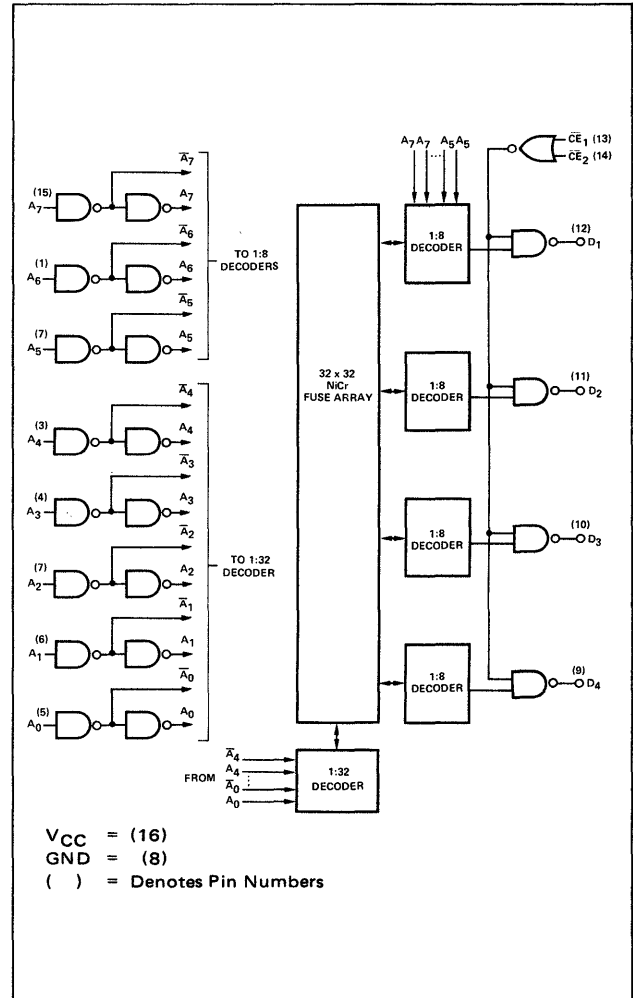

## INPUT/OUTPUT SCHEMATIC DIAGRAMS

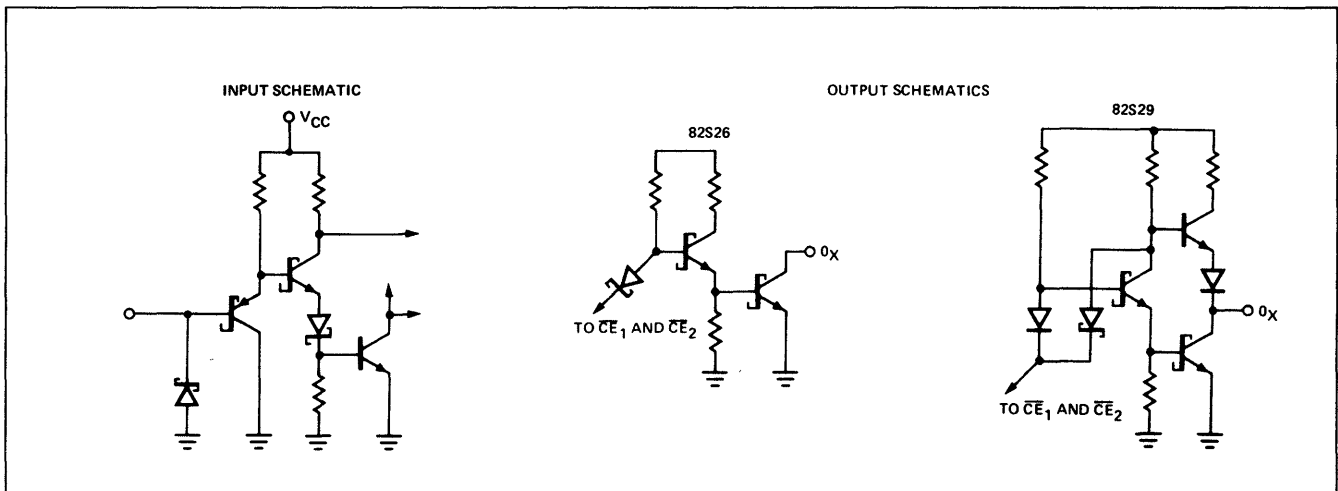

**OBJECTIVE ELECTRICAL CHARACTERISTICS** (Over Recommended Operating Temperature and Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS
	MIN.	TYP.	MAX.	UNITS	
"0" Output Voltage			0.5	V	$I_{out} = 16mA$ $\overline{CE}_1$ or $\overline{CE}_2 = "1"$ , $V_{out} = 2.6V$ $\overline{CE}_1 = \overline{CE}_2 = "0"$ , $V_{out} = 2.6V$ $\overline{CE}_1$ or $\overline{CE}_2 = "1"$ , $V_{out} = 0.5$ to $2.4V$ $\overline{CE}_1 = \overline{CE}_2 = "0"$ , $V_{out} = 2.4V$ $V_{in} = 0.5V$ $V_{in} = 2.7V$
"1" Output Leakage (82S26)			40	$\mu A$	
(82S29)			100	$\mu A$	
(82S29)			+40	$\mu A$	
"1" Output Current (82S29)	-2.0			mA	
"0" Input Current			-250	$\mu A$	
"1" Input Current			50	$\mu A$	
Input Threshold Voltage					
"0" Level	.85			V	
"1" Level			2.0	V	

( $T_A = 25^\circ C$  and  $V_{CC} = 5.0V$ )

CHARACTERISTICS	LIMITS				TEST CONDITIONS
	MIN	TYP	MAX	UNITS	
Input Clamp Voltage	-1.0			V	$I_{in} = 5.0mA$ $V_{CC} = 5.00V$
Power Consumption		105/525		mA/mW	
Propagation Delay					
Address to Output			60	ns	
Chip Enable to Output			50	ns	

- Positive current is defined as into the terminal referenced.
- Manufacturer reserves the right to make design and process changes and improvements.
- Applied voltage must not exceed 6.0V except while programming.  
Input currents must not exceed  $\pm 30$  mA.  
Output currents must not exceed  $\pm 50$  mA except while programming.
- Specifications are tentative. Final specifications will be available by May 1972.

**PROGRAMMING PROCEDURE**

The 82S26 and 82S29 may be programmed by using the Curtis Electro Devices or Spectrum Dynamics Programmers. Each perform the procedures outlined.

The 82S26 and 82S29 standard parts, are shipped with all outputs at Logical "0". To write a logical "1" proceed as follows:

**A. Simple Programming Procedure using "bench" equipment.**

- Connect pin 8 (Gnd) to ground. Enable the device by connecting  $\overline{CE}_1$ , (pin 13) and  $\overline{CE}_2$  (pin 14) to a logical "0".
- Raise  $V_{CC}$  (pin 16) to  $12.5V \pm 0.5V$ . (Note:  $I_{CC}$  will be approximately 300mA during the programming procedure.)
- Address the word to be programmed through  $A_0$  through  $A_6$  using 0V to 0.5V as logical "0" and 2.4V to 5.0V as logical "1".
- Force  $64 \pm 3mA$  into the output to be programmed to a "1". (Note: LIMIT THE OUTPUT VOLTAGE TO 20.0V MAX. PROGRAM ONE OUTPUT AT A TIME.)

NOTE:  $V_{CC}$  and output programming pulse width should be 50ms (1.0 sec max.).

- Remove the programming current from the output and remove  $V_{CC}$ . (Do not exceed a 25% power on


duty cycle during programming.)

- Repeat steps 2 through 5 until the addressed word is completely programmed.
- Repeat steps 2 through 6 until the device is completely programmed.

**B. Fast Programming Procedure**

- Steps 1 through 3 same as above in slow procedures.
- Force  $64 \pm 3mA$  into the output, limited to 20.0V max, to be programmed to a "1" and monitor the voltage at the output pin. When the output voltage rises above 19.5V the bit is programmed. (Note: Unprogrammed outputs will be 18.7V or less. Typical Programming time is 10 millisec/bit.)
- Remove the current source and apply it to the next output, in the same word, to be programmed. (Note: Full power may be applied to the device for 1.0 sec continuously. Therefore, bits may be programmed until 1.0 sec has been accumulated. At that time, remove all power for 4.0 seconds, then continue programming.)
- Repeat steps 4 and 5 until the entire word is programmed.
- Repeat steps 2 through 6 until the device is fully programmed. The typical 82S26 or 82S29 can be programmed in less than one-half minute using the above procedure.

AC TEST FIGURE AND WAVEFORM

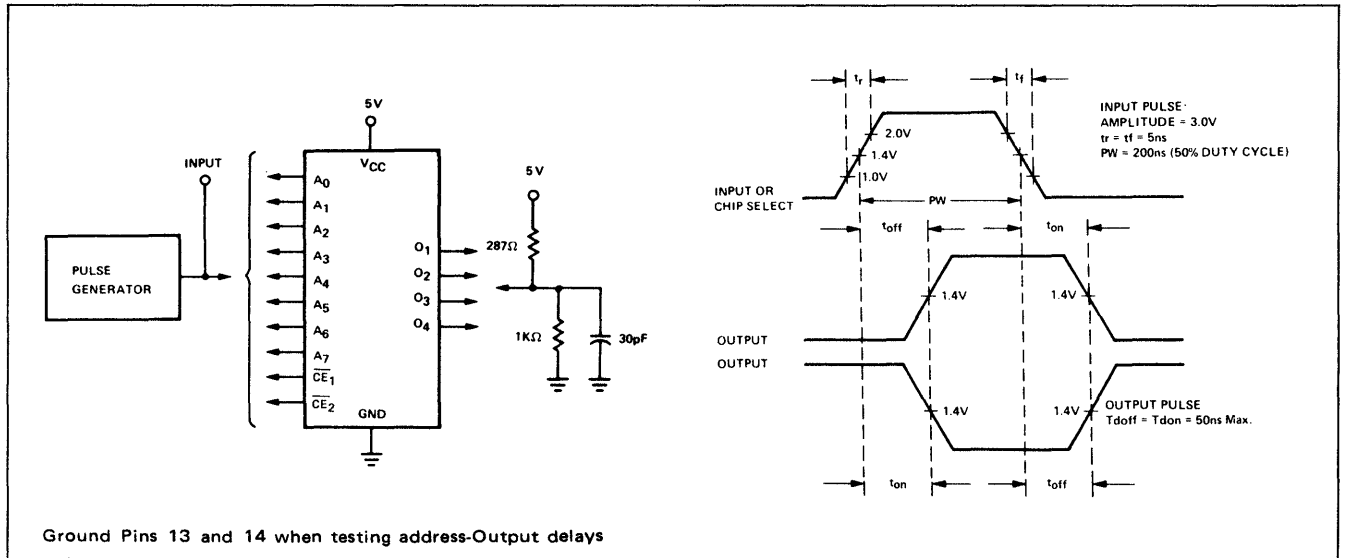





# SECTION 9

## SIGNETICS SURE 883 PROGRAM

### FOR DIGITAL DEVICES BULLETIN 5001A

The Signetics SURE\*/883 Program consists of a combination of 100 percent and statistical sample tests designed to assure specified performance, continuing uniformity, and long term reliability of Signetics products. These tests are made regularly at no extra cost to the user and are performed in addition to the 40 quality assurance inspections and tests to which every circuit is subjected before final seal. The tests, tabulated below for the specifier's convenience, are performed in accordance with the following conditions, sequence, and schedules on equipment calibrated to meet all requirements of MIL-Q-9858A and MIL-C-45662A.

Every circuit of every lot is processed to the environmental screens shown in Table I. These screens are performed in production and include 100% final production electrical tests. Any unit failing either the environmental screens or the final production electrical tests is rejected and removed from the lot.

After completion of Table I tests, each manufacturing lot is sampled and tested by Quality Assurance for conformance to the requirements of Table II. The unsampled portion of the lot is held pending acceptance of the lot sample. Detailed electrical test limits and conditions applicable to each subgroup are shown in the Electrical Characteristics table of the individual part type data sheets.

Tables IIIA, IIIB, and IIIC provide a complete process qualification and verification program in accordance with the conditions of MIL-STD-883, Group A, B and C tests. These tests are performed once in every 90 day manufacturing period, on representative devices from each standard production die process family and on each production package family. The representative circuits and packages selected are changed routinely, and the tests performed monitor and qualify all structurally similar devices produced by the same process and production during that period. A summary of these test results is available on request at the time of order placement.

\* Systematic Uniformity and Reliability Evaluation

All of the applicable Electrical Parameters of Table IIIA are performed at pretest on the Table IIIC samples. This provides the MIL-STD-883 electrical parameter and design verification Group A tests. These tests are performed on representative circuit types from every die process family type in manufacturing during this period.

Table IIIB consists of the package oriented qualification environmental stress tests of MIL-STD-883, Groups B and C. Representative samples from each package product family type are monitored and qualified every 90 day period by these tests. A common device is used as the die type for these package and assembly qualification tests.

Table IIIC consists of the die process oriented qualification electrical stress or operational tests at high temperature per MIL-STD-883, Groups B and C. Representative devices from each die process family are monitored and qualified every 90 day period by these tests. The package type is randomly selected as applicable.

An additional screening series is available at extra cost. Details are given in Table V, MIL-STD-883, method 5004, high reliability screening.

**Table I — 100% Production Screen Tests**

TEST	CONDITIONS
Preseal Visual Thermal Shock	High Power — Low Power Liquid to Liquid, 5 Cycles, 60 Seconds at 0°C, 60 Seconds at 100°C, transfer time 5 Seconds. (See Note 1.)
Centrifuge	Y <sub>1</sub> Axis; 30,000 g minimum, 1 minute. (See Note 1.)
Hermeticity	Gross leak test (Bubble Test). (See Note 1.)
Production Electrical Tests	

**Table II — Signetics Acceptance Tests (See Notes 2 and 3)**

SIGNETICS SUBGROUP	TEST	CONDITIONS	AQL	MIL-STD-105 INSPECTION LEVEL
A-1	Visual and Mechanical Inspection	MIL-STD-883 Method 2009	1.0%	II
A-2	DC Parameters	T <sub>A</sub> = +25°C	1.0%	II
A-3	DC Parameters	T <sub>A</sub> = +25°C	1.0%	II
A-4	DC Parameters	T <sub>A</sub> = +125°C	1.0%	II
A-5	DC Parameters	T <sub>A</sub> = -55°C	1.0%	II
A-6	AC Parameters	T <sub>A</sub> = +25°C	1.0%	II

**TABLE IIIA. MIL-STD-883 GROUP A ELECTRICAL TESTS**

MIL-STD-883 GROUP A SUBGROUP	SIGNETICS SUBGROUP	TEST DESCRIPTION
A1	A-2, A-3	Static tests at 25°C
A2	A-4	Static tests at maximum rated operating temperature.
A3	A-5	Static tests at minimum rated operating temperature.
A4	A-6	Dynamic tests at 25°C.
A5	C 2, when applicable	Dynamic tests at maximum rated operating temperature.
A6	C 2, when applicable	Dynamic tests at minimum rated operating temperature.
A7	*	Functional tests at 25°C.
A8	A-4, A-5	Functional tests at maximum and minimum rated operating temperatures.
A9	A-6	Switching tests at 25°C.
A10	C 2, when applicable	Switching tests at maximum rated operating temperature.
A11	C 2, when applicable	Switching tests at minimum rated operating temperature.

**TABLE IIIB. MIL-STD-883 GROUPS B AND C ENVIRONMENTAL TESTS**

MIL-STD-883 GROUP B & C SUBGROUP	TEST DESCRIPTION	MIL-STD-883 METHOD	CONDITIONS	LTPD
B <sub>1</sub>	Physical Dimensions	2008	Test Condition A	15
B <sub>2</sub>	Marking Permanency Visual and Mechanical Bond Strength	2008 2008 2011	Test Condition B, Para. 3.2.1 Test Condition B Test Condition D	4 devices/no failure 1 device/no failure 15
B <sub>3</sub>	Solderability	2003	Solder Temperature 260°C ±10°C	15
B <sub>4</sub>	Lead Fatigue Hermeticity a. Fine b. Gross	2004 1014	Test Condition B2 See Note 4 Test Condition A or B Test Condition C	15
C <sub>1</sub>	Pre-Test Electrical Parameters Thermal Shock  Temperature Cycle  Moisture Resistance End Point Electrical Parameters FAILURE CRITERIA	1011  1010  1004	Signetics Subgroup A-3  15 Cycles. Test Condition C, +150°C to -65°C 10 Cycles. Test Condition C, 150°C to -65°C Omit initial conditioning.  Signetics Subgroup A-3 Refer to Table IV.	15
C <sub>2</sub>	Pre-Test Electrical Parameters Mechanical Shock Vibration Variable Frequency Constant Acceleration End Point Electrical Parameters FAILURE CRITERIA	2002  2007 2001	Signetics Subgroup A-3 Test Condition B  Test Condition A Test Condition E  Signetics Subgroup A-3 Refer to Table IV.	15
C <sub>3</sub>	Salt Atmosphere	1009	Test Condition A. Omit initial conditioning.	15
C <sub>4</sub>	Pre-Test Electrical Parameters High Temperature Storage End Point Electrical Parameters FAILURE CRITERIA	1008	Signetics Subgroup A-3  T <sub>A</sub> = +150°C, t = 1000 hours  Signetics Subgroup A-3 Refer to Table IV.	λ = 15

**TABLE IIIC. MIL-STD-883 GROUPS B AND C HIGH TEMPERATURE OPERATING LIFE TESTS**

MIL-STD-883 GROUP B & C SUBGROUP	TEST DESCRIPTION	MIL-STD-883 METHOD	CONDITIONS	LTPD
	Pre-Test and Design Verification Electrical Parameters		Table IIIA as applicable, data sheet groups A & C.	
B <sub>5</sub> & C <sub>5</sub>	High Temperature Operating Life  End Point Electrical Parameters FAILURE CRITERIA	1005	Test Condition D or E as applicable. T <sub>A</sub> = +125°C or +85°C, per Part Data Sheet. t = 1000 hours.  Signetics Subgroup A-3 Refer to Table IV.	λ = 10

\* Signetics performs a truth table test.

**Table IV – Signetics Failure Criteria**

TEST	"1" Input Current	"1" Output Voltage	"0" Input Current	"0" Output Voltage	Expansion Node Current
LIMITS	Data Sheet Limits and: 10X Initial Value for DTL 5X Initial Value for TTL	Data Sheet Limits and: ±20% Initial Value	Data Sheet Limits ±20% Initial Value	Data Sheet Limits and: ±0.1V	Data Sheet Limits and: ±20% Initial Value

**Optional High Reliability Screening**

To maximize reliability in critical application, the Optional High Reliability Screening of Table V provides for three levels of 100% screening per MIL-STD-883, Method 5004 at extra cost. This series eliminates the necessity for special specification, minimizes cost and provides the shortest possible delivery time. This series is applied after the normal Group A acceptance test. Circuits subjected to this Preconditioning Series are clearly distinguishable from standard products in the following ways:

- Individual serial number on each circuit (Class A only).
- The first letters of a part number are either RA, RB, or RC.
  - RA = Class A
  - RB = Class B
  - RC = Class C
  - i.e., RA8880J = 100% screening of Table V, Class A.
- Individual device variables parametric test data is supplied with each shipment (Class A only).

Consult your local representative for price information. Device types should be specified with the appropriate letter prefixes.

**Notes:**

- Not applicable to solid molded packaged devices.
- All test equipment calibrated to meet requirements of MIL-Q-9858A and MIL-C-45662A.
- Detailed tests, conditions, and limits applicable to each subgroup are given in the Signetics data sheet ELECTRICAL CHARACTERISTICS table. See Table IIIA for the corresponding Group A tests of MIL-STD-883.
- The Hermeticity tests are not employed for solid molded packages.
- Class B and Class C may be subjected to thermal shock as an alternate.
- The test sequence of fine and gross leak may be reversed when fluorocarbons are utilized for gross leak.
- The individual MIL-STD-883 Test Methods are, in many cases designed to "stand alone" as a sole screen or sole Group B environmental sampling test. But since 5004 specifies a screening series or flow, some of the measurements, etc., specified in an individual Test Method are not intended to be applicable in the screening series.

**TABLE V – MIL-STD-883 METHOD 5004, HIGH RELIABILITY SCREENING**

TEST	MIL-STD-883 METHOD	CLASS A	CLASS B	CLASS C	CLARIFICATIONS (See Note 7)
Internal Visual (preseal)	2010.1	Cond. A	Cond. B	Cond. B	Test Condition A, Paragraph 3.1.1.7, a, delete the words "and parameter".
Stabilization Bake	1008 (24 hours)	Cond. C	Cond. C	Cond. C	Condition C (150°C) max. for au/al metallization system. Cond. D (200°C) max. for al/al metallization system. No electrical measurements at this point.
Thermal Shock	1011	Cond. C	Not required. NOTE 5	Not required. NOTE 5	Cond. C (150°C) max. for au/al metallization system. Cond. D (200°C) max. for al/al metallization system. No electrical measurements, no external visual inspection at this point.
Temperature Cycling	1010	Cond. C	Cond. C NOTE 5	Cond. C NOTE 5	(150°C) max. for au/al metallization system. Cond. D (200°C) max. for al/al metallization system. No electrical measurements, no external visual inspection, no hermeticity tests at this point.
Mechanical Shock	2002, Y1 plane only	Cond. B	Not Required	Not Required	No electrical measurements at this point.
Centrifuge	2001	Cond. E Y2 then Y1 plane	Cond. E Y1 plane	Cond. E Y1 plane	
Hermeticity A. Fine Leak B. Gross Leak	1014, Note 6 (Hermetic devices only)	Cond. A or B Cond. C	Cond. A or B Cond. C	Cond. A or B Cond. C	
Critical Electrical Parameters	Signetics Subgroup A 3	Read and Record	Not Required	Not Required	
Burn In Test	1015, T <sub>A</sub> = +125°C	240 hours Cond. D or E (as applicable)	168 hours Cond. D or E (as applicable)	Not Required	
Critical Electrical Parameters	Signetics Subgroup A 3	Read and Record	Not Required	Not Required	
Signetics FAILURE CRITERIA		Table IV	Not Required	Not Required	
Reverse Bias Burn In	1015, T <sub>A</sub> = +150°C t = 72 hours	Cond. A or C	Not Required	Not Required	Required only when specified in the applicable procurement document. Signetics standard burn-in (above) includes reverse bias of unused junctions.
Final Electrical Test	Perform go no go measurements of Signetics Subgroup A Parameters	Signetics Subgroups A 2, A 4, A 5, A 6. Functional tests, truth table when applicable	Signetics Subgroups A 2, A 3, A 5. Functional tests, truth table when applicable	Signetics Subgroups A 2, A 3 Functional tests, truth table when applicable	
Radiographic Inspection	2012	Yes	Not Required	Not Required	
External Visual	2009	Yes	Yes	Yes	



# SECTION 10

## CUSTOMER ORDERING INFORMATION

N8205Y - CB175      ASCII-TO-EBCDIC, EBCDIC-TO-ASCII  
 N8204Y - CB504      ASCII-TO-EBCDIC CODE CONVERTER  
 N8204Y - CB505      EBCDIC-TO-ASCII CODE CONVERTER

### ASCII (ADDRESS) TO EBCDIC (DATA)      8205 — CB175 FIRST HALF 8204 — CB504

0	00000000	1	00000001	2	00000010	3	00000011	128	00100000	129	00100001	130	00100010	131	00100011
4	00101011	5	00101101	6	00101110	7	00101111	132	00100100	133	00010101	134	00000110	135	00010111
8	00010110	9	00000101	10	00100101	11	00001011	136	00101000	137	00101001	138	00101010	139	00101011
12	00001100	13	00001101	14	00001110	15	00001111	140	00101100	141	00001001	142	00001010	143	00011011
16	00010000	17	00010001	18	00010010	19	00010011	144	00110000	145	00110001	146	00011010	147	00110011
20	00111000	21	00111101	22	00110010	23	00100110	148	00110100	149	00110101	150	00110110	151	00001000
24	00011000	25	00011001	26	00111111	27	00100111	152	00111000	153	00111001	154	00111010	155	00011011
28	00011100	29	00011101	30	00011110	31	00011111	156	00000100	157	00010100	158	00111110	159	11100001
32	01000000	33	01001111	34	01111111	35	01111011	160	01000001	161	01000010	162	01000011	163	01000100
36	01011011	37	01101100	38	01010000	39	01111101	164	01000101	165	01000110	166	01000111	167	01001000
40	01001101	41	01011101	42	01011100	43	01001110	168	01001001	169	01010001	170	01010010	171	01010011
44	01101011	45	01100000	46	01001011	47	01100001	172	01010100	173	01010101	174	01010110	175	01010111
48	11110000	49	11110001	50	11110010	51	11110011	176	01011000	177	01011001	178	01100010	179	01100011
52	11110100	53	11110101	54	11110110	55	11110111	180	01100100	181	01100101	182	01100110	183	01100111
56	11111000	57	11111001	58	01111010	59	01101110	184	01101000	185	01101001	186	01110000	187	01110001
60	01001100	61	01111110	62	01101110	63	01101111	188	01110010	189	01110011	190	01110100	191	01110101
64	01111100	65	11000001	66	11000010	67	11000011	192	01110110	193	01110111	194	01111000	195	10000000
68	11000100	69	11000101	70	11000110	71	11000111	196	10001010	197	10001011	198	10001000	199	10001101
72	11001000	73	11001001	74	11010001	75	11010010	200	10001110	201	10001111	202	10010000	203	10011010
76	11010011	77	11010100	78	11010101	79	11010110	204	10011011	205	10011100	206	10011101	207	10011110
80	11010111	81	11011000	82	11011001	83	11100010	208	10011111	209	10100000	210	10101010	211	10101011
84	11100011	85	11100100	86	11100101	87	11100110	212	10101100	213	10101101	214	10101110	215	10101111
88	11100111	89	11101000	90	11101001	91	01001010	216	10100000	217	10110001	218	10110010	219	10110011
92	11100000	93	01011010	94	01011111	95	01101101	220	10110100	221	10110101	222	10110110	223	10110111
96	01111001	97	10000001	98	10000010	99	10000011	224	10111000	225	10111001	226	10111010	227	10111011
100	10000100	101	10000101	102	10000110	103	10000111	228	10111100	229	10111101	230	10111110	231	10111111
104	10001000	105	10001001	106	10010001	107	10010010	232	11001010	233	11001011	234	11001100	235	11001101
108	10010011	109	10010100	110	10010101	111	10010110	236	11001110	237	11001111	238	11011010	239	11011011
112	10010111	113	10011000	114	10011001	115	10100010	240	11011100	241	11011101	242	11011110	243	11011111
116	10100011	117	10100100	118	10100101	119	10100110	244	11101010	245	11101011	246	11101100	247	11101101
120	10100111	121	10101000	122	10101001	123	11000000	248	11101110	249	11101111	250	11111010	251	11111011
124	01101010	125	11010000	126	10100001	127	00000111	252	11111100	253	11111101	254	11111110	255	11111111

### EBCDIC (ADDRESS) TO ASCII (DATA)      8205 — CB175 SECOND HALF 8204 — CB505

256	00000000	257	00000001	258	00000010	259	00000011	384	11000011	385	01100001	386	01100010	387	01100011
260	10011100	261	00001001	262	10000110	263	01111111	388	01100100	389	01100101	390	01100110	391	01100111
264	10010111	265	10001101	266	10001110	267	00001011	392	01101000	393	01101001	394	11000100	395	11000101
268	00001100	269	00001101	270	00001110	271	00001111	396	11000110	397	11000111	398	11001000	399	11001001
272	00010000	273	00010001	274	00010010	275	00010011	400	11001010	401	11001011	402	01101011	403	01101100
276	10011101	277	10000101	278	00001000	279	10000111	404	01101101	405	01101110	406	01101111	407	01110000
280	00011000	281	00011001	282	10010100	283	10001111	408	01110001	409	01110010	410	11001011	411	11001100
284	00011100	285	00011101	286	00011110	287	00011111	412	11001101	413	11001110	414	11001111	415	11010000
288	10000000	289	10000001	290	10000010	291	10000011	416	11010001	417	01111110	418	01110011	419	01110100
292	10000100	293	00001010	294	00010111	295	00011011	420	01110101	421	01110110	422	01110111	423	01111000
296	10001000	297	10001001	298	10001010	299	10001011	424	01111001	425	01111010	426	11010010	427	11010011
300	10001100	301	00000101	302	00000110	303	00000111	428	11010100	429	11010101	430	11010110	431	11010111
304	10010000	305	10010001	306	00010110	307	10010011	432	11011000	433	11011001	434	11011010	435	11011011
308	10010100	309	10010101	310	10010110	311	00000100	436	11011100	437	11011101	438	11011110	439	11011111
312	10010100	313	10011001	314	10011010	315	10011011	440	11100000	441	11100001	442	11100010	443	11100011
316	00010100	317	00010101	318	10011110	319	00010101	444	11100100	445	11100101	446	11100110	447	11100111
320	00100000	321	10100000	322	10100001	323	10100010	448	01111011	449	01000001	450	01000010	451	01000011
324	10100011	325	10100100	326	10100101	327	10100110	452	01000100	453	01000101	454	01000110	455	01000111
328	10100111	329	10101000	330	01011011	331	00101110	456	01001000	457	01001001	458	11101000	459	11101001
332	00111100	333	00101000	334	00101011	335	00100001	460	11101010	461	11101011	462	11101100	463	11101101
336	00100110	337	10101001	338	10101010	339	10101011	464	01111101	465	01001010	466	01001011	467	01001010
340	10101100	341	10101101	342	10101110	343	10101111	468	01001101	469	01001110	470	01001111	471	01010000
344	10110000	345	10110001	346	01011101	347	00100100	472	01010001	473	01010010	474	11101110	475	11101111
348	00101010	349	00101001	350	00111011	351	01011110	476	11110000	477	11110001	478	11110010	479	11110011
352	00101101	353	00101111	354	10110010	355	10110011	480	01011100	481	10011111	482	01010011	483	01010100
356	10110100	357	10110101	358	10110110	359	10110111	484	01010101	485	01010110	486	01010111	487	01011000
360	10111000	361	10111001	362	01111100	363	00101100	488	01011001	489	01011010	490	11110100	491	11110101
364	00100101	365	01011111	366	00111110	367	00111111	492	11110110	493	11110111	494	11111000	495	11111001
368	10111010	369	10111011	370	10111100	371	10111101	496	00110000	497	00110001	498	00110010	499	00110011
372	10111110	373	10111111	374	11000000	375	11000001	500	00110100	501	00110101	502	00110110	503	00110111
376	11000010	377	01100000	378	00111010	379	00100011	504	00111000	505	00111001	506	11111010	507	11111011
380	01000000	381	00100111	382	00111101	383	00100010	508	11111100	509	11111101	510	11111110	511	11111111

N8228I - CD162 PATTERN  
 USASC II ROW CHARACTER GENERATOR

	A <sub>0</sub> A <sub>1</sub> A <sub>2</sub> A <sub>3</sub> A <sub>4</sub> A <sub>5</sub>	A <sub>6</sub> A <sub>7</sub> A <sub>8</sub> A <sub>9</sub>	0		0		0		0		1		1		1		1	
			0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1
			0 <sub>4</sub> 0 <sub>3</sub> 0 <sub>2</sub> 0 <sub>1</sub>	0 <sub>4</sub> 0 <sub>3</sub> 0 <sub>2</sub> 0 <sub>1</sub>	0 <sub>4</sub> 0 <sub>3</sub> 0 <sub>2</sub> 0 <sub>1</sub>	0 <sub>4</sub> 0 <sub>3</sub> 0 <sub>2</sub> 0 <sub>1</sub>	0 <sub>4</sub> 0 <sub>3</sub> 0 <sub>2</sub> 0 <sub>1</sub>	0 <sub>4</sub> 0 <sub>3</sub> 0 <sub>2</sub> 0 <sub>1</sub>	0 <sub>4</sub> 0 <sub>3</sub> 0 <sub>2</sub> 0 <sub>1</sub>	0 <sub>4</sub> 0 <sub>3</sub> 0 <sub>2</sub> 0 <sub>1</sub>	0 <sub>4</sub> 0 <sub>3</sub> 0 <sub>2</sub> 0 <sub>1</sub>	0 <sub>4</sub> 0 <sub>3</sub> 0 <sub>2</sub> 0 <sub>1</sub>	0 <sub>4</sub> 0 <sub>3</sub> 0 <sub>2</sub> 0 <sub>1</sub>	0 <sub>4</sub> 0 <sub>3</sub> 0 <sub>2</sub> 0 <sub>1</sub>	0 <sub>4</sub> 0 <sub>3</sub> 0 <sub>2</sub> 0 <sub>1</sub>	0 <sub>4</sub> 0 <sub>3</sub> 0 <sub>2</sub> 0 <sub>1</sub>	0 <sub>4</sub> 0 <sub>3</sub> 0 <sub>2</sub> 0 <sub>1</sub>	0 <sub>4</sub> 0 <sub>3</sub> 0 <sub>2</sub> 0 <sub>1</sub>
0 0 0	000 001 010 011 100 101 110 111																	
0 0 1	000 001 010 011 100 101 110 111																	
0 1 0	000 001 010 011 100 101 110 111																	
0 1 1	000 001 010 011 100 101 110 111																	
1 0 0	000 001 010 011 100 101 110 111																	
1 0 1	000 001 010 011 100 101 110 111																	
1 1 0	000 001 010 011 100 101 110 111																	
1 1 1	000 001 010 011 100 101 110 111																	

## PUNCHED CARD PROGRAM INPUT FOR 8204 & 8205

The customer may specify the content of the ROM either by filling out the accompanying form or by using punched cards. He should note that:

1. "Zero" levels on data out lines are defined as low.
2. Address bit  $A_0$  is the least significant address bit.  
(See 8204 and 8205 data sheet)

Punched Card Data Input - Data to program the 8205 and the 8204 can be supplied in punched card-format. The format for the data is shown in Figure 1. Each data word is preceded by an address word which identifies its

position in memory. Figure 2 shows the deck format for the 8204 256 x 8 bit ROM. For the 8204 the first card in the deck contains the part number and it is immediately followed by up to 40 alphanumeric characters of customer supplied information used to identify the part. The 64 customer data cards follow immediately. Figure 3 shows the deck format for the 8205 512 x 8 ROM. For the 8205 the first card in the deck contains the part number and it is immediately followed by up to 40 alphanumeric characters of customer supplied information used to identify the part. 128 data cards follow immediately. The left-most digit in the data word corresponds to output  $O_8$  and the right-most digit to output  $O_1$ .

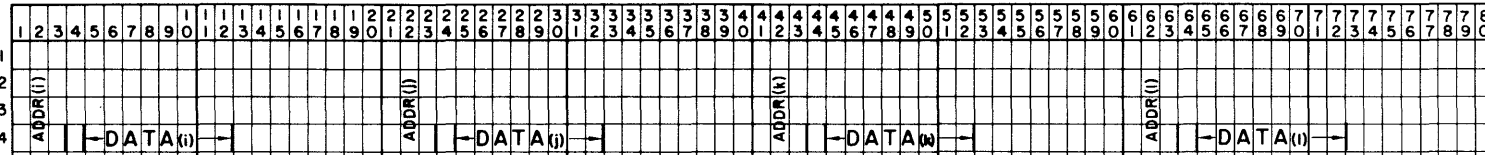


FIGURE 1. CARD DATA FORMAT

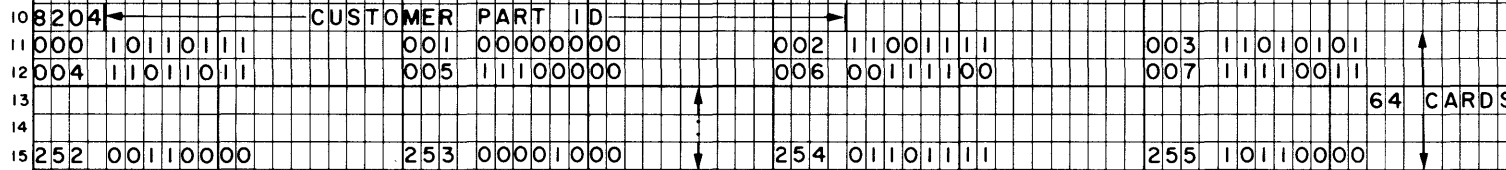


FIGURE 2. DECK FORMAT FOR 8204 ROM (256x8)

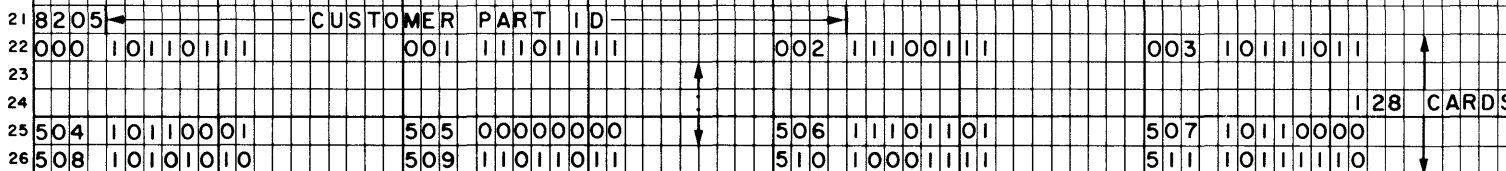


FIGURE 3. DECK FORMAT FOR 8205 ROM (512x8)





### DATA CARDS

1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0
ADDR	a									ADDR	b									ADDR	c									ADDR	d									ADDR	e									ADDR	f									ADDR	g									ADDR	h									ADDR	i																																																										
BLANK										BLANK										BLANK										BLANK										BLANK										BLANK										BLANK										BLANK										BLANK										BLANK										BLANK										BLANK																													
DATA	a									DATA	b									DATA	c									DATA	d									DATA	e									DATA	f									DATA	g									DATA	h									DATA	i																																																										
BLANK										BLANK										BLANK										BLANK										BLANK										BLANK										BLANK										BLANK										BLANK										BLANK										BLANK																																							
EXAMPLE																																																																																																																																											
0000	1010	0001	1000	0002	0111	0003	1010	0004	1100	0005	1111	0006	1101	0007	1001																																																																																																																												
0008	1101	0009	1010	0010	1101	0011	1111	0012	1000	0013	0000	0014	0111	0015	0110																																																																																																																												
																↑																																																																																																																											
																⋮																																																																																																																											
																↓																																																																																																																											
1016	1101	1017	1111	1018	0000	1019	1001	1020	0110	1021	1010	1022	0101	1023	1111																																																																																																																												

FIGURE 2. DATA DECK LAYOUT

2048/4096 BIT READ ONLY MEMORY TRUTH TABLE/ORDERING BLANK

CUSTOMER: \_\_\_\_\_

THIS PORTION TO BE COMPLETED BY SIGNETICS

P.O. NO.: \_\_\_\_\_

PART NO.: \_\_\_\_\_

YOUR PART NO.: \_\_\_\_\_

S.D. NO.: \_\_\_\_\_

DATE: \_\_\_\_\_

DATE RECEIVED: \_\_\_\_\_

Note: For 256 x 8 Use This Page Only

Word	OUTPUT								Word	OUTPUT								Word	OUTPUT								Word	OUTPUT							
	O <sub>8</sub>	O <sub>7</sub>	O <sub>6</sub>	O <sub>5</sub>	O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>8</sub>	O <sub>7</sub>	O <sub>6</sub>	O <sub>5</sub>	O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>8</sub>	O <sub>7</sub>	O <sub>6</sub>	O <sub>5</sub>	O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>8</sub>	O <sub>7</sub>	O <sub>6</sub>	O <sub>5</sub>	O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>
0								64								128													192						
1								65								129													193						
2								66								130													194						
3								67								131													195						
4								68								132													196						
5								69								133													197						
6								70								134													198						
7								71								135													199						
8								72								136													200						
9								73								137													201						
10								74								138													202						
11								75								139													203						
12								76								140													204						
13								77								141													205						
14								78								142													206						
15								79								143													207						
16								80								144													208						
17								81								145													209						
18								82								146													210						
19								83								147													211						
20								84								148													212						
21								85								149													213						
22								86								150													214						
23								87								151													215						
24								88								152													216						

25										89										153																	217		
26										90											154																	218	
27										91											155																		219
28										92											156																		220
29										93											157																		221
30										94											158																		222
31										95											159																		223
32										96											160																		224
33										97											161																		225
34										98											162																		226
35										99											163																		227
36										100											164																		228
37										101											165																		229
38										102											166																		230
39										103											167																		231
40										104											168																		232
41										105											169																		233
42										106											170																		234
43										107											171																		235
44										108											172																		236
45										109											173																		237
46										110											174																		238
47										111											175																		239
48										112											176																		240
49										113											177																		241
50										114											178																		242
51										115											179																		243
52										116											180																		244
53										117											181																		245
54										118											182																		246
55										119											183																		247
56										120											184																		248
57										121											185																		249
58										122											186																		250
59										123											187																		251
60										124											188																		252
61										125											189																		253
62										126											190																		254
63										127											191																		255

2048/4096 BIT READ ONLY MEMORY TRUTH TABLE/ORDERING BLANK

CUSTOMER: \_\_\_\_\_

THIS PORTION TO BE COMPLETED BY SIGNETICS

P.O. NO.: \_\_\_\_\_

PART NO.: \_\_\_\_\_

YOUR PART NO.: \_\_\_\_\_

S.D. NO.: \_\_\_\_\_

DATE: \_\_\_\_\_

DATE RECEIVED: \_\_\_\_\_

Note: For 256 x 8 Use Previous Page Only

Word	OUTPUT								Word	OUTPUT								Word	OUTPUT								Word	OUTPUT							
	O <sub>8</sub>	O <sub>7</sub>	O <sub>6</sub>	O <sub>5</sub>	O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>8</sub>	O <sub>7</sub>	O <sub>6</sub>	O <sub>5</sub>	O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>8</sub>	O <sub>7</sub>	O <sub>6</sub>	O <sub>5</sub>	O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>8</sub>	O <sub>7</sub>	O <sub>6</sub>	O <sub>5</sub>	O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>
256									320											384												448			
257									321												385											449			
258									322												386											450			
259									323												387											451			
260									324												388											452			
261									325												389											453			
262									326												390											454			
263									327												391											455			
264									328												392											456			
265									329												393											457			
266									330												394											458			
267									331												395											459			
268									332												396											460			
269									333												397											461			
270									334												398											462			
271									335												399											463			
272									336												400											464			
273									337												401											465			
274									338												402											466			
275									339												403											467			
276									340												404											468			
277									341												405											469			
278									342												406											470			
279									343												407											471			
280									344												408											472			





(8223,8224)

CB (XXX) 256 BIT READ ONLY MEMORIES TRUTH TABLE/ORDER BLANK

CUSTOMER: _____	THIS PORTION TO BE COMPLETED BY SIGNETICS
P.O. NO.: _____	PART NO.: _____
YOUR PART NO.: _____	S.D. NO.: _____
DATE: _____	DATE RECEIVED: _____

WORD	INPUTS						OUTPUTS							
	A <sub>4</sub>	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>	ENABLE	B <sub>7</sub>	B <sub>6</sub>	B <sub>5</sub>	B <sub>4</sub>	B <sub>3</sub>	B <sub>2</sub>	B <sub>1</sub>	B <sub>0</sub>
0	0	0	0	0	0	0								
1	0	0	0	0	1	0								
2	0	0	0	1	0	0								
3	0	0	0	1	1	0								
4	0	0	1	0	0	0								
5	0	0	1	0	1	0								
6	0	0	1	1	0	0								
7	0	0	1	1	1	0								
8	0	1	0	0	0	0								
9	0	1	0	0	1	0								
10	0	1	0	1	0	0								
11	0	1	0	1	1	0								
12	0	1	1	0	0	0								
13	0	1	1	0	1	0								
14	0	1	1	1	0	0								
15	0	1	1	1	1	0								
16	1	0	0	0	0	0								
17	1	0	0	0	1	0								
18	1	0	0	1	0	0								
19	1	0	0	1	1	0								
20	1	0	1	0	0	0								
21	1	0	1	0	1	0								
22	1	0	1	1	0	0								
23	1	0	1	1	1	0								
24	1	1	0	0	0	0								
25	1	1	0	0	1	0								
26	1	1	0	1	0	0								
27	1	1	0	1	1	0								
28	1	1	1	0	0	0								
29	1	1	1	0	1	0								
30	1	1	1	1	0	0								
31	1	1	1	1	1	0								
ALL	X	X	X	X	X	1	1	1	1	1	1	1	1	1



CB (XXXX) 1024 BIT READ ONLY MEMORY TRUTH TABLE/ORDER BLANK

CUSTOMER: \_\_\_\_\_

THIS PORTION TO BE COMPLETED BY SIGNETICS

P.O. NO.: \_\_\_\_\_

PART NO.: \_\_\_\_\_

YOUR PART NO.: \_\_\_\_\_

S.D. NO.: \_\_\_\_\_

DATE: \_\_\_\_\_

DATE RECEIVED: \_\_\_\_\_

Word	OUTPUT				Word	OUTPUT				Word	OUTPUT				Word	OUTPUT			
	O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>
0					64					128					192				
1					65					129					193				
2					66					130					194				
3					67					131					195				
4					68					132					196				
5					69					133					197				
6					70					134					198				
7					71					135					199				
8					72					136					200				
9					73					137					201				
10					74					138					202				
11					75					139					203				
12					76					140					204				
13					77					141					205				
14					78					142					206				
15					79					143					207				
16					80					144					208				
17					81					145					209				
18					82					146					210				
19					83					147					211				
20					84					148					212				
21					85					149					213				
22					86					150					214				
23					87					151					215				
24					88					152					216				
25					89					153					217				



(8228)

4096 BIT READ ONLY MEMORY TRUTH TABLE/ORDER BLANK

CUSTOMER: \_\_\_\_\_

THIS PORTION TO BE COMPLETED BY SIGNETICS

P.O. NO.: \_\_\_\_\_

PART NO.: \_\_\_\_\_

YOUR PART NO.: \_\_\_\_\_

S.D. NO.: \_\_\_\_\_

DATE: \_\_\_\_\_

DATE RECEIVED: \_\_\_\_\_

Word	OUTPUT				Word	OUTPUT				Word	OUTPUT				Word	OUTPUT			
	O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>
0					70					140					210				
1					71					141					211				
2					72					142					212				
3					73					143					213				
4					74					144					214				
5					75					145					215				
6					76					146					216				
7					77					147					217				
8					78					148					218				
9					79					149					219				
10					80					150					220				
11					81					151					221				
12					82					152					222				
13					83					153					223				
14					84					154					224				
15					85					155					225				
16					86					156					226				
17					87					157					227				
18					88					158					228				
19					89					159					229				
20					90					160					230				
21					91					161					231				
22					92					162					232				
23					93					163					233				
24					94					164					234				
25					95					165					235				
26					96					166					236				
27					97					167					237				
28					98					168					238				

29					99					169					239				
30					100					170					240				
31					101					171					241				
32					102					172					242				
33					103					173					243				
34					104					174					244				
35					105					175					245				
36					106					176					246				
37					107					177					247				
38					108					178					248				
39					109					179					249				
40					110					180					250				
41					111					181					251				
42					112					182					252				
43					113					183					253				
44					114					184					254				
45					115					185					255				
46					116					186					256				
47					117					187					257				
48					118					188					258				
49					119					189					259				
50					120					190					260				
51					121					191					261				
52					122					192					262				
53					123					193					263				
54					124					194					264				
55					125					195					265				
56					126					196					266				
57					127					197					267				
58					128					198					268				
59					129					199					269				
60					130					200					270				
61					131					201					271				
62					132					202					272				
63					133					203					273				
64					134					204					274				
65					135					205					275				
66					136					206					276				
67					137					207					277				
68					138					208					278				
69					139					209					279				

4096 BIT READ ONLY MEMORIES TRUTH TABLE/ORDER BLANK

CUSTOMER: \_\_\_\_\_

THIS PORTION TO BE COMPLETED BY SIGNETICS

P.O. NO.: \_\_\_\_\_

PART NO.: \_\_\_\_\_

YOUR PART NO.: \_\_\_\_\_

S.D. NO.: \_\_\_\_\_

DATE: \_\_\_\_\_

DATE RECEIVED: \_\_\_\_\_

Word	OUTPUT				Word	OUTPUT				Word	OUTPUT				Word	OUTPUT			
	O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>
280					350					420					490				
281					351					421					491				
282					352					422					492				
283					353					423					493				
284					354					424					494				
285					355					425					495				
286					356					426					496				
287					357					427					497				
288					358					428					498				
289					359					429					499				
290					360					430					500				
291					361					431					501				
292					362					432					502				
293					363					433					503				
294					364					434					504				
295					365					435					505				
296					366					436					506				
297					367					437					507				
298					368					438					508				
299					369					439					509				
300					370					440					510				
301					371					441					511				
302					372					442					512				
303					373					443					513				
304					374					444					514				
305					375					445					515				
306					376					446					516				
307					377					447					517				
308					378					448					518				

309					379					449					519				
310					380					450					520				
311					381					451					521				
312					382					452					522				
313					383					453					523				
314					384					454					524				
315					385					455					525				
316					386					456					526				
317					387					457					527				
318					388					458					528				
319					389					459					529				
320					390					460					530				
321					391					461					531				
322					392					462					532				
323					393					463					533				
324					394					464					534				
325					395					465					535				
326					396					466					536				
327					397					467					537				
328					398					468					538				
329					399					469					539				
330					400					470					540				
331					401					471					541				
332					402					472					542				
333					403					473					543				
334					404					474					544				
335					405					475					545				
336					406					476					546				
337					407					477					547				
338					408					478					548				
339					409					479					549				
340					410					480					550				
341					411					481					551				
342					412					482					552				
343					413					483					553				
344					414					484					554				
345					415					485					555				
346					416					486					556				
347					417					487					557				
348					418					488					558				
349					419					489					559				

(8228)

4096 BIT READ ONLY MEMORIES TRUTH TABLE/ORDER BLANK

CUSTOMER: _____	THIS PORTION TO BE COMPLETED BY SIGNETICS
P.O. NO.: _____	PART NO.: _____
YOUR PART NO.: _____	S.D. NO.: _____
DATE: _____	DATE RECEIVED: _____

Word	OUTPUT				Word	OUTPUT				Word	OUTPUT				Word	OUTPUT			
	O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>
560					630					700					770				
561					631					701					771				
562					632					702					772				
563					633					703					773				
564					634					704					774				
565					635					705					775				
566					636					706					776				
567					637					707					777				
568					638					708					778				
569					639					709					779				
570					640					710					780				
571					641					711					781				
572					642					712					782				
573					643					713					783				
574					644					714					784				
575					645					715					785				
576					646					716					786				
577					647					717					787				
578					648					718					788				
579					649					719					789				
580					650					720					790				
581					651					721					791				
582					652					722					792				
583					653					723					793				
584					654					724					794				
585					655					725					795				
586					656					726					796				
587					657					727					797				
588					658					728					798				

589					659					729					799				
590					660					730					800				
591					661					731					801				
592					662					732					802				
593					663					733					803				
594					664					734					804				
595					665					735					805				
596					666					736					806				
597					667					737					807				
598					668					738					808				
599					669					739					809				
600					670					740					810				
601					671					741					811				
602					672					742					812				
603					673					743					813				
604					674					744					814				
605					675					745					815				
606					676					746					816				
607					677					747					817				
608					678					748					818				
609					679					749					819				
610					680					750					820				
611					681					751					821				
612					682					752					822				
613					683					753					823				
614					684					754					824				
615					685					755					825				
616					686					756					826				
617					687					757					827				
618					688					758					828				
619					689					759					829				
620					690					760					830				
621					691					761					831				
622					692					762					832				
623					693					763					833				
624					694					764					834				
625					695					765					835				
626					696					766					836				
627					697					767					837				
628					698					768					838				
629					699					769					839				



(8228)

4096 BIT READ ONLY MEMORIES TRUTH TABLE/ORDER BLANK

CUSTOMER: \_\_\_\_\_

THIS PORTION TO BE COMPLETED BY SIGNETICS

P.O. NO.: \_\_\_\_\_

PART NO.: \_\_\_\_\_

YOUR PART NO.: \_\_\_\_\_

S.D. NO.: \_\_\_\_\_

DATE: \_\_\_\_\_

DATE RECEIVED: \_\_\_\_\_

Word	OUTPUT				Word	OUTPUT				Word	OUTPUT				Word	OUTPUT			
	O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>		O <sub>4</sub>	O <sub>3</sub>	O <sub>2</sub>	O <sub>1</sub>
840					910					980									
841					911					981									
842					912					982									
843					913					983									
844					914					984									
845					915					985									
846					916					986									
847					917					987									
848					918					988									
849					919					989									
850					920					990									
851					921					991									
852					922					992									
853					923					993									
854					924					994									
855					925					995									
856					926					996									
857					927					997									
858					928					998									
859					929					999									
860					930					1000									
861					931					1001									
862					932					1002									
863					933					1003									
864					934					1004									
865					935					1005									
866					936					1006									
867					937					1007									
868					938					1008									

869					939					1009									
870					940					1010									
871					941					1011									
872					942					1012									
873					943					1013									
874					944					1014									
875					945					1015									
876					946					1016									
877					947					1017									
878					948					1018									
879					949					1019									
880					950					1020									
881					951					1021									
882					952					1022									
883					953					1023									
884					954														
885					955														
886					956														
887					957														
888					958														
889					959														
890					960														
891					961														
892					962														
893					963														
894					964														
895					965														
896					966														
897					967														
898					968														
899					969														
900					970														
901					971														
902					972														
903					973														
904					974														
905					975														
906					976														
907					977														
908					978														
909					979														

## SALES OFFICES

- **New England Regional Sales Office:** Miller Building, Suite 11  
594 Marrett Road, Lexington, Massachusetts 02173  
Phone (617) 861-0840 TWX: (710) 326-6711
- **Atlantic States Regional Sales Office:** 2460 Lemoine Ave., Fort Lee,  
New Jersey 07024  
Phone: (201) 947-9870 TWX: (710) 991-9794
- Florida:** 3267 San Mateo, Clearwater 33515  
Phone: (813) 726-3469 TWX: (810) 866-0437
- Florida:** 4347 Northwest 2nd Court  
Boca Raton, Florida 33432  
Phone: (305) 391-8318 TWX: (510) 953-7538
- Maryland:** Silver Springs  
Phone: (301) 946-6030
- Pennsylvania and Southern New Jersey:** P. O. Box 431  
Oakwood Drive, Medford, New Jersey 08055  
Phone: (609) 665-5071
- Virginia:** 12001 Whip Road, Reston 22070  
Phone: (301) 946-6030
- **Central Regional Sales Office:** 5105 Tollview Drive, Suite 209  
Rolling Meadows, Illinois 60008  
Phone: (312) 259-8300 TWX: (910) 687-0765
- Minnesota:** 7710 Computer Ave., Suite 132, Minneapolis 55435  
Phone: (612) 922-2801 TWX: (910) 576-2740
- Ohio:** 3300 So. Dixie Drive, Suite 220, Dayton 45439  
Phone: (513) 294-8722
- **Northwest Regional Sales Office:** 811 E. Arques,  
Sunnyvale, CA 94086  
Phone (408) 739-7700 TWX: (910) 339-9220 (910) 339-9283
- **Southwest Regional Sales Office:** 2061 Business Center Dr.  
Suite 214, Irvine, CA 92664  
Phone: (714) 833-8980, (213) 924-1668 TWX: (910) 595-1506
- Arizona:** 4747 No. 16th St., Suite D-102, Phoenix  
Phone: (602) 265-3153
- California:** P. O. Box 788, Del Mar 92014  
Phone: (714) 453-7570

## REPRESENTATIVES

### ALABAMA

**Huntsville 35801: Compar Corp.,** 904 Bob Wallace Ave., Suite A  
Phone: (205) 539-8476

### ARIZONA

**Scottsdale 85252: Compar Corp.,** Box 1607  
Phone: (602) 947-4336 TWX: (910) 950-1293

### CALIFORNIA

**San Diego 92123: Celtec Company, Inc.,** 8799 Balboa Avenue  
Phone: (714) 279-7961 TWX: (910) 335-1512

### CANADA

**Toronto 17, Ontario: Corning Glass Works of Canada, Ltd.,**  
135 Vanderhoff Ave.  
Phone: (416) 421-1500 TWX: (610) 491-2155

**Montreal 265, Quebec: Corning Glass Works of Canada,**  
7065 Chester Ave.

### COLORADO

**Denver 80237: Parker Webster Company,** 8213 E. Kenyon Dr.  
Phone: (303) 770-1972

## CONNECTICUT

**Hamden 06518: Compar Corp.,** P. O. Box 5204  
Phone: (203) 288-9276 TWX: (710) 465-1540

## FLORIDA

**Altamonte Springs 32701: WMM Associates, Inc.,** 515 Tivoli Ct.  
Phone: (305) 831-4645

**Clearwater 33516: WMM Associates, Inc.,** 1260A S. Highland Ave.  
Phone: (813) 446-0075

**Pompano Beach 33060: WMM Associates, Inc.,**  
721 South East 6th Terrace  
Phone: (305) 943-3091

## INDIANA

**Indianapolis 46250: R. H. Newsom Associates,** 6320 Woburn Dr.  
Phone: (317) 849-4442

## MARYLAND

**Silver Springs 20904: Mechtronics Sales, Inc.,** 11700 Old Columbia  
Pike, Suite L-6 Phone: (301) 622-2420

## MASSACHUSETTS

**Newton Highlands 02161: Compar Corp.,** 88 Needham Street  
Phone: (617) 969-7140 TWX: (710) 335-1686

## MICHIGAN

**Grosse Pointe Park 48230: Greiner Associates, Inc.,**  
15324 E. Jefferson  
Phone: (313) 499-0188, (313) 499-0189 TWX: (801) 221-5157

## MINNESOTA

**Minneapolis 55416: Compar Corp.,** P. O. Box 16183  
Phone: (612) 922-7011

## MISSOURI

**St. Louis 63141: Compar Corp.,** 11734 Lackland Industrial Drive  
Phone: (314) 567-3399 TWX: (910) 764-0839

## UPSTATE NEW YORK

**Dewitt 13214: TriTech Electronics, Inc.,**  
P. O. Box C Phone: (315) 446-2881

## NORTH CAROLINA

**Winston-Salem 27101: Compar Corp.,** 1106 Burke Street  
Phone: (919) 723-1002 TWX: (510) 931-3101

## OHIO

**Dayton 45405: Compar Corp.,** P. O. Box 57, Forest Park Branch  
Phone: (415) 435-1301

**Fairview Park 44126: Compar Corp.,** P. O. Box 4791  
Phone: (216) 333-4120 TWX: (810) 421-8396

## TEXAS

**Richardson 75080: Semiconductor Sales Associates,**  
312 North Central Expressway, Suite 213  
Phone: (214) 231-6181

## WASHINGTON

**Bellevue 98009: Western Technical Sales,** P. O. Box 902  
Phone: (206) 454-3906 TWX: (910) 443-2309

## DISTRIBUTORS

### ARIZONA

**Phoenix 85009: Hamilton/Avnet Electronics,** 1739 N. 28th Ave.  
Phone: (602) 269-1391 TELEX: 667-450

### CALIFORNIA

**Burbank 91504: Compar Corp.,** 2908 Naomi Avenue  
Phone: (213) 843-1772 TWX: (910) 498-2203  
**Burlingame 94010: Compar Corp.,** 820 Airport Blvd.  
Phone: (415) 347-5411 TWX: (910) 374-2366

**Culver City 90230: Hamilton Electro Sales**, 10912 W. Washington  
Phone: (213) 559-3311 TELEX: 677-100, 674-381, 674-354

**El Monte 91731: G. S. Marshall**, 9674 Telstar Avenue  
Phone: (213) 686-1500 TWX: (910) 587-1565

**Los Angeles 90022: KT/Wesco Electronics**, 5650 Jillson Street  
Phone: (213) 685-9525 TWX: (910) 580-1980

**Mountain View 94041: Hamilton/Avnet Electronics**,  
340 East Middlefield Road  
Phone: (415) 961-7000 TELEX: 348-201

**Palo Alto 94303: Wesco Electronics**, 3973 East Bayshore Road  
Phone: (415) 968-3475 TWX: (910) 379-6488

**San Diego 92111: G. S. Marshall**, 7990 Engineer Road, Suite 1  
Phone: (714) 278-6350 TWX: (910) 587-1565

**San Diego 92123: Hamilton/Avnet Electronics**,  
5567 Keeny Villa Rd.  
Phone: (714) 279-2421

**San Diego 92123: Kierulff Electronics**, 8797 Balboa Avenue  
Phone: (714) 278-2112 TWX: (910) 335-1182

## CANADA

**Toronto, Ontario: Cescio Electronics, Ltd.**, 24 Martin Ross Avenue  
Phone: (416) 638-5250

**Montreal, Quebec: Cescio Electronics, Ltd.**, 4050 Jean Talon West  
Phone: (514) 735-5511 TWX: (610) 421-3445

**Ottawa, Ontario: Cescio Electronics, Ltd.**, 1300 Carling Avenue  
Phone: (613) 729-5118

**Quebec: Cescio Electronics, Ltd.**, 98 St. Vallier Street  
Phone: (418) 524-3518

## COLORADO

**Denver 80216: Hamilton/Avnet Electronics**, 1400 W. 46th Avenue  
Phone: (303) 433-8551 TELEX: 45872

## FLORIDA

**Hollywood 33021: Hamilton/Avnet Electronics**, 4020 No. 29th Ave.  
Phone: (305) 925-5401 TELEX: 51-4328

**Orlando 32805: Hammond Electronics**, 911 West Central Blvd.  
Phone: (305) 241-6601 TWX: (810) 850-4121

## ILLINOIS

**Elmhurst 60126: Semiconductor Specialists, Inc.**,  
195 Spangler Avenue, Elmhurst Industrial Park  
Phone: (312) 279-1000 TWX: 254-0169

**Schiller Park 60176: Hamilton/Avnet Electronics**, 3901 Pace Court  
Phone: (312) 678-6310 TELEX: 728-330

## KANSAS

**Prairie Village 66208: Hamilton/Avnet Electronics**,  
3500 West 75th Street  
Phone: (913) 362-3250

## MARYLAND

**Hanover 21076: Hamilton/Avnet Electronics**, 7255 Standard Drive,  
P. O. Box 8647  
Phone: (301) 796-5000 TELEX: 879-68

**Rockville 20850: Pioneer Washington Electronics, Inc.**,  
1037 Taft Street Phone: (301) 424-3300

## MASSACHUSETTS

**Burlington 01803: Hamilton/Avnet Electronics**  
207 Cambridge Street  
Phone: (617) 272-3060 TELEX: 9494-61

**Needham Heights 02194: Kierulff/Schley**, 14 Charles Street  
Phone: (617) 449-3600 TWX: (710) 325-1179

## MICHIGAN

**Livonia 48150: Hamilton/Avnet Electronics**, 13150 Wayne Rd.  
Phone: (313) 522-4700

**Detroit 48240: Semiconductor Specialists, Inc.**,  
25127 W. Six Mile Road  
Phone: (313) 255-0300 TWX: (910) 254-0169

## MINNESOTA

**Minneapolis 55420: Semiconductor Specialists, Inc.**,  
8030 Cedar Avenue, South  
Phone: (612) 854-8841

## MISSOURI

**Hazelwood 63042: Hamilton/Avnet Electronics**, 400 Brookes Lane  
Phone: (314) 731-1144 TELEX: 442348

## NORTHERN NEW JERSEY

**Cedar Grove 07009: Hamilton/Avnet Electronics**,  
220 Little Falls Road  
Phone: (201) 239-0800 TELEX: 138313

## SOUTHERN NEW JERSEY AND PENNSYLVANIA

**Cherry Hill, N. J. 08034: Hamilton/Avnet Electronics**,  
1608-10 W. Marlton Pike  
Phone: (609) 662-9337 TELEX: 834737

**Cherry Hill, N. J. 08034: Milgray-Delaware Valley**,  
1165 Marlkrass Road  
Phone: N.J. (609) 424-1300 Phila. (215) 228-2000  
TWX: (710) 896-0405

## NEW YORK

**Buffalo 14202: Summit Distributors, Inc.**, 916 Main Street  
Phone: (716) 884-3450 TWX: (710) 522-1692

**Farmingdale, L. I., 11735: Arrow Electronics**,  
900 Broad Hollow Rd.  
Phone: (516) 995-2100

**Hauppauge, L.I. 11787: Semiconductor Concepts, Inc.**,  
Engineer Road  
Phone: (516) 273-1234 TWX: (510) 227-6232

**Syracuse 13211: Hamilton/Avnet Electronics**, 222 Boss Rd.  
Phone: (315) 437-2642

**Woodbury, L.I. 11797: Harvey Radio**, 60 Crossways Park West  
Phone: (516) 921-8700 TWX: (510) 221-2184

## OHIO

**Cleveland 44105: Pioneer Standard Electronics**,  
5403 Prospect Ave., P. O. Box 05100  
Phone: (216) 587-3600 TWX: (810) 421-8238

**Kettering 45429: Arrow Electronics**, 3100 Plainfield Road  
Phone: (513) 253-9176 TWX: (810) 459-1611

## TEXAS

**Dallas 75207: Hamilton/Avnet Electronics**, 2403 Farrington Ave.  
Phone: (214) 638-2850 TELEX: 732359

**Dallas 75220: Solid State Electronics Company**,  
2643 Manana Dr., P. O. Box 20299  
Phone: (214) 352-2601

**Houston 77019: Hamilton/Avnet Electronics**,  
1216 West Clay Street  
Phone: (713) 526-4661 TELEX: 762589

## WASHINGTON

**Seattle 98121: Hamilton/Avnet Electronics**, 2320 Sixth Avenue  
Phone: (206) 624-5930 TELEX: 32249

## INTERNATIONAL SALES

### EUROPEAN HEADQUARTERS

**Signetics International Corp.**, Yeoman House, 63 Croydon Road, Penge, London, S.E. 20, England  
Phone: (01) 6592111 TELEX: 946619

### FRANCE

**Signetics S.A.R.L.**, 90 Rue Baudin, F 92 Levallois-Perret, France  
Phone: 739-85-80/739-96-40 TELEX: 62014

### WEST GERMANY

**Signetics GmbH**, Ernstthaldestrasse 17, D 7 Stuttgart 80, West Germany  
Phone: (0711) 73-50-61 TELEX: 7255798

## STOCKING DISTRIBUTORS

### AUSTRALIA

**Pye Industries, Ltd.**, Technico Electronics Division, 53 Carrington Rd., Marrickville, Sydney, N.S.W.  
Phone: 55-0411 TELEX: 790-21490

**Pye Industries, Ltd.**, Technico Electronics Division, 2-18 Normanby Road, South Melbourne, Vic.  
Phone 69-60-61 TELEX: 31240

### BELGIUM

**Klaasing Benelux S.A.**, 30 Rue Leon Frederic, 1040 Brussels  
Phone: (02) 33-62-63, 34-20-30 TELEX: 25003

### WEST GERMANY

**EBV Elektronik GmbH**, Augustenstrasse 79, D-8 Muenchen 2  
Phone: (0811) 52-53-40/48 TELEX: 524535

**EBV Elektronik GmbH**, Myliusstrasse 54 D-6 Frankfurt/Main 1  
Phone: (0611) 72-04-16/18 TELEX: 413590

**EBV Elektronik GmbH**, Scheurenstrasse 1, D-4 Duesseldorf  
Phone: (0211) 8-48-46/47 TELEX: 8587267

**"Muetron" Muller & Co. KG**, Postfach 164, Bornstrasse 65, D-28 Bremen 1  
Phone: (0421) 31-04-85 TELEX: 245-325

**Dima-Elektronik Karl Manger KG**, Postfach 80 0744 Robert-Leichtstrasse 43, D-7 Stuttgart-Vaihingen 80  
Phone (0711) 73-40-50/9 TELEX: 255-642

**Distron GmbH**, D-1 Berlin 31, Wilhelmsaue 39-41  
Phone: 0311/870144 TELEX: 18-27-58

**Signetics GmbH**, Eulenkrukgstr, 81 E, D-2 Hamburg 67  
Phone: (411) 60-35-242

### AUSTRIA

**Ing. Ernst Steiner**, Beckgasse 30, A-1130 Wien  
Phone: (222) 82-10-605

### SWITZERLAND

**Dewald AG**, Seestrasse 561, CH 8038, Zuerich  
Phone: (051) 45-13-00 TELEX: 52012

### FRANCE

**S. A. Gallec Electronique**, 78, Avenue des Champs-Elysees, Paris 8e Phone: 359-58-38/255-67-10/255-67-11

**R.T.F.**, 73, Av. de Neuilly, 92 - Neuilly sur Seine, Paris  
Phone: 722.70.40 TELEX: 65.933

**Elic 38, le Bureau Barisien S.A.R.L.**, 8-10 Avenue du Grand Sablon, 38 La Tronche  
Phone: (76) 87-67-71 TELEX: 32-739

### ITALY

**Metroelettronica S.A.S.**, Viale Cirene 18, I-20135 Milano  
Phone: 546-26-41 TELEX: 33-168 Metronic

### ISRAEL

**Rapac Electronics Ltd.**, P. O. Box 18053, 15 Karl Herbst St., Tel-Baruch, Tel-Aviv Phone: 77 71 15,6,7 TELEX: TV 528

### UNITED KINGDOM

**Quarndon Electronics Ltd.**, Slack Lane, Derby, Derbyshire  
Phone: (0332) 3 26 51 TELEX: 37163

**S.D.S. (Portsmouth) Ltd.**, Hilsea Industrial Estate Portsmouth, Hampshire  
Phone: 6 53 11 TELEX: 86114

**Semicomps Ltd.**, 5 Northfield Industrial Estate, Beresford Ave., Wembley, Middlesex  
Phone: (01) 903-3161 TELEX: 935243

**A. M. Lock & Co. Ltd.**, 79 Union St., Oldham, Lancs, England  
Phone: 061-624-6832

### SCOTLAND

**Semicomps Northern Ltd.**, 44, The Square, Kelso, Roxburghshire  
Phone: 2366 TELEX: 72692

### SWEDEN, NORWAY, FINLAND

**A. B. Kuno Kallman**, Jarntorget 7, S-413 04 Goteberg SV,  
Phone: 17-01-20 TELEX: 21072

### DENMARK

**E. Friis-Mikkelsen A/S**, Krogshojvej 51, DK-2880 Bagsvaerd  
Phone: (01) 986333 TELEX: 2350

### THE NETHERLANDS

**Mulder-Hardenberg**, P. O. Box 5059, Westerhoutpark 1-A, Haarlem  
Phone: (023) 3191 84 TELEX: 41431

### JAPAN

**Asahi Glass Co., Ltd.**, 1-2 Marunouchi, 2 Chome Chiyoda-ku, Tokyo  
Phone: 218-5536 TELEX: 4616

## REPRESENTATIVES

### SWEDEN, NORWAY, FINLAND

**A. B. Kuno Kallman**, Jarntorget 7, S-413 04 Goteborg SV, Sweden  
Phone 17-01-20 TELEX: 21072

### ISRAEL

**Rapac Electronics Ltd.**, P. O. Box 18053, 15 Karl Herbst St., Tel-Baruch, Tel-Aviv Phone: 77 71 15,6,7 TELEX: TV 528

### JAPAN

**Asahi Glass Co., Ltd.**, 1-2 Marunouchi, 2 Chome, Chiyoda-ku, Tokyo Phone 218-5536 TELEX: 4616

### SWITZERLAND

**Dewald AG**, Seestrasse 561, CH 8038 Zuerich  
Phone: (051) 45-13-00 TELEX: 52012

### INDIA

**Semiconductors Limited**, Radia House, 6, Rampart Row, Fort, Bombay - 1  
Phone: 293667 TELEX: Transducer, Bombay





**signetics**

811 EAST ARQUES AVENUE  
SUNNYVALE, CALIFORNIA 94086  
TEL: (408) 739-7700  
TWX: (910) 339-9283